

Indoor/Outdoor Mounts and Accessories

Honeywell's Performance Series mounts and accessories provide a range of installation options for the Honeywell Performance Series IP cameras and Performance Series HQA cameras, including junction box, wall, pole, and corner mounts.

The mounts provide easy cable routing with no exposed wiring, and the cameras can be installed, adjusted, and tested without repositioning the housing. All of the mounts and accessories are suitable for indoor or outdoor use.

The junction boxes, and pole mount are constructed of die-cast aluminum. The corner mount adapter is made of SECC steel. The HEJB junction box is made of die-cast aluminum and SECC steel. All of the mounts and accessories are powder coated to match the finish of the camera.

Market Opportunities

Honeywell's Performance Series mounts and accessories provide excellent value at an attractive price, featuring simple, clean lines, and rugged construction for a wide range of mounting options.



HQA-BB1
Junction Box



HQA-WK
Wall Mount



HQA-BB2/HQA-BB2G
Junction Box



HQA-WK2/HQA-WK2G
Wall Mounts



HQA-BB3/HQA-BB3G
Junction Boxes



HQA-PM2
Pole Mount



HQA-BB4
Junction Box



HB34S2-CM
Corner Mount



HBS2-BB
Junction Box



HQA-PK
Pendant Mount Cap



HEJB
Junction Box



HQA-RS
Rain Shield Bracket



HQA-IC
In-Ceiling Bracket



HQA-CB
Ceiling Mount Bracket


Indoor/Outdoor Mounts and Accessories

FEATURES AND BENEFITS


| DESCRIPTION | JUNCTION BOX | | | | | | | | WALL MOUNT | | | POLE MOUNT | CORNER MOUNT | CEILING MOUNT | | PENDENT MOUNT | RAIN SHEILD |
|----------------------------------|--------------|---------|----------|---------|---------|----------|---------|------|------------|---------|----------|------------|--------------|---------------|--------|---------------|-------------|
| | HQA-BB1 | HQA-BB2 | HQA-BB2G | HQA-BB3 | HQA-BB4 | HQA-BB3G | HBS2-BB | HEJB | HQA-WK | HQA-WK2 | HQA-WK2G | HQA-PM2 | HB34S2-CM | HQA-IC | HQA-CB | HQA-PK | HQA-RS |
| LOW PROFILE, CONTEMPORARY DESIGN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ECONOMICALLY PRICED | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| EASY CABLE FEED-THROUGH | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DIE-CAST ALUMINUM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| SECC STEEL | | | | | | | | ✓ | | | | | ✓ | | | | |
| OFF-WHITE POWDER FINISH | ✓ | ✓ | | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ |
| GREY POWDER FINISH | | | ✓ | | | ✓ | | | | | ✓ | | | | | | |
| INDOOR/OUTDOOR | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

DIMENSIONS


HQA-BB1

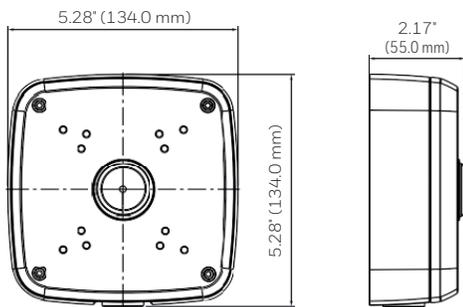


HBS2-BB

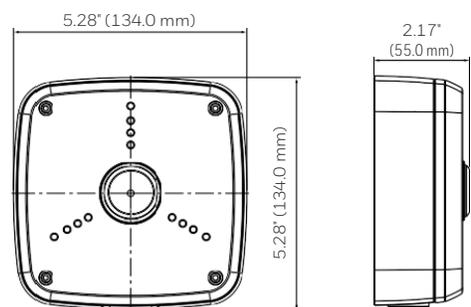

HQA-BB2/HQA-BB2G

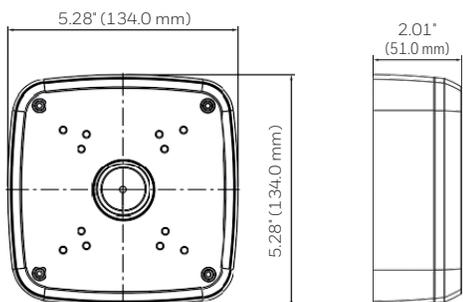


HEJB




Indoor/Outdoor Mounts and Accessories

DIMENSIONS


HQA-BB2/HQA-BB2G

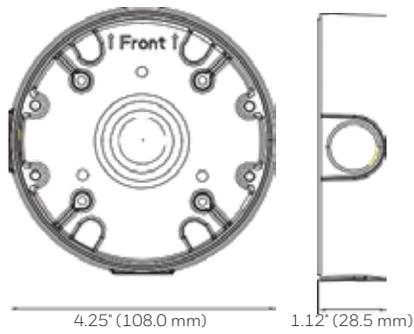


HQA-BB2/HQA-BB2G

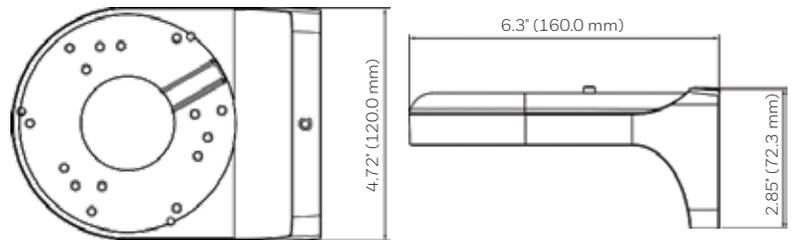


HQA-BB4

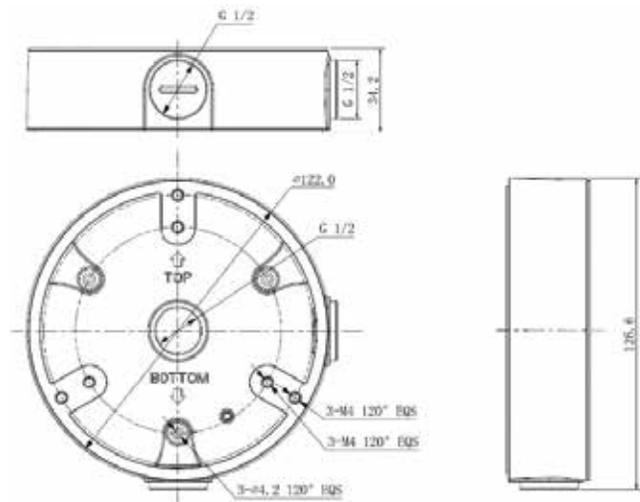

HQA-IC

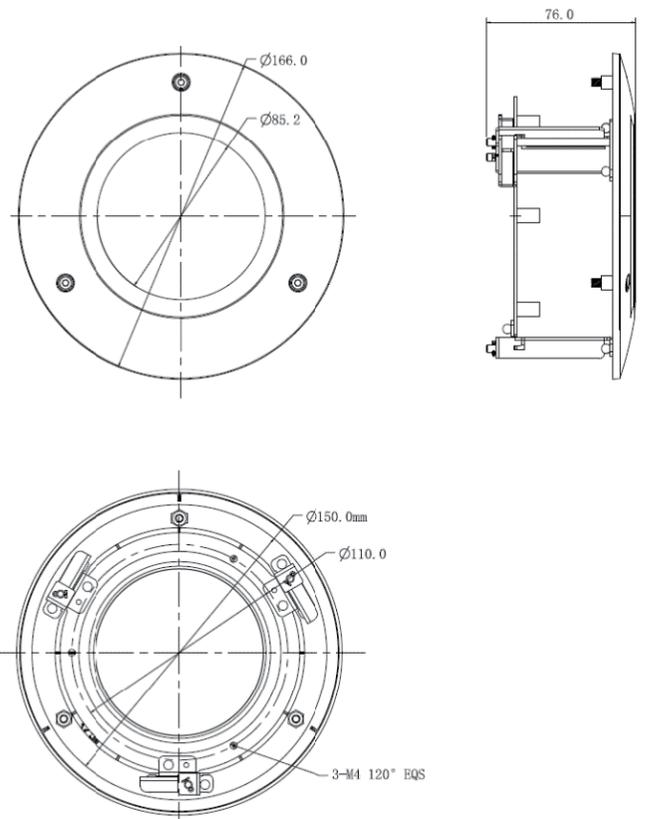


HQA-RS

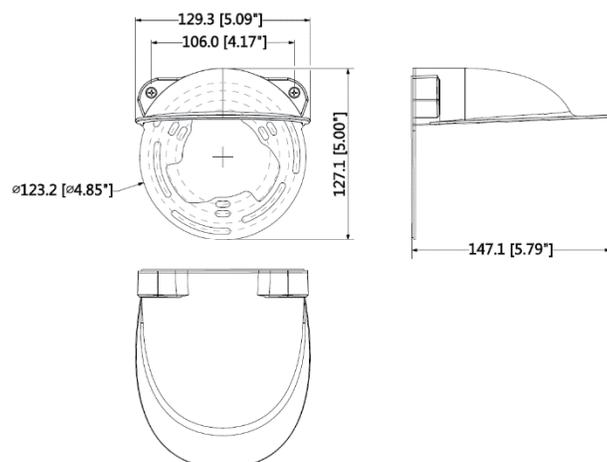


Indoor/Outdoor Mounts and Accessories

DIMENSIONS


HQA-WK2/HQA-WK2G

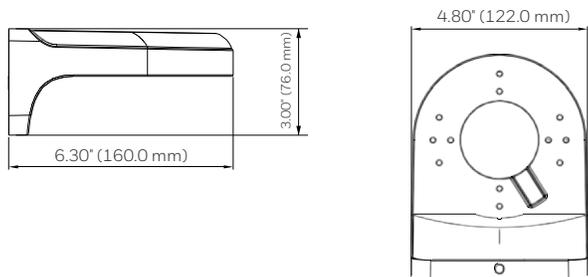


HB34S2-CM

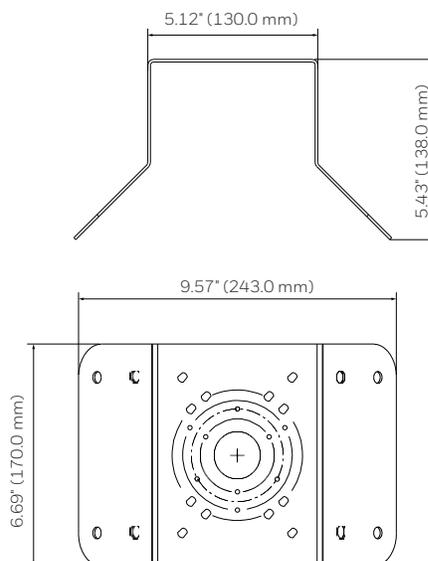


HQA-PK

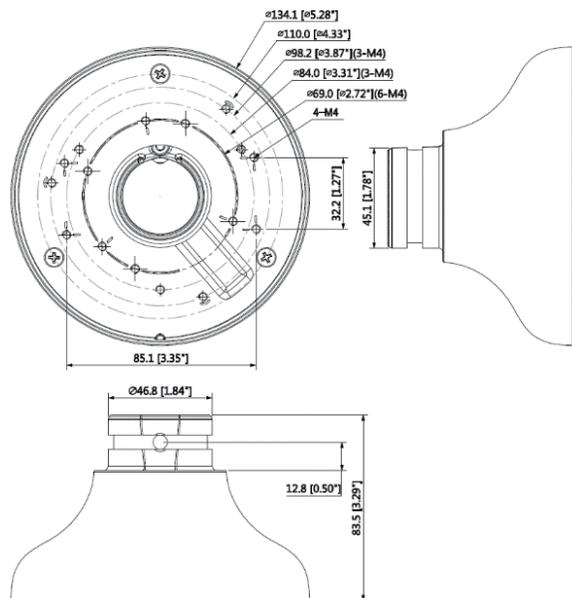

HQA-PK

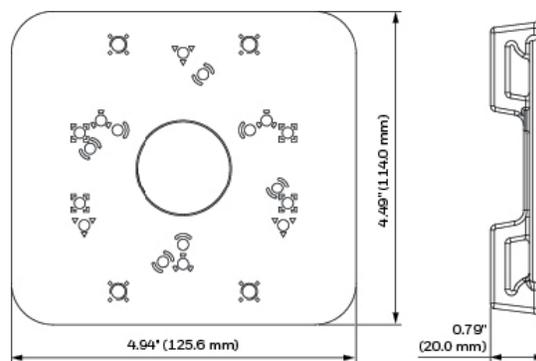

HQA-CB

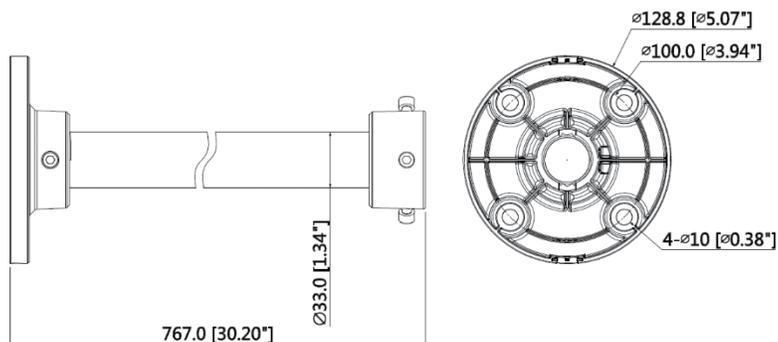

Indoor/Outdoor Mounts and Accessories

COMPATIBLE HQA AND IP CAMERAS

| MOUNTS | COMPATIBLE PERFORMANCE HQA CAMERAS | MOUNTS | COMPATIBLE PERFORMANCE IP CAMERAS |
|-------------------|---|------------------|---|
| HQA-BB1 | HB74HD2, HD30HD1, HD30HD2, HB74HD4 | HQA-BB1 | HBW2PR1, HBW4PR1, HBD8PR1 |
| HQA-BB2/G | HD31HD2, HD73HD1, HD74HD2, HD231HD2, HD274HD2, HD72HD4, HD274HD4 | HQA-BB2/G | H4D3PRV2, H4D2PRV3, H4W2PRV2, H4W4PRV2, H4W4PRV3, HEW2PR2, HEW4PR2, H4D8PR1, HFD5PR1, H4W4PER3, H4W4PER2 |
| HQA-BB3/G | HD30HD4 | HQA-BB3/G | H2W2PRV3, H2W4PRV3, HEW2PR1, HEW2PRW1, HEW3PR3, HEW4PRW3, HED8PR1 |
| HBS2-BB | HB74HD1, HB75HD1, HB76HD2, HB276HD2, HD29HD1, HD31HD2, HD231HD2, HB276HD4 | HBS2-BB | HED1PR3, HED3PR3, HBD1PR1, HBD3PR1, HBD3PR2, HBW2PR2, HBW4PR2, H4W4PER3, H4W4PER2 |
| HEJB | HB74HD1, HD31HD2, HD231HD2 | HEJB | HED1PR3, HED3PR3, HBD1PR1, HBD3PR1, HBD3PR2 |
| HQA-PM2* | All HQA cameras (with a compatible junction box) | HQA-PM2* | HED8PR1, HBD8PR1, H4D8PR1, HFD5PR1, HED2PER3, H4W4PER3, HEW4PER3, H4W4PER2 (with a compatible junction box) |
| HB34S2-CM* | All HQA cameras (with a compatible junction box) | HB34S2-CM | H2W2PRV3, H2W4PRV3, H4W2PRV2, H4W4PRV2, H4W4PRV3, HBW2PR1, HBW4PR1, HBW2PR2, HBW4PR2, HEW2PR1, HEW2PRW1, HEW2PR2, HEW4PR2, HEW4PR3, HEW4PRW3, HED8PR1, HBD8PR1, H4D8PR1, H4D3PRV2, H4D3PRV3, HBD1PR1, HBD3PR1, HBD3PR2, HED1PR3, HED3PR3, HED2PER3, H4W4PER3, HEW4PER3, H4W4PER2 (with a compatible junction box) |
| HQA-WK | HD29HD1, HD31HD2, HD73HD1, HD74HD2, HD231HD2, HD274HD2, HD274HD4, HD72HD4, H4D42HD8, HFD40HD4 | HQA-WK | HED1PR3, HED3PR3, H4D3PRV2, H4D3PRV3, H4W2PRV2, H4W4PRV2, H4W4PRV3, HEW2PR2, HEW4PR2, H4D8PR1, HFD5PR1, HED2PER3, HEW4PER3, H4W4PER3, H4W4PER2 |
| HQA-WK2/G | HD30HD1, HD30HD2, HD30HD4 | HQA-WK2/G | H2W2PRV3, H2W4PRV3, HEW2PR1, HEW2PRW1, HEW4PR3, HEW4PRW3, HED8PR1, HED2PER3, HEW4PER3 |
| HQA-BB4 | HD73HD1, HD41XD2, HD274HD2, HD74HD2, HD42XD2, HB276HD4, HD231HD2, HD31HD2, HE42XD2, HE42XD2G, H4D42HD8 | HQA-BB4 | H4D3PRV2, H4W4PRV2, H4W2PRV2, H4W4PER2, HED1PR3, HED3PR3, HEW4PR2, HEW2PR2, HED2PER3, HEW4PER3 |
| HQA-IC | HD73HD1, HD41XD2, HD274HD2, HD74HD2, HD42XD2, HB276HD4, H4D42HD8 | HQA-IC | H4D3PRV2, H4W4PRV2, H4W2PRV2, H4W4PER2 |
| HQA-RS | HD30XD2, HD72HD4, HD73HD1, HD41XD2, H4D42HD8 | HQA-RS | H4D3PRV3, H4D3PRV2, H2W4PRV3, H2W2PRV3, H4W4PRV3, H4W4PRV2, H4W2PRV2, H4D8PR1, H4W4PER3, H4W4PER2 |
| HQA-PK* | HD30XD2, HD72HD4, HD73HD1, HD41XD2, HD274HD2, HD74HD2, HD42XD2, HB276HD4, HD30HD1, HD30HD2, HD29HD1, HE41XD2, HE30XD2, HE30XD2G, HD30HD4, HD231HD2, H4D42HD8HD31HD2, HE42XD2, HE42XD2G, H4D42HD8 (with compatible HQA-CB) | HQA-PK* | H4D3PRV3, H4D3PRV2, H2W4PRV3, H2W2PRV3, H4W4PRV3, H4W4PRV2, H4W2PRV2, H4D8PR1, H4W4PER3, H4W4PER2, HED1PR3, HED3PR3, HEW4PR3, HEW2PR1, HEW4PRW3, HEW2PRW1, HEW4PR2, HEW2PR2, HED8PR1, HED2PER3, HEW4PER3 (with compatible HQA-CB) |
| HQA-CB* | HD30XD2, HD72HD4, HD73HD1, HD41XD2, HD274HD2, HD74HD2, HD42XD2, HB276HD4, HD30HD1, HD30HD2, HD29HD1, HE41XD2, HE30XD2, HE30XD2G, HD30HD4, HD231HD2, HD31HD2, HE42XD2, HE42XD2G, H4D42HD8 (with compatible HQA-PK) | HQA-CB* | H4D3PRV3, H4D3PRV2, H2W4PRV3, H2W2PRV3, H4W4PRV3, H4W4PRV2, H4W2PRV2, H4D8PR1, H4W4PER3, H4W4PER2, HED1PR3, HED3PR3, HEW4PR3, HEW2PR1, HEW4PRW3, HEW2PRW1, HEW4PR2, HEW2PR2, HED8PR1, HED2PER3, HEW4PER3 (with compatible HQA-PK) |

Indoor/Outdoor Mounts and Accessories

SPECIFICATIONS

| RECOMMENDED RECORDERS | | | |
|--|-------------------|----------------------------------|---|
| MODEL NO. | UNIT WEIGHT | CONSTRUCTION | DIMENSIONS |
| HQA-BB1 | 1.1 lb (0.5 kg) | Die-cast aluminum | 5.28 × 5.28 × 2.17 in. (134.0 × 134.0 × 55.0 mm) |
| HQA-BB2/HQA-BB2G | 1.32 lb (0.6 kg) | Die-cast aluminum | 5.28 × 5.28 × 2.01 in. (134.0 × 134.0 × 51.0 mm) |
| HQA-BB3/HQA-BB3G | 1.08 lb (0.49 kg) | Die-cast aluminum | 6.30 × 4.80 × 3.00 in. (160.0 × 122.0 × 76.0 mm) |
| HBS2-BB | 1.1 lb (0.5 kg) | Die-cast aluminum | 5.28 × 5.28 × 2.17 in. (134.0 × 134.0 × 55.0 mm) |
| HEJB | 0.84 lb (0.38 kg) | Die-cast aluminum and SECC steel | ø 5.43 × 1.65 in. (ø 138.0 × 42.0 mm) |
| HQA-PM2 (REQUIRES A COMPATIBLE JUNCTION BOX) | 0.6 lb (0.27 kg) | Die-cast aluminum | 4.94 × 4.49 × 0.79 in. (125.6 × 114.0 × 20.0 mm) |
| HB34S2-CM (REQUIRES A COMPATIBLE JUNCTION BOX) | 3.75 lb (1.7 kg) | SECC steel | 9.57 × 6.69 × 5.43 in. (243.0 × 170.0 × 138.0 mm) |
| HQA-WK | 2.2 lb (1.0 kg) | Die-cast aluminum and ABS | 4.72 × 2.85 × 6.3 in. (120.0 × 72.3 × 160.0 mm) |
| HQA-WK2/HQA-WK2G | 0.35 lb (0.16 kg) | Die-cast aluminum | ø 4.25 × 1.12 in. (ø 108.0 × 28.5 mm) |
| HQA-BB4 | 0.53 lb (0.24 kg) | Aluminum | ø 4.80 × 1.35 in. (ø 122.0 × 34.2 mm) |
| HQA-IC | 0.71 lb (0.32 kg) | SECC & PC | ø 6.54 × 2.98 in. (ø 166.0 × 75.8 mm) |
| HQA-RS | 0.55 lb (0.25 kg) | Aluminum & SGCC | 5.09 × 5 × 5.79 in. (129.3 × 127 × 147 mm) |
| HQA-PK | 0.64 lb (0.29 kg) | Aluminum | ø 5.28 × 3.29 in. (ø 134.1 × 83.5 mm) |
| HQA-CB | 1.98 lb (0.9 kg) | Aluminum | ø 5.07 × 30.2 in. (ø 128.8 × 767.0 mm) |

ORDERING

| | | | |
|----------|-------------------------------|------------|----------------------------------|
| HQA-BB1 | Junction Box, Off-White | H3W2GR1 | Pole Mount Adapter, Off-White |
| HQA-BB2 | Junction Box, Off-White | HB34S2-CM* | Corner Mount Adapter, Off-White |
| HQA-BB2G | Junction Box, Grey | HQA-WK | Wall Mount, Off-White |
| HQA-BB3 | Junction Box, Off-White | HQA-WK2 | Wall Mount, Off-White |
| HQA-BB3G | Junction Box, Grey | HQA-WK2G | Wall Mount, Grey |
| HBS2-BB | Junction Box, Off-White | HQA-RS | Rain Shield Bracket, Off-White |
| HEJB | Junction Box, Off-White | HQA-PK** | Pendant Mount Cap, Off-White |
| HQA-BB4 | Junction Box, Off-White | HQA-CB** | Ceiling Mount Bracket, Off-White |
| HQA-IC | In-Ceiling Bracket, Off-White | | |

* A compatible junction box is required when installing to either the HQA-PM pole mount, the HQA-PM2 pole mount or the HB34S2-CM corner mount.

** HQA-PK and HQA-CB are compatible with each other.

For more information

www.honeywell.com/security

Honeywell Security and Fire

2700 Blankenbaker Pkwy, Suite 150

Louisville, KY 40299

1.800.323.4576

www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

L/HQADD/D | 06/18
© 2018 Honeywell International Inc.

Honeywell