

# DH-CS4010-8GT-110

10-Port Cloud Managed Desktop Gigabit Switch with 8-Port PoE



PoE 2.0

## Series Overview

Highly intuitive, the Cloud Managed Switch can be managed in local networks. With the DoLynk Cloud-Management platform, it additionally enables seamless cloud management capabilities. With just one click, you can start both the CCTV and IT system through EasyConfig. The switch performs operation and maintenance using topology visualization on front-end, transmission and back-end storage devices. The device supports link aggregation and STP to ensure high network stability. It can effortlessly turn on and off its managed mode with the simple flip of a switch. Additionally, the switch supports abundant PoE 2.0 features. With full metal design, it has great heat dissipation and can operate in temperatures ranging  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$  ( $+14^{\circ}\text{F}$  to  $+131^{\circ}\text{F}$ ). It also features surge protection against up to 6 kV, resisting interference from static electricity, lightning and pulses. The switch can be used in small and medium-sized businesses such as supermarkets, offices, restaurants, cafés and hotels.

## Functions


### Managed Mode ON/OFF

Easily switches between managed and unmanaged mode with just the flip of a switch. When in managed mode, you can perform management through the webpage locally or the cloud platform. This allows the device to seamlessly adapt to a variety of scenes.

### Cloud Management

Devices can be managed through the DoLynk Care app and performs real-time monitoring of the network. The app also displays the status of devices, triggers alarms for errors in real time and sends notifications.

- 8 x RJ-45 Gigabit PoE ports, 2 x RJ-45 Gigabit ports.
- 110 W total PoE budget, 802.3af/at on all PoE ports, 802.3bt on red ports.
- DIP switch to fast turn on/off working mode of Cloud-Managed, PoE Watchdog, Long Distance PoE.
- Wide operating temperature ranging from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ .
- Supports VLAN, STP, RSTP and link aggregation.
- WEB-managed and centralized cloud management through the DoLynk App and performs real-time monitoring of the network.
- Easy config to auto detect and set up network and systems.

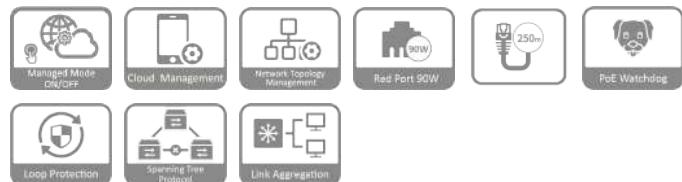

### Network Topology Management

Supports the LLDP protocol and is able to generate and display the network topology, so that you can quickly identify issues, and perform operation and maintenance remotely on devices that are in the topology.

### BT 90W (Red Port)

The red ports support IEEE802.3af, IEEE802.3at, IEEE802.3bt and Hi-PoE standards, with a maximum output power consumption of 90W per port. Suitable for powering high-power devices.

### Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

### PoE Watchdog

Adopts the innovative PoE Watchdog. It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its true sense and effectively reduces manual maintenance costs.

### Loop Protection

When a loop is detected, the loop alarm will be triggered and the elimination mechanism will activate to prevent broadcast storms from occurring.

## Scene

Suitable for scenes such as factories and office buildings.

Technical Specification		Performance		
Basic		MTBF	2,482,955 hours	
Layer	Layer 2	Packet Buffer Size	4 Mbit	
Switching Capacity	20 Gbps	Jumbo Frame	15360 Byte	
Packet Forwarding Rate	14.88 Mpps	MAC Table Size	8K	
Description of Function Slots	Port 1-8: 8 × RJ45 10/100/1000 Mbps (PoE) Port 9-10: 2 × RJ45 10/100/1000 Mbps (uplink)	Communication Standard	IEEE 802.3; IEEE 802.3u; IEEE 802.3x; IEEE 802.3ab; IEEE 802.3az; IEEE 802.3ad	
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)	VLAN Number	32	
Operating Humidity	10%–90% (RH), non-condensing	Feature		
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)	Ethernet Loop Protection	STP; RSTP	
Storage Humidity	5%–95% (RH), non-condensing	VLAN Function	IEEE 802.1Q VLAN	
Power Supply	External Power Adapter ( 54 V, 2.22 A )	Link Aggregation	Static Aggregation	
Power Consumption	Idle: 5.7 W Full load: 115 W	Port Feature	IEEE 802.3x Flow Control Unknown Unicast Suppression Multicast Storm Control Broadcast Storm Control MAC+Port Binding Loop Prevention	
Statics Protection	Air discharge: 8 kV Contact discharge: 6 kV		Local Port Mirroring N:1 Mirroring	
Lightning Protection	Common mode: 6 kV Differential mode: 1 kV		LLDP	
Net Weight	0.36 kg (0.79 lb)		DHCP Client	
Gross Weight	1.13 kg (2.49 lb)		Port Isolation	
Product Dimensions	184.6 mm × 103.3 mm × 27 mm (7.27" × 4.07" × 1.06") (L × W × H)	Equipment Management	Web Management Cloud Management Logs Fault Alarm	
Packaging Dimensions	252 mm × 137 mm × 113 mm (9.92" × 5.39" × 4.45") (L × W × H)			
Casing Material	Sheet metal			
Installation	Desktop mount; wall mount	General		
Certifications	CE	Packing List	1 × User Manual 1 × Legal and Regulatory Information 1 × Power Cord 1 × Power Adapter	
PoE		Transmission Performance		
PoE	Yes	Switch power supply voltage 54V. CAT6. Max. DC resistance < 8 Ω/100 m		
PoE Power	Port 3-8≤30 W, port 1-2≤90 W, total≤110 W	Cable(m)	Load Capacity(W)	Bandwidth(Mbps)
PoE Protocol	IEEE 802.3af; IEEE 802.3at; Hi-PoE; IEEE 802.3bt	IEEE802.3bt 90W		
PoE Power Consumption Management	PoE power consumption management; PoE power on/off; turns off PoE if overload is detected	100	71.3	1000
PoE Pin Assignment	Port 1-2 : 1,2,4,5 ( V+ ),3,6,7,8 ( V- ) Port 3-8 : 1,2, ( V+ ),3,6, ( V- )	150	62	10
Long Distance PoE Transmission	Yes	200	51	10
Hardware	Managed Mode: On by default for both local web and cloud management. Off for Unmanaged Mode. PoE Watchdog: Monitors ports 1-8 and auto-restarts the PoE port when there is no traffic for 2 min. (Only works when Managed Mode is Off) Extend Mode: Ports 1-8; transmission distance up to 250 meters at 10 Mbps. (Only works when Managed Mode is Off)	250	40	10
DIP Switch		Hi-PoE 60W		
Reset Button	1	100	46	1000
		150	42	10
		200	37	10
		250	32	10

# Cloud Managed Switch (PoE) | DH-CS4010-8GT-110

## IEEE802.3at 30W

100	25.5	1000
150	25.5	10
200	25.5	10
250	24	10

Note: Data from this table was collected by Dahua test lab and is for reference only. The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.

## Panels




## Ordering Information

Type	Model	Description
PoE Switch	DH-CS4010-8GT-110	10-Port Cloud Managed Desktop Gigabit Switch with 8-Port PoE



## Installation

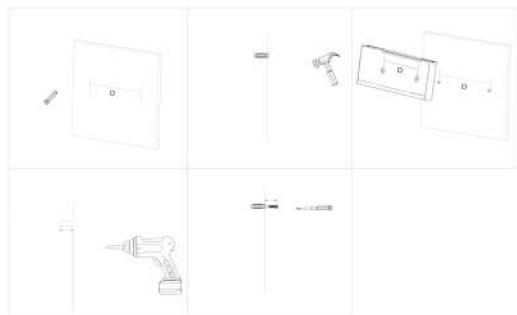

## Dimensions (mm[inch])

