



**TEST REPORT**  
**IEC 60950-1**  
**Information technology equipment – Safety –**  
**Part 1: General requirements**

**Report Number..... :** SHES190201177901

**Date of issue ..... :** 2019-04-24

**Total number of pages..... :** 44 pages

**Applicant's name ..... :** ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

**Address..... :** No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

**Test specification:**

**Standard ..... :** IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013

**Test procedure ..... :** SGS-CSTC

**Non-standard test method ..... :** N/A

**Test Report Form No..... :** IEC60950\_1F

**Test Report Form(s) Originator .... :** SGS Fimko Ltd

**Master TRF..... :** Dated 2014-02

**Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.


**Test item description ..... :** DIGITAL VIDEO RECORDER

**Trade Mark..... :**  or 

**Manufacturer..... :** Same as applicant

**Model/Type reference..... :** DH-XVR8816S-4KL-I, XVR8816S-4KL-I

**Ratings..... :** 100 V a.c. - 240 V a.c.; 50 Hz - 60 Hz; 1,9 A; Class I

<b>Testing procedure and testing location:</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
<b>Testing location/ address.....:</b>		588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name + signature) .....</b>		Ade Wu
<b>Approved by (name + signature) .....</b>		Michael Xu
		
<input type="checkbox"/>	<b>Testing procedure: TMP/CTF Stage 1:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name + signature) .....</b>		
<b>Approved by (name + signature) .....</b>		
<input type="checkbox"/>	<b>Testing procedure: WMT/CTF Stage 2:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name + signature) .....</b>		
<b>Witnessed by (name + signature) .....</b>		
<b>Approved by (name + signature) .....</b>		
<input type="checkbox"/>	<b>Testing procedure: SMT/CTF Stage 3 or 4:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name + signature) .....</b>		
<b>Witnessed by (name + signature) .....</b>		
<b>Approved by (name + signature) .....</b>		
<b>Supervised by (name + signature) .....</b>		

<b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1 – 9 pages of Photos documents; Attachment 2 – 18 pages of European group differences and national differences.	
<b>Summary of testing:</b> The sample(s) tested complies with the requirements of EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013.  When determining the test conclusion, the Measurement Uncertainty of test has been considered.  Unless otherwise specified, tests on model DH-XVR8816S-4KL-I was considered representative.  The product is powered by separately certified building-in power supply, see appended table 1.5.1 for details.  Heating test (4.5): Tma = 55°C (declared by manufacturer)  K-type thermocouple used for temperature measurement.	
<b>Tests performed (name of test and test clause):</b> <input checked="" type="checkbox"/> 1. GENERAL <input checked="" type="checkbox"/> 2. PROTECTION FROM HAZARDS <input checked="" type="checkbox"/> 3. WIRING, CONNECTIONS AND SUPPLY <input checked="" type="checkbox"/> 4. PHYSICAL REQUIREMENTS <input checked="" type="checkbox"/> 5. ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS <input type="checkbox"/> 6. CONNECTION TO TELECOMMUNICATION NETWORKS <input type="checkbox"/> 7. CONNECTION TO CABLE DISTRIBUTION SYSTEMS	<b>Testing location:</b> SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. 588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
<b>Summary of compliance with National Differences:</b> <b>List of countries addressed:</b> 1. EU Group Differences (EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013) 2. EU Special National Conditions, EU A-deviations: none The product fulfils the above requirements.	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Marking for DH-XVR8816S-4KL-I****Remark:**

1. As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.
2. The marking plates for other models are of the same pattern.
3. The height of CE logo should not be less than 5mm, and height of WEEE logo should be not less than 7mm.

**Marking for building-in power supply unit (Model: DPS-150AB-3 A)**

<b>Test item particulars..... :</b>	
<b>Equipment mobility.....:</b>	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
<b>Connection to the mains.....:</b>	<input checked="" type="checkbox"/> pluggable equipment <input checked="" type="checkbox"/> type A <input type="checkbox"/> type B <input type="checkbox"/> permanent connection <input checked="" type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input type="checkbox"/> not directly connected to the mains
<b>Operating condition.....:</b>	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
<b>Access location .....</b>	<input checked="" type="checkbox"/> operator accessible <input type="checkbox"/> restricted access location
<b>Over voltage category (OVC) .....</b>	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other:
<b>Mains supply tolerance (%) or absolute mains supply values .....</b>	±10%
<b>Tested for IT power systems .....</b>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
<b>IT testing, phase-phase voltage (V) .....</b>	N/A
<b>Class of equipment .....</b>	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
<b>Considered current rating of protective device as part of the building installation (A) .....</b>	16A
<b>Pollution degree (PD) .....</b>	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
<b>IP protection class .....</b>	IPX0
<b>Altitude during operation (m) .....</b>	≤ 2000m
<b>Altitude of test laboratory (m) .....</b>	≤ 100m
<b>Mass of equipment (kg) .....</b>	Appro. 6,58kg without HDD Appro. 11,7kg with 8 HDDs

<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
<b>Testing .....</b>	
<b>Date of receipt of test item.....:</b>	2019-03-22
<b>Date (s) of performance of tests .....</b>	2019-03-22 to 2019-04-03

**General remarks:**

The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

This document is issued by the company under its General Conditions of Service accessible at [http://www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined there in. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated: (a) the results shown in this document refer only to the sample(s) tested and (b) such sample(s) are retained for 1 month. This document cannot be reproduced except in full, without prior approval of the company.

**Manufacturer's Declaration per sub-clause 4.2.5 of IEC60950-1:**

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....

☒ **Yes**
☐ **Not applicable**
**When differences exist; they shall be identified in the General product information section.**

**Name and address of factory (ies) .....** : 1.ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.  
No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China  
2.ZHEJIANG DAHUA ZHILIAN CO., LTD  
No.28, Dongqiao Road, Dongzhou Street, Fuyang District, Hangzhou, P.R. China.

**General product information:**

Functions	The EUT are serials Class I DIGITAL VIDEO RECORDER equipment, which is powered by building-in power supply through detachable power cord set. The EUT support max 8 hard disk drivers
Material of enclosure	Front side: Plastic, Other sides: Metal
Model difference	All models are the same except for model name and sales markets.
Other features	Indoor use only

**Abbreviations used in the report:**

- normal conditions	<b>N.C.</b>	- single fault conditions	<b>S.F.C</b>
- functional insulation	<b>FI</b>	- basic insulation	<b>BI</b>
- double insulation	<b>DI</b>	- supplementary insulation	<b>SI</b>
- between parts of opposite polarity	<b>BOP</b>	- reinforced insulation	<b>RI</b>

**Indicate used abbreviations (if any)**

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1</b>	<b>GENERAL</b>		<b>P</b>
<b>1.5</b>	<b>Components</b>		<b>P</b>
1.5.1	General	See below.	P
	Comply with IEC 60950-1 or relevant component standard	(see appended tables 1.5.1)	P
1.5.2	Evaluation and testing of components		P
1.5.3	Thermal controls	No thermal control.	N/A
1.5.4	Transformers	Building-in power supply unit has been certified separately.	P
1.5.5	Interconnecting cables		P
1.5.6	Capacitors bridging insulation	Building-in power supply unit has been certified separately.	P
1.5.7	Resistors bridging insulation	Building-in power supply unit has been certified separately.	P
1.5.7.1	Resistors bridging functional, basic or supplementary insulation	Building-in power supply unit has been certified separately.	P
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems		N/A
1.5.9	Surge suppressors	Building-in power supply unit has been certified separately.	P
1.5.9.1	General	Building-in power supply unit has been certified separately.	P
1.5.9.2	Protection of VDRs	Building-in power supply unit has been certified separately.	P
1.5.9.3	Bridging of functional insulation by a VDR	Building-in power supply unit has been certified separately.	P
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A
<b>1.6</b>	<b>Power interface</b>		<b>P</b>
1.6.1	AC power distribution systems	TN, TT	P
1.6.2	Input current	(see appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6.4	Neutral conductor	Neutral is insulated from earth with basic insulation. Building-in power supply unit has been certified separately.	P

<b>1.7</b>	<b>Marking and instructions</b>		<b>P</b>
1.7.1	Power rating and identification markings		P
1.7.1.1	Power rating marking		P
	Multiple mains supply connections.....:	Single mains supply	N/A
	Rated voltage(s) or voltage range(s) (V) .....	See copy of marking plate.	P
	Symbol for nature of supply, for d.c. only .....	a.c. mains	N/A
	Rated frequency or rated frequency range (Hz) .....	See copy of marking plate.	P
	Rated current (mA or A) .....	See copy of marking plate.	P
1.7.1.2	Identification markings	See below.	P
	Manufacturer's name or trade-mark or identification mark .....	See copy of marking plate.	P
	Model identification or type reference .....	See copy of marking plate.	P
	Symbol for Class II equipment only .....	Class I	N/A
	Other markings and symbols .....	The additional marking does not give rise to misunderstandings.	P
1.7.1.3	Use of graphical symbols		P
1.7.2	Safety instructions and marking	See below.	P
1.7.2.1	General	The user's manual contains information for operation, installation, servicing, transport, storage and technical data. The operation guide is provided to the user.	P
1.7.2.2	Disconnect devices	Appliance coupler is provided as disconnection device.	N/A
1.7.2.3	Overcurrent protective device	Not pluggable equipment type B or permanently connected equipment.	N/A
1.7.2.4	IT power distribution systems		N/A
1.7.2.5	Operator access with a tool	No tool used for access to operator access area.	N/A
1.7.2.6	Ozone	Not produce ozone.	N/A
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N/A
1.7.4	Supply voltage adjustment .....	No voltage adjustment.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Methods and means of adjustment; reference to installation instructions .....		N/A
1.7.5	Power outlets on the equipment .....	No power outlet.	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference) .....	Building-in power supply unit has been certified separately.	P
1.7.7	Wiring terminals		P
1.7.7.1	Protective earthing and bonding terminals .....	Appliance inlet used.	P
1.7.7.2	Terminals for a.c. mains supply conductors	Not permanently connected or provided with non-detachable power supply cord.	N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators		P
1.7.8.1	Identification, location and marking .....	No control and indicator affects safety.	N/A
1.7.8.2	Colours .....	Safety is not involved.	N/A
1.7.8.3	Symbols according to IEC 60417.....	Suitable symbol used.	P
1.7.8.4	Markings using figures .....	No control uses figures.	N/A
1.7.9	Isolation of multiple power sources .....	No such device.	N/A
1.7.10	Thermostats and other regulating devices .....	No such device.	N/A
1.7.11	Durability	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 s and then again for 15 s with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was neither curling nor lifting of the label edge.	P
1.7.12	Removable parts		N/A
1.7.13	Replaceable batteries .....	RTC battery	P
	Language(s) .....	English	—
1.7.14	Equipment for restricted access locations .....		N/A

<b>2</b>	<b>PROTECTION FROM HAZARDS</b>		<b>P</b>
<b>2.1</b>	<b>Protection from electric shock and energy hazards</b>		<b>P</b>
2.1.1	Protection in operator access areas	See below.	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.1.1.1	Access to energized parts	There is adequate protection against operator contact with bare parts at ELV or hazardous voltage or parts separated from these with basic or functional insulation only (except protective earth). No hazardous voltages exceeding 1000V a.c. or 1500V d.c.	P
	Test by inspection .....	No access to hazardous voltage part.	P
	Test with test finger (Figure 2A) .....	No access to hazardous voltage part.	P
	Test with test pin (Figure 2B) .....	No access to hazardous voltage part.	P
	Test with test probe (Figure 2C) .....	No TNV circuit.	N/A
2.1.1.2	Battery compartments		N/A
2.1.1.3	Access to ELV wiring	No ELV wiring in operator accessible area.	N/A
	Working voltage (V <sub>peak</sub> or V <sub>rms</sub> ); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage wiring in operator accessible area.	N/A
2.1.1.5	Energy hazards .....	No energy hazard in operator access area. Checked by means of the test finger. (see appended table 2.1.1.5)	P
2.1.1.6	Manual controls	No such part.	N/A
2.1.1.7	Discharge of capacitors in equipment	Building-in power supply unit has been certified separately.	P
	Measured voltage (V); time-constant (s).....	See above	—
2.1.1.8	Energy hazards – d.c. mains supply	Not intended to be connected to d.c. mains supply.	N/A
	a) Capacitor connected to the d.c. mains supply ..		N/A
	b) Internal battery connected to the d.c. mains supply :		N/A
2.1.1.9	Audio amplifiers .....	No audio amplifier.	N/A
2.1.2	Protection in service access areas		P
2.1.3	Protection in restricted access locations	Not intended to be used in RAL.	N/A
<b>2.2</b>	<b>SELV circuits</b>		<b>P</b>
2.2.1	General requirements		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.2.2	Voltages under normal conditions (V) .....	Building-in power supply unit has been certified separately.	P
2.2.3	Voltages under fault conditions (V) .....	Building-in power supply unit has been certified separately.	P
2.2.4	Connection of SELV circuits to other circuits .....	SELV circuits are only connected to other SELV and LCC circuits.	P

<b>2.3</b>	<b>TNV circuits</b>		N/A
2.3.1	Limits	No TNV circuit.	N/A
	Type of TNV circuits .....		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions .....		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed .....		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed .....		—
2.3.5	Test for operating voltages generated externally		N/A

<b>2.4</b>	<b>Limited current circuits</b>		N/A
2.4.1	General requirements		N/A
2.4.2	Limit values		N/A
	Frequency (Hz) .....		—
	Measured current (mA) .....		—
	Measured voltage (V) .....		—
	Measured circuit capacitance (nF or µF) .....		—
2.4.3	Connection of limited current circuits to other circuits		N/A

<b>2.5</b>	<b>Limited power sources</b>		P
	a) Inherently limited output		P
	b) Impedance limited output		N/A
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition	All USB and HDMI ports protected by IC current limiter.	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Use of integrated circuit (IC) current limiters	U67, U68, U1, U87, U88	P
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA) .....		—
	Current rating of overcurrent protective device (A) ..		—

<b>2.6</b>	<b>Provisions for earthing and bonding</b>		<b>P</b>
2.6.1	Protective earthing	Accessible conductive parts are reliably connected to protective earth.	P
2.6.2	Functional earthing	Functional earthing is separated from hazardous voltages by reinforced insulation or basic insulation and protective earthing.	P
	Use of symbol for functional earthing .....	Not used.	N/A
2.6.3	Protective earthing and protective bonding conductors	See below.	P
2.6.3.1	General	Refer to 2.6.3.2, 2.6.3.3 and 2.6.3.4.	P
2.6.3.2	Size of protective earthing conductors		N/A
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
2.6.3.3	Size of protective bonding conductors	See 2.6.3.4.	P
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
	Protective current rating (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min) .....	From GND pin of appliance inlet to metal enclosure: 8mΩ; 0,256V; 32A; 2 min	P
2.6.3.5	Colour of insulation .....	Building-in power supply unit has been certified separately.	P
2.6.4	Terminals		P
2.6.4.1	General	See below.	P
2.6.4.2	Protective earthing and bonding terminals		P
	Rated current (A), type, nominal thread diameter (mm) .....	The earth terminal of appliance inlet is considered as the main protective earthing terminal.	—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	The equipment is provided with an appliance inlet.	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.5	Integrity of protective earthing		P
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	There is no switch or overcurrent protective device in the protective earthing / bonding conductors.	P
2.6.5.3	Disconnection of protective earth	It is not possible to disconnect protective earth without disconnecting mains. The appliance coupler is used as disconnect device.	P
2.6.5.4	Parts that can be removed by an operator	No operator removable parts with protective earth connection except supply cord.	P
2.6.5.5	Parts removed during servicing	Protective earthed parts cannot be removed in a way which impair safety.	P
2.6.5.6	Corrosion resistance	No risk of corrosion.	P
2.6.5.7	Screws for protective bonding	Adequate connection of protective bonding.	P
2.6.5.8	Reliance on telecommunication network or cable distribution system	Protective earthing does not rely on a telecommunication network.	N/A

<b>2.7</b>	<b>Overcurrent and earth fault protection in primary circuits</b>		P
2.7.1	Basic requirements	Protective devices are integrated in the certified building-in power supply unit.	P
	Instructions when protection relies on building installation	Not rely on building installation.	N/A
2.7.2	Faults not simulated in 5.3.7		P
2.7.3	Short-circuit backup protection		P
2.7.4	Number and location of protective devices .....	Building-in power supply unit has been certified separately.	P
2.7.5	Protection by several devices	Only one protective device in power supply unit.	N/A
2.7.6	Warning to service personnel .....	No part of the equipment that remain energized might represent a hazard during servicing.	N/A

<b>2.8</b>	<b>Safety interlocks</b>		N/A
2.8.1	General principles	No safety interlock used.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm) .....		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

<b>2.9</b>	<b>Electrical insulation</b>		<b>P</b>
2.9.1	Properties of insulating materials	Building-in power supply unit has been certified separately. Neither natural rubber, materials containing asbestos nor hygroscopic materials are used as insulation. No driving belts or couplings used.	P
2.9.2	Humidity conditioning	Tested for 120 hrs.	P
	Relative humidity (%), temperature (°C) .....	93%, 40°C	—
2.9.3	Grade of insulation	Insulation is considered to be functional, basic, supplementary, reinforced or double insulation.	P
2.9.4	Separation from hazardous voltages		P
	Method(s) used .....	Method 1	—

<b>2.10</b>	<b>Clearances, creepage distances and distances through insulation</b>		<b>P</b>
2.10.1	General	All hazardous voltage parts have been enclosed in power supply unit, which has been certified separately. All circuits external to the power supply are SELV or protective earth. The insulation is functional.	P
2.10.1.1	Frequency .....	Comply	P
2.10.1.2	Pollution degrees .....	2	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.1.3	Reduced values for functional insulation		P
2.10.1.4	Intervening unconnected conductive parts	Building-in power supply unit has been certified separately.	P
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A
2.10.2	Determination of working voltage	Building-in power supply unit has been certified separately.	P
2.10.2.1	General		P
2.10.2.2	RMS working voltage	Building-in power supply unit has been certified separately.	P
2.10.2.3	Peak working voltage	Building-in power supply unit has been certified separately.	P
2.10.3	Clearances	Building-in power supply unit has been certified separately.	P
2.10.3.1	General		P
2.10.3.2	Mains transient voltages		P
	a) AC mains supply .....	2500 V <sub>peak</sub> considered.	P
	b) Earthed d.c. mains supplies .....		N/A
	c) Unearthed d.c. mains supplies .....		N/A
	d) Battery operation .....		N/A
2.10.3.3	Clearances in primary circuits	Building-in power supply unit has been certified separately.	P
2.10.3.4	Clearances in secondary circuits		N/A
2.10.3.5	Clearances in circuits having starting pulses		N/A
2.10.3.6	Transients from a.c. mains supply .....		N/A
2.10.3.7	Transients from d.c. mains supply .....		N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems .....		N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply .....		N/A
	For a d.c. mains supply .....		N/A
	b) Transients from a telecommunication network :		N/A
2.10.4	Creepage distances		P
2.10.4.1	General		P
2.10.4.2	Material group and comparative tracking index		P
	CTI tests .....	Material group IIIb is assumed to be used	—



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.4.3	Minimum creepage distances	Building-in power supply unit has been certified separately.	P
2.10.5	Solid insulation		P
2.10.5.1	General		P
2.10.5.2	Distances through insulation		P
2.10.5.3	Insulating compound as solid insulation	Building-in power supply unit has been certified separately.	P
2.10.5.4	Semiconductor devices		P
2.10.5.5.	Cemented joints	Building-in power supply unit has been certified separately.	P
2.10.5.6	Thin sheet material – General		P
2.10.5.7	Separable thin sheet material		P
	Number of layers (pcs) ..... :	Building-in power supply unit has been certified separately.	—
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material – standard test procedure		N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure	Building-in power supply unit has been certified separately.	P
	Electric strength test		—
2.10.5.11	Insulation in wound components		P
2.10.5.12	Wire in wound components	Approved TIW used in power supply	P
	Working voltage ..... :		P
	a) Basic insulation not under stress ..... :		N/A
	b) Basic, supplementary, reinforced insulation ..... :	Reinforced insulation	P
	c) Compliance with Annex U ..... :	See Annex U	P
	Two wires in contact inside wound component; angle between 45° and 90° ..... :	Building-in power supply unit has been certified separately	P
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage ..... :		N/A
	- Basic insulation not under stress ..... :		N/A
	- Supplementary, reinforced insulation ..... :		N/A
2.10.6	Construction of printed boards	Building-in power supply unit has been certified separately	P
2.10.6.1	Uncoated printed boards		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs) ..... :		N/A
2.10.7	Component external terminations		P
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N/A
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts		N/A

<b>3</b>	<b>WIRING, CONNECTIONS AND SUPPLY</b>		<b>P</b>
<b>3.1</b>	<b>General</b>		<b>P</b>
3.1.1	Current rating and overcurrent protection	Adequate cross sectional areas on internal wiring.	P
3.1.2	Protection against mechanical damage	The Wireways are smooth and free from sharp edges.	P
3.1.3	Securing of internal wiring	Internal wiring is secured against excessive strain, loosening of terminals and damage to the conductor insulation.	P
3.1.4	Insulation of conductors	The insulation of the individual conductors is suitable for the application and the working voltage.	P
3.1.5	Beads and ceramic insulators	No such component.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.1.6	Screws for electrical contact pressure	Electrical screw connection is only connecting protective earth to chassis. Metal screw engages more than 2 threads. Screws made of insulating material are not used where electrical connections, including protective earthing are involved.	P
3.1.7	Insulating materials in electrical connections	No contact pressure through insulating material.	P
3.1.8	Self-tapping and spaced thread screws	No self- tapping or spaced thread screws for electrical connections.	P
3.1.9	Termination of conductors	Terminations cannot become displaced so that clearances and creepage distances can be reduced.	P
	10 N pull test	Conducted.	P
3.1.10	Sleeving on wiring		P

<b>3.2</b>	<b>Connection to a mains supply</b>		P
3.2.1	Means of connection		P
3.2.1.1	Connection to an a.c. mains supply	Appliance inlet used.	P
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment		N/A
	Number of conductors, diameter of cable and conduits (mm) .....		—
3.2.4	Appliance inlets	Appliance inlet is integrated in the certified building-in power supply unit.	P
3.2.5	Power supply cords		N/A
3.2.5.1	AC power supply cords		N/A
	Type .....		—
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N) .....		—
	Longitudinal displacement (mm) .....		—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.7	Protection against mechanical damage		N/A
3.2.8	Cord guards		N/A
	Diameter or minor dimension D (mm); test mass (g) ..... :		—
	Radius of curvature of cord (mm) ..... :		—
3.2.9	Supply wiring space		N/A

<b>3.3</b>	<b>Wiring terminals for connection of external conductors</b>		N/A
3.3.1	Wiring terminals	Appliance inlet used.	N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm <sup>2</sup> ) ..... :		—
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type, nominal thread diameter (mm) ..... :		—
3.3.6	Wiring terminal design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

<b>3.4</b>	<b>Disconnection from the mains supply</b>		P
3.4.1	General requirement	See below.	P
3.4.2	Disconnect devices	The appliance coupler is acting as disconnect device.	P
3.4.3	Permanently connected equipment	Not permanently connected equipment.	N/A
3.4.4	Parts which remain energized	No parts remain energized after the disconnect device is pull out.	P
3.4.5	Switches in flexible cords	No switch in flexible cord.	P
3.4.6	Number of poles - single-phase and d.c. equipment	The disconnect device disconnects both poles simultaneously.	P
3.4.7	Number of poles - three-phase equipment	Single phase equipment.	N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices	The appliance coupler is regarded as disconnect device, no warning is required.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.4.10	Interconnected equipment	No interconnections using hazardous voltages.	N/A
3.4.11	Multiple power sources	One power source only.	N/A

<b>3.5</b>	<b>Interconnection of equipment</b>		<b>P</b>
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits ..... :	SELV circuit.	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnection.	N/A
3.5.4	Data ports for additional equipment	See table 2.5	P

<b>4</b>	<b>PHYSICAL REQUIREMENTS</b>		<b>P</b>
<b>4.1</b>	<b>Stability</b>		<b>P</b>
	Angle of 10°		P
	Test force (N) ..... :	Not floor-standing equipment.	N/A

<b>4.2</b>	<b>Mechanical strength</b>		<b>P</b>
4.2.1	General		P
	Rack-mounted equipment.		N/A
4.2.2	Steady force test, 10 N		P
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	No hazard. The test is performed at all sides of enclosure.	P
4.2.5	Impact test		P
	Fall test		P
	Swing test		P
4.2.6	Drop test; height (mm) ..... :		N/A
4.2.7	Stress relief test		N/A
4.2.8	Cathode ray tubes	No cathode ray tube.	N/A
	Picture tube separately certified ..... :		N/A
4.2.9	High pressure lamps	No high pressure lamp.	N/A
4.2.10	Wall or ceiling mounted equipment; force (N) ..... :		N/A

<b>4.3</b>	<b>Design and construction</b>		<b>P</b>
4.3.1	Edges and corners	All edges and corners are rounded and smoothed.	P
4.3.2	Handles and manual controls; force (N) ..... :		N/A
4.3.3	Adjustable controls	No adjustable control.	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.4	Securing of parts		P
4.3.5	Connection by plugs and sockets		P
4.3.6	Direct plug-in equipment	Not direct plug-in equipment.	N/A
	Torque .....		—
	Compliance with the relevant mains plug standard .....		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries	(See appended table 4.3.8)	P
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		P
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		P
4.3.9	Oil and grease	No oil and grease.	N/A
4.3.10	Dust, powders, liquids and gases	Not intend to product dust, or using powders, liquids and gases.	N/A
4.3.11	Containers for liquids or gases	No such containers used.	N/A
4.3.12	Flammable liquids .....	No flammable liquids.	N/A
	Quantity of liquid (l) .....		N/A
	Flash point (°C) .....		N/A
4.3.13	Radiation		P
4.3.13.1	General	See below.	P
4.3.13.2	Ionizing radiation	No ionizing radiation.	N/A
	Measured radiation (pA/kg) .....		—
	Measured high-voltage (kV) .....		—
	Measured focus voltage (kV) .....		—
	CRT markings .....		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials	No UV lamp used.	N/A
	Part, property, retention after test, flammability classification .....		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation .....	No UV radiation.	N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	See below	P
4.3.13.5.1	Lasers (including laser diodes)		N/A
	Laser class .....		—
4.3.13.5.2	Light emitting diodes (LEDs)	The LED only used as indicating lights.	—
4.3.13.6	Other types .....		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

<b>4.4</b>	<b>Protection against hazardous moving parts</b>		<b>P</b>
4.4.1	General	The EUT contains DC Fans.	P
4.4.2	Protection in operator access areas .....	DC fan protected by enclosure.	P
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations .....	Not intended for installation in RAL.	N/A
4.4.4	Protection in service access areas	Unintentional contact is unlikely in service access areas.	N/A
4.4.5	Protection against moving fan blades		P
4.4.5.1	General	See below.	P
	Not considered to cause pain or injury. a).....	The DC Fan is within the limits under normal and fault conditions. DC Fan AD0812LX-A70GL in system: $K=6 \times 10^{-7} (0,04 \times 40^2 \times 2000^2)$ $=153,6$ $2000/15000+153,6/2400=0,198 < 1$ ; According to above caculation, moving fans blade are considered not likely to cause pain or injury.	P
	Is considered to cause pain, not injury. b) .....		N/A
	Considered to cause injury. c) .....		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning .....		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning .....		N/A

<b>4.5</b>	<b>Thermal requirements</b>		<b>P</b>
4.5.1	General		P
4.5.2	Temperature tests	(see appended table 4.5)	P
	Normal load condition per Annex L .....	See annex L.	—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat .....	Building-in power supply unit has been certified separately.	P

<b>4.6</b>	<b>Openings in enclosures</b>		<b>P</b>
------------	-------------------------------	--	----------

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.6.1	Top and side openings	Openings do not allow foreign objects entering the equipment to fall on bare parts. Also, openings are not located within 5° of fire hazardous parts.	P
	Dimensions (mm) ..... :	Front side: no openings; Top side: no openings; Rear side: building-in power supply provide numerous regular hexagon openings with diagonal max 6,7mm; Left side: provide numerous regular hexagon openings with side max 4,1mm; Right side: provide numerous regular hexagon openings with diagonal max 5,4mm.	—
4.6.2	Bottoms of fire enclosures	See blew.	P
	Construction of the bottom, dimensions (mm) .... :	No openings.	—
4.6.3	Doors or covers in fire enclosures	No cover can be removed by hand.	N/A
4.6.4	Openings in transportable equipment	Not transportable equipment.	N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm) ..... :		—
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks)..... :		—

<b>4.7</b>	<b>Resistance to fire</b>		P
4.7.1	Reducing the risk of ignition and spread of flame		P
	Method 1, selection and application of components wiring and materials		P
	Method 2, application of all of simulated fault condition tests		N/A
4.7.2	Conditions for a fire enclosure	See below.	P
4.7.2.1	Parts requiring a fire enclosure	The fire enclosure covers all parts.	P
4.7.2.2	Parts not requiring a fire enclosure		N/A
4.7.3	Materials		P
4.7.3.1	General	Components and materials have adequate flammability classification. See appended table 1.5.1.	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3.2	Materials for fire enclosures	The fire enclosure is constructed metal and V-1 plastic front panel enclosure.	P
4.7.3.3	Materials for components and other parts outside fire enclosures	No parts outside the fire enclosure.	N/A
4.7.3.4	Materials for components and other parts inside fire enclosures	Other materials inside fire enclosure are minimum V-2 material.	P
4.7.3.5	Materials for air filter assemblies	No air filter.	N/A
4.7.3.6	Materials used in high-voltage components	No high-voltage component.	N/A

<b>5</b>	<b>ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS</b>		P
<b>5.1</b>	<b>Touch current and protective conductor current</b>		P
5.1.1	General	(see appended Table 5.1)	P
5.1.2	Configuration of equipment under test (EUT)		P
5.1.2.1	Single connection to an a.c. mains supply		P
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Figure 5A is used.	P
5.1.4	Application of measuring instrument	Measuring instrument D1 is used.	P
5.1.5	Test procedure		P
5.1.6	Test measurements		P
	Supply voltage (V) .....	264V	—
	Measured touch current (mA) .....	(see appended table 5.1)	—
	Max. allowed touch current (mA) .....	(see appended table 5.1)	—
	Measured protective conductor current (mA) .....		—
	Max. allowed protective conductor current (mA)....		—
5.1.7	Equipment with touch current exceeding 3,5 mA		N/A
5.1.7.1	General .....		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	Not connected to a telecommunication network or cable distribution system.	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V) .....		—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Measured touch current (mA) .....		—
	Max. allowed touch current (mA) .....		—
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports .....		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

<b>5.2</b>	<b>Electric strength</b>		P
5.2.1	General	(see appended table 5.2)	P
5.2.2	Test procedure		P

<b>5.3</b>	<b>Abnormal operating and fault conditions</b>		P
5.3.1	Protection against overload and abnormal operation	(see appended table 5.3)	P
5.3.2	Motors	Approved DC fans.	P
5.3.3	Transformers	Building-in power supply unit has been certified separately.	P
5.3.4	Functional insulation .....	Complies with c).	P
5.3.5	Electromechanical components	No such components.	N/A
5.3.6	Audio amplifiers in ITE .....	No audio amplifier.	N/A
5.3.7	Simulation of faults	Power supply unit has been certified separately. See appended table 5.3 for additional fault tests.	P
5.3.8	Unattended equipment		N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	No fire or molten metal occurred and no deformation of enclosure during the tests.	P
5.3.9.1	During the tests	No fire or molten metal occurred and no deformation of enclosure during the tests.	P
5.3.9.2	After the tests	No reduction of clearance and creepage test is made on functional, basic and reinforced insulation.	P

<b>6</b>	<b>CONNECTION TO TELECOMMUNICATION NETWORKS</b>		N/A
<b>6.1</b>	<b>Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment</b>		N/A
6.1.1	Protection from hazardous voltages		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A
	Supply voltage (V) .....		—
	Current in the test circuit (mA) .....		—
6.1.2.2	Exclusions .....		N/A

<b>6.2</b>	<b>Protection of equipment users from overvoltages on telecommunication networks</b>		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

<b>6.3</b>	<b>Protection of the telecommunication wiring system from overheating</b>		N/A
	Max. output current (A) .....		—
	Current limiting method .....		—

<b>7</b>	<b>CONNECTION TO CABLE DISTRIBUTION SYSTEMS</b>		N/A
<b>7.1</b>	<b>General</b>		N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

<b>A</b>	<b>ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE</b>		N/A
<b>A.1</b>	<b>Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)</b>		N/A
A.1.1	Samples .....		—
	Wall thickness (mm) .....		—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
A.1.2	Conditioning of samples; temperature (°C) .....		N/A
A.1.3	Mounting of samples .....		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D .....		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
<b>A.2</b>	<b>Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)</b>		N/A
A.2.1	Samples, material .....		—
	Wall thickness (mm) .....		—
A.2.2	Conditioning of samples; temperature (°C) .....		N/A
A.2.3	Mounting of samples .....		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C .....		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
<b>A.3</b>	<b>Hot flaming oil test (see 4.6.2)</b>		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A
<b>B</b>	<b>ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)</b>		P
<b>B.1</b>	<b>General requirements</b>	Certified DC Fan was used.	P
	Position .....	In SELV circuits.	—
	Manufacturer .....	(see appended table 1.5.1)	—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Type .....	(see appended table 1.5.1)	—
	Rated values .....	(see appended table 1.5.1)	—
<b>B.2</b>	<b>Test conditions</b>		N/A
<b>B.3</b>	<b>Maximum temperatures</b>		N/A
<b>B.4</b>	<b>Running overload test</b>		N/A
<b>B.5</b>	<b>Locked-rotor overload test</b>		N/A
	Test duration (days) .....		—
	Electric strength test: test voltage (V) .....		—
<b>B.6</b>	<b>Running overload test for d.c. motors in secondary circuits</b>		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V) .....		N/A
<b>B.7</b>	<b>Locked-rotor overload test for d.c. motors in secondary circuits</b>		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V) .....		N/A
<b>B.8</b>	<b>Test for motors with capacitors</b>		N/A
<b>B.9</b>	<b>Test for three-phase motors</b>		N/A
<b>B.10</b>	<b>Test for series motors</b>		N/A
	Operating voltage (V) .....		—

<b>C</b>	<b>ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)</b>		P
	Position .....	Building-in power supply unit has been certified separately.	—
	Manufacturer .....		—
	Type .....		—
	Rated values .....		—
	Method of protection.....		—
<b>C.1</b>	<b>Overload test</b>	Building-in power supply unit has been certified separately.	P
<b>C.2</b>	<b>Insulation</b>		P
	Protection from displacement of windings .....		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>D</b>	<b>ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)</b>		P
<b>D.1</b>	<b>Measuring instrument</b>	Figure D.1 used.	P
<b>D.2</b>	<b>Alternative measuring instrument</b>		N/A
<b>E</b>	<b>ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)</b>		N/A
<b>F</b>	<b>ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)</b>		P
<b>G</b>	<b>ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES</b>		N/A
<b>G.1</b>	<b>Clearances</b>		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
<b>G.2</b>	<b>Determination of mains transient voltage (V)</b>		N/A
G.2.1	AC mains supply .....		N/A
G.2.2	Earthed d.c. mains supplies .....		N/A
G.2.3	Unearthed d.c. mains supplies .....		N/A
G.2.4	Battery operation .....		N/A
<b>G.3</b>	<b>Determination of telecommunication network transient voltage (V) .....</b>		N/A
<b>G.4</b>	<b>Determination of required withstand voltage (V)</b>		N/A
G.4.1	Mains transients and internal repetitive peaks .....		N/A
G.4.2	Transients from telecommunication networks .....		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
<b>G.5</b>	<b>Measurement of transient voltages (V)</b>		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
<b>G.6</b>	<b>Determination of minimum clearances .....</b>		N/A
<b>H</b>	<b>ANNEX H, IONIZING RADIATION (see 4.3.13)</b>		N/A
<b>J</b>	<b>ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)</b>		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Metal(s) used .....	Comply	—

<b>K</b>	<b>ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)</b>		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V) .....		N/A
K.3	Thermostat endurance test; operating voltage (V) .....		N/A
K.4	Temperature limiter endurance; operating voltage (V) .....		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A

<b>L</b>	<b>ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)</b>		P
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A
L.7	Other business equipment		P

<b>M</b>	<b>ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)</b>		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz) .....		—
M.3.1.2	Voltage (V) .....		—
M.3.1.3	Cadence; time (s), voltage (V) .....		—
M.3.1.4	Single fault current (mA) .....		—
M.3.2	Tripping device and monitoring voltage .....		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V) .....		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>N</b>	<b>ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)</b>		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A
<b>P</b>	<b>ANNEX P, NORMATIVE REFERENCES</b>		N/A
<b>Q</b>	<b>ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)</b>		P
	- Preferred climatic categories .....	Building-in power supply unit has been certified separately. Refer to power supply unit test report.	P
	- Maximum continuous voltage .....		P
	- Combination pulse current .....		P
	Body of the VDR Test according to IEC60695-11-5.....		N/A
	Body of the VDR. Flammability class of material ( min V-1).....		P
<b>R</b>	<b>ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES</b>		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A
<b>S</b>	<b>ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)</b>		N/A
S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
<b>T</b>	<b>ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)</b>		N/A
			—
<b>U</b>	<b>ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)</b>		U
		Certified TIW in power supply	—
<b>V</b>	<b>ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)</b>		P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
V.1	Introduction		P
V.2	TN power distribution systems		P
<b>W</b>	<b>ANNEX W, SUMMATION OF TOUCH CURRENTS</b>		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
<b>X</b>	<b>ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)</b>		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A
<b>Y</b>	<b>ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)</b>		N/A
Y.1	Test apparatus .....		N/A
Y.2	Mounting of test samples .....		N/A
Y.3	Carbon-arc light-exposure apparatus .....		N/A
Y.4	Xenon-arc light exposure apparatus .....		N/A
<b>Z</b>	<b>ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)</b>		P
<b>AA</b>	<b>ANNEX AA, MANDREL TEST (see 2.10.5.8)</b>		N/A
<b>BB</b>	<b>ANNEX BB, CHANGES IN THE SECOND EDITION</b>		N/A
<b>CC</b>	<b>ANNEX CC, Evaluation of integrated circuit (IC) current limiters</b>		N/A
CC.1	General		N/A
CC.2	Test program 1.....		N/A
CC.3	Test program 2.....		N/A
CC.4	Test program 3.....		N/A
CC.5	Compliance.....		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>DD</b>	<b>ANNEX DD, Requirements for the mounting means of rack-mounted equipment</b>		N/A
DD.1	General		N/A
DD.2	Mechanical strength test, variable N.....:		N/A
DD.3	Mechanical strength test, 250N, including end stops.....:		N/A
DD.4	Compliance.....:		N/A

<b>EE</b>	<b>ANNEX EE, Household and home/office document/media shredders</b>		N/A
EE.1	General		N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols.....:		N/A
	Information of user instructions, maintenance and/or servicing instructions.....:		N/A
EE.3	Inadvertent reactivation test.....:		N/A
EE.4	Disconnection of power to hazardous moving parts:		N/A
	Use of markings or symbols.....:		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A) .....		N/A
	Test with wedge probe (Figure EE1 and EE2) ...:		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity <sup>1)</sup>	
Building-in power supply	DELTA ELECTRONICS INC	DPS-150AB-3 A	I/P: 100-240V~, 4A, 47-63Hz, class I; O/P: 12Vdc, 12,5A, 150W MAX. 55°C	IEC 60950-1: 2005 + A1 + A2 EN 60950-1: 2006 + A11 + A1 + A12+ A2 IEC 62368-1:2014 EN 62368-1:2014+A11	TUV RH Ref. Certif. No.: JPTUV-065367 Report No.: 16070336 001 TUV RH Ref. Certif. No.: JPTUV-084112 Report No.: 16086082 001	
Metal enclosure	Interchangeable	Interchangeable	Min. Thickness 1,0mm	IEC 60950-1:2005 + A1 + A2 EN 60950-1: 2006 + A11 + A1 + A12 + A2	Test with appliance	
Plastic enclosure for H.D.D.	NINGBO LG YONGXING CHEMICAL CO LTD	FR-500	Min. V-1, 60°C, Min. thickness 1,5mm	UL 94	UL E203955	
System DC Fan	ADDA CORPORATION	AD0812LX-A70GL	12Vdc, 0,12A, 26,8CFM, 2000r/min	IEC 60950-1:2005 + A1 + A2 EN 60950-1: 2006 + A11 + A1 + A12 + A2	TUV Rheinland R 50068602	
IC current limiter for all USB2.0 & USB3.0 ports	SILERGY CORP.	SY6288A	2,5-5,5Vdc, 1,6A	EN 60730-1:1995+A11+A12+A1 EN 60730-1/A2+A13+A14+A15	TUV Rheinland Cert. No.: JPTUV-058243-M1	
IC current limiter for HDMI port	DIODES. INC	AP2331	2,7-5,2Vdc, 5,2A	EN 60730-1:1995+A11+A12+A1 EN 60730-1/A2+A13+A14+A15	TUV Rheinland Test report: E322375-A6-CB-1	
Lithium battery	HITACHI MAXELL, LTD	CR2032	3Vdc, Max Abnormal Charging Current 10mA 210mAh	UL 1642	UL MH12568	

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
-Alt.	CHANGZHOU JINTAN CHAOCHUANG BATTERY CO LTD	CR2032	3Vdc, Max Abnormal Charging Current 10mA 220mAh	UL1642	UL MH10136
PCB	Interchangeable	Interchangeable	Min. V-1, 105°C	UL94	UL
Internal wire	Interchangeable	Interchangeable	PVC, TFE, PTFE, FEP, polychloroprene or polyimide or VW-1	--	--
<b>Supplementary information:</b> <sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

1.5.1	TABLE: Opto Electronic Devices	N/A
Manufacturer .....: -- Type .....: -- Separately tested.....: -- Bridging insulation .....: -- External creepage distance .....: -- Internal creepage distance .....: -- Distance through insulation .....: -- Tested under the following conditions.....: -- Input .....: -- Output.....: --		
supplementary information		

1.6.2	TABLE: Electrical data (in normal conditions)						P
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status	
90V 50Hz	1,43	--	108,6	F1	1,43	Normal operation condition.	
90V 60Hz	1,43	--	108,6	F1	1,43	Normal operation condition.	
100V 50Hz	1,34	1,9	107,2	F1	1,34	Normal operation condition.	
100V 60Hz	1,35	1,9	107,5	F1	1,35	Normal operation condition.	
240V 50Hz	0,60	1,9	102,0	F1	0,60	Normal operation condition.	
240V 60Hz	0,61	1,9	102,0	F1	0,61	Normal operation condition.	
264V 50Hz	0,52	--	101,5	F1	0,52	Normal operation condition.	
264V 60Hz	0,53	--	101,4	F1	0,53	Normal operation condition.	
Supplementary information: Each USB2.0 port loaded with 0,5A, USB3.0 port loaded with 0,9A, the equipment load with 8 HDD.							

IEC 60950-1					
Clause	Requirement + Test			Result - Remark	Verdict
2.1.1.5 c) 1)	TABLE: max. V, A, VA test				P
Voltage (rated) (V)		Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)
5V (Rear USB 3.0 port)		0,9	4,98	2,97	10,53
5V (Front USB 2.0 port)		0,5	4,98	2,93	11,03
5V (HDMI)		--	4,98	0,40	1,78
supplementary information:					
1) Tested with 240Vac / 50Hz.					
2) All USB2.0, USB3.0, HDMI ports have the same result.					

2.1.1.5 c) 2)	TABLE: stored energy		N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)	
--	--	--	
supplementary information:			

2.2	TABLE: evaluation of voltage limiting components in SELV circuits			N/A
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
--		--	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
--		--		
supplementary information:				

2.5	TABLE: Limited power sources				P
Circuit output tested: Output terminal (+) and pin (-)					
Note: Measured Uoc (V) with all load circuits disconnected:					
Components	Uoc (V)	I <sub>sc</sub> (A)		VA	
		Meas.	Limit	Meas.	Limit
Rear USB 3.0 port	4,98	2,97	8	10,53	100
Front USB 2.0 port	4,98	2,93	8	11,03	100
HDMI port	4,98	0,40	8	1,78	100
supplementary information:					

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

- 1) Tested with 264Vac / 50Hz.  
2) All USB2.0, USB3.0 and HDMI ports are limited by IC current limiters.  
3) All USB2.0, USB3.0, HDMI ports have the same result.  
Sc: Short circuit.

2.10.2	Table: working voltage measurement			N/A
Location		RMS voltage (V)	Peak voltage (V)	Comments
--		--	--	--
supplementary information:				
Building-in power supply has been certified separately by IEC 60950-1:2005 + A1 + A2.				

<b>2.10.3 and 2.10.4</b>	<b>TABLE: Clearance and creepage distance measurements</b>						N/A
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
--	--	--	--	--	--	--	--
Basic/supplementary:							
--	--	--	--	--	--	--	--
Reinforced:							
--	--	--	--	--	--	--	--
Supplementary information: Building-in power supply has been certified separately by IEC 60950-1:2005 + A1 + A2, All hazardous live parts are enclosed in power supply unit and have sufficient distance to the secondary circuits/components/wires.							

<b>2.10.5</b>	<b>TABLE: Distance through insulation measurements</b>						N/A
Distance through insulation (DTI) at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)		
--	--	--	--	--	--	--	--
Supplementary information:							


<b>4.3.8</b>	<b>TABLE: Batteries</b>					P
The tests of 4.3.8 are applicable only when appropriate battery data is not available			Appropriate battery data is not available			P
Is it possible to install the battery in a reverse polarity position?			No			P
	Non-rechargeable batteries		Rechargeable batteries			
	Discharging	Un-	Charging	Discharging	Reversed charging	

IEC 60950-1									
Clause	Requirement + Test					Result - Remark			Verdict
	Meas. current	Manuf. Specs.	intentional charging	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	0,01mA	--	Prevented	--	--	--	--	--	--
Max. current during fault condition	1,55mA C416 shorted	--	See the data in below 4.3.8 table	--	--	--	--	--	--
Test results:									Verdict
- Chemical leaks						No			P
- Explosion of the battery						No			P
- Emission of flame or expulsion of molten metal						No			P
- Electric strength tests of equipment after completion of tests									N/A
Supplementary information: Appropriate battery data is not available, the tests of 4.3.8 were performed. See table 5.3.									

<b>4.3.8</b>	<b>TABLE: Batteries</b>	<b>P</b>
Battery category .....: Lithium Battery		
Manufacturer .....: See table 1.5.1		
Type / model .....: See table 1.5.1		
Voltage .....: See table 1.5.1		
Capacity.....: --		
Tested and Certified by (incl. Ref. No.) .....: See table 1.5.1		
Circuit protection diagram:		

## IEC 60950-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

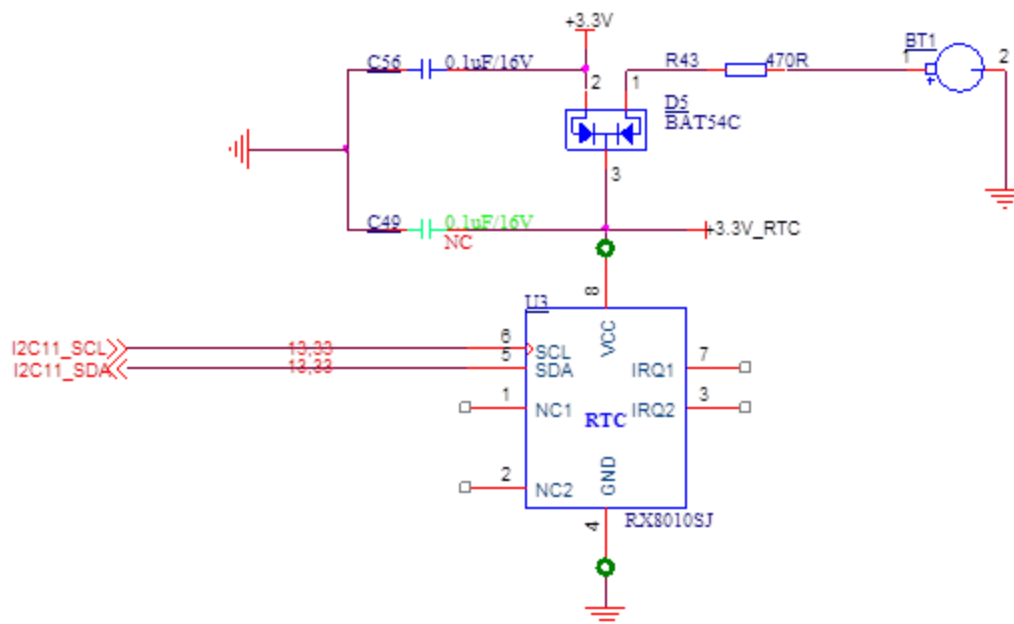

When D8 pin1-2 short circuit, measured  $I = 5,65\text{mA}$ , less than the battery max. abnormal charging current 300mA. RTC battery is replaced by an ammeter during the test.

### MARKINGS AND INSTRUCTIONS (1.7.13)

Location of replaceable battery	Located in service access area, can't be replaced by operator.
Language(s) .....	English
Close to the battery .....	N/A
In the servicing instructions .....	Provided
In the operating instructions .....	N/A

4.5	TABLE: Thermal requirements					P
	Supply voltage (V) .....	90V, 60Hz	264V, 50Hz	--	--	—
	Ambient $T_{\min}$ (°C) .....	--	--	--	--	—
	Ambient $T_{\max}$ (°C) .....	55	55	--	--	—
Maximum measured temperature T of part/at.....:		T (°C)				Allowed T (°C)



IEC 60950-1							
Clause	Requirement + Test			Result - Remark			Verdict
T501 coil (Power supply)	82,7	80,9	--	--	--	110	
T501 core (Power supply)	82,2	80,0	--	--	--	110	
CY7 body (Power supply)	75,8	70,6	--	--	--	125	
L801 coil (Power supply)	98,5	74,7	--	--	--	130	
PCB near BD1 (Power supply)	91,6	73,4	--	--	--	130	
CY6 body (Power supply)	89,2	72,0	--	--	--	125	
FL3 coil (Power supply)	86,6	68,5	--	--	--	130	
Optocoupler (Power supply)	85,5	81,5	--	--	--	100	
AC inlet (Power supply)	63,6	61,1	--	--	--	70	
Power switch (Power supply)	62,1	60,6	--	--	--	85	
PCB near U37 (Main board)	66,4	66,3	--	--	--	105	
PCB near U38 (Main board)	67,3	67,1	--	--	--	105	
PCB near U35 (Main board)	62,8	62,7	--	--	--	105	
RTC body (Main board)	58,8	58,6	--	--	--	Ref.	
Internal enclosure near HDD	55,8	55,9	--	--	--	60	
External enclosure near HDD	55,7	55,6	--	--	--	60	
Metal enclosure near power supply	57,6	56,7	--	--	--	70	
Metal enclosure near U38	57,4	57,0	--	--	--	70	
Temperature T of winding:	t <sub>1</sub> (°C)	R <sub>1</sub> (Ω)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)	Insulation class
--	--	--	--	--	--	--	--
Supplementary information:							
The limited value of power supply unit temperature refers to the power supply test report.							
Each USB2.0 port loaded with 0,5A, USB3.0 port loaded with 0,9A, the equipment load with 8 HDD.							

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm) .....:	≤ 2 mm		—
Part		Test temperature (°C)	Impression diameter (mm)	
--		--	--	
Supplementary information: Building-in power supply unit has been certified separately.				

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
--	--	--	--	--	--	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information: See table 1.5.1

5.1	TABLE: touch current measurement			P
Measured between:		Measured (mA)	Limit (mA)	Comments/conditions
L/N and metal enclosure		0,22	3,50	--
L/N and plastic enclosure		0,01	0,25	--
supplementary information:				
Tested with 264Vac / 60Hz				

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			P
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Functional:				
--	--	--	--	--
Basic/supplementary:				
Primary live parts to metal enclosure		AC	1979	No
Reinforced:				
L&N to secondary terminals		AC	3000	No
L&N to plastic enclosure with metal foil		AC	3000	No
Supplementary information:				

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

<b>5.3</b>	<b>TABLE: Fault condition tests</b>					<b>P</b>
	Ambient temperature (°C) .....				See below	—
	Power source for EUT: Manufacturer, model/type, output rating .....				See table 1.5.1	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Ventilation openings	Blocked	264V	58mins	F1	0,53A	The EUT normal operation. Max. temp. measured: T501 coil = 58,1°C, T501 core = 57,6°C, Ambient= 24,9°C, No damage, no hazards.
DC Fan in system	Locked	264V	2Hrs	F1	0,53A	The EUT normal operation. Max. temp. measured: T501 coil = 44,4°C, T501 core = 44,3°C, Ambient= 24,3°C, No damage, no hazards.
DC fan in power supply	Locked	264V	57mins	F1	0,53A	The EUT normal operation. Max. temp. measured: T501 coil = 48,1°C, T501 core = 44,6°C, Ambient= 25,0°C, No damage, no hazards.
D8 pin1-2 Overcharging	Sc	264V	7Hrs	F1	0,53A	The EUT normal operation. BATTERY charging current is 5,65mA. No damage, no hazards.
C416	Sc	264V	10mins	F1	0,53A	The EUT normal operation. BATTERY discharging current is 1,55mA. No damage, no hazards.
Supplementary information: Sc: Short Circuit						

<b>C.2</b>	<b>TABLE: transformers</b>						<b>N/A</b>
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)
--	--	--	--	--	--	--	--

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
Loc.	Tested insulation	Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
--	--	--	--	--	--
Supplementary information:					

<b>C.2</b>	<b>TABLE: transformers</b>	N/A
--		

\*\*\*\*\*End of Test report\*\*\*\*\*

Details of: General view (Model: DH-XVR8816S-4KL-I)



Details of: General view (Model: DH-XVR8816S-4KL-I)






Details of: Terminal view (Model: DH-XVR8816S-4KL-I)




Details of: Terminal view (Model: DH-XVR8816S-4KL-I)



Details of: Internal view (Model: DH-XVR8816S-4KL-I)

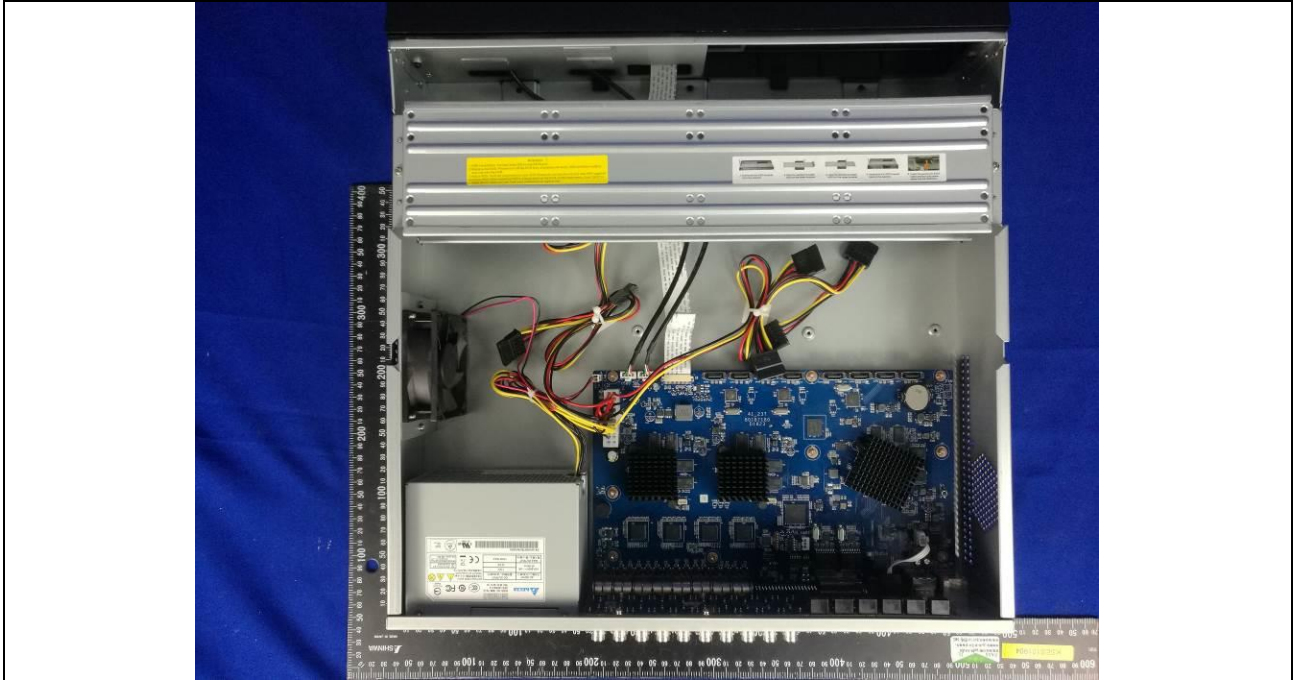


Details of: Front panel (Model: DH-XVR8816S-4KL-I)

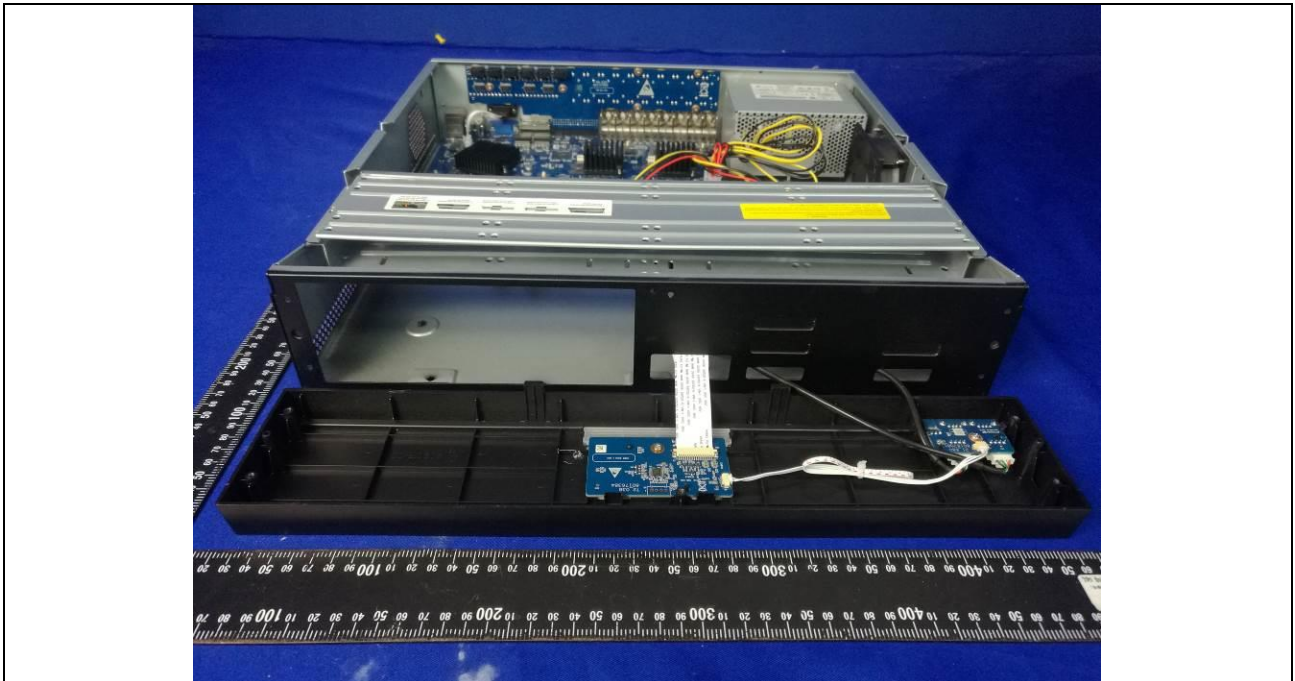




Details of: PCB-1

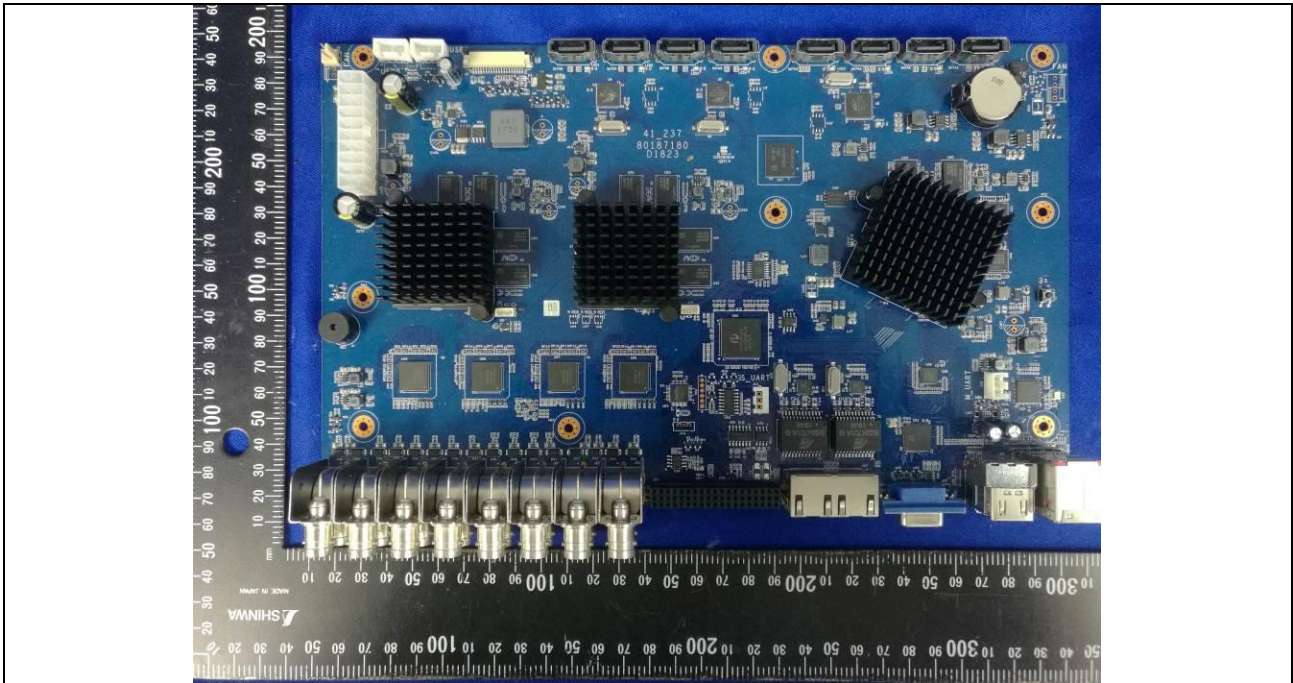


Details of: PCB-1

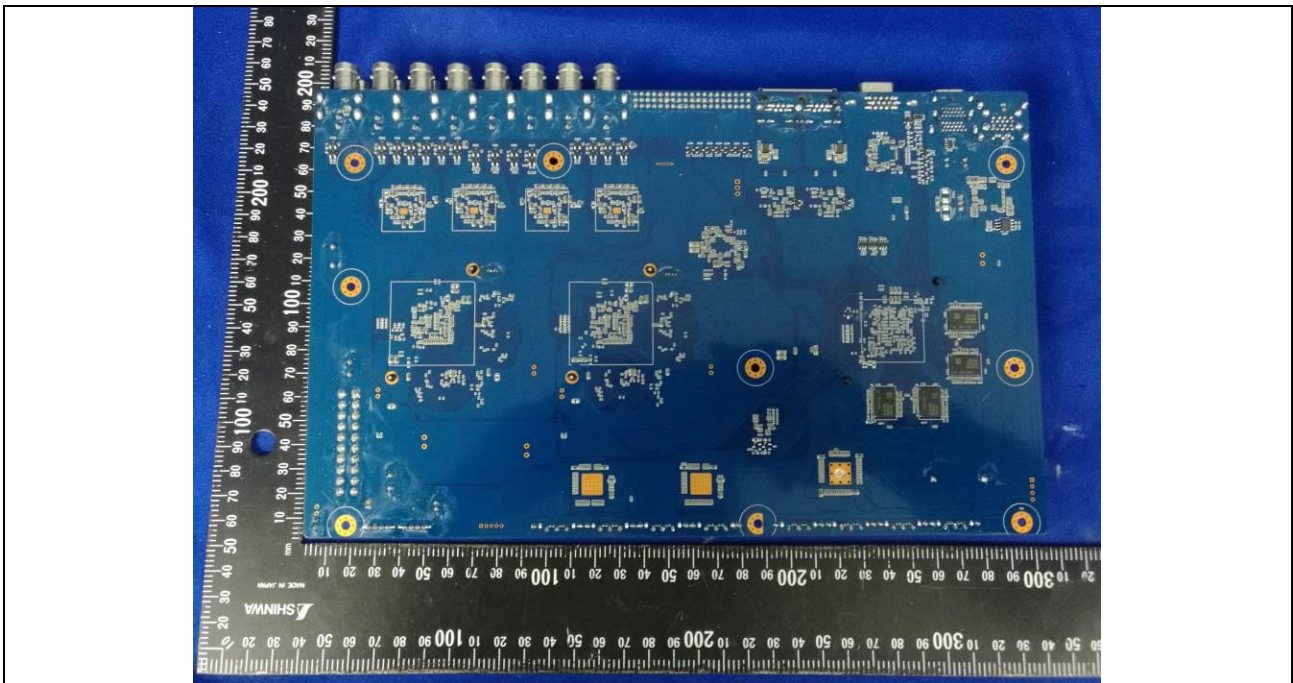





Details of: PCB-2

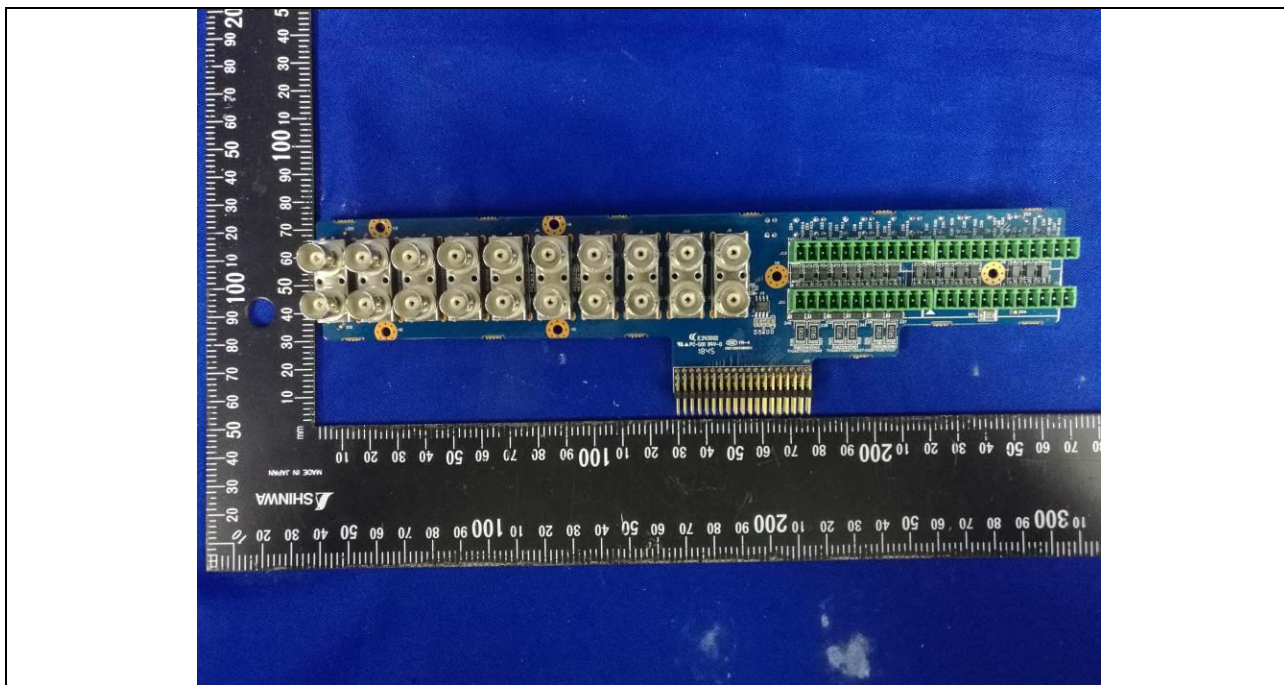


Details of: PCB-2

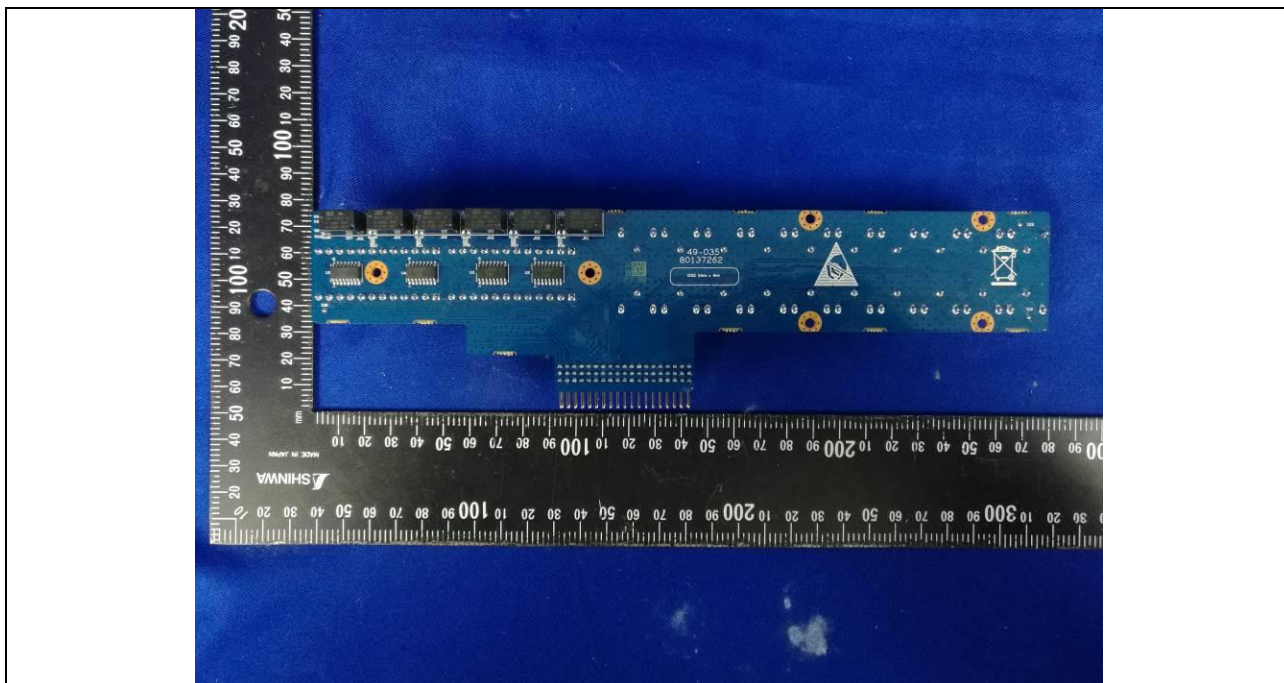

Details of: PCB-3

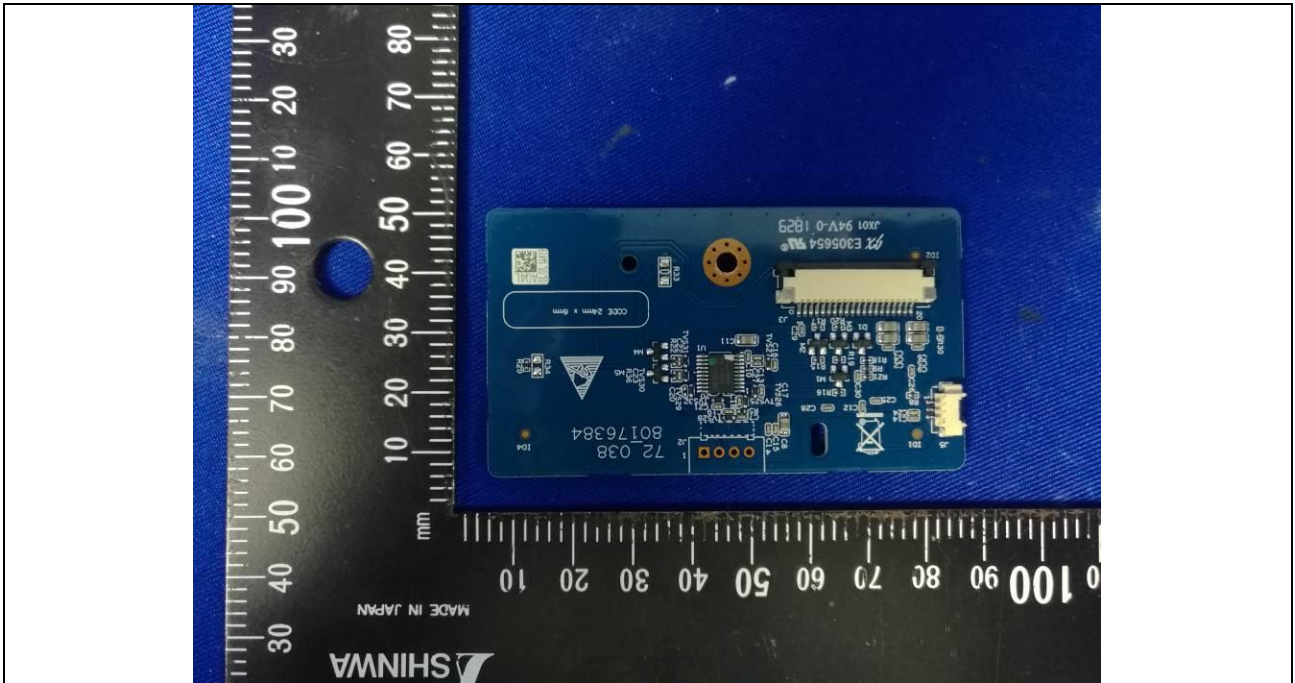


Details of: PCB-3

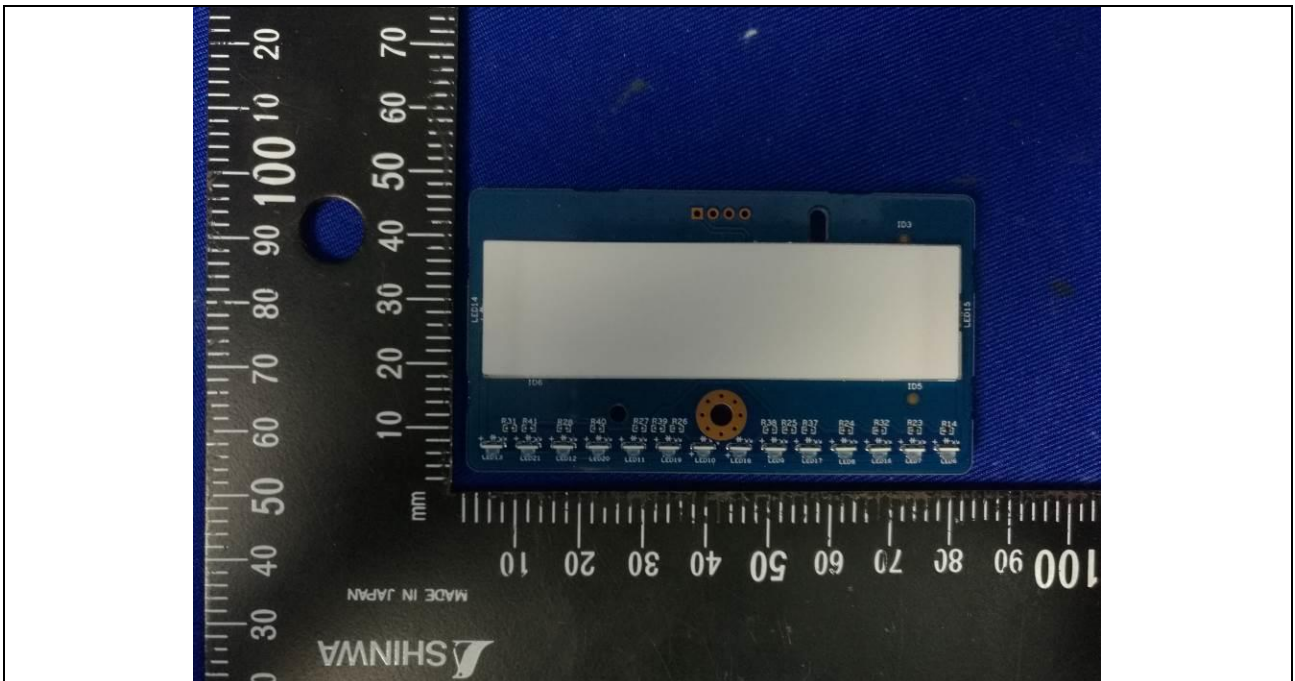





Details of: PCB-4

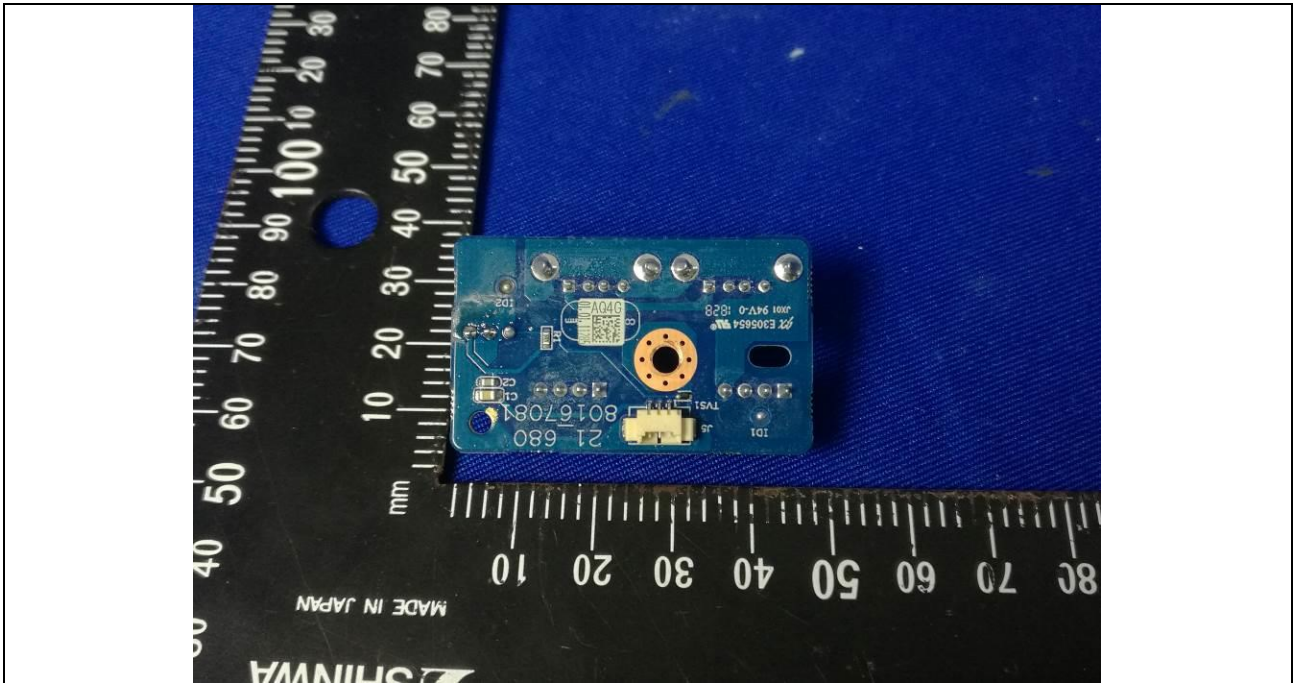

Details of: PCB-4

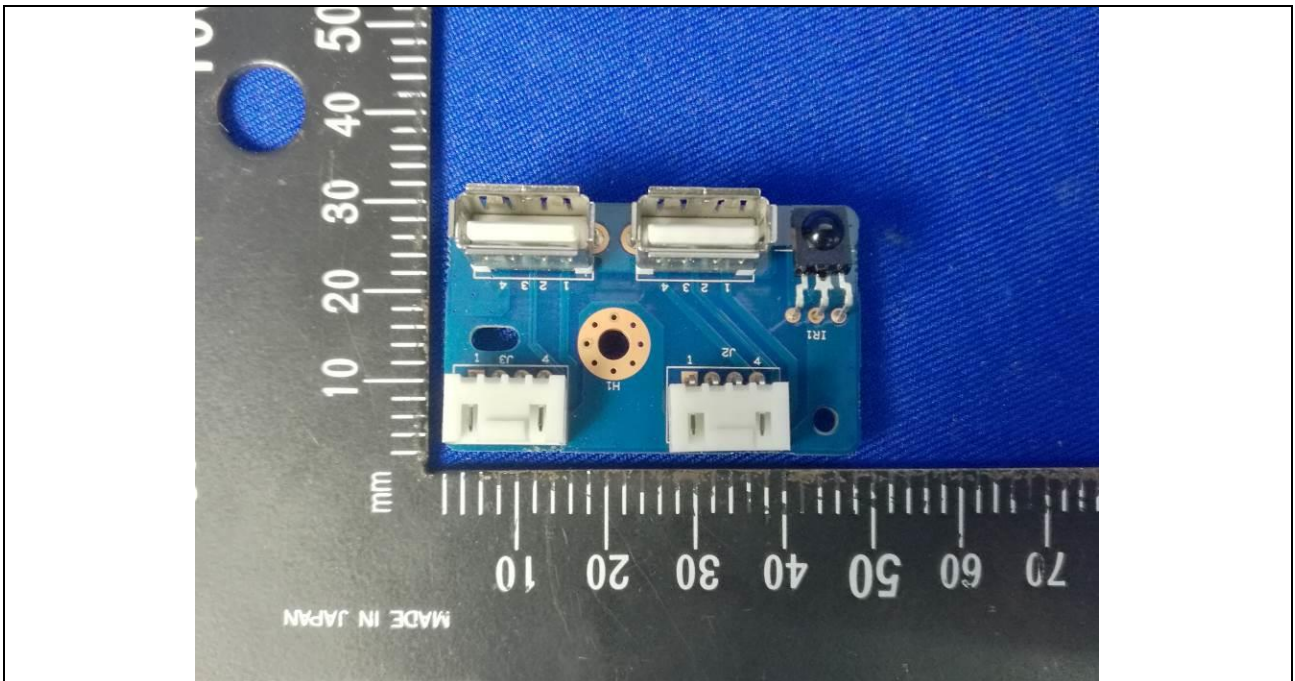

Details of: DC Fan

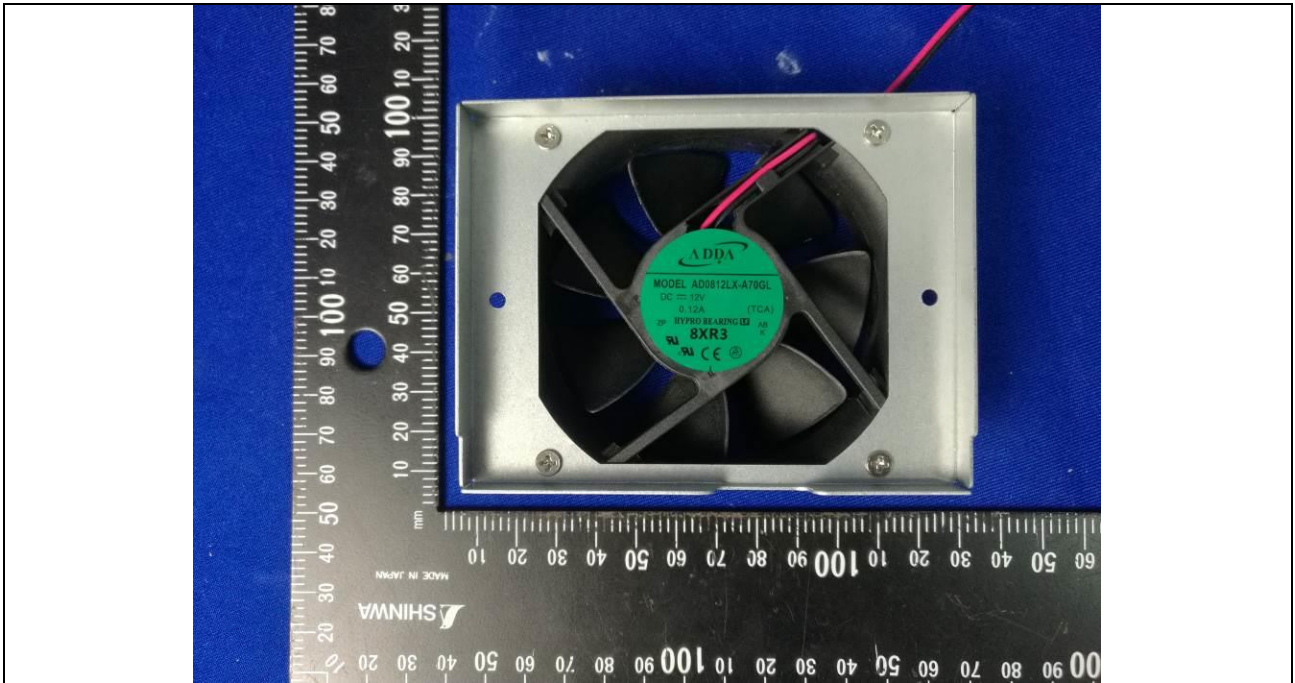

Details of: Building-in power supply (DPS-150AB-3 A)



Details of: Building-in power supply (DPS-150AB-3 A)



\*\*\*\*\*End of Attachment 1\*\*\*\*\*



IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

## Attachment 2 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

<b>ATTACHMENT TO TEST REPORT IEC 60950-1</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> Information technology equipment – Safety – Part 1: General requirements	
<b>Differences according to</b> .....	EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013
<b>Attachment Form No.</b> .....	EU_GD_IEC60950_1F
<b>Attachment Originator</b> .....	SGS Fimko Ltd
<b>Master Attachment</b> .....	Date 2014-02
<b>Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>	

<b>EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS</b>
---

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and its amendments are prefixed "Z"		P
Contents  (A2:2013)	Add the following annexes: Annex ZA (normative)      Normative references to international publications with their corresponding European publications Annex ZB (normative)      Special national conditions Annex ZD (informative)      IEC and CENELEC code designations for flexible cords		P
General	Delete all the "country" notes in the reference document (IEC 60950-1:2005) according to the following list: 1.4.8 Note 2      1.5.1      Note 2 & 3      1.5.7.1      Note 1.5.8 Note 2      1.5.9.4      Note      1.7.2.1      Note 4, 5 & 6 2.2.3 Note      2.2.4      Note      2.3.2      Note 2.3.2.1 Note 2      2.3.4      Note 2      2.6.3.3      Note 2 & 3 2.7.1 Note      2.10.3.2      Note 2      2.10.5.13      Note 3 3.2.1.1 Note      3.2.4      Note 3.      2.5.1      Note 2 4.3.6 Note 1 & 2      4.7      Note 4      4.7.2.2      Note 4.7.3.1 Note 2      5.1.7.1      Note 3 & 4      5.3.7      Note 1 6      Note 2 & 5      6.1.2.1      Note 2      6.1.2.2      Note 6.2.2 Note      6.2.2.1      Note 2      6.2.2.2      Note 7.1      Note 3      7.2      Note      7.3      Note 1 & 2 G.2.1 Note 2      Annex H      Note 2		P


IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
General (A1:2010)	Delete all the "country" notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note		P
General (A2:2013)	Delete all the "country" notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: 2.7.1 Note * 2.10.3.1 Note 2 6.2.2. Note * Note of secretary: Text of Common Modification remains unchanged.		P
1.1.1 (A1:2010)	<b>Replace</b> the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.		P
1.3.Z1	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.		N/A
(A12:2011)	In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010		N/A
1.5.1  (Added info*)	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC. New Directive 2011/65/11 *		P

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A1:2010)	In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.		N/A
1.7.2.1 (A12:2011)	In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments.		N/A
	<b>Zx Protection against excessive sound pressure from personal music players</b>		N/A
	<b>Zx.1 General</b> This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players. A personal music player is a portable equipment□ for personal use, that: – is designed to allow the user to listen to recorded or broadcast sound or video; and – primarily uses headphones or earphones that can be worn in or on or around the ears; and – allows the user to walk around while in use. NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment. A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause. The requirements in this sub-clause are valid for music or video mode only. The requirements do not apply: – while the personal music player is connected to an external amplifier; or – while the headphones or earphones are not used. NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.		N/A



IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Cont'd	<p>The requirements do not apply to:</p> <ul style="list-style-type: none"> <li>– hearing aid equipment and professional equipment;</li> </ul> <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> <li>– analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015.</li> </ul> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		N/A
	<p><b>Zx.2 Equipment requirements</b></p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> <li>– equipment provided as a package (personal music player with its listening device), where the acoustic output <math>L_{Aeq,T}</math> is <math>\leq 85</math> dBA measured while playing the fixed “programme simulation noise” as described in EN 50332-1; and</li> <li>– a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is <math>\leq 27</math> mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” as described in EN 50332-1.</li> </ul> <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level <math>L_{Aeq,T}</math> is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ol style="list-style-type: none"> <li>protect the user from unintentional acoustic outputs exceeding those mentioned above; and</li> <li>have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and</li> </ol>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Cont'd	<p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <ol style="list-style-type: none"> <li>1) equipment provided as a package (player with its listening device), the acoustic output shall be <math>\leq 100</math> dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</li> <li>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be <math>\leq 150</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</li> </ol> <p>For music where the average sound pressure (long term <math>L_{Aeq,T}</math>) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term <math>L_{Aeq,T}</math>) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p><b>Zx.3 Warning</b></p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> <li>– the symbol of Figure 1 with a minimum height of 5 mm; and</li> <li>– the following wording, or similar:</li> </ul> <p>“To prevent possible hearing damage, do not listen at high volume levels for long periods.”</p>  <p><b>Figure 1 – Warning label (IEC 60417-6044)</b></p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		N/A
	<b>Zx.4 Requirements for listening devices (headphones and earphones)</b>		N/A
	<p><b>Zx.4.1 Wired listening devices with analogue input</b></p> <p>With 94 dBA sound pressure output <math>L_{Aeq,T}</math>, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be <math>\geq 75</math> mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p><b>Zx.4.2 Wired listening devices with digital input</b></p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>		N/A
	<p><b>Zx.4.3 Wireless listening devices</b></p> <p>In wireless mode:</p> <ul style="list-style-type: none"> <li>– with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and</li> <li>– respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and</li> <li>– with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.</li> </ul> <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>		N/A
	<p><b>Zx.5 Measurement methods</b></p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>		N/A

IEC60950_1F - ATTACHMENT									
Clause	Requirement + Test	Result - Remark	Verdict						
2.7.1	<p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p>	Building-in power supplies have been certified separately.	P						
	<p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N/A						
2.7.2	This subclause has been declared 'void'.		N/A						
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A						
3.2.5.1	<p>Replace "60245 IEC 53" by "H05 RR-F";</p> <p>"60227 IEC 52" by "H03 VV-F or H03 VVH2-F";</p> <p>"60227 IEC 53" by "H05 VV-F or H05 VVH2-F2".</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td>Up to and including 6  </td><td>0,75 <sup>a)</sup>  </td></tr><tr><td>Over 6 up to and including 10  </td><td>(0,75) <sup>b)</sup> 1,0  </td></tr><tr><td>Over 10 up to and including 16  </td><td>(1,0) <sup>c)</sup> 1,5  </td></tr></table> <p>In the conditions applicable to Table 3B delete the words "in some countries" in condition <sup>a)</sup>.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>	Up to and including 6	0,75 <sup>a)</sup>	Over 6 up to and including 10	(0,75) <sup>b)</sup> 1,0	Over 10 up to and including 16	(1,0) <sup>c)</sup> 1,5		P
Up to and including 6	0,75 <sup>a)</sup>								
Over 6 up to and including 10	(0,75) <sup>b)</sup> 1,0								
Over 10 up to and including 16	(1,0) <sup>c)</sup> 1,5								

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD		N/A
3.3.4	In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: Over 10 up to and including 16   1,5 to 2,5   1,5 to 4   Delete the fifth line: conductor sizes for 13 to 16 A		N/A
4.3.13.6 (A1:2010)	Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to: 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).		N/A
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.		N/A
Bibliography	Additional EN standards.		—

<b>ZA</b>	<b>NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>	—
-----------	--	---

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.4.1	In <b>Denmark</b> , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N/A
1.2.13.14 (A11:2009)	In <b>Norway</b> and <b>Sweden</b> , for requirements see 1.7.2.1 and 7.3 of this annex.		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
Clause	Requirement+ Test	Result - Remark	Verdict
1.5.7.1 (A11:2009)	In <b>Finland, Norway</b> and <b>Sweden</b> , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.8	In <b>Norway</b> , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
1.5.9.4	In <b>Finland, Norway</b> and <b>Sweden</b> , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	<p>In <b>Finland, Norway</b> and <b>Sweden</b>, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows:</p> <p>In <b>Finland</b>: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In <b>Norway</b>: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In <b>Sweden</b>: "Apparaten skall anslutas till jordat uttag"</p>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A11:2009)	<p>In <b>Norway</b> and <b>Sweden</b>, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11).”</p> <p>NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>		N/A



IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A2:2013)	<p>In <b>Denmark</b>, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in <b>Denmark</b> shall be as follows: In <b>Denmark</b>: "Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord."</p>		N/A
1.7.5  1.7.5 (A11:2009)	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.</p> <p>For <b>CLASS II EQUIPMENT</b> the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.</p>		N/A
1.7.5 (A2:2013)	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011.</p> <p>For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a.</p> <p>Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N/A
2.2.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.2	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.3.3	In the <b>United Kingdom</b> , the current rating of the circuit shall be taken as 13 A, not 16 A.		P
2.7.1	In the <b>United Kingdom</b> , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
2.10.5.13	In <b>Finland, Norway and Sweden</b> , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A
3.2.1.1	In <b>Switzerland</b> , supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A		N/A
	SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A  In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998: SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A  SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A  SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V, 16 A		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In <b>Denmark</b>, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>		N/A
3.2.1.1 (A2:2013)	<p>In <b>Denmark</b>, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In <b>Spain</b>, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>		N/A
3.2.1.1	<p>In the <b>United Kingdom</b>, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		P
3.2.1.1	<p>In <b>Ireland</b>, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.</p>		N/A
3.2.4	<p>In <b>Switzerland</b>, for requirements see 3.2.1.1 of this annex.</p>		N/A
3.2.5.1	<p>In the <b>United Kingdom</b>, a power supply cord with conductor of 1,25 mm<sup>2</sup> is allowed for equipment with a rated current over 10 A and up to and including 13 A.</p>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.4	In the <b>United Kingdom</b> , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm <sup>2</sup> to 1,5 mm <sup>2</sup> nominal cross-sectional area.		N/A
4.3.6	In the <b>United Kingdom</b> , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
4.3.6	In <b>Ireland</b> , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A
5.1.7.1	In <b>Finland, Norway and Sweden</b> TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	<p>In <b>Finland, Norway and Sweden</b>, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> <li>- two layers of thin sheet material, each of which shall pass the electric strength test below, or</li> <li>- one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below.</li> </ul> <p>Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> <li>- passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and</li> <li>- is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.</li> </ul>		N/A
	<p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> <li>- the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1;</li> <li>- the additional testing shall be performed on all the test specimens as described in EN 60384-14:</li> <li>- the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</li> </ul>		N/A

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.2	In <b>Finland, Norway</b> and <b>Sweden</b> , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	In <b>Finland, Norway</b> and <b>Sweden</b> , for requirements see 6.1.2.1 and 6.1.2.2 of this annex.  The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3 (A11:2009)	In <b>Norway</b> and <b>Sweden</b> , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.		N/A

### Annex ZD (informative)

#### IEC and CENELEC code designations for flexible cords

Type of flexible cord	Code designations	
	IEC	CENELEC
<b>PVC insulated cords</b>		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H05VV-F H05VVH2-F
<b>Rubber insulated cords</b>		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
<b>Cords having high flexibility</b>		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H

\*\*\*\*\*End of Attachment 2\*\*\*\*\*