



<b>TEST REPORT</b> <b>IEC 60950-1</b> <b>Information technology equipment – Safety –</b> <b>Part 1: General requirements</b>	
<b>Report Reference No.</b> .....	T1612193-953
<b>Tested by</b> (printed name and signature) .....	Samantha Xue <i>Samantha Xue</i>
<b>Approved by</b> (printed name and signature) .....	Ann Cao <i>Ann Cao</i>
<b>Date of issue</b> .....	2017-01-17
<b>Testing Laboratory Name</b> .....	Cerpass Technology (Suzhou) Co., Ltd.
<b>Address</b> .....	No.66, Tangzhuang Road, Suzhou Industrial Park, Jiangsu, China.
<b>Applicant's name</b> .....	Zhejiang Dahua Vision Technology Co., Ltd.
<b>Address</b> .....	No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China.
<b>Test specification:</b>	
<b>Standard</b> .....	IEC 60950-1:2005 (Second Edition) + A1:2009 + A2:2013 and EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
<b>Test procedure</b> .....	Service of CE Marking in LVD
<b>Non-standard test method</b> .....	N/A
<b>Test item description</b> .....	Network Video Recorder
<b>Trade Mark</b> .....	
<b>Manufacturer</b> .....	Zhejiang Dahua Vision Technology Co., Ltd. No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China.
<b>Model/Type reference</b> .....	DHI-NVR4216-16P-4KS2, DHI-NVR4232-16P-4KS2, NVR4216-16P-4KS2, NVR4232-16P-4KS2, <b>HS602-16P-J1900, DHI-HS602-16P-J1900</b>
<b>Ratings</b> .....	I/P: 100-240Vac, 3.5A, 47-63Hz


**Particulars: test item vs. test requirements**

Equipment mobility.....	Movable
Connection to the mains .....	Pluggable A
Operating condition.....	Continuous
Access location .....	Operator accessible
Over voltage category (OVC) .....	OVCII
Mains supply tolerance (%) or absolute mains supply values .....	+10%, -10%
Tested for IT power systems .....	Yes
IT testing, phase-phase voltage (V) .....	230V (for Norway)
Class of equipment .....	Class I
Considered current rating (A) .....	16A
Pollution degree (PD) .....	PD 2
IP protection class .....	IPX0
Altitude during operation (m) .....	≤ 2000 m
Altitude of test laboratory (m) .....	≤ 2000 m
Mass of equipment (kg) .....	2.63Kg (Without H.D.D)

**Possible test case verdicts:**

- test case does not apply to the test object ..... : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement..... : F (Fail)

**Testing**

Date of receipt of test item .....	2017-01-05
Date(s) of performance of tests .....	2017-01-05 to 2017-01-17

**General remarks:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

The instructions specified by the standard have to be in official language of each country, however, only English is checked for this report. It is the applicant responsibility to provide instruction in each official language of the EU.

This report is submitted for the exclusive use of the client to whom it is addressed. Its significance is subject to the adequacy and representative character of the sample(s) and to the comprehensiveness of the tests,



examinations or surveys made.

This report justified only the submitted samples exclusively and not necessarily implies that all other samples are also to be found in same result.

The CE marking may only be used if all relevant and effective EC directives are complied with.

**Factor(ies):**

Zhejiang Dahua Vision Technology Co., Ltd.

Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China.

**General product information:**

1. The equipment is a network video recorder which is intended to use within information technology equipment.
2. All ports complied with limited power source, see appended table 2.5.
3. The equipment consists of approved switching power supply, H.D.D (optional), DC fan and mainboard and all electrical components mounted on the V- 1 PCB and housed in metal enclosure and plastic enclosure which fixed together by screws and mechanical fixing.
4. All models are similar except for software configuration and the type designation for different marketing.

**Other comments:**

The product was submitted and tested for use at the maximum ambient temperature (T<sub>ma</sub>) permitted by the manufacturer's specification of: 55°C.

Unless otherwise indicated, all tests were conducted on model DHI-NVR4232-16P-4KS2 to represent the other similar models.

**This report has been amended, due to the following:**

1. To add new model name HS602-16P-J1900 and DHI-HS602-16P-J1900.

2. To add trade mark  for all models.

**For the above described change(s) the following was considered to be necessary:**

Change	Testing	Comments
1, 2	N/A	See clause 1.7.1.2

**History of amendments and modifications:**

Item	Certificate No. / Issue date	Test Report No. / Issue date	Remark
1	T1610036-422 / 2016-10-25	T1610036-422 / 2016-10-25	Original report

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

(Representative)




Notes: Importer's address and name will be provided on its packaging or a document accompanying this equipment prior to marketing in the EEC.



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1</b>	<b>GENERAL</b>		<b>P</b>
<b>1.5</b>	<b>Components</b>		<b>P</b>
1.5.1	General	See below.	P
	Comply with IEC 60950-1 or relevant component standard	Components which were found to affect safety aspects comply with the requirements of this standard or with the safety aspects of the relevant IEC/EN component standards (See appended table 1.5.1).	P
1.5.2	Evaluation and testing of components	Components that are certified to IEC and /or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment.	P
1.5.3	Thermal controls	No thermal control.	N/A
1.5.4	Transformers	Used transformer in approved switching power supply, which is suitable for their intended application and comply with the relevant requirements of the standard.	N/A
1.5.5	Interconnecting cables	Interconnection o/p cable to other device is carrying only SELV on an energy level below 240VA. Except for the insulation material, there are no further requirements for the o/p interconnection cable.	P
1.5.6	Capacitors bridging insulation	Evaluated in approved switching power supply.	N/A
1.5.7	Resistors bridging insulation	Evaluated in approved switching power supply.	N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation	Same as above.	N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits	Same as above.	N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable	Same as above.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.8	Components in equipment for IT power systems	Evaluated in approved switching power supply.	N/A
1.5.9	Surge suppressors	Same as above.	N/A
1.5.9.1	General	Same as above.	N/A
1.5.9.2	Protection of VDRs	Same as above.	N/A
1.5.9.3	Bridging of functional insulation by a VDR	Same as above.	N/A
1.5.9.4	Bridging of basic insulation by a VDR	Same as above.	N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR	Same as above.	N/A
<b>1.6</b>	<b>Power interface</b>		P
1.6.1	AC power distribution systems	TN power system and IT power system (for Norway).	P
1.6.2	Input current	The steady state input current of the equipment did not exceed the RATED CURRENT by more than 10% under NORMAL LOAD. (See appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	This appliance is not a hand-held equipment.	N/A
1.6.4	Neutral conductor	Evaluated in approved switching power supply.	P
<b>1.7</b>	<b>Marking and instructions</b>		P
1.7.1	Power rating and identification markings	The required marking is located on the outside surface of the equipment.	P
1.7.1.1	Power rating marking	See below.	P
	Multiple mains supply connections.....:	Single supply connection.	N/A
	Rated voltage(s) or voltage range(s) (V) .....	100-240Vac.	P
	Symbol for nature of supply, for d.c. only .....	Mains from AC Source.	N/A
	Rated frequency or rated frequency range (Hz) .....	47-63Hz	P
	Rated current (mA or A) .....	3.5A	P
1.7.1.2	Identification markings	See below.	P
	Manufacturer's name or trade-mark or identification mark .....	Trade-mark: 	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Model identification or type reference .....	See page 1.	P
	Symbol for Class II equipment only .....	Class I equipment.	N/A
	Other markings and symbols .....	Additional symbols or markings do not give rise to misunderstanding.	P
1.7.1.3	Use of graphical symbols		P
1.7.2	Safety instructions and marking	See below.	P
1.7.2.1	General	The user's manual contains information for operation, installation, servicing, transport, storage and technical data. The operation guide is provided to the user.	P
1.7.2.2	Disconnect devices	Appliance inlet is provided as disconnection device.	P
1.7.2.3	Overcurrent protective device	Neither Pluggable equipment type B nor Permanently Connected Equipment.	N/A
1.7.2.4	IT power distribution systems	For Norway compliance has to be evaluated during the national approval.	N/A
1.7.2.5	Operator access with a tool	No tool is required to gain access to operator access area.	N/A
1.7.2.6	Ozone	No ozone produces within this equipment.	N/A
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N/A
1.7.4	Supply voltage adjustment .....	No adjustment of supply voltage necessary.	N/A
	Methods and means of adjustment; reference to installation instructions .....	Same as above.	N/A
1.7.5	Power outlets on the equipment .....	No outlet provided.	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference) .....	Evaluated in approved switching power supply.	N/A
1.7.7	Wiring terminals	See below.	N/A
1.7.7.1	Protective earthing and bonding terminals .....	Evaluated in approved switching power supply.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.7.2	Terminals for a.c. mains supply conductors	The equipment with appliance inlet is intended to be used the detachable type power supply cord.	N/A
1.7.7.3	Terminals for d.c. mains supply conductors	Mains from AC source only.	N/A
1.7.8	Controls and indicators	See below.	P
1.7.8.1	Identification, location and marking .....	The marking and indication for switches are located adjacent to the switches.	P
1.7.8.2	Colours .....	Colours of the LED indicator are used for functional controls or indicators.	P
1.7.8.3	Symbols according to IEC 60417 .....	The symbols of switch comply with IEC 60417-5007, IEC 60417-5008 and IEC 60417-5009.	P
1.7.8.4	Markings using figures .....	No used.	N/A
1.7.9	Isolation of multiple power sources .....	Single power source.	N/A
1.7.10	Thermostats and other regulating devices .....	No such device provided.	N/A
1.7.11	Durability	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 s and then again for 15 s with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was neither curling nor lifting of the label edge.	P
1.7.12	Removable parts	No removable part provided.	N/A
1.7.13	Replaceable batteries .....	Replaceable battery is placed in an service and operator access area. The marking or statement shall in the servicing and operating instructions.	P
	Language(s) .....	English.	—
1.7.14	Equipment for restricted access locations .....	The equipment is not intended to be use in restricted access.	N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>2</b>	<b>PROTECTION FROM HAZARDS</b>		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	See below.	P
2.1.1.1	Access to energized parts	See below.	P
	Test by inspection .....	No acces with test finger and test pin to any parts with only basic insulation to hazardous voltage. Any hazardous parts accessible are unlikely.	P
	Test with test finger (Figure 2A) .....	Same as above.	P
	Test with test pin (Figure 2B) .....	Same as above.	P
	Test with test probe (Figure 2C) .....	No TNV circuits provided.	N/A
2.1.1.2	Battery compartments	No battery compartment.	N/A
2.1.1.3	Access to ELV wiring	No ELV wiring in operator accessible area.	N/A
	Working voltage (V <sub>peak</sub> or V <sub>rms</sub> ); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage wiring in operator accessible area.	N/A
2.1.1.5	Energy hazards .....	Evaluated in approved switching power supply. And no energy hazards circuit in user accessible parts.	N/A
2.1.1.6	Manual controls	No conductive shaft of operating knob and handle.	N/A
2.1.1.7	Discharge of capacitors in equipment	No risk of electric shock, see below.	N/A
	Measured voltage (V); time-constant (s) .....	Evaluated in approved switching power supply.	—
2.1.1.8	Energy hazards – d.c. mains supply	AC mains supply only.	N/A
	a) Capacitor connected to the d.c. mains supply ...:		N/A
	b) Internal battery connected to the d.c. mains supply .....		N/A
2.1.1.9	Audio amplifiers .....	No audio amplifier provided.	N/A
2.1.2	Protection in service access areas	Hazardous bare parts are guarded and unintentional contact with such parts is unlikely during servicing operations involving other parts of the equipment.	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.1.3	Protection in restricted access locations	The equipment is not limited to be used in restricted access locations.	N/A
<b>2.2</b>	<b>SELV circuits</b> (Evaluated in approved switching power supply, the secondary circuits were tested as SELV.)		P
2.2.1	General requirements	See below.	P
2.2.2	Voltages under normal conditions (V) .....	All accessible voltages are less than 42.4Vp or 60Vdc and are classified as SELV.	P
2.2.3	Voltages under fault conditions (V) .....	Evaluated in approved switching power supply.	P
2.2.4	Connection of SELV circuits to other circuits .....	SELV circuits are only connected to other SELV circuits.	P
<b>2.3</b>	<b>TNV circuits</b> (No TNV circuits within the equipment.)		N/A
2.3.1	Limits		N/A
	Type of TNV circuits:		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions .....		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed .....		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed .....		—
2.3.5	Test for operating voltages generated externally		N/A
<b>2.4</b>	<b>Limited current circuits</b> (No limited current circuits within the equipment.)		N/A
2.4.1	General requirements		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.4.2	Limit values		N/A
	Frequency (Hz) .....		—
	Measured current (mA).....		—
	Measured voltage (V) .....		—
	Measured circuit capacitance (nF or $\mu$ F).....		—
2.4.3	Connection of limited current circuits to other circuits		N/A
<b>2.5</b>	<b>Limited power sources</b>		P
	a) Inherently limited output	(See appended table 2.5)	P
	b) Impedance limited output		N/A
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition	(See appended table 2.5)	P
	Use of integrated circuit (IC) current limiters		N/A
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA).....	(See appended table 2.5)	—
	Current rating of overcurrent protective device (A) ..		—
<b>2.6</b>	<b>Provisions for earthing and bonding</b>		P
2.6.1	Protective earthing	Approved sources of internal switching power supply are used.	P
2.6.2	Functional earthing	Functional earthing (secondary trace) connected to protective bonding and separated from Hazardous voltage by reinforced insulation.	P
	Use of symbol for functional earthing .....		N/A
2.6.3	Protective earthing and protective bonding conductors	See below.	P
2.6.3.1	General	No power supply cord provided. (See subclause 2.6.3.4)	P
2.6.3.2	Size of protective earthing conductors	No power cord provided.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
2.6.3.3	Size of protective bonding conductors	Complied with sub-clause 2.6.3.4.	N/A
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
	Protective current rating (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min) .....	(See appended table 2.6.3.4)	P
2.6.3.5	Colour of insulation .....	Evaluated in approved switching power supply.	N/A
2.6.4	Terminals	See below.	P
2.6.4.1	General	Refer to 2.6.4.2 and 2.6.4.3.	P
2.6.4.2	Protective earthing and bonding terminals	Appliance inlet considered as protective earthing terminal.	P
	Rated current (A), type, nominal thread diameter (mm) .....		—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	Appliance inlet used. Green/yellow wire is provided for protective bonding conductor from appliance inlet to metal enclosure.	P
2.6.5	Integrity of protective earthing	See below.	P
2.6.5.1	Interconnection of equipment	The unit has its own earthing connection. Any other units connected via the output shall be provided SELV only.	P
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	No switches or fuses in earthing conductors.	P
2.6.5.3	Disconnection of protective earth	It is not possible to disconnect protective earth without disconnecting mains; an appliance inlet is used as disconnect device.	P
2.6.5.4	Parts that can be removed by an operator	Plug or inlet, earthing connected before and disconnected after hazardous voltage. No other operator removable parts.	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.5.5	Parts removed during servicing	It is not necessary to disconnect earthing except for the removing of the earthed parts itself.	P
2.6.5.6	Corrosion resistance	All protective earth connections in compliance with Annex J. Specifically no direct Al – Cu contacts.	P
2.6.5.7	Screws for protective bonding	No selftapping screws are used.	N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system	No TNV circuits.	N/A

<b>2.7</b>	<b>Overcurrent and earth fault protection in primary circuits</b> (Evaluated in approved switching power supply.)		N/A
2.7.1	Basic requirements		N/A
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7		N/A
2.7.3	Short-circuit backup protection		N/A
2.7.4	Number and location of protective devices ..... :		N/A
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel..... :		N/A

<b>2.8</b>	<b>Safety interlocks</b> (No such device within this equipment.)		N/A
2.8.1	General principles		N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm) ..... :		N/A
2.8.7.2	Overload test		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

<b>2.9</b>	<b>Electrical insulation</b>		<b>P</b>
2.9.1	Properties of insulating materials	Natural rubber, materials containing asbestos and hygroscopic materials are not used as insulation. Electric strength test was conducted after the humidity treatment. See below.	P
2.9.2	Humidity conditioning	See below.	P
	Relative humidity (%), temperature (°C) ..... :	95%, 30°C, 48hours.	—
2.9.3	Grade of insulation	Functional, basic, supplementary, double and reinforced insulation.	P
2.9.4	Separation from hazardous voltages	See below.	P
	Method(s) used ..... :	Method 1, 2 used.	—

2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General	See below.	P
2.10.1.1	Frequency :	The Frequency does not exceeding 30kHz.	P
2.10.1.2	Pollution degrees :	2	P
2.10.1.3	Reduced values for functional insulation	See subclause 5.3.4.	P
2.10.1.4	Intervening unconnected conductive parts	No such conductive parts.	N/A
2.10.1.5	Insulation with varying dimensions	No reduction of distances considered.	N/A
2.10.1.6	Special separation requirements	No TNV circuit.	N/A
2.10.1.7	Insulation in circuits generating starting pulses	No such circuit.	N/A
2.10.2	Determination of working voltage	Evaluated in the approved switching power supply.	N/A
2.10.2.1	General	Same as above.	N/A
2.10.2.2	RMS working voltage	Same as above.	N/A
2.10.2.3	Peak working voltage	Same as above.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.3	Clearances	See below and alternative method of annex G is not considered.	P
2.10.3.1	General	Annex F and minimum clearances considered in approved switching power supply.	P
2.10.3.2	Mains transient voltages	Normal transient voltage considered.	P
	a) AC mains supply .....	Overvoltage category II for primary circuit and transient voltage 2500Vpeak.	P
	b) Earthed d.c. mains supplies .....		N/A
	c) Unearthed d.c. mains supplies .....		N/A
	d) Battery operation .....		N/A
2.10.3.3	Clearances in primary circuits	Evaluated in the approved switching power supply.	N/A
2.10.3.4	Clearances in secondary circuits	Evaluated in the approved switching power supply.	N/A
2.10.3.5	Clearances in circuits having starting pulses	No such circuit.	N/A
2.10.3.6	Transients from a.c. mains supply .....	1500Vpeak.	P
2.10.3.7	Transients from d.c. mains supply .....	Mains from AC source.	N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems .....	No such circuits.	N/A
2.10.3.9	Measurement of transient voltage levels	See sub-clause 2.10.3.6.	P
	a) Transients from a mains supply	Same as above.	N/A
	For an a.c. mains supply .....	Same as above.	N/A
	For a d.c. mains supply .....	Same as above.	N/A
	b) Transients from a telecommunication network :	Same as above.	N/A
2.10.4	Creepage distances	See below.	P
2.10.4.1	General	Insulation between other parts in the equipment is functional. For details see sub-clause 5.3.4. Creepage distances on building-in power supply unit have been evaluated during type approval and are in compliance with the requirements of this standard.	P
2.10.4.2	Material group and comparative tracking index	See below.	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	CTI tests .....	Material group IIIb assumed; 100≤CTI<175.	—
2.10.4.3	Minimum creepage distances	Evaluated in the approved switching power supply.	N/A
2.10.5	Solid insulation	Evaluated in the approved switching power supply.	N/A
2.10.5.1	General	Same as above.	N/A
2.10.5.2	Distances through insulation	Same as above.	N/A
2.10.5.3	Insulating compound as solid insulation		N/A
2.10.5.4	Semiconductor devices		N/A
2.10.5.5	Cemented joints		N/A
2.10.5.6	Thin sheet material – General	Evaluated in the approved switching power supply.	N/A
2.10.5.7	Separable thin sheet material		N/A
	Number of layers (pcs) .....		—
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material – standard test procedure		N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure		N/A
	Electric strength test		—
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components		N/A
	Working voltage .....		N/A
	a) Basic insulation not under stress .....		N/A
	b) Basic, supplementary, reinforced insulation .....		N/A
	c) Compliance with Annex U .....		N/A
	Two wires in contact inside wound component; angle between 45° and 90° .....		N/A
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage .....		N/A
	- Basic insulation not under stress .....		N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Supplementary, reinforced insulation .....		N/A
2.10.6	Construction of printed boards	Evaluated in the approved switching power supply.	N/A
2.10.6.1	Uncoated printed boards		N/A
2.10.6.2	Coated printed boards	No coated printed board.	N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs) .....		N/A
2.10.7	Component external terminations		N/A
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N/A
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts		N/A

<b>3</b>	<b>WIRING, CONNECTIONS AND SUPPLY</b>		<b>P</b>
3.1	General		<b>P</b>
3.1.1	Current rating and overcurrent protection	All internal wires are UL recognized. Cross-sectional area of internal wiring is suitable for current intended to be carried.	<b>P</b>
3.1.2	Protection against mechanical damage	Wires do not touch sharp edges and heatsinks, which could damage the insulation and cause hazards.	<b>P</b>



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.1.3	Securing of internal wiring	The wires are secured by soldering and use of quick-connect termination, so that a loosening of the terminal connection is unlikely.	P
3.1.4	Insulation of conductors	The insulation of the individual conductors is suitable for the application and the working voltage. For the insulation material see 3.1.1.	P
3.1.5	Beads and ceramic insulators	No such insulators used.	N/A
3.1.6	Screws for electrical contact pressure	No screw used for electrical connection.	N/A
3.1.7	Insulating materials in electrical connections	All current carrying connections are metal to metal.	N/A
3.1.8	Self-tapping and spaced thread screws	No self-tapping or spaced thread screws used.	N/A
3.1.9	Termination of conductors	All conductors are reliably secured.	P
	10 N pull test	After test, no break away or pivot on its terminal.	P
3.1.10	Sleeving on wiring	No sleeving used as supplementary insulation.	N/A
<b>3.2</b>	<b>Connection to a mains supply</b>		<b>P</b>
3.2.1	Means of connection	Approved appliance inlet is provided.	P
3.2.1.1	Connection to an a.c. mains supply	An appliance inlet for connection of detachable power supply cord.	P
3.2.1.2	Connection to a d.c. mains supply	AC mains supply.	N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment	Not permanently connected equipment.	N/A
	Number of conductors, diameter of cable and conduits (mm) .....:	Same as above.	—
3.2.4	Appliance inlets	Approved Appliance inlets used.	P
3.2.5	Power supply cords	No power supply cords provided.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.5.1	AC power supply cords	Same as above.	N/A
	Type .....		—
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		—
3.2.5.2	DC power supply cords	AC power supply cords used.	N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N) .....		—
	Longitudinal displacement (mm) .....		—
3.2.7	Protection against mechanical damage	No parts under this unit likely to damage the power supply cord. Enclosure without sharp edges.	P
3.2.8	Cord guards	No cord guard.	N/A
	Diameter or minor dimension D (mm); test mass (g) .....		—
	Radius of curvature of cord (mm).....		—
3.2.9	Supply wiring space		N/A
<b>3.3</b>	<b>Wiring terminals for connection of external conductors</b> <i>(Neither permanently connected equipment nor equipment with ordinary non-detachable power supply cords.)</i>		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm <sup>2</sup> ).....		—
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type, nominal thread diameter (mm) .....		—
3.3.6	Wiring terminal design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A
<b>3.4</b>	<b>Disconnection from the mains supply</b>		P
3.4.1	General requirement	See below.	P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.4.2	Disconnect devices	Appliance inlet is provided as disconnect devices.	P
3.4.3	Permanently connected equipment	Not permanently connected equipment.	N/A
3.4.4	Parts which remain energized	When power cord is removed from inlet, no remaining parts with hazardous voltage in the equipment.	P
3.4.5	Switches in flexible cords	No such components.	N/A
3.4.6	Number of poles - single-phase and d.c. equipment	The appliance inlet disconnects both poles simultaneously.	P
3.4.7	Number of poles - three-phase equipment	Single phase.	N/A
3.4.8	Switches as disconnect devices	Refer to 1.7.8.3	P
3.4.9	Plugs as disconnect devices	Appliance inlet used. No plugs as disconnect device.	N/A
3.4.10	Interconnected equipment	Interconnection of the power supply to the other equipment by secondary output connectors only.	N/A
3.4.11	Multiple power sources	Only one power source.	N/A
<b>3.5</b>	<b>Interconnection of equipment</b>		P
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits .....	Interconnection circuits to SELV through the connectors.	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnection.	N/A
3.5.4	Data ports for additional equipment	Refer to sub-clause 2.5.	P
<b>4</b>	<b>PHYSICAL REQUIREMENTS</b>		P
4.1	Stability		P
	Angle of 10°	The weight of unit does not exceed 7kg.	N/A
	Test force (N) .....	Equipment is not a floor standing unit.	N/A
<b>4.2</b>	<b>Mechanical strength</b>		P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.2.1	General	See below. After tests, unit complies with the requirements of sub-clauses 2.1.1, 2.6.1, 2.10 and 4.4.1.	P
	Rack-mounted equipment.	Equipment is not a floor-standing unit.	N/A
4.2.2	Steady force test, 10 N	Evaluated in approved switching power supply.	N/A
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	250N applied to outer enclosures. No energy or other hazards.	P
4.2.5	Impact test	No hazard as result from steel ball impact test, applied to outer enclosures.	P
	Fall test	Same as above.	P
	Swing test	Same as above.	P
4.2.6	Drop test; height (mm) .....	Not hand-held or direct plug-in equipment.	N/A
4.2.7	Stress relief test	70°C	P
4.2.8	Cathode ray tubes	No CRTs provided.	N/A
	Picture tube separately certified .....		N/A
4.2.9	High pressure lamps	No such lamps.	N/A
4.2.10	Wall or ceiling mounted equipment; force (N) .....	No such equipment.	N/A
<b>4.3</b>	<b>Design and construction</b>		P
4.3.1	Edges and corners	Edges and corners of the enclosure are rounded.	P
4.3.2	Handles and manual controls; force (N)..... :	No handles or controls provided.	N/A
4.3.3	Adjustable controls	No controls provided.	NA
4.3.4	Securing of parts	Mechanical fixings in such a way designed that they will withstand mechanical stress occurring in normal use.	P
4.3.5	Connection by plugs and sockets	Only SELV connector.	N/A
4.3.6	Direct plug-in equipment	Not direct plug-in type.	N/A
	Torque .....		—



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance with the relevant mains plug standard .....		N/A
4.3.7	Heating elements in earthed equipment	No heating elements provided.	N/A
4.3.8	Batteries	Approved non-rechargeable source. (See appended table 1.5.1)	P
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery	(See appended table 4.3.8)	P
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease	Insulation in intended use not considered to be exposed to oil or grease.	N/A
4.3.10	Dust, powders, liquids and gases	The equipment in intended use not considered to be exposed to dust, powders, liquids and gases.	N/A
4.3.11	Containers for liquids or gases	No container for liquid or gas provided.	N/A
4.3.12	Flammable liquids .....	No flammable liquids provided.	N/A
	Quantity of liquid (l) .....		N/A
	Flash point (°C) .....		N/A
4.3.13	Radiation	See below.	P
4.3.13.1	General	See below.	P
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg) .....		N/A
	Measured high-voltage (kV) .....		N/A
	Measured focus voltage (kV) .....		N/A
	CRT markings .....		N/A
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification .....		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation .....		N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	LEDs considered as Class I.	P
4.3.13.5.1	Lasers (including laser diodes)		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Laser class .....		N/A
4.3.13.5.2	Light emitting diodes (LEDs)	The LED used as indicating lights.	P
4.3.13.6	Other types .....	No such consideration.	N/A

<b>4.4</b>	<b>Protection against hazardous moving parts</b>		P
4.4.1	General	See below.	P
4.4.2	Protection in operator access areas .....	No moving parts except for DC fans located within equipment which was no operator accessible area inside.	P
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations .....	Not for restricted access locations used	N/A
4.4.4	Protection in service access areas	See sub-clause 4.4.5.1.	P
4.4.5	Protection against moving fan blades	See below.	P
4.4.5.1	General	See below.	P
	Not considered to cause pain or injury. a).....:	<p><b>[Under normal operation condition ]:</b>  <math>K \text{ factor} = 6 \times 10^{-7} (\text{mr}^2 \text{N}^2) = 6 \times 10^{-7} (0.014 \times 20^2 \times 4500^2) = 68.04</math>  <math>\text{RPM} / 15000 + K / 2400 = 4500 / 15000 + 68.04 / 2400 = 0.32835 &lt; 1</math></p> <p><b>[Under single fault condition]:</b>  <math>K \text{ factor} = 6 \times 10^{-7} (\text{mr}^2 \text{N}^2) = 6 \times 10^{-7} (0.014 \times 20^2 \times 4950^2) = 82.3284</math>  <math>\text{RPM} / 15000 + K / 2400 = 4950 / 15000 + 82.3284 / 2400 = 0.3643 &lt; 1</math></p> <p>A moving fan blade is not considered likely to cause pain or injury.</p>	P
	Is considered to cause pain, not injury. b) .....	Same as above.	N/A
	Considered to cause injury. c) .....	Same as above.	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.4.5.2	Protection for users	The moving fan blade classified as 4.4.5.1 a) under normal and a single fault condition. Therefore the protection for users is unnecessary.	P
	Use of symbol or warning .....	Same as above.	N/A
4.4.5.3	Protection for service persons	See sub-clause 4.4.5.2.	P
	Use of symbol or warning .....	Same as above.	N/A
<b>4.5</b>	<b>Thermal requirements</b>		P
4.5.1	General	See below	P
4.5.2	Temperature tests	(See appended table 4.5.1)	P
	Normal load condition per Annex L .....	See Annex L.	P
4.5.3	Temperature limits for materials	(See appended table 4.5.1)	P
4.5.4	Touch temperature limits	(See appended table 4.5.1)	P
4.5.5	Resistance to abnormal heat .....	Evaluated in approved switching power supply.	N/A
<b>4.6</b>	<b>Openings in enclosures</b>		P
4.6.1	Top and side openings	See below.	P
	Dimensions (mm) .....	(See appended table 4.6.1, 4.6.2.)	—
4.6.2	Bottoms of fire enclosures	See below.	P
	Construction of the bottom, dimensions (mm) ...	(See appended table 4.6.1, 4.6.2.)	—
4.6.3	Doors or covers in fire enclosures	No doors or covers provided.	N/A
4.6.4	Openings in transportable equipment	The equipment is not transportable equipment.	N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm) .....		N/A
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks) .....		N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4.7</b>	<b>Resistance to fire</b>		P
4.7.1	Reducing the risk of ignition and spread of flame	Use of materials with the required flammability classes.	P
	Method 1, selection and application of components wiring and materials	Method 1 used.	P
	Method 2, application of all of simulated fault condition tests		N/A
4.7.2	Conditions for a fire enclosure	See below.	P
4.7.2.1	Parts requiring a fire enclosure	With having the following components: - Componets in primary - Component in secondary (not supplied by LPS) - Insulated wirings The fire enclosre is required.	P
4.7.2.2	Parts not requiring a fire enclosure	See sub-clauses 4.7.2.1	N/A
4.7.3	Materials		P
4.7.3.1	General	Integrated circuits and small electrical parts mounted on a printed wiring board min. rated V-1.	P
4.7.3.2	Materials for fire enclosures	Use metal and plastic enclosure as fire enclosure.	P
4.7.3.3	Materials for components and other parts outside fire enclosures	(See appended table 1.5.1)	P
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are V-2 or better.	P
4.7.3.5	Materials for air filter assemblies	No air-filter assemblies.	N/A
4.7.3.6	Materials used in high-voltage components	No high voltage components provided.	N/A

<b>5</b>	<b>ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS</b>		P
5.1	<b>Touch current and protective conductor current</b>		P
5.1.1	General	See sub-clauses 5.1.2 to 5.1.6.	P
5.1.2	Configuration of equipment under test (EUT)	See below.	P
5.1.2.1	Single connection to an a.c. mains supply		P



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Equipment of figure 5A used.	P
5.1.4	Application of measuring instrument	Tests are conducted using one of the measuring instruments in Annex D, or any other circuit giving the same results.	P
5.1.5	Test procedure	Applied.	P
5.1.6	Test measurements	See below.	P
	Supply voltage (V) .....	(See appended table 5.1)	—
	Measured touch current (mA) .....	(See appended table 5.1)	—
	Max. allowed touch current (mA) .....	(See appended table 5.1)	—
	Measured protective conductor current (mA) .....		—
	Max. allowed protective conductor current (mA) ...		—
5.1.7	Equipment with touch current exceeding 3,5 mA	Touch current does not exceed 3.5mA.	N/A
5.1.7.1	General .....		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	No TNV circuit connection.	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V) .....		—
	Measured touch current (mA) .....		—
	Max. allowed touch current (mA) .....		—
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports .....		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A
<b>5.2</b>	<b>Electric strength</b>		<b>P</b>



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.1	General	(See appended table 5.2)	P
5.2.2	Test procedure	Table 5B used.	P
<b>5.3</b>	<b>Abnormal operating and fault conditions</b>		P
5.3.1	Protection against overload and abnormal operation	(See appended table 5.3)	P
5.3.2	Motors	Certified DC Fan used.	N/A
5.3.3	Transformers	Evaluated in approved switching power supply.	N/A
5.3.4	Functional insulation .....	Method c).	P
5.3.5	Electromechanical components	No electromechanical component provided.	N/A
5.3.6	Audio amplifiers in ITE .....		N/A
5.3.7	Simulation of faults	Faults in primary/secondary components and operational insulation were already considered during the approval of the building-in power supply. Ventilation openings blocked and Fan locked tested. (See appended table 5.3)	P
5.3.8	Unattended equipment	None of the listed components was provided.	N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	(See appended table 5.3)	P
5.3.9.1	During the tests	No fire, emission of molten metal or deformation was noted during the tests.	P
5.3.9.2	After the tests	Electric Strength tests performed after abnormal and fault tests.	P
<b>6</b>	<b>CONNECTION TO TELECOMMUNICATION NETWORKS</b>		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Supply voltage (V) .....		—
	Current in the test circuit (mA) .....		—
6.1.2.2	Exclusions .....		N/A

<b>6.2</b>	<b>Protection of equipment users from overvoltages on telecommunication networks</b>		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

<b>6.3</b>	<b>Protection of the telecommunication wiring system from overheating</b>		N/A
	Max. output current (A) .....		—
	Current limiting method .....		—

<b>7</b>	<b>CONNECTION TO CABLE DISTRIBUTION SYSTEMS</b>		N/A
7.1	General		N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

<b>A</b>	<b>ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE</b>		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples.....		—
	Wall thickness (mm).....		—



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
A.1.2	Conditioning of samples; temperature (°C) .....		N/A
A.1.3	Mounting of samples .....		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D .....		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material.....		—
	Wall thickness (mm).....		—
A.2.2	Conditioning of samples; temperature (°C) .....		N/A
A.2.3	Mounting of samples .....		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C .....		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s) .....		—
	Sample 2 burning time (s) .....		—
	Sample 3 burning time (s) .....		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A
<b>B</b>	<b>ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)</b>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.1	General requirements		N/A
	Position .....		—
	Manufacturer .....		—
	Type .....		—
	Rated values .....		—
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days) .....		—
	Electric strength test: test voltage (V) .....		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V) .....		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V) .....		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V) .....		—
<b>C</b>	<b>ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)</b>		N/A
	Position .....	Evaluated in approved switching power supply.	—
	Manufacturer .....		—
	Type .....		—
	Rated values .....		—



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Method of protection.....:		—
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings.....:		N/A
<b>D</b>	<b>ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)</b>		P
D.1	Measuring instrument		P
D.2	Alternative measuring instrument		N/A
<b>E</b>	<b>ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)</b>		N/A
<b>F</b>	<b>ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)</b>		P
<b>G</b>	<b>ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES</b>		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply .....		N/A
G.2.2	Earthed d.c. mains supplies .....		N/A
G.2.3	Unearthed d.c. mains supplies .....		N/A
G.2.4	Battery operation .....		N/A
G.3	Determination of telecommunication network transient voltage (V) .....		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks .....		N/A
G.4.2	Transients from telecommunication networks .....		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances .....		N/A
<b>H</b>	<b>ANNEX H, IONIZING RADIATION (see 4.3.13)</b>		N/A
<b>J</b>	<b>ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)</b>		P
	Metal(s) used .....	Considerated.	—
<b>K</b>	<b>ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)</b>		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V) .....		N/A
K.3	Thermostat endurance test; operating voltage (V) .....		N/A
K.4	Temperature limiter endurance; operating voltage (V) .....		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A
<b>L</b>	<b>ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)</b>		P
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A
L.7	Other business equipment	(See appended table 1.6.2)	P
<b>M</b>	<b>ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)</b>		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz) .....		—
M.3.1.2	Voltage (V) .....		—
M.3.1.3	Cadence; time (s), voltage (V) .....		—
M.3.1.4	Single fault current (mA) .....		—
M.3.2	Tripping device and monitoring voltage .....		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V) .....		N/A
<b>N</b>	<b>ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)</b>		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A
<b>P</b>	<b>ANNEX P, NORMATIVE REFERENCES</b>		—
<b>Q</b>	<b>ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)</b>		N/A
	a) Preferred climatic categories .....		N/A
	b) Maximum continuous voltage .....		N/A
	c) Pulse current .....		N/A
	Body of the VDR Test according to IEC60695-11-5.....		N/A
	Body of the VDR. Flammability class of material ( min V-1).....		N/A
<b>R</b>	<b>Annex R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES</b>		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A
<b>S</b>	<b>ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)</b>		N/A
S.1	Test equipment		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
<b>T</b>	<b>ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)</b>		N/A
<b>U</b>	<b>ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.12)</b>		N/A
			—
<b>V</b>	<b>ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)</b>		P
V.1	Introduction	See below.	P
V.2	TN power distribution systems	Single-phase TN power system considered and used for the testing.	P
<b>W</b>	<b>ANNEX W, SUMMATION OF TOUCH CURRENTS</b>		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
<b>X</b>	<b>ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)</b>		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A
<b>Y</b>	<b>ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)</b>		N/A
Y.1	Test apparatus .....		N/A
Y.2	Mounting of test samples .....		N/A
Y.3	Carbon-arc light-exposure apparatus .....		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.4	Xenon-arc light exposure apparatus .....		N/A
<b>Z</b>	<b>ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)</b>		<b>P</b>
<b>AA</b>	<b>ANNEX AA, MANDREL TEST (see 2.10.5.8)</b>		<b>N/A</b>
<b>BB</b>	<b>ANNEX BB, CHANGES IN THE SECOND EDITION</b>		<b>—</b>
<b>CC</b>	<b>ANNEX CC, Evaluation of integrated circuit (IC) current limiters</b>		<b>N/A</b>
CC.1	General	(See appended table 1.5.1)	N/A
CC.2	Test program 1.....		N/A
CC.3	Test program 2.....		N/A
CC.4	Test program 3.....		N/A
CC.5	Compliance.....		N/A
<b>DD</b>	<b>ANNEX DD, Requirements for the mounting means of rack-mounted equipment</b>		<b>N/A</b>
DD.1	General		N/A
DD.2	Mechanical strength test, variable N.....		N/A
DD.3	Mechanical strength test, 250N, including end stops.....		N/A
DD.4	Compliance.....		N/A
<b>EE</b>	<b>ANNEX EE, Household and home/office document/media shredders</b>		<b>N/A</b>
EE.1	General		N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols.....		N/A
	Information of user instructions, maintenance and/or servicing instructions.....		N/A
EE.3	Inadvertent reactivation test.....		N/A
EE.4	Disconnection of power to hazardous moving parts:		N/A
	Use of markings or symbols.....		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A) .....		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with wedge probe (Figure EE1 and EE2) .....		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS</b>			
Contents  (A2:2013)	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
General	Delete all the “country” notes in the reference document (IEC 60950-1:2005) according to the following list: 1.4.8 Note 2      1.5.1 Note 2 & 3      1.5.7.1 Note 1.5.8 Note 2      1.5.9.4 Note      1.7.2.1 Note 4, 5 & 6 2.2.3 Note      2.2.4 Note      2.3.2 Note 2.3.2.1 Note 2      2.3.4 Note 2      2.6.3.3 Note 2 & 3 2.7.1 Note      2.10.3.2 Note 2      2.10.5.13 Note 3 3.2.1.1 Note      3.2.4 Note 3.      2.5.1 Note 2 4.3.6 Note 1 & 2      4.7 Note 4      4.7.2.2 Note 4.7.3.1 Note 2      5.1.7.1 Note 3 & 4      5.3.7 Note 1 6 Note 2 & 5      6.1.2.1 Note 2      6.1.2.2 Note 6.2.2 Note      6.2.2.1 Note 2      6.2.2.2 Note 7.1 Note 3      7.2 Note      7.3 Note 1 & 2 G.2.1 Note 2      Annex H Note 2		P
General (A1:2010)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note      6.1.2.1 Note 2 6.2.2.1 Note 2      EE.3 Note		P
General (A2:2013)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: 2.7.1 Note *      2.10.3.1 Note 2 6.2.2. Note * Note of secretary: Text of Common Modification remains unchanged.		P
1.1.1 (A1:2010)	<b>Replace</b> the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.3.Z1	<p>Add the following subclause:</p> <p>1.3.Z1 Exposure to excessive sound pressure</p> <p>The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones.</p> <p>NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.</p>		N/A
(A12:2011)	<p>In EN 60950-1:2006/A12:2011</p> <p>Delete the addition of 1.3.Z1 / EN 60950-1:2006</p> <p>Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010</p>		P
1.5.1  (Added info*)	<p>Add the following NOTE:</p> <p>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC.</p> <p>New Directive 2011/65/11 *</p>		P
1.7.2.1 (A1:2010)	<p>In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.</p>		N/A
1.7.2.1 (A12:2011)	<p>In EN 60950-1:2006/A12:2011</p> <p>Delete NOTE Z1 and the addition for Portable Sound System.</p> <p>Add the following clause and annex to the existing standard and amendments.</p>		N/A
	<b>Zx Protection against excessive sound pressure from personal music players</b>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p><b>Zx.1 General</b></p> <p>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none"> <li>is designed to allow the user to listen to recorded or broadcast sound or video; and</li> <li>primarily uses headphones or earphones that can be worn in or on or around the ears; and</li> <li>allows the user to walk around while in use.</li> </ul> <p>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none"> <li>while the personal music player is connected to an external amplifier; or</li> <li>while the headphones or earphones are not used.</li> </ul> <p>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> <li>hearing aid equipment and professional equipment;</li> </ul> <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p>		N/A




IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015.</p> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		N/A
	<p><b>Zx.2 Equipment requirements</b></p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> <li>equipment provided as a package (personal music player with its listening device), where the acoustic output <math>L_{Aeq,T}</math> is <math>\leq 85</math> dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and</li> <li>a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is <math>\leq 27</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1.</li> </ul> <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level <math>L_{Aeq,T}</math> is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ul style="list-style-type: none"> <li>a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and</li> <li>b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and</li> </ul>		N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <ol style="list-style-type: none"> <li>1) equipment provided as a package (player with its listening device), the acoustic output shall be <math>\leq 100</math> dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</li> <li>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be <math>\leq 150</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</li> </ol> <p>For music where the average sound pressure (long term <math>L_{Aeq,T}</math>) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term <math>L_{Aeq,T}</math>) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p><b>Zx.3 Warning</b>  The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:  the symbol of Figure 1 with a minimum height of 5 mm; and  the following wording, or similar:  “To prevent possible hearing damage, do not listen at high volume levels for long periods.”</p>  <p><b>Figure 1 – Warning label (IEC 60417-6044)</b></p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		N/A
	<b>Zx.4 Requirements for listening devices (headphones and earphones)</b>		N/A
	<p><b>Zx.4.1 Wired listening devices with analogue input</b>  With 94 dBA sound pressure output <math>L_{Aeq,T}</math>, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be <math>\geq 75</math> mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p><b>Zx.4.2 Wired listening devices with digital input</b>            With any playing device playing the fixed "programme simulation noise" described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>		N/A
	<p><b>Zx.4.3 Wireless listening devices</b>            In wireless mode:                with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and                respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and                with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.</p> <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>		N/A
	<p><b>Zx.5 Measurement methods</b>            Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	<p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p>		N/A
	<p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N/A
2.7.2	This subclause has been declared 'void'.		N/A
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A



IEC 60950-1									
Clause	Requirement + Test	Result - Remark	Verdict						
3.2.5.1	<p>Replace “60245 IEC 53” by “H05 RR-F”; “60227 IEC 52” by “H03 VV-F or H03 VVH2-F”; “60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”.</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td>Up to and including 6  </td><td>0,75 <sup>a)</sup>  </td></tr><tr><td>Over 6 up to and including 10   (0,75) <sup>b)</sup></td><td>1,0  </td></tr><tr><td>Over 10 up to and including 16   (1,0) <sup>c)</sup></td><td>1,5  </td></tr></table> <p>In the conditions applicable to Table 3B delete the words “in some countries” in condition <sup>a)</sup>.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>	Up to and including 6	0,75 <sup>a)</sup>	Over 6 up to and including 10   (0,75) <sup>b)</sup>	1,0	Over 10 up to and including 16   (1,0) <sup>c)</sup>	1,5		N/A
Up to and including 6	0,75 <sup>a)</sup>								
Over 6 up to and including 10   (0,75) <sup>b)</sup>	1,0								
Over 10 up to and including 16   (1,0) <sup>c)</sup>	1,5								
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD		N/A						
3.3.4	<p>In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following:</p> <p>Over 10 up to and including 16   1,5 to 2,5   1,5 to 4  </p> <p>Delete the fifth line: conductor sizes for 13 to 16 A</p>		N/A						
4.3.13.6 (A1:2010)	<p>Replace the existing NOTE by the following:</p> <p>NOTE Z1 Attention is drawn to:</p> <p>1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and</p> <p>2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).</p>		N/A						
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A						
Annex H	<p>Replace the last paragraph of this annex by:</p> <p>At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level.</p> <p>Replace the notes as follows:</p> <p>NOTE These values appear in Directive 96/29/Euratom.</p> <p>Delete NOTE 2.</p>		N/A						
Bibliography	Additional EN standards.		—						



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ZA</b>	<b>NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>	—
-----------	--	---

<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
1.2.4.1	In <b>Denmark</b> , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N/A
1.2.13.14 (A11:2009)	In <b>Norway</b> and <b>Sweden</b> , for requirements see 1.7.2.1 and 7.3 of this annex.		N/A
1.5.7.1 (A11:2009)	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.8	In <b>Norway</b> , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
1.5.9.4	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
1.7.2.1	<p>In <b>Finland, Norway</b> and <b>Sweden</b>, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In <b>Finland</b>: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In <b>Norway</b>: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In <b>Sweden</b>: "Apparaten skall anslutas till jordat uttag"</p>		N/A
1.7.2.1 (A11:2009)	<p>In <b>Norway</b> and <b>Sweden</b>, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>"Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."</p>		



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
	<p>NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>		N/A
1.7.2.1 (A2:2013)	<p>In <b>Denmark</b>, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in <b>Denmark</b> shall be as follows:  In <b>Denmark</b>: “Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.”</p>		N/A
1.7.5  1.7.5 (A11:2009)	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.</p> <p>For <b>CLASS II EQUIPMENT</b> the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.</p>		N/A





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
1.7.5 (A2:2013)	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011.</p> <p>For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a.</p> <p>Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N/A
2.2.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.2	In <b>Finland, Norway and Sweden</b> there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.6.3.3	In the <b>United Kingdom</b> , the current rating of the circuit shall be taken as 13 A, not 16 A.		N/A
2.7.1	In the <b>United Kingdom</b> , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
2.10.5.13	In <b>Finland, Norway and Sweden</b> , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A
3.2.1.1	<p>In <b>Switzerland</b>, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
	<p>SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A</p> <p>SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998: SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A</p> <p>SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A</p> <p>SEV 5934-2.1998: Plug Type 23, L+N+PE .250 V, 16 A</p>		N/A
3.2.1.1	<p>In <b>Denmark</b>, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
3.2.1.1 (A2:2013)	<p>In <b>Denmark</b>, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N/A
3.2.1.1	<p>In <b>Spain</b>, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>		N/A
3.2.1.1	<p>In the <b>United Kingdom</b>, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
3.2.1.1	In <b>Ireland</b> , apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.		N/A
3.2.4	In <b>Switzerland</b> , for requirements see 3.2.1.1 of this annex.		N/A
3.2.5.1	In the <b>United Kingdom</b> , a power supply cord with conductor of 1,25 mm <sup>2</sup> is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N/A
3.3.4	In the <b>United Kingdom</b> , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm <sup>2</sup> to 1,5 mm <sup>2</sup> nominal cross-sectional area.		N/A
4.3.6	In the <b>United Kingdom</b> , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
4.3.6	In <b>Ireland</b> , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
5.1.7.1	<p>In <b>Finland, Norway</b> and <b>Sweden</b> TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment:</p> <ul style="list-style-type: none"> <li>• STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON;</li> <li>• STATIONARY PLUGGABLE EQUIPMENT TYPE B;</li> <li>• STATIONARY PERMANENTLY CONNECTED EQUIPMENT.</li> </ul>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
6.1.2.1 (A1:2010)	<p>In <b>Finland, Norway</b> and <b>Sweden</b>, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> <li>- two layers of thin sheet material, each of which shall pass the electric strength test below, or</li> <li>- one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below.</li> </ul> <p>Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> <li>- passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and</li> <li>- is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.</li> </ul>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB ANNEX (normative)</b> <b>SPECIAL NATIONAL CONDITIONS (EN)</b>			
	<p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> <li>- the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1;</li> <li>- the additional testing shall be performed on all the test specimens as described in EN 60384-14;</li> <li>- the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</li> </ul>		N/A
6.1.2.2	<p>In <b>Finland, Norway and Sweden</b>, the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.</p>		N/A
7.2	<p>In <b>Finland, Norway and Sweden</b>, for requirements see 6.1.2.1 and 6.1.2.2 of this annex.</p> <p>The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.</p>		N/A
7.3 (A11:2009)	<p>In <b>Norway and Sweden</b>, for requirements see 1.2.13.14 and 1.7.2.1 of this annex.</p>		N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Annex ZD (informative)			
IEC and CENELEC code designations for flexible cords			
Type of flexible cord	Code designations		
	IEC	CENELEC	
<b>PVC insulated cords</b>			
Flat twin tinsel cord	60227 IEC 41	H03VH-Y	
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F	
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H03VVH2-F	
		H05VV-F	
		H05VVH2-F	
<b>Rubber insulated cords</b>			
Braided cord	60245 IEC 51	H03RT-F	
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F	
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F	
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F	
<b>Cords having high flexibility</b>			
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H	
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H	
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H	





IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity <sup>1)</sup>	
Metal Enclosure	Interchangeable	Interchangeable	Min. 0.7mm thickness	--	--	
Plastic Enclosure	Ningbo LG Yongxing Chemical Co., Ltd	FR-500	V-1, min. 1.6mm thickness, 60°C	UL 94, UL 746	UL	
Switching Power Supply	Delta Electronics, Inc.	DPS-200PB-185 XX (X=0-9, A-Z or blank)	Input: 100- 240Vac, 47- 63Hz, 3.5A, Output: 12Vdc/5A, 52Vdc/2.5A, Max. 190W, Ambient: 45°C, Class I	IEC 60950-1: 2005+A1: 2009+A2: 2013 EN 60950-1: 2006+A11: 2009+A1: 2010+A12: 2011+A2: 2013	CB by TUV RH	
RTC Battery (BT1)	Shenzhen Gaonengda Battery Co., Ltd	CR1220	Max. abnormal charging current 10mA. Max. abnormal charging voltage 3.5Vdc.	UL 1642	UL	
H.D.D (two provided) (Optional)	Interchangeable	Interchangeable	5/12Vdc, 0.75/0.75A max.	EN 60950-1: 2006+A11: 2009+A1:2010 + A12:2011+A2: 2013	Approved by certification Body	
DC Fan for System (One provided)	Sunonwealth Electric Machine Industry Co., Ltd.	HA40101V4- D26C-999	12Vdc, 0.67A, Min.5.2CFM	EN 60950-1: 2006+A11: 2009+A1:2010 + A12:2011+A2: 2013	TUV	
PCB	Interchangeable	Interchangeable	Min. V-1, min. 105°C	UL 796, UL 94	UL	
Supplementary information:						

1.6.2	TABLE: Electrical data (in normal conditions)					P
U (V)	I (A)	Irated (A)	P (W)	Fuse #	Ifuse (A)	Condition/status
90Vac/47Hz	2.38	--	212.3	F1	2.38	Maximum normal load



IEC 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
90Vac/63Hz	2.38	--	212.2	F1	2.38	Maximum normal load
100Vac/47Hz	2.11	3.5	209.4	F1	2.11	Maximum normal load
100Vac/63Hz	2.11	3.5	210.1	F1	2.11	Maximum normal load
240Vac/47Hz	0.86	3.5	198.7	F1	0.86	Maximum normal load
240Vac/63Hz	0.86	3.5	198.8	F1	0.86	Maximum normal load
254.4Vac/47Hz	0.81	--	198.7	F1	0.81	Maximum normal load
254.4Vac/63Hz	0.81	--	198.6	F1	0.81	Maximum normal load
264Vac/47Hz	0.79	--	198.6	F1	0.79	Maximum normal load
264Vac/63Hz	0.79	--	198.6	F1	0.79	Maximum normal load
Supplementary information: Maximum normal load: Cross reading & writing data in HDD, one USB 2.0 port loaded 2.5 W, one USB 3.0 port loaded 4.5W, 16 POE ports loaded 130W (Max 25.5W for single port), Unit normal record video continually.						

<b>2.1.1.5 c) 1)</b>	<b>TABLE: max. V, A, VA test</b>				N/A
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
--	--	--	--	--	
supplementary information:					

<b>2.1.1.5 c) 2)</b>	<b>TABLE: stored energy</b>			N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)		
--	--	--		
supplementary information:				



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

--

<b>2.1.1.7</b>	<b>TABLE: Discharge test</b>				N/A
Condition	$\tau$ calculated (s)	$\tau$ measured (s)	t u → 0V (s)	Comments	
--	--	--	--	--	
Supplementary information:					

2.2	TABLE: evaluation of voltage limiting components in SELV circuits			P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
--		--	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
--		--		
supplementary information:				
Evaluated in approved switching power supply.				

<b>2.4.2</b>	<b>TABLE: Limited current circuit measurement</b>					N/A
Location	Voltage (V)	Current (mA)	Freq. (kHz)	Limit (mA)	Comments	
--	--	--	--	--	--	
Supplementary information:						

2.5	TABLE: limited power sources					P
Circuit output tested: See Below						
Note: Measured Uoc (V) with all load circuits disconnected: See Below						
Components	Sample No.	Uoc (V)	I <sub>sc</sub> (A)		VA	
			Meas.	Limit	Meas.	Limit
USB2.0 port (J1) (Pin 4: GND)						



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to Table 2B (Normal condition) (Pin 2, 3 to GND)	1	0	0	8.0	0	100
According to Table 2B (Normal condition) (Pin 1 to GND)	1	5.04	1.8	8.0	8	100
According to Table 2B (Single fault: U1 Pin 1-5 Shorted) (Pin 1 to GND)	1	5.05	3.2	8.0	12.6	100
<b>USB3.0 port (J16) (Pin 4, 7: GND)</b>						
According to Table 2B (Normal condition) (Pin 2, 3, 5, 6, 8, 9 to GND)	1	0	0	8.0	0	100
According to Table 2B (Normal condition) (Pin 1 to GND)	1	5.04	1.9	8.0	8.2	100
According to Table 2B (Single fault: U35 Pin 1-5 Shorted) (Pin 1 to GND)	1	5.05	3.2	8.0	12.6	100
<b>RS232 port (J10) (Pin 3: GND)</b>						
According to Table 2B (Normal condition) (Pin 1, 2 to GND)	1	0	0	8.0	0	100
<b>RJ45 port (J17)</b>						



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to Table 2B (Normal condition) (Pin AP1~AP8, BP1~BP8 to GND)	1	0	0	8.0	0	100
<b>VGA port (J9) (Pin 3: GND)</b>						
According to Table 2B (Normal condition) (Pin 1, 2, 4, 5, 6 to GND)	1	0	0	8.0	0	100
<b>HDMI Port (J18) (Pin 2, 5, 8, 11, 17: GND) (Pin 13, 14: NC)</b>						
According to Table 2B (Normal condition) (Pin 18 to GND)	1	5.03	1.6	8.0	7.6	100
According to Table 2B (Single fault: U38 shorted Pin 2 to 3) (Pin 18 to GND)	1	5.05	3.2	8.0	12.6	100
According to Table 2B (Normal condition) (Pin 15, 16 to GND)	1	4.76	0	8.0	0	100
According to Table 2B (Normal condition) (Pin 1, 3, 4, 6, 7, 9, 10, 12, 19 to GND)	1	0	0	8.0	0	100
<b>Mic in &amp; out port (J4) (Pin1: GND)</b>						



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to Table 2B (Normal condition) (Pin Pin 2, 3 to GND)	1	0	0	8.0	0	100
<b>ALARM port (J15) (Pin 5, 6, 11, 12: GND)</b>						
According to Table 2B (Normal condition) (Pin Pin 1-4, 7-10 to GND)	1	0	0	8.0	0	100
<b>Four POE ports (J11) (Pin A4, A5, A7, A8, B4, B5, B7, B8, C4, C5, C7, C8, D4, D5, D7, D8: NC)</b>						
According to table 2B, Normal, Pin A1, A2 to A3, A6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M9 Pin 4-1 short, Pin A1, A2 to A3, A6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin B1, B2 to B3, B6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M7 Pin 4-1 short, Pin B1, B2 to B3, B6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin C1, C2 to C3, C6	1	47.22	0.59	$150/47.22=3.1$	25.64	100



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to table 2B, Single fault: M5 Pin 4-1 short, Pin C1, C2 to C3, C6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin D1, D2 to D3, D6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M2 Pin 4-1 short, Pin D1, D2 to D3, D6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
<b>Four POE ports (J12) (Pin A4, A5, A7, A8, B4, B5, B7, B8, C4, C5, C7, C8, D4, D5, D7, D8: NC)</b>						
According to table 2B, Normal, Pin A1, A2 to A3, A6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M17 Pin 4-1 short, Pin A1, A2 to A3, A6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin B1, B2 to B3, B6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M15 Pin 4-1 short, Pin B1, B2 to B3, B6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin C1, C2 to C3, C6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to table 2B, Single fault: M13 Pin 4-1 short, Pin C1, C2 to C3, C6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin D1, D2 to D3, D6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M12 Pin 4-1 short, Pin D1, D2 to D3, D6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
<b>Four POE ports (J13) (Pin A4, A5, A7, A8, B4, B5, B7, B8, C4, C5, C7, C8, D4, D5, D7, D8: NC)</b>						
According to table 2B, Normal, Pin A1, A2 to A3, A6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M11 Pin 4-1 short, Pin A1, A2 to A3, A6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin B1, B2 to B3, B6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100
According to table 2B, Single fault: M10 Pin 4-1 short, Pin B1, B2 to B3, B6	1	47.22	2.1	$150/47.22 = 3.1$	83.6	100
According to table 2B, Normal, Pin C1, C2 to C3, C6	1	47.22	0.59	$150/47.22 = 3.1$	25.64	100





IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to table 2B, Single fault: M8 Pin 4-1 short, Pin C1, C2 to C3, C6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin D1, D2 to D3, D6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M6 Pin 4-1 short, Pin D1, D2 to D3, D6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
<b>Four POE ports (J14) (Pin A4, A5, A7, A8, B4, B5, B7, B8, C4, C5, C7, C8, D4, D5, D7, D8: NC)</b>						
According to table 2B, Normal, Pin A1, A2 to A3, A6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M19 Pin 4-1 short, Pin A1, A2 to A3, A6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin B1, B2 to B3, B6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M18 Pin 4-1 short, Pin B1, B2 to B3, B6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin C1, C2 to C3, C6	1	47.22	0.59	$150/47.22=3.1$	25.64	100



IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
According to table 2B, Single fault: M16 Pin 4-1 short, Pin C1, C2 to C3, C6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
According to table 2B, Normal, Pin D1, D2 to D3, D6	1	47.22	0.59	$150/47.22=3.1$	25.64	100
According to table 2B, Single fault: M14 Pin 4-1 short, Pin D1, D2 to D3, D6	1	47.22	2.1	$150/47.22=3.1$	83.6	100
supplementary information:						

<b>2.6.3.4</b>	<b>TABLE: Resistance of earthing measurement</b>		P
Location		Resistance measured (mΩ)	Comments
Earth Pin of AC Inlet to farthest metal enclosure		20	Current: 32A, Test Duration= 2 mins, Voltage Drop: 0.64V.
Supplementary information:			

4.3.8	TABLE: Batteries								P
The tests of 4.3.8 are applicable only when appropriate battery data is not available						See below.			P
Is it possible to install the battery in a reverse polarity position?						Not possible.			--
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	0	--	--	--	--	--	--




IEC 60950-1									
Clause	Requirement + Test					Result - Remark		Verdict	
4.3.8	TABLE: Batteries								P
The tests of 4.3.8 are applicable only when appropriate battery data is not available						See below.		P	
Is it possible to install the battery in a reverse polarity position?						Not possible.		--	
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during fault condition	--	--	0 (R390 Shorted)	--	--	--	--	--	--
Max. current during fault condition	--	--	7mA (D37 Pin 1-2 Shorted)	--	--	--	--	--	--
Test results:								Verdict	
- Chemical leaks						No chemical leak.		P	
- Explosion of the battery						No explosion of the battery.		P	
- Emission of flame or expulsion of molten metal						No emission of flame or expulsion of molten metal.		P	
- Electric strength tests of equipment after completion of tests								P	
Supplementary information:									

<b>4.3.8</b>	<b>TABLE: Batteries</b>	P
Battery category .....: Lithium		
Manufacturer .....: See appended table 1.5.1		
Type / model.....: See appended table 1.5.1		
Voltage .....: See appended table 1.5.1		
Capacity .....: --		
Tested and Certified by (incl. Ref. No.) .....: See appended table 1.5.1 & 4.3.8		
Circuit protection diagram: See below		



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

## RTC

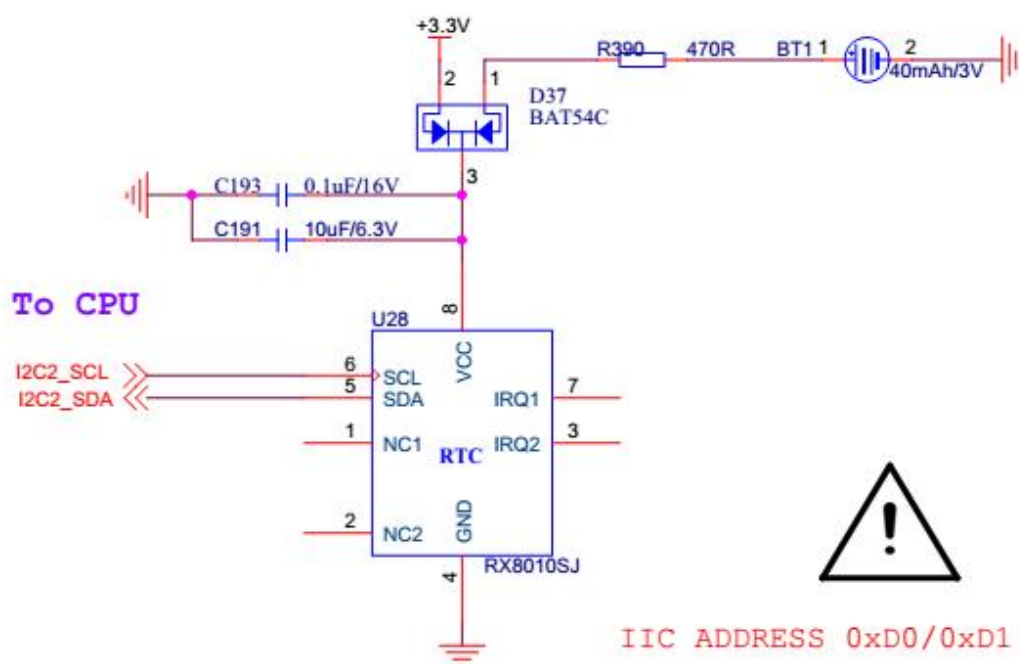

### MARKINGS AND INSTRUCTIONS (1.7.2.1, 1.7.13)

Location of replaceable battery	In service and operator access areas
Language(s) .....	English
Close to the battery .....	N/A
In the servicing instructions .....	Provided.
In the operating instructions .....	Provided.

4.5	TABLE: Thermal requirements						P
	Supply voltage (V) .....	See below	See below	See below	See below	--	—
	Ambient T <sub>min</sub> (°C) .....	See below	See below	See below	See below	--	—
	Ambient T <sub>max</sub> (°C) .....	See below	See below	See below	See below	--	—



IEC 60950-1							
Clause	Requirement + Test				Result - Remark		Verdict
Maximum measured temperature T of part/at::			T (°C)				Allowed T <sub>max</sub> (°C)
Test Voltage			90Vac/47Hz		264Vac/63Hz		--
Power switch(Power supply)			30.3	62.1	30.3	61.0	--
AC inlet(Power supply)			35.6	67.4	32.3	63.0	--
CX2 body(Power supply)			52.6	84.4	45.0	75.7	--
FL3 coil(Power supply)			66.5	98.3	46.7	77.4	--
PCB near BD1(Power supply)			73.2	105.0	52.1	82.8	--
C801 body(Power supply)			44.1	75.9	41.5	72.2	--
CY5 body(Power supply)			38.3	70.1	38.9	69.6	--
PCB near Q1(Power supply)			64.3	96.1	54.4	85.1	--
PCB near NTC1(Power supply)			69.7	101.5	49.0	79.7	--
IC151 body(Power supply)			46.8	78.6	47.7	78.4	--
T351 core(Power supply)			48.1	79.9	46.7	77.4	--
T351 coil(Power supply)			56.4	88.2	55.6	86.3	--
T501 coil(Power supply)			52.3	84.1	52.6	83.3	--
T501 core(Power supply)			50.0	81.8	50.4	81.1	--
T2 body(Main board)			39.0	70.8	39.5	70.2	--
PCB near U23(Main board)			41.4	73.2	42.4	73.1	--
PCB near U30(Main board)			49.4	81.2	50.2	80.9	--
PCB near U17(Main board)			34.4	66.2	35.3	66.0	--
BT1 body(Main board)			31.4	63.2	32.2	62.9	--
HDD body			46.0	77.8	47.0	77.7	--
Internal plastic enclosure near power supply			25.4	57.2	26.6	57.3	--
External plastic enclosure near power supply			25.0	56.8	26.1	56.8	--
Metal enclosure near power supply			31.0	62.8	31.9	62.6	--
Ambient			23.2	Shift to 55.0	24.3	Shift to 55.0	--
Supplementary information:							
Temperature T of winding:		t <sub>1</sub> (°C)	R <sub>1</sub> (Ω)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)
--		--	--	--	--	--	--



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

1. The temperature were measured under the worse case normal mode defined in 1.2.2.1 and as described in sub-clause 1.6.2 at voltage as described above.
2. The maximum ambient temperature (Tma) permitted by the manufacturer's specification is 55°C.

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm) .....	≤ 2 mm		—
Part		Test temperature (°C)	Impression diameter (mm)	
--		--	--	
Supplementary information:				

4.6.1, 4.6.2	Table: enclosure openings		P
Location	Size (mm)	Comments	
Top	--	No openings.	
Front	--	No openings.	
Rear	Max. Φ 6.68 mm	Numerous regular hexagon openings for DC fan within built-in power supply, no hazardous parts within 5° projection area.	
Left	Max. Φ 4.2 mm	Numerous regular hexagon openings that do not exceed 5 mm in any dimension.	
Right	Max. Φ 4.2 mm	Numerous regular hexagon openings that do not exceed 5 mm in any dimension.	
Bottom	Max. Φ3.8mm	Four circular openings that is H.D.D screw hole.	
Note(s):			

<b>4.7</b>	<b>TABLE: Resistance to fire</b>				P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence
PCB	--	--	-	V-1 or better	Pass
Metal Enclosure	--	metallic	1.0mm	--	Pass
Plastic Enclosure	Ningbo LG Yongxing Chemical Co., Ltd	FR-500	1.6mm	V-1	Pass
Supplementary information:					



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5.1</b>	<b>TABLE: touch current measurement</b>		<b>P</b>
Measured between:	Measured (mA)	Limit (mA)	Comments/conditions
Switch On			
Metal Enclosure	0.175	3.5	Switch "e" opened, Polarity Switch P1 Normal
Metal Enclosure	0.175	3.5	Switch "e" opened, Polarity Switch P1 Reverse
SELV terminal	0.175	3.5	Switch "e" opened, Polarity Switch P1 Normal
SELV terminal	0.175	3.5	Switch "e" opened, Polarity Switch P1 Reverse
Plastic enclosure with metal foil	0.005	0.25	Switch "e" closed, Polarity Switch P1 Normal
Plastic enclosure with metal foil	0.005	0.25	Switch "e" closed, Polarity Switch P1 Reverse
Switch Off			
Metal Enclosure	0.03	3.5	Switch "e" opened, Polarity Switch P1 Normal
Metal Enclosure	0.32	3.5	Switch "e" opened, Polarity Switch P1 Reverse
SELV terminal	0.03	3.5	Switch "e" opened, Polarity Switch P1 Normal
SELV terminal	0.32	3.5	Switch "e" opened, Polarity Switch P1 Reverse
Plastic enclosure with metal foil	0.005	0.25	Switch "e" closed, Polarity Switch P1 Normal
Plastic enclosure with metal foil	0.005	0.25	Switch "e" closed, Polarity Switch P1 Reverse
supplementary information:			
Test Voltage 264Vac, 60Hz			

<b>5.2</b>	<b>TABLE: Electric strength tests, impulse tests and voltage surge tests</b>			<b>P</b>
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
<b>Functional:</b>				



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
--		--	--
<b>Basic/supplementary:</b>			
	Line and Neutral of AC inlet to metal enclosre	DC 3231	No
<b>Reinforced:</b>			
	Line and Neutral to Plastic enclosre	AC 3000	No
	Line and Neutral to SELV terminals	DC 4242	No
Supplementary information:			
<ul style="list-style-type: none"> <li>- All electrical strength test durations last at least 60s.</li> <li>- All applied test voltages for electric strength (In table 5B) are based on the working voltage measured on TA3 of switching power supply: 538Vr.m.s, 860Vpeak.</li> </ul>			

5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C) .....				See below	—
	Power source for EUT: Manufacturer, model/type, output rating .....				See table 1.5.1.	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Ventilation Openings	Lock	240Vac	1hr. 31mins.	F1	0.86→0.86A	Unit shut down, Max. Temp: T351 coil (Power supply) = 125.1°C, T351 core (Power supply) = 121.3°C, T501 coil (Power supply) = 115.6°C, T501 core (Power supply) = 108.3°C, PCB near Q1 (Power supply) = 148.4°C, Ambient= 27.3°C. No damage, no hazards, NC, NT, NB.
DC Fan for Unit	Lock	240Vac	2hrs. 24mins.	F1	0.86→0.85A	Normal Operation, Max. Temp: T351 coil (Power supply) = 58.2°C, T351 core (Power supply) = 50.6°C, T501 coil (Power supply) = 50.2°C, T501 core (Power supply) = 47.7°C, PCB near U30 (Main board) = 60.5°C, Ambient= 25.4°C. No damage, no hazards, NC, NT, NB.






IEC 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
DC Fan for Power Supply	Lock	240Vac	1hr. 18mins.	F1	0.86→0.85A	Unit shut down, Max. Temp: T351 coil (Power supply) = 119.7°C, T351 core (Power supply) = 122.8°C, T501 coil (Power supply) = 113.3°C, T501 core (Power supply) = 105.7°C, PCB near Q1 (Power supply) = 147.6°C, Ambient = 26.4°C. No damage, no hazards, NC, NT, NB.
Supplementary information: NB - No indication of dielectric breakdown NC - Cheesecloth remained intact NT - Tissue paper remained intact						

C.2	TABLE: transformers							N/A
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)	
--	--	--	--	--	--	--	--	
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers	
--	--			--	--	--	--	
supplementary information:								

C.2	TABLE: transformers	N/A




## Photo(s)

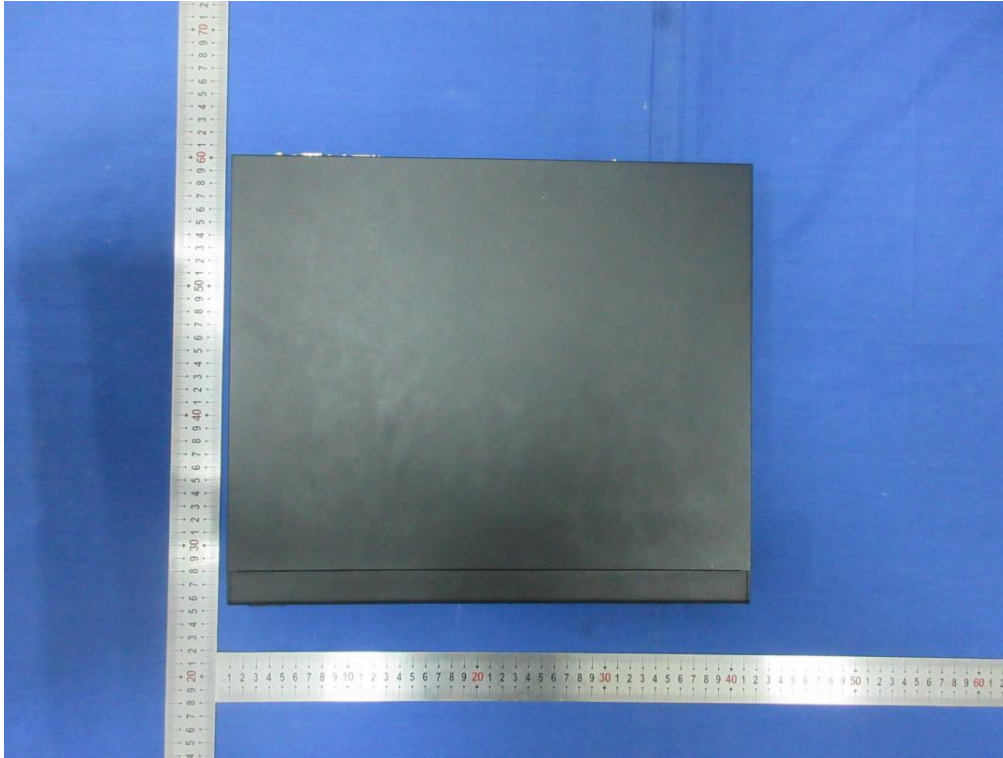





## Photo(s)

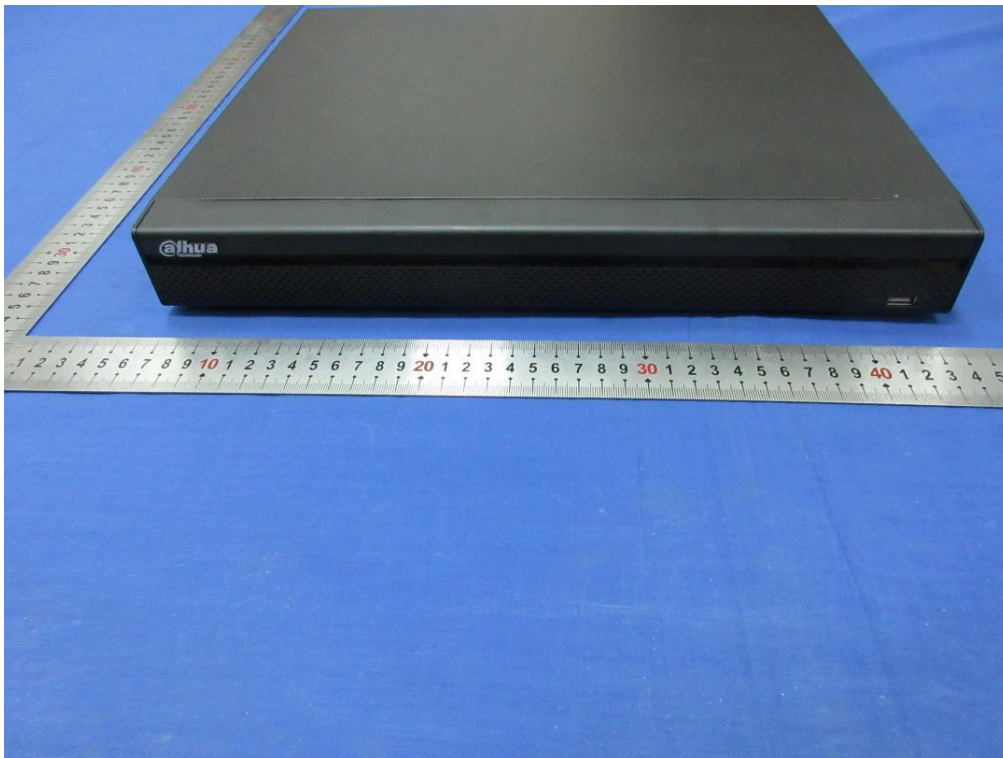







## Photo(s)

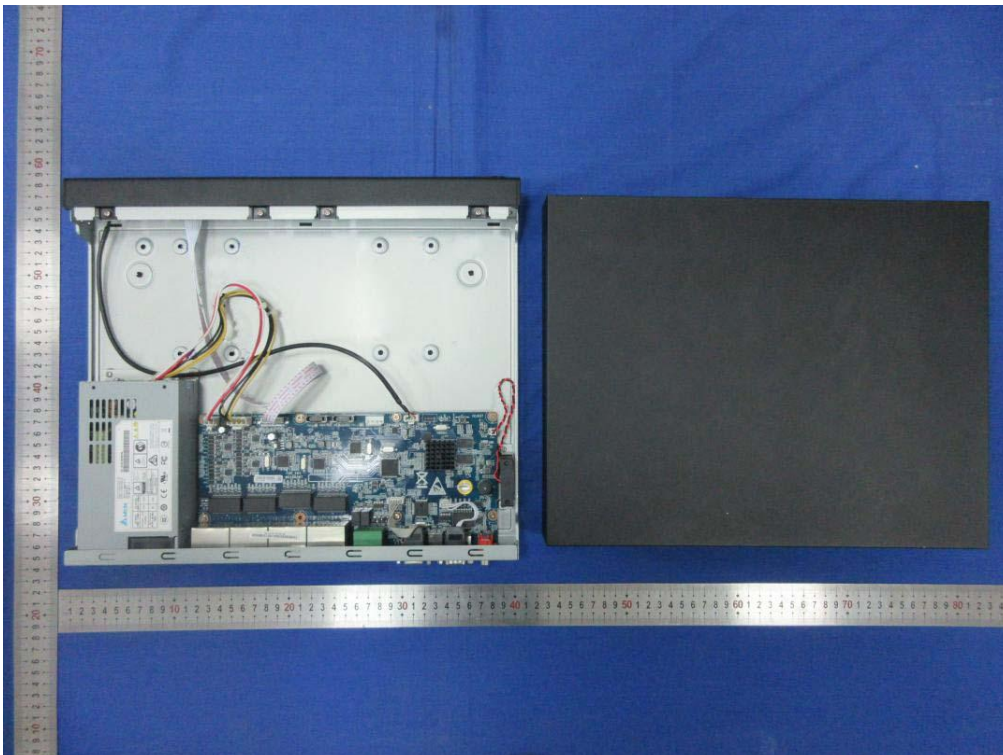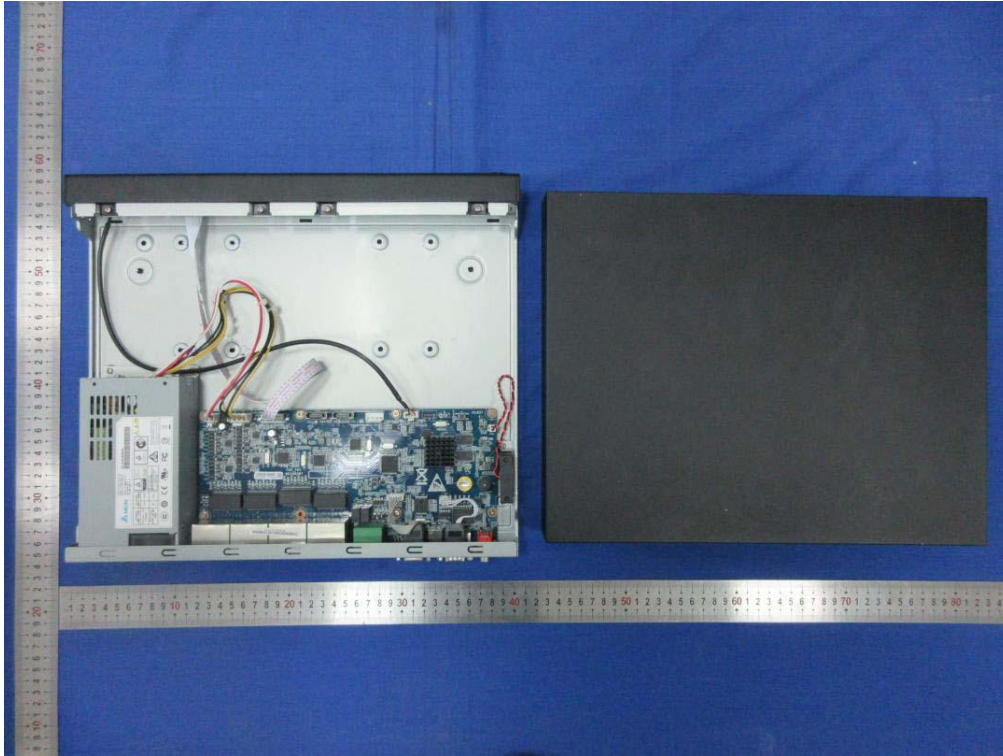




## Photo(s)

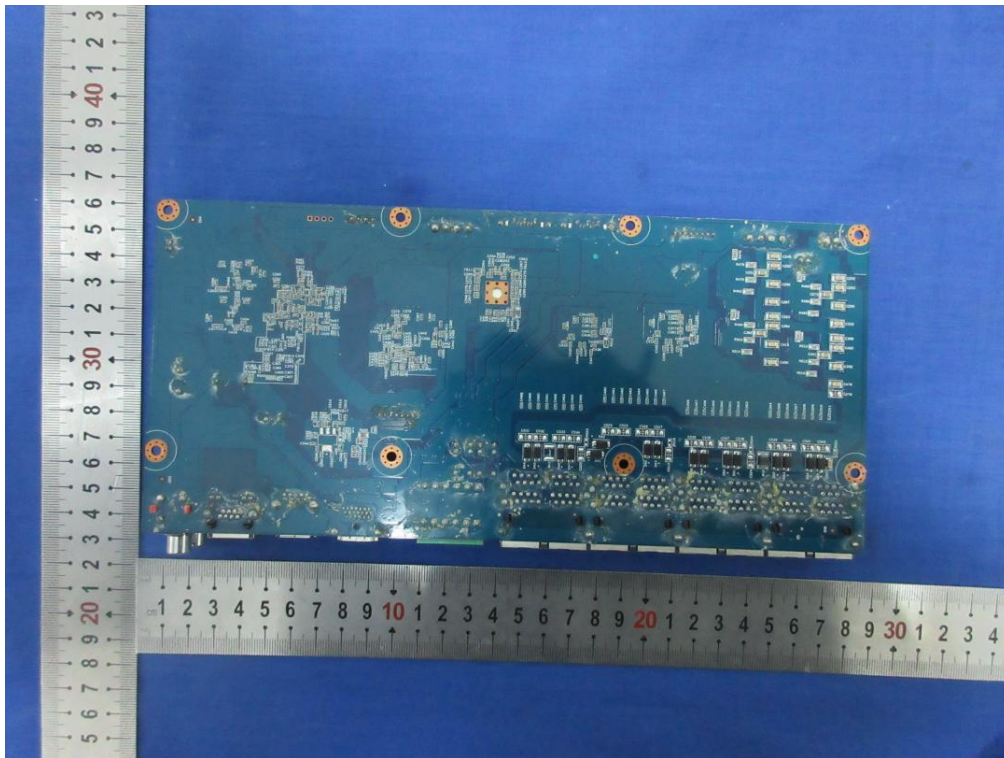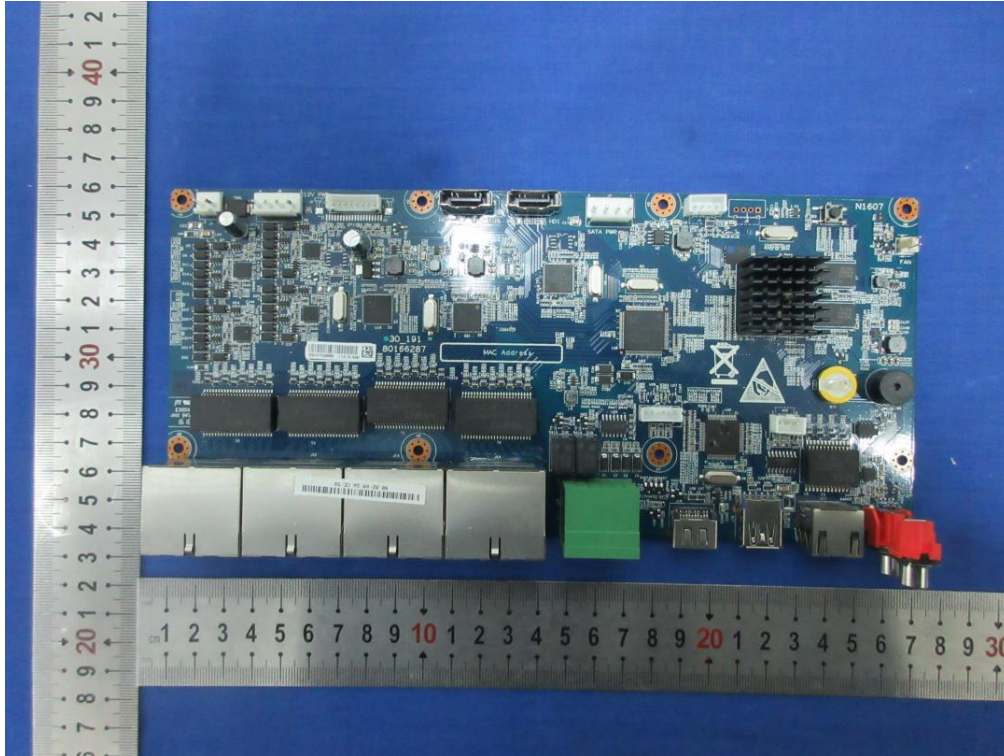







## Photo(s)

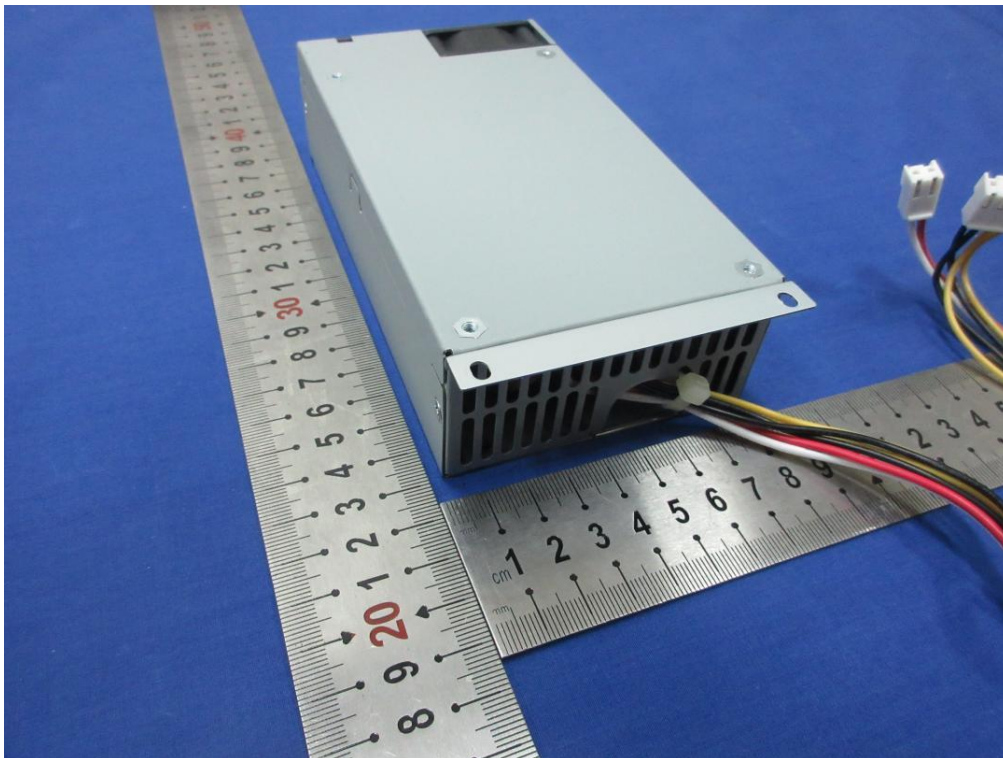



## Photo(s)

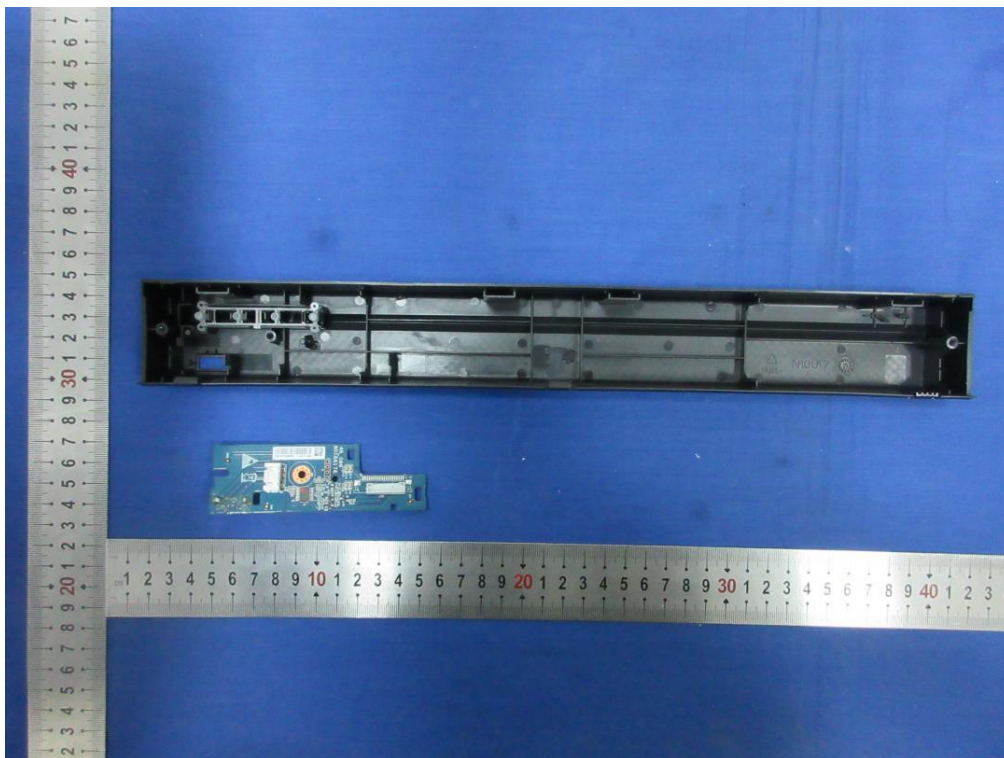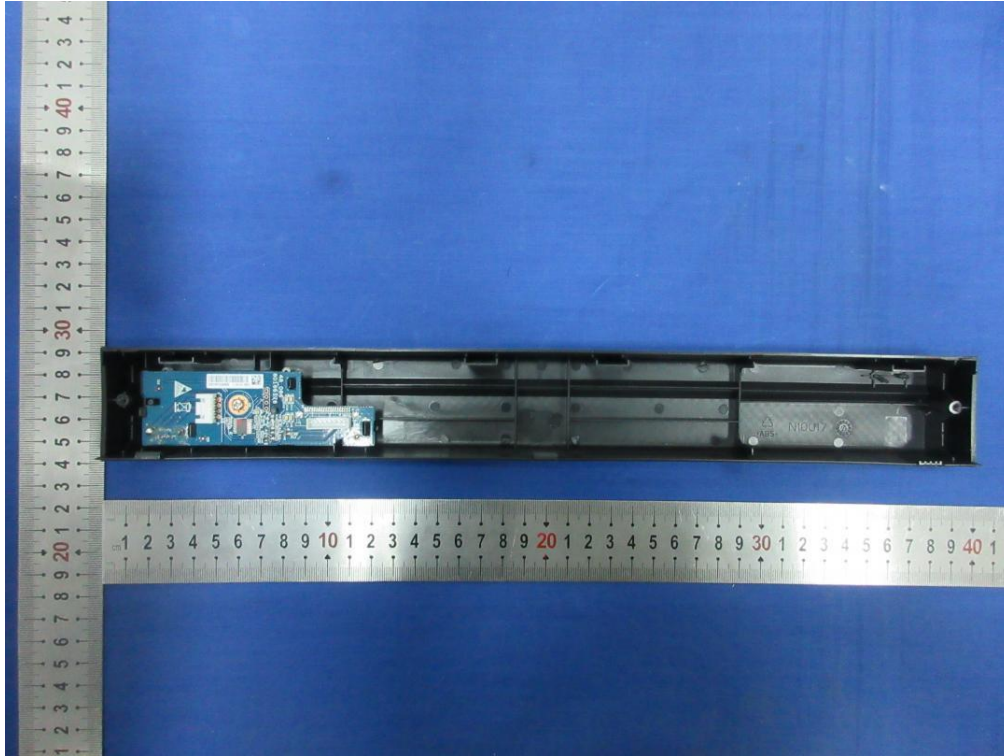





## Photo(s)

