


DHI-HCVR8208/16A-S3

8/16 Channel Quadri-brid 1080P-Ultra 1U Digital Video Recorder



- Embedded processor
- H.264+/H.264 video compression
- Support HDCVI/AHD/CVBS video inputs
- Max 64 channels IP camera inputs, each channel up to 12MP
- Max 256Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System

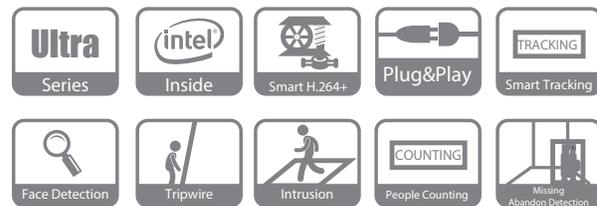

System Overview

Dahua newest generation digital video recorder adopts HDCVI technology, our in-house technology is an over-coaxial-cable analog HD video transmission standard, allowing long-distance HD transmission at a lower cost to meet the requirements for a complex and large installation. It supports up to 16 channels of HDCVI/CVBS inputs, or up to 64 channels IP camera totally, 16 channels local live-view channels, and 16 playback channels.

Designed as a low-cost, easy installation product, this HCVR is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education. It is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF 2.42.

Functions

Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

Fisheye Dewarping

The multiple fisheye dewarping modes to make viewing video easy whether its live or during playback.

Spot Output

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the HCVR has the ability to detect and analyze moving objects for improved video surveillance. The HCVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

Smart Tracking

The auto tracking PTZ feature automatically tracks a moving target throughout the camera's field of view. This function is ideal for following an object as it moves through airports, parking lots, city centers, or other applications

Technical Specification

System

| | |
|------------------|--------------------|
| Main Processor | Embedded Processor |
| Operating System | Embedded LINUX |

Display

| | |
|----------------------|--------------------------------------------------------------------------|
| Interface | 2 HDMI (HDMI1 up to 4K), 1 VGA, 1 TV |
| Resolution | 3840×2160, 2560×1440, 1920×1080, 1280×1024, 1280×720, 1024×768 |
| Multi-screen Display | 8CH: 1/4/8/9 16CH: 1/4/8/9/16 |
| OSD | Camera title, Time, Video loss, Camera lock, Motion detection, Recording |

Video Detection and Alarm

| | |
|-----------------|-------------------------------------------------------------------------------------------|
| Trigger Events | Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips |
| Video Detection | Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis |
| Alarm input | 8/16 |
| Relay Output | 3 |

Playback and Backup

| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Playback | 8CH: 1/4/9 16CH: 1/4/9/16 |
| Search Mode | Time /Date, Alarm, MD and Exact Search (accurate to second) |
| Playback Function | Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode | USB Device/Network |

Storage

| | |
|--------------|------------------------------------------------|
| Internal HDD | 2 SATA Ports, up to 8TB capacity for each disk |
| eSATA | 1 Port |

Auxiliary Interface

| | |
|-------|-----------------------------------------|
| USB | 3 USB Ports (1 USB 2.0 , 2 USB 3.0) |
| RS232 | 1 port, For PC communication & Keyboard |
| RS485 | 1 Port, for PTZ Control |

Third-party Support

| | |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Third-party Support | Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|

Audio and Video

| | |
|--------------------|---------------------------------------|
| HDCVI Camera Input | 8/16 Channel |
| IP Camera Input | 64 Channel, each channel up to 12MP |
| Audio In/Out | 4/1, BNC |
| Two-way Talk | 1 Mic Input, BNC, 1 Audio Output, RCA |

Recording

| | |
|-----------------|--------------------------------------------------------------------------------------------------------------------|
| Compression | H.264+/H.264 |
| Resolution | 1080P, 720P, 960H, D1, HD1, BCIF, CIF, QCIF |
| Record Rate | Main stream: 1080P/720P/960H/D1/HD1/BCIF/CIF/QCIF (1/16~25/30fps) Sub stream: 960H/D1/CIF/QCIF (1/16~25/30fps) |
| Bit Rate | 1Kbps ~ 6144Kbps Per Channel |
| Record Mode | Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop |
| Record Interval | 1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec |

Network

| | |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface | 2 RJ-45 Port (1000M) |
| Network Function | HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.) |
| Max. User Access | 128 users |
| Smart Phone | iPhone, iPad, Android |
| Interoperability | ONVIF 2.42, CGI Conformant |

Electrical

| | |
|-------------------|--------------------|
| Power Supply | DC12V/5A |
| Power Consumption | <40W (Without HDD) |

Environmental

| | |
|----------------------|-------------------------------------------|
| Operating Conditions | -10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH |
| Storage Conditions | -20°C ~ +70°C (-4°F ~ +158°F) , 0~ 90% RH |

Construction

| | |
|--------------|---------------------------------------------|
| Dimensions | 1U, 375mm×310mm×55mm (14.8" x 12.2" x 2.2") |
| Net Weight | 2.35kg (5.2lb) (without HDD) |
| Gross Weight | 3.2kg (7.05lb) |
| Installation | Desktop installation |

Certifications


| | |
|----------------|---------------------------------------------------------------------------------------------------------------------|
| Certifications | FCC: Part 15 Subpart B ICES 003 Issue 6 |
| | CE: EN 55032: 2012+AC:2013 (Class B) EN 55024 : 2010 EN 61000-3-2 : 2014 EN 50130-4: 2011 EN 61000-3-3 : 2013 |
| | UL 60950-1 and CAN/CSA C22.2 No. 60950-1-07 |

Ordering Information

| Type | Part Number | Description |
|-------------------|------------------|--------------------------------------------|
| 8/16 Channel HCVR | DHI-HCVR8208A-S3 | 8 Channel 1080P 1U Digital Video Recorder |
| | DHI-HCVR8216A-S3 | 16 Channel 1080P 1U Digital Video Recorder |

Rear Panel

DHI-HCVR8208A-S3 DHI-HCVR8216A-S3

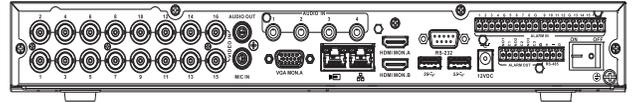

Dimensions (mm)

