

DH-PFB5202C

In-ceiling Mount Bracket



- Supports in-ceiling mount installation and is applicable to large-size dome cameras.
- Easy to install and aesthetically pleasing.
- Designed for easy disassembly and maintenance.



Scene

Ideal for mounting cameras, it works in temperatures ranging from -40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$) and in environments with relative humidity of less than 90%.

Technical Specification


Structure

Product Material	SECC, PC
Product Dimensions	$\Phi211.5 \text{ mm} \times 109.7 \text{ mm}$ ($\Phi8.33" \times 4.32"$)
Appearance Color	White
Net Weight	0.55 kg (1.21 lb)
Gross Weight	0.83 kg (1.83 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	In-ceiling Mount
Rotation Angle	Pan: 0° to 360°
Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	$266.0 \text{ mm} \times 266.0 \text{ mm} \times 138.0 \text{ mm}$ ($10.47" \times 10.47" \times 5.43"$) (L \times W \times H)
Transport Package Dimensions	$719.0 \text{ mm} \times 553.0 \text{ mm} \times 298.0 \text{ mm}$ ($28.31" \times 21.77" \times 11.73"$) (L \times W \times H)
Packaging Method	10 pcs in each carton


Environment

Operating Temperature	-40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$)
Operating Humidity	< 90% (RH)
Storage Temperature	-40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$)
Storage Humidity	10%–90% (RH)

Installation

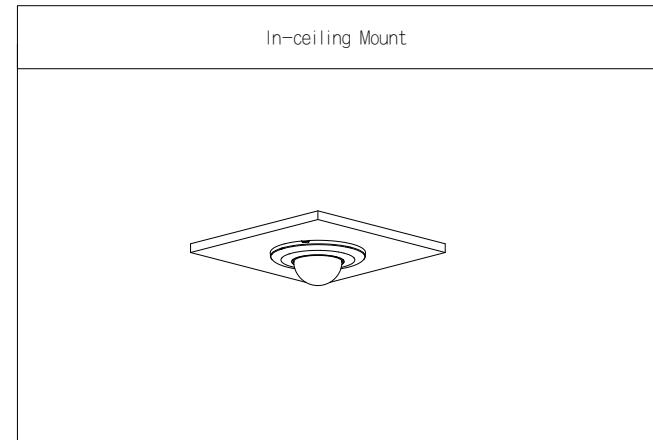

Dimensions (mm[inch])

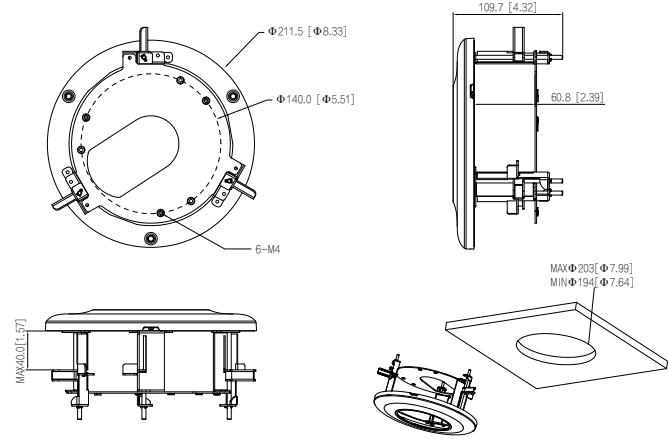

Package Information

- In-ceiling mount bracket × 1
- Installation Guide × 1
- M4×14 screw × 3
- S3.0 wrench × 1