



TEST REPORT

Application No.: SHEM1906013841AT
Applicant: ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
Address of Applicant: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Manufacturer: ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
Address of Manufacturer: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Equipment Under Test (EUT):
EUT Name: Digital Video Recorder
Model No.: DH-XVR8208A-4KL-I, XVR8208A-4KL-I; ㄱ
ㄱ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : EN 55032:2015 (Class A)
EN 61000-3-2:2014
EN 61000-3-3:2013
EN 55024:2010 +A1:2015
EN 55035:2017
EN 50130-4:2011 +A1:2014
Date of Receipt: 2019-06-05
Date of Test: 2019-06-10 to 2019-06-17
Date of Issue: 2019-07-26

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Parlam Zhan

Parlam Zhan
E&E Section Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
Testing Center (Shanghai)

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612
中国·上海·松江区金都西路588号 邮编: 201612

t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn
t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2019-07-26	/

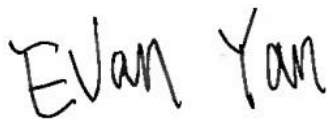Authorized for issue by:				
				
		<hr/> Evan Yan / Project Engineer		
				
		<hr/> Bruce Tang / Reviewer		

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Asymmetric Mode Conducted Emissions (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Radiated Emissions (30MHz-1GHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Harmonic Current Emission	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	N/A
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	Pass

N/A: Not applicable. Please refer to Section 6.5 of this report for details.

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 55024:2010 +A1:2015	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrostatic Discharge	EN 55035:2017	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz)	EN 55035:2017	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m, 80%, 1kHz Amp. Mod.	Pass
Radiated Immunity (80MHz-2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass
Radiated Immunity (80MHz-1GHz)	EN 55024:2010 +A1:2015	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m, 80%, 1kHz Amp. Mod.	Pass
Electrical Fast Transients/Burst at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	2kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrical Fast Transients/Burst at Power Port	EN 55035:2017	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 55035:2017	EN 61000-4-4:2012	0.5kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	0.5kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Surge at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 0.5,1kV Line to Line 0.5,1,2kV Line to Ground	Pass
Surge at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Surge at Power Port	EN 55035:2017	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Surge at Signal Port	EN 55035:2017	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 1kV Line to Ground	Pass
Surge at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 1kV Line to Ground	Pass
Surge at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 0.5,1kV Line to Ground	Pass
Conducted Immunity at Power Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Conducted Immunity at Power Port (150kHz-80MHz)	EN 55035:2017	EN 61000-4-6:2014	3 Vrms: 0.15MHz - 10MHz 3 to 1 (Lines) Vrms: 10MHz - 30MHz 1 Vrms: 30MHz - 80MHz 80%,1kHz Amp. Mod.	Pass
Conducted Immunity at Power Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf),80%,1kHz sinusoidal Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-80MHz)	EN 55035:2017	EN 61000-4-6:2014	3 Vrms: 0.15MHz - 10MHz 3 to 1 (Lines) Vrms: 10MHz - 30MHz 1 Vrms: 30MHz - 80MHz 80%,1kHz Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf),80%,1kHz sinusoidal Amp. Mod.	Pass
Voltage Dips and Interruptions	EN 50130-4:2011 +A1:2014	EN 61000-4-11:2004 +A1:2017	80 % UT for 250per 70 % UT for 25per 40 % UT for 10per 0 % UT for 250per UT is Supply Voltage	Pass
Voltage Dips and Interruptions	EN 55024:2010 +A1:2015	EN 61000-4-11:2004 +A1:2017	0 % UT for 0.5per 0 % UT for 250per 70 % UT for 25per UT is Supply Voltage	Pass
Voltage Dips and Interruptions	EN 55035:2017	EN 61000-4-11:2004 +A1:2017	<5% residual voltage for 0.5 periods: B 70% residual voltage for 25 periods: C <5% residual voltage for 250 periods: C	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Mains Supply Voltage Variations-Conditioning	EN 50130-4:2011 +A1:2014	EN 50130-4:2011+A1:2014	Unom+10% Unom-15%	Pass

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less

Note1: Declaration of EUT Family Grouping:

There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-XVR8208A-4KL-I was tested since their differences is model number and packing.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY.....	3
3 CONTENTS	7
4 GENERAL INFORMATION.....	9
4.1 DETAILS OF E.U.T.	9
4.2 DESCRIPTION OF SUPPORT UNITS	9
4.3 MEASUREMENT UNCERTAINTY	9
4.4 TEST LOCATION	10
4.5 TEST FACILITY	10
4.6 DEVIATION FROM STANDARDS	10
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST	10
5 EQUIPMENT LIST	11
6 EMISSION TEST RESULTS	15
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ).....	15
6.2 ASYMMETRIC MODE CONDUCTED EMISSIONS (150KHZ-30MHZ).....	20
6.3 RADIATED EMISSIONS (30MHZ-1GHZ)	23
6.4 RADIATED EMISSIONS (ABOVE 1GHZ)	28
6.5 HARMONIC CURRENT EMISSION	33
6.6 VOLTAGE FLUCTUATIONS AND FLICKER	34
7 IMMUNITY TEST RESULTS	35
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 55024:2010 +A1:2015	35
7.2 PERFORMANCE CRITERIA DESCRIPTION IN EN 55035:2017	35
7.3 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014	36
7.4 ELECTROSTATIC DISCHARGE	37
7.5 ELECTROSTATIC DISCHARGE	38
7.6 ELECTROSTATIC DISCHARGE	39
7.7 RADIATED IMMUNITY (80MHZ-1GHZ,1800MHZ,2600MHZ,3500MHZ,5000MHZ).....	40
7.8 RADIATED IMMUNITY(80MHZ-2.7GHZ)	42
7.9 RADIATED IMMUNITY (80MHZ-1GHZ)	44
7.10 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	45
7.11 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	46
7.12 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	47
7.13 ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	48
7.14 ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	49
7.15 ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	50
7.16 SURGE AT POWER PORT	51
7.17 SURGE AT POWER PORT	53
7.18 SURGE AT POWER PORT	55
7.19 SURGE AT SIGNAL PORT.....	57
7.20 SURGE AT SIGNAL PORT.....	58
7.21 SURGE AT SIGNAL PORT.....	59
7.22 CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz).....	60
7.23 CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz).....	61
7.24 CONDUCTED IMMUNITY AT POWER PORT (150kHz-100MHz).....	62
7.25 CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-80MHz)	64



7.26	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHz-80MHz)	65
7.27	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHz-100MHz)	66
7.28	VOLTAGE DIPS AND INTERRUPTIONS	68
7.29	VOLTAGE DIPS AND INTERRUPTIONS	69
7.30	VOLTAGE DIPS AND INTERRUPTIONS	70
7.31	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING	71
8	PHOTOGRAPHS	72
8.1	CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHz-30MHz) TEST SETUP	72
8.2	ASYMMETRIC MODE CONDUCTED EMISSIONS (150KHz-30MHz) TEST SETUP.....	73
8.3	RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	74
8.4	RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP.....	75
8.5	VOLTAGE FLUCTUATIONS AND FLICKER TEST SETUP.....	76
8.6	ELECTROSTATIC DISCHARGE TEST SETUP.....	77
8.7	RADIATED IMMUNITY (80MHz-1GHz,1800MHz,2600MHz,3500MHz,5000MHz) TEST SETUP.....	79
8.8	RADIATED IMMUNITY (80MHz-2.7GHz) TEST SETUP	81
8.9	RADIATED IMMUNITY (80MHz-1GHz) TEST SETUP	82
8.10	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT TEST SETUP	83
8.11	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT TEST SETUP	84
8.12	SURGE AT POWER PORT TEST SETUP	85
8.13	SURGE AT SIGNAL PORT TEST SETUP.....	86
8.14	CONDUCTED IMMUNITY AT POWER PORT (150KHz-80MHz) TEST SETUP.....	88
8.15	CONDUCTED IMMUNITY AT POWER PORT (150KHz-100MHz) TEST SETUP.....	89
8.16	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHz-80MHz) TEST SETUP	90
8.17	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHz-100MHz) TEST SETUP	91
8.18	VOLTAGE DIPS AND INTERRUPTIONS TEST SETUP.....	92
8.19	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING TEST SETUP	93
8.20	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	94

4 General Information

4.1 Details of E.U.T.

Power supply: DC12V, 5A
 Adapter 1: ADS-65HI-12N-1 12048E, input: AC100-240V 50/60Hz 1.5A max, output: DC12V 4.0A
 Adapter 2: S050-1A120400B3, input: AC100-240V 50/60Hz 1.5A, output: DC12V 4.0A

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC Adapter	HOIOTO	ADS-25FSG-12	/
Hard disk	HGST	HTS541010A9E680	/
Headset	HYUNDAI	HY-R362	/
Laptop	LENOVO	R400	/
Monitor	DELL	ST2220Lb	/
Network Camera	/	DS-2CD893PF-E	/
USB Disk	SanDisk	Cruzer Blade 8GB	/
USB Mouse	3D Optical Mouse	--	/

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	$\pm 2.6\text{dB}$ (9kHz to 150kHz)
		$\pm 2.3\text{dB}$ (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	$\pm 1.9\text{ dB}$ (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	$\pm 4.1\text{ dB}$ (150kHz to 30MHz)
4	Radiated Power	$\pm 3.0\text{dB}$
5	Radiated emission	$\pm 4.4\text{dB}$ (30MHz-1GHz)
		$\pm 4.8\text{dB}$ (1GHz-6GHz)
		$\pm 5.2\text{dB}$ (6GHz-18GHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (Certificate No. 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). Certificate No. 201034-0.

- **FCC –Designation Number: CN5033**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

IC Registration No.: 8617A-1. CAB identifier: CN0020.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 Monitoring of EUT for All Immunity Test

Visual: work status and video quality

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2018-12-20	2019-12-19
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2018-12-20	2019-12-19
Line impedance stabilization network	EMCO	3816/2	SHEM019-1	2018-12-20	2019-12-19
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2018-12-20	2019-12-19
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2017-12-20	2020-12-19
CE test Cable	/	/	CE01	2018-12-26	2019-12-25

Asymmetric Mode Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2018-12-20	2019-12-19
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2018-12-20	2019-12-19
8-wire ISN cat 5	SCHWARZBECK	CAT5 8158	SHEM137-1	2018-12-20	2019-12-19
8-wire ISN cat 3	SCHWARZBECK	CAT3 8158	SHEM137-2	2018-12-20	2019-12-19
8-wire ISN cat 6	SCHWARZBECK	NTFM8158	SHEM137-3	2018-12-20	2019-12-19
2-Draht ISN	Schwarzbeck - Mess-Elektronik	NTFM 8131	SHEM139-1	2018-12-20	2019-12-19
CE test Cable	/	/	CE01	2018-12-26	2019-12-25

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2018-12-20	2019-12-19
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
Low Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2018-08-13	2019-08-12

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2018-12-20	2019-12-19
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
High-amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2018-12-20	2019-12-19
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
High Amplifier	CLAVIIO	BDLNA-0118-352810	SHEM165-1	2018-08-13	2019-08-12



Voltage Fluctuations and Flicker					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2018-08-13	2019-08-12
AC Power Source 5KVA	AMETEK	500iX	SHEM025-2	2018-08-13	2019-08-12

Electrostatic Discharge					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2018-08-13	2019-08-12

Radiated Immunity (80MHz-1GHz,1800MHz,2600MHz,3500MHz,5000MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2018-12-20	2019-12-19
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2018-12-20	2019-12-19
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2018-12-11	2019-12-10

Radiated Immunity(80MHz-2.7GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2018-12-20	2019-12-19
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2018-12-20	2019-12-19
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2018-12-20	2019-12-19
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2018-12-11	2019-12-10
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21

Radiated Immunity (80MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2018-12-20	2019-12-19
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2018-12-20	2019-12-19
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2018-12-11	2019-12-10
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21

**Electrical Fast Transients/Burst at Power Port**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19

Electrical Fast Transients/Burst at Signal Port

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19
Capacitive coupling clamp	EM test	HFK	SHEM026-2	2018-12-20	2019-12-19
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2018-12-20	2019-12-19

Surge at Power Port

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19

Surge at Signal Port

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2018-12-20	2019-12-19

Conducted Immunity at Power Port (150kHz-80MHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2018-12-20	2019-12-19
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2018-12-20	2019-12-19
Coupling clamp	LIITHI	EM 101	SHEM027-1	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2018-12-20	2019-12-19
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2018-08-13	2019-08-12

Conducted Immunity at Power Port (150kHz-100MHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2018-12-20	2019-12-19
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2018-12-20	2019-12-19



Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2018-08-13	2019-08-12

Conducted Immunity at Signal Port (150kHz-80MHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2018-12-20	2019-12-19
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2018-12-20	2019-12-19
Coupling clamp	LIITHI	EM 101	SHEM027-1	2018-12-20	2019-12-19
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28

Conducted Immunity at Signal Port (150kHz-100MHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2018-12-20	2019-12-19
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2018-12-20	2019-12-19
Coupling clamp	LIITHI	EM 101	SHEM027-1	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2018-12-20	2019-12-19
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2018-12-20	2019-12-19
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2018-08-13	2019-08-12

Voltage Dips and Interruptions

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19

Mains Supply Voltage Variations-Conditioning

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2018-12-20	2019-12-19

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2018-01-25	2021-01-24
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-1~6	2018-08-31	2019-08-30
Digital Multimeter	FLUKE	17B	SHEM043-3	2018-09-03	2019-09-02
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	316	SHEM001-1	2018-12-20	2019-12-19

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	79dB(μV) quasi-peak, 66dB(μV) average
0.5M-30MHz	73dB(μV) quasi-peak, 60dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.


6.1.2 Test Setup Diagram

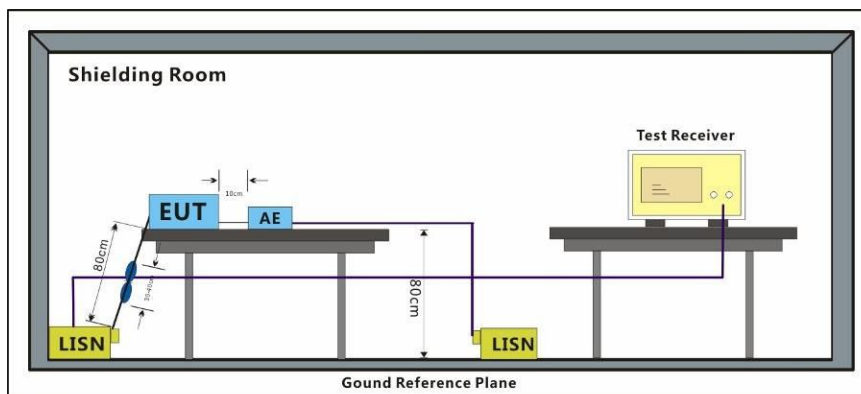

6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Mode:a; Line:Live Line

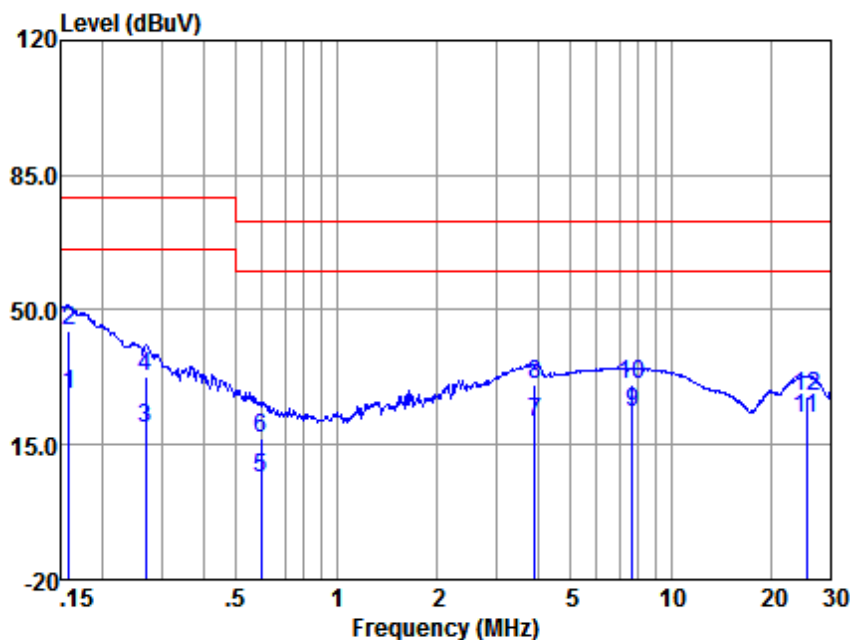


LISN : LINE
EUT/Project No : 13841AT
Test mode : a

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	17.76	0.08	10.00	27.84	66.00	-38.16	Average
2	0.16	34.42	0.08	10.00	44.50	79.00	-34.50	QP
3	0.27	9.06	0.07	10.00	19.13	66.00	-46.87	Average
4	0.27	22.40	0.07	10.00	32.47	79.00	-46.53	QP
5	0.59	-3.50	0.08	10.00	6.58	60.00	-53.42	Average
6	0.59	6.37	0.08	10.00	16.45	73.00	-56.55	QP
7	3.92	10.42	0.13	10.30	20.85	60.00	-39.15	Average
8	3.92	20.30	0.13	10.30	30.73	73.00	-42.27	QP
9	7.69	13.02	0.20	10.30	23.52	60.00	-36.48	Average
10	7.69	20.28	0.20	10.30	30.78	73.00	-42.22	QP
11	25.46	10.87	0.32	10.40	21.59	60.00	-38.41	Average
12	25.46	16.69	0.32	10.40	27.41	73.00	-45.59	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Mode:a; Line:Neutral Line

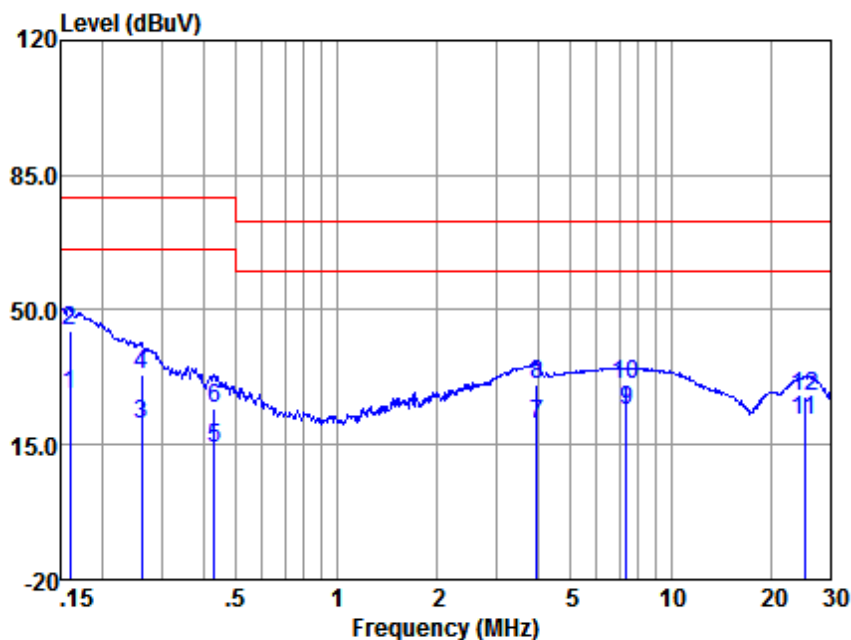

LISN : NEUTRAL


EUT/Project No : 13841AT

Test mode : a

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	17.80	0.07	10.00	27.87	66.00	-38.13	Average
2	0.16	34.41	0.07	10.00	44.48	79.00	-34.52	QP
3	0.26	10.17	0.06	10.00	20.23	66.00	-45.77	Average
4	0.26	23.16	0.06	10.00	33.22	79.00	-45.78	QP
5	0.43	3.98	0.06	10.00	14.04	66.00	-51.96	Average
6	0.43	14.61	0.06	10.00	24.67	79.00	-54.33	QP
7	3.96	10.10	0.13	10.30	20.53	60.00	-39.47	Average
8	3.96	20.01	0.13	10.30	30.44	73.00	-42.56	QP
9	7.37	13.54	0.16	10.30	24.00	60.00	-36.00	Average
10	7.37	20.35	0.16	10.30	30.81	73.00	-42.19	QP
11	25.19	10.76	0.32	10.40	21.48	60.00	-38.52	Average
12	25.19	16.67	0.32	10.40	27.39	73.00	-45.61	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss

Mode:b; Line:Live Line

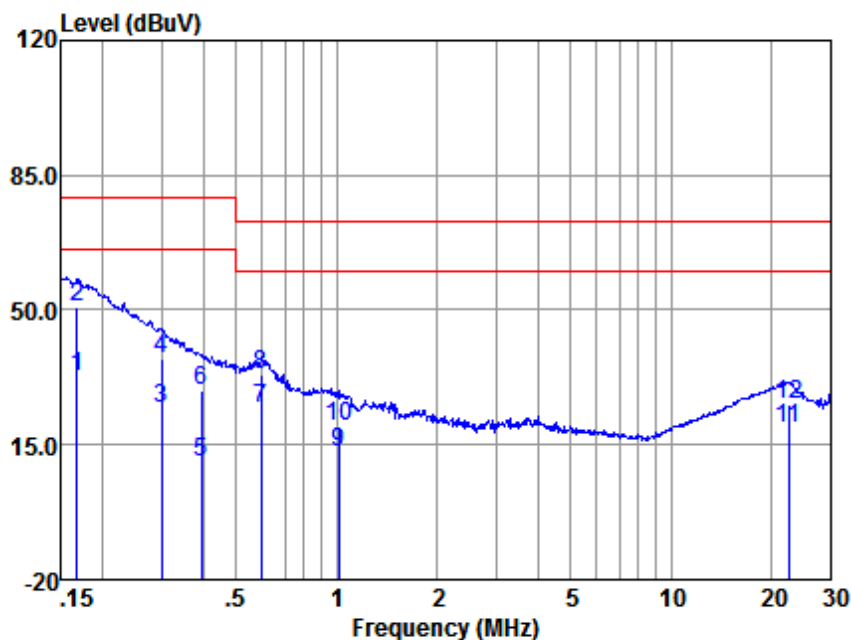


LISN : LINE
EUT/Project No : 13841AT
Test mode : b

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.17	22.80	0.08	10.00	32.88	66.00	-33.12	Average
2	0.17	40.78	0.08	10.00	50.86	79.00	-28.14	QP
3	0.30	14.26	0.07	10.00	24.33	66.00	-41.67	Average
4	0.30	27.34	0.07	10.00	37.41	79.00	-41.59	QP
5	0.39	0.34	0.08	10.00	10.42	66.00	-55.58	Average
6	0.39	19.03	0.08	10.00	29.11	79.00	-49.89	QP
7	0.59	14.42	0.08	10.00	24.50	60.00	-35.50	Average
8	0.59	23.00	0.08	10.00	33.08	73.00	-39.92	QP
9	1.02	3.02	0.09	10.02	13.13	60.00	-46.87	Average
10	1.02	9.48	0.09	10.02	19.59	73.00	-53.41	QP
11	22.54	8.41	0.31	10.40	19.12	60.00	-40.88	Average
12	22.54	14.69	0.31	10.40	25.40	73.00	-47.60	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Mode:b; Line:Neutral Line

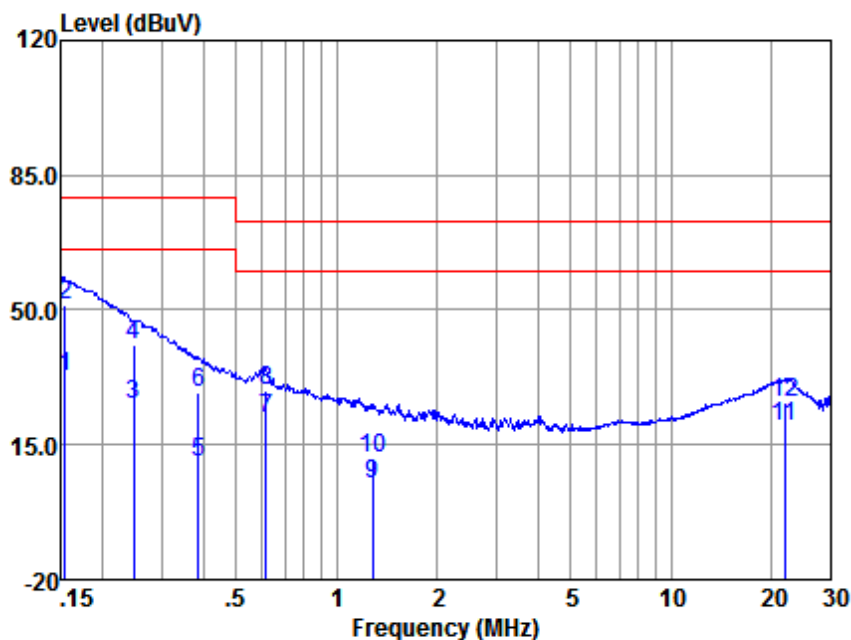

LISN : NEUTRAL

EUT/Project No : 13841AT

Test mode : b

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.15	22.63	0.07	10.00	32.70	66.00	-33.30	Average
2	0.15	41.03	0.07	10.00	51.10	79.00	-27.90	QP
3	0.25	15.24	0.06	10.00	25.30	66.00	-40.70	Average
4	0.25	30.65	0.06	10.00	40.71	79.00	-38.29	QP
5	0.39	0.18	0.06	10.00	10.24	66.00	-55.76	Average
6	0.39	18.49	0.06	10.00	28.55	79.00	-50.45	QP
7	0.61	11.67	0.07	10.00	21.74	60.00	-38.26	Average
8	0.61	18.82	0.07	10.00	28.89	73.00	-44.11	QP
9	1.28	-5.26	0.09	10.10	4.93	60.00	-55.07	Average
10	1.28	1.52	0.09	10.10	11.71	73.00	-61.29	QP
11	21.95	9.24	0.30	10.40	19.94	60.00	-40.06	Average
12	21.95	15.49	0.30	10.40	26.19	73.00	-46.81	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

6.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz)

Test Requirement: EN 55032:2015

Test Method: EN 55032:2015

Frequency Range: 150kHz to 30MHz

Limit:

0.15M-0.5MHz(Voltage) 97-87(dB μ V) quasi-peak; 84-74(dB μ V) average

0.5M-30MHz(Voltage) 87(dB μ V) quasi-peak; 74(dB μ V) average

0.15M-0.5MHz(Current) 53-43(dB μ A) quasi-peak; 40-30(dB μ A) average

0.5M-30MHz(Current) 43(dB μ V) quasi-peak; 30(dB μ V) average

Detector: 9kHz resolution bandwidth 0.15M to 30MHz

Remark: The voltage measured shall be corrected at each frequency of interest as follows:

if the current margin with respect to the current limit is ≤ 6 dB, the actual current margin shall be subtracted from the measured voltage;

if the current margin with respect to the current limit is > 6 dB, 6 dB shall be subtracted from the measured voltage.

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.


b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

6.2.2 Test Setup Diagram

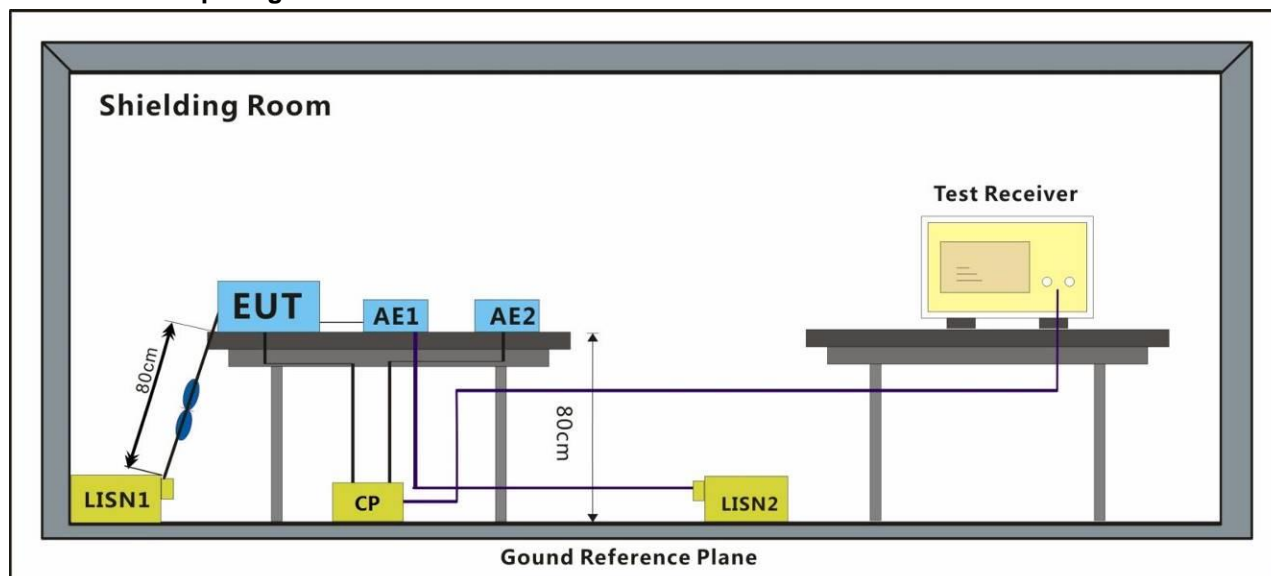

6.2.3 Measurement Data

Mode:a

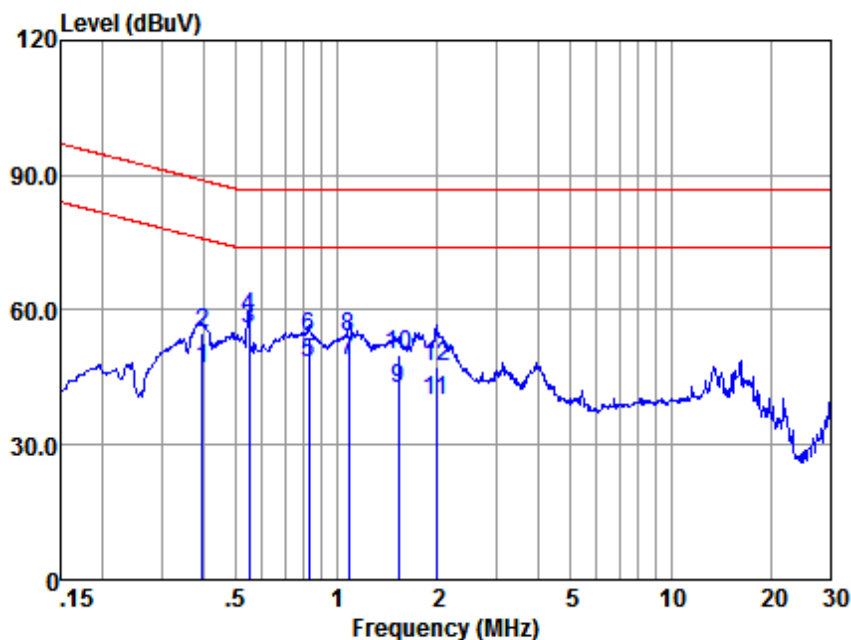

ISN : CAT5-2019


EUT/Project No : 13841AT

Test Mode : a

	Freq (MHz)	Read level (dBuV)	ISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.40	27.47	9.50	10.00	46.97	75.90	-28.93	Average
2	0.40	35.39	9.50	10.00	54.89	88.90	-34.01	QP
3	0.55	36.41	9.46	10.00	55.87	74.00	-18.13	Average
4	0.55	38.77	9.46	10.00	58.23	87.00	-28.77	QP
5	0.83	28.89	9.41	10.00	48.30	74.00	-25.70	Average
6	0.83	34.83	9.41	10.00	54.24	87.00	-32.76	QP
7	1.09	29.33	9.38	10.09	48.80	74.00	-25.20	Average
8	1.09	34.77	9.38	10.09	54.24	87.00	-32.76	QP
9	1.54	23.22	9.33	10.10	42.65	74.00	-31.35	Average
10	1.54	30.47	9.33	10.10	49.90	87.00	-37.10	QP
11	1.99	20.56	9.30	10.10	39.96	74.00	-34.04	Average
12	1.99	28.18	9.30	10.10	47.58	87.00	-39.42	QP

Notes: Emission Level = Read Level + ISN Factor + Cable loss

Mode:b

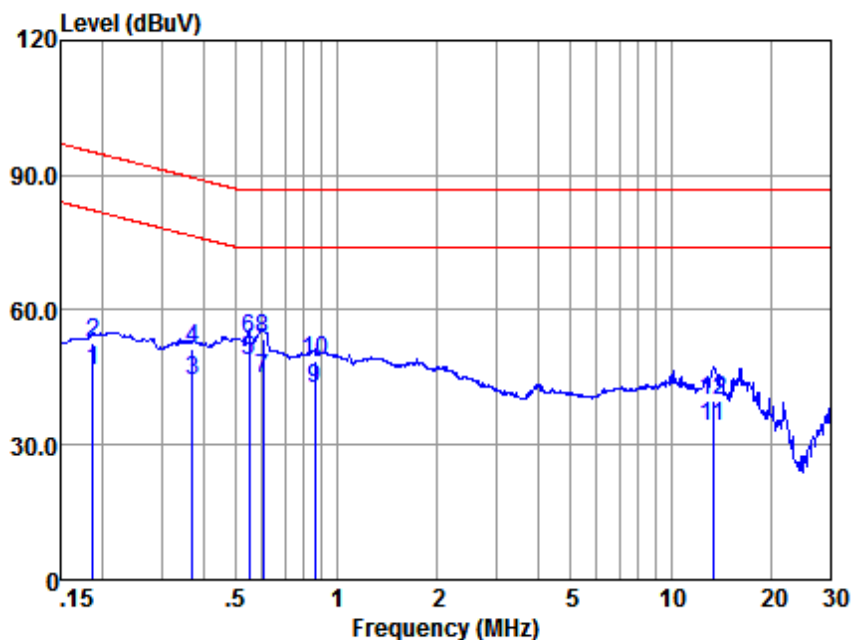

ISN : CAT5-2019

EUT/Project No : 13841AT

Test Mode : b

	Freq (MHz)	Read level (dBuV)	ISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.19	26.69	9.72	10.00	46.41	82.20	-35.79	Average
2	0.19	32.94	9.72	10.00	52.66	95.20	-42.54	QP
3	0.37	24.82	9.53	10.00	44.35	76.47	-32.12	Average
4	0.37	31.63	9.53	10.00	51.16	89.47	-38.31	QP
5	0.55	29.30	9.46	10.00	48.76	74.00	-25.24	Average
6	0.55	34.11	9.46	10.00	53.57	87.00	-33.43	QP
7	0.60	25.18	9.45	10.00	44.63	74.00	-29.37	Average
8	0.60	34.14	9.45	10.00	53.59	87.00	-33.41	QP
9	0.86	23.07	9.40	10.00	42.47	74.00	-31.53	Average
10	0.86	29.15	9.40	10.00	48.55	87.00	-38.45	QP
11	13.41	14.30	9.39	10.40	34.09	74.00	-39.91	Average
12	13.41	20.01	9.39	10.40	39.80	87.00	-47.20	QP

Notes: Emission Level = Read Level + ISN Factor + Cable loss

6.3 Radiated Emissions (30MHz-1GHz)

Test Requirement: EN 55032:2015
 Test Method: EN 55032:2015
 Frequency Range: 30MHz to 1GHz
 Measurement Distance: 3m
 Limit:
 30MHz-230MHz 50 dB(μ V/m) quasi-peak
 230MHz-1GHz 57 dB(μ V/m) quasi-peak
 Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz


6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode
 a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.


6.3.2 Test Setup Diagram

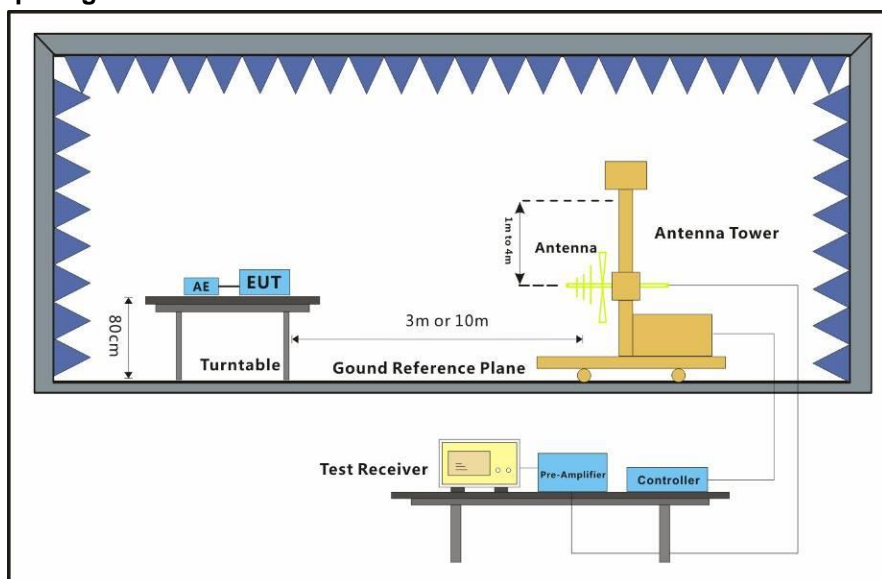

6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:a; Polarization:Horizontal

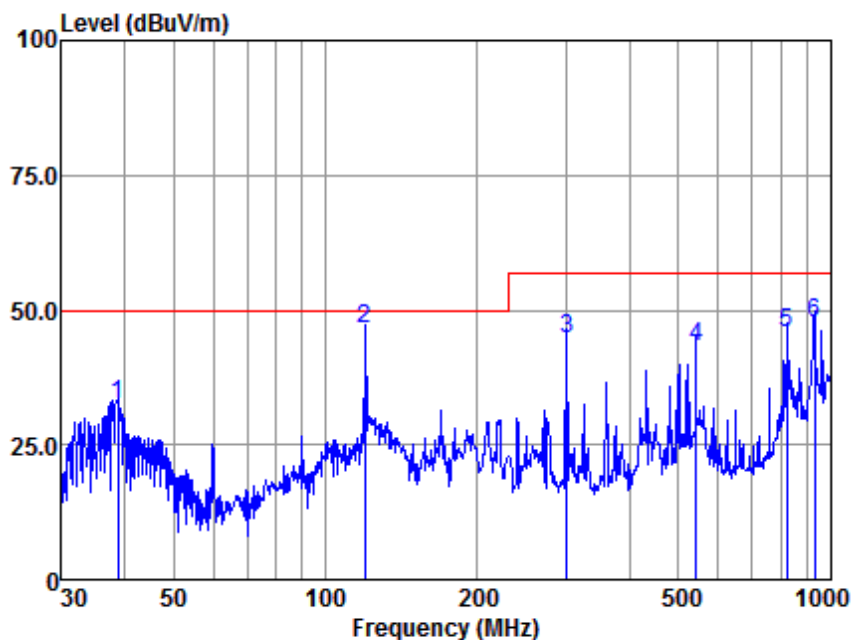

Antenna Polarity :HORIZONTAL


EUT/Project :13841AT

Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	38.752	58.44	16.20	0.13	42.34	32.43	50.00	-17.57	QP
2	119.856	77.30	10.00	1.33	42.28	46.35	50.00	-3.65	QP
3	300.367	71.00	13.20	2.49	42.12	44.57	57.00	-12.43	QP
4	541.373	63.10	18.14	3.61	41.68	43.17	57.00	-13.83	QP
5	818.834	61.08	22.05	4.40	41.91	45.62	57.00	-11.38	QP
6	929.008	61.46	23.00	4.73	41.50	47.69	57.00	-9.31	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:a; Polarization:Vertical

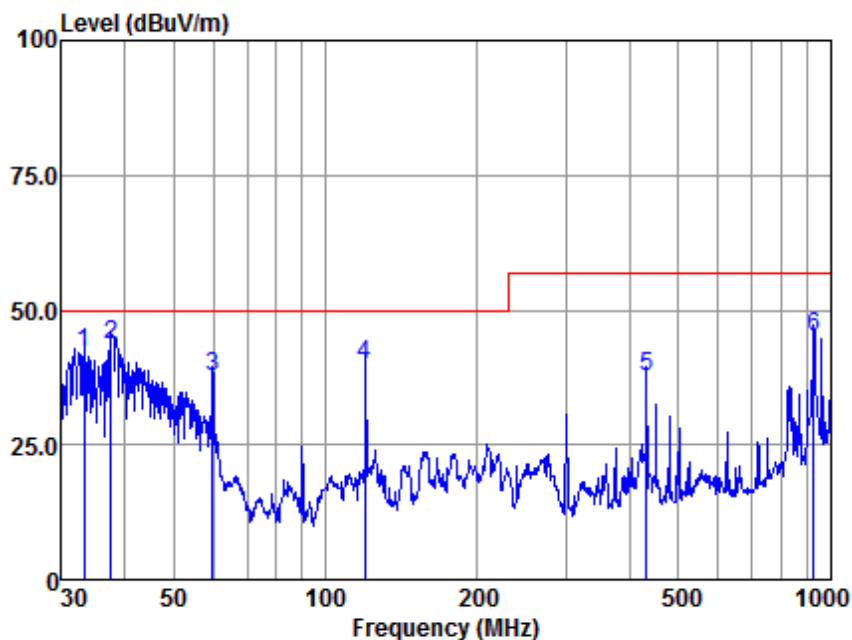

Antenna Polarity :VERTICAL


EUT/Project :13841AT

Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	33.328	68.50	15.67	0.36	42.36	42.17	50.00	-7.83	QP
2	37.680	69.35	16.09	0.49	42.34	43.59	50.00	-6.41	QP
3	59.859	66.68	12.55	0.59	42.33	37.49	50.00	-12.51	QP
4	119.856	70.95	10.00	1.33	42.28	40.00	50.00	-10.00	QP
5	432.546	60.33	15.83	3.12	41.81	37.47	57.00	-19.53	QP
6	925.756	58.91	23.00	4.72	41.55	45.08	57.00	-11.92	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Mode:b; Polarization:Horizontal

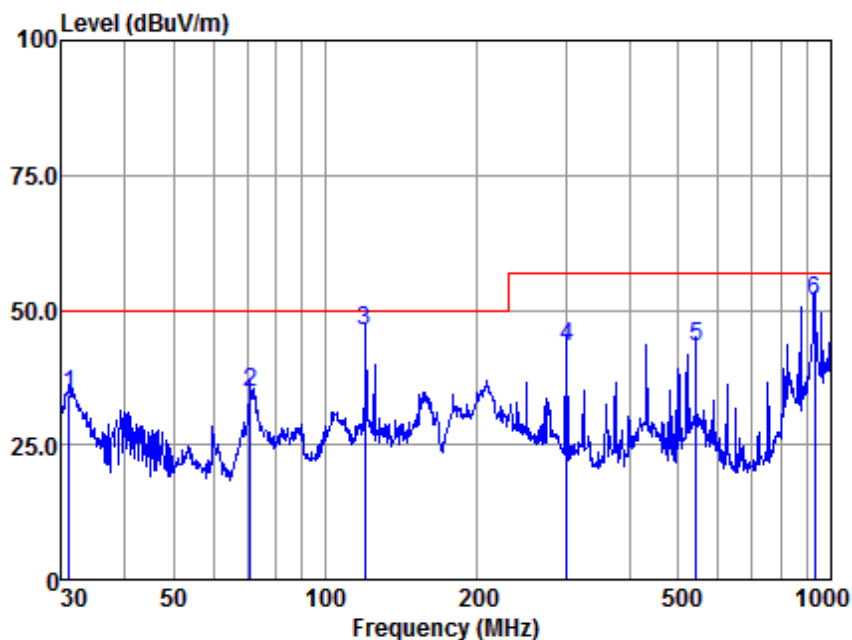

Antenna Polarity :HORIZONTAL


EUT/Project :13841AT

Test mode :b

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.071	60.84	15.43	0.28	42.37	34.18	50.00	-15.82	QP
2	71.080	65.33	11.05	0.65	42.26	34.77	50.00	-15.23	QP
3	119.856	77.04	10.00	1.33	42.28	46.09	50.00	-3.91	QP
4	300.367	69.61	13.20	2.49	42.12	43.18	57.00	-13.82	QP
5	541.373	63.03	18.14	3.61	41.68	43.10	57.00	-13.90	QP
6	932.272	65.22	23.05	4.73	41.50	51.50	57.00	-5.50	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical

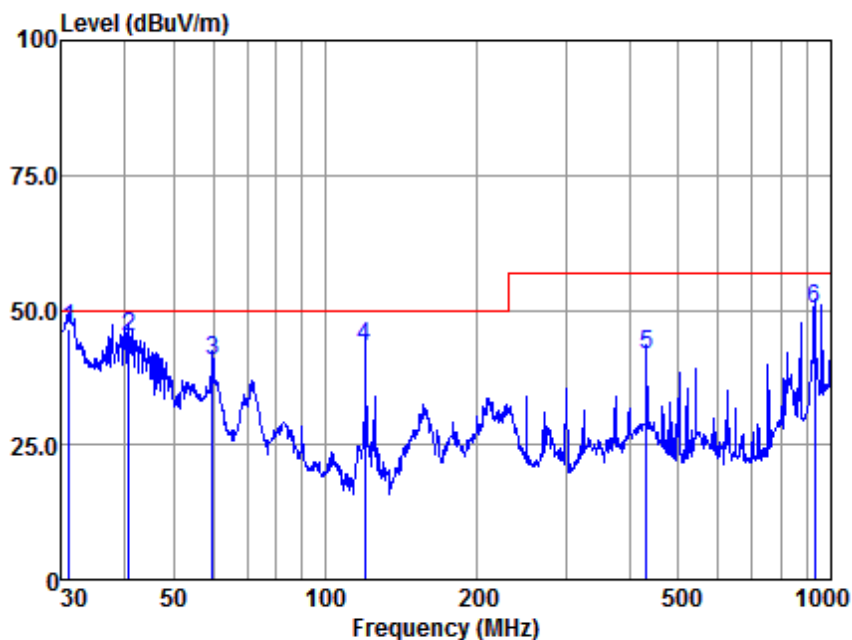

Antenna Polarity :VERTICAL

EUT/Project :13841AT

Test mode :b

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.071	72.97	15.43	0.28	42.37	46.31	50.00	-3.69	QP
2	40.845	71.43	15.72	0.32	42.33	45.14	50.00	-4.86	QP
3	59.859	69.74	12.55	0.59	42.33	40.55	50.00	-9.45	QP
4	119.856	74.09	10.00	1.33	42.28	43.14	50.00	-6.86	QP
5	432.546	64.43	15.83	3.12	41.81	41.57	57.00	-15.43	QP
6	929.008	63.94	23.00	4.73	41.50	50.17	57.00	-6.83	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

6.4 Radiated Emissions (above 1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
1GHz-3GHz	76 dB(μ V/m) peak, 56 dB(μ V/m) average
3GHz-6GHz	80 dB(μ V/m) peak, 60dB(μ V/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz


6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode
a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.


6.4.2 Test Setup Diagram

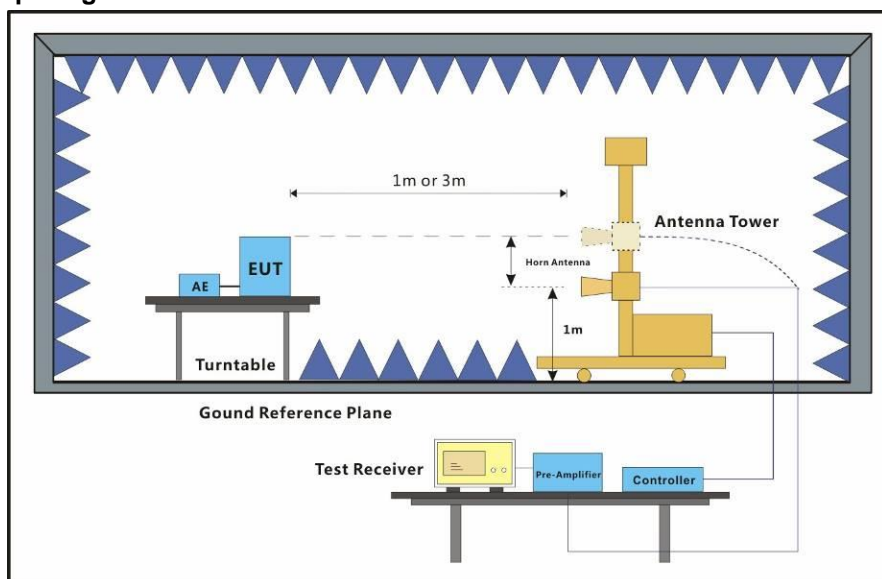

6.4.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Mode:a; Polarization:Horizontal

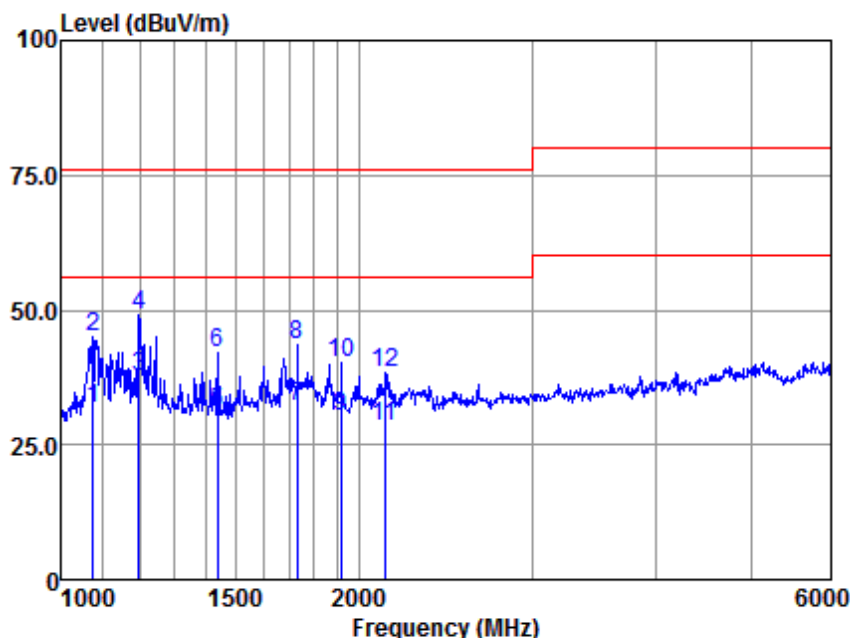

Antenna Polarity :HORIZONTAL


EUT/Project :13841AT

Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1076.228	45.38	24.30	4.70	42.49	31.89	56.00	-24.11	Average
2	1076.228	58.59	24.30	4.70	42.49	45.10	76.00	-30.90	Peak
3	1198.376	50.34	24.60	5.15	42.47	37.62	56.00	-18.38	Average
4	1198.376	61.69	24.60	5.15	42.47	48.97	76.00	-27.03	Peak
5	1438.682	42.67	25.09	5.74	42.43	31.07	56.00	-24.93	Average
6	1438.682	53.74	25.09	5.74	42.43	42.14	76.00	-33.86	Peak
7	1733.375	42.69	25.60	6.32	42.40	32.21	56.00	-23.79	Average
8	1733.375	53.85	25.60	6.32	42.40	43.37	76.00	-32.63	Peak
9	1919.760	40.12	25.89	6.57	42.38	30.20	56.00	-25.80	Average
10	1919.760	50.32	25.89	6.57	42.38	40.40	76.00	-35.60	Peak
11	2126.188	37.08	26.38	7.17	42.36	28.27	56.00	-27.73	Average
12	2126.188	47.04	26.38	7.17	42.36	38.23	76.00	-37.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:a; Polarization:Vertical

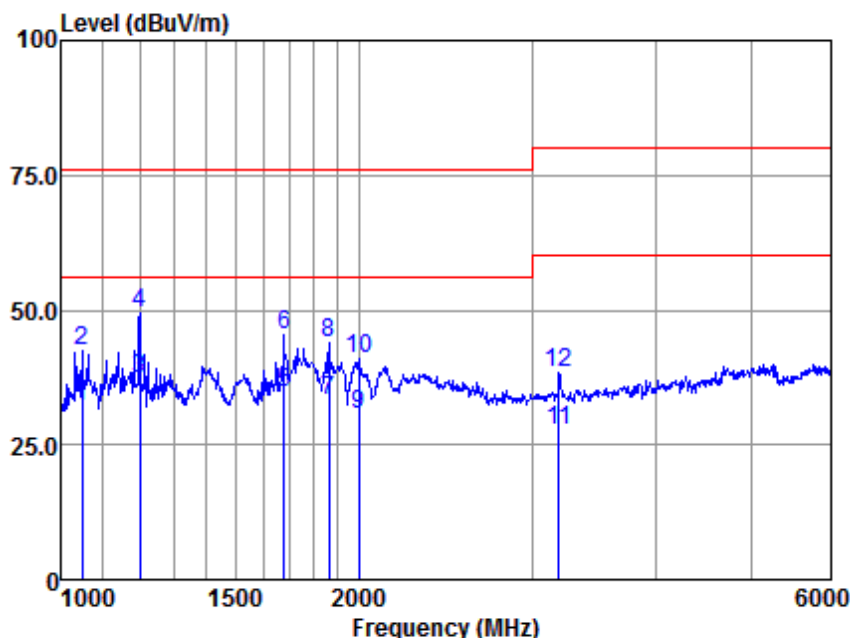

Antenna Polarity :VERTICAL


EUT/Project :13841AT

Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1049.567	45.82	24.23	4.68	42.49	32.24	56.00	-23.76	Average
2	1049.567	56.19	24.23	4.68	42.49	42.61	76.00	-33.39	Peak
3	1200.526	50.17	24.60	5.15	42.47	37.45	56.00	-18.55	Average
4	1200.526	62.21	24.60	5.15	42.47	49.49	76.00	-26.51	Peak
5	1678.362	45.38	25.51	6.03	42.41	34.51	56.00	-21.49	Average
6	1678.362	56.11	25.51	6.03	42.41	45.24	76.00	-30.76	Peak
7	1865.506	43.25	25.81	6.46	42.39	33.13	56.00	-22.87	Average
8	1865.506	54.06	25.81	6.46	42.39	43.94	76.00	-32.06	Peak
9	2000.528	40.13	26.00	6.89	42.37	30.65	56.00	-25.35	Average
10	2000.528	50.37	26.00	6.89	42.37	40.89	76.00	-35.11	Peak
11	3187.600	32.15	28.62	9.05	42.32	27.50	60.00	-32.50	Average
12	3187.600	42.97	28.62	9.05	42.32	38.32	80.00	-41.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal

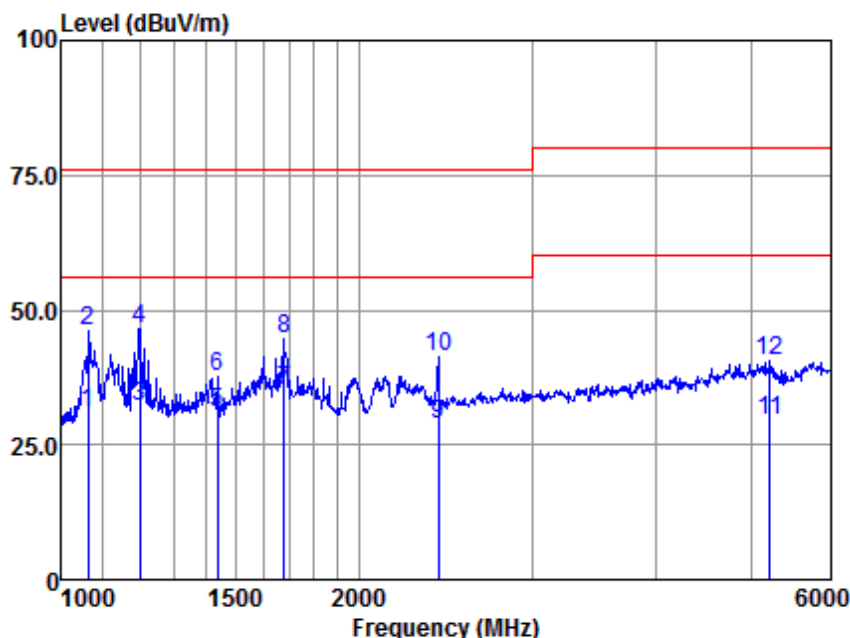

Antenna Polarity :HORIZONTAL


EUT/Project :13841AT

Test mode :b

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1064.720	44.63	24.27	4.69	42.49	31.10	56.00	-24.90	Average
2	1064.720	59.67	24.27	4.69	42.49	46.14	76.00	-29.86	Peak
3	1200.526	44.96	24.60	5.15	42.47	32.24	56.00	-23.76	Average
4	1200.526	59.40	24.60	5.15	42.47	46.68	76.00	-29.32	Peak
5	1438.682	42.67	25.09	5.74	42.43	31.07	56.00	-24.93	Average
6	1438.682	49.32	25.09	5.74	42.43	37.72	76.00	-38.28	Peak
7	1678.362	45.87	25.51	6.03	42.41	35.00	56.00	-21.00	Average
8	1678.362	55.54	25.51	6.03	42.41	44.67	76.00	-31.33	Peak
9	2405.992	36.42	27.16	7.63	42.34	28.87	56.00	-27.13	Average
10	2405.992	48.76	27.16	7.63	42.34	41.21	76.00	-34.79	Peak
11	5208.076	27.85	31.73	12.60	42.53	29.65	60.00	-30.35	Average
12	5208.076	38.84	31.73	12.60	42.53	40.64	80.00	-39.36	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical

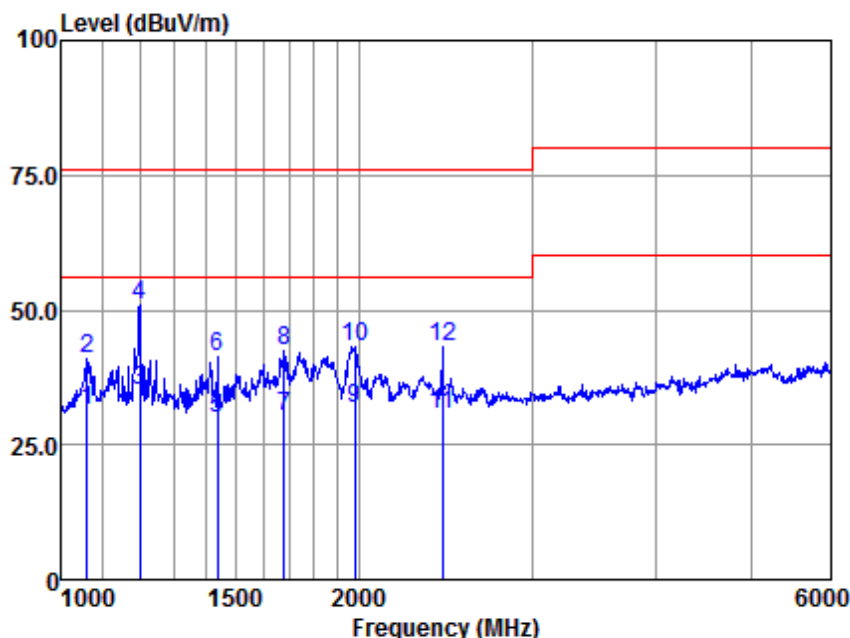

Antenna Polarity :VERTICAL

EUT/Project :13841AT

Test mode :b

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1060.911	44.85	24.26	4.69	42.49	31.31	56.00	-24.69	Average
2	1060.911	54.39	24.26	4.69	42.49	40.85	76.00	-35.15	Peak
3	1200.526	47.93	24.60	5.15	42.47	35.21	56.00	-20.79	Average
4	1200.526	63.61	24.60	5.15	42.47	50.89	76.00	-25.11	Peak
5	1438.682	41.55	25.09	5.74	42.43	29.95	56.00	-26.05	Average
6	1438.682	52.82	25.09	5.74	42.43	41.22	76.00	-34.78	Peak
7	1678.362	41.14	25.51	6.03	42.41	30.27	56.00	-25.73	Average
8	1678.362	53.14	25.51	6.03	42.41	42.27	76.00	-33.73	Peak
9	1982.685	41.26	25.98	6.69	42.38	31.55	56.00	-24.45	Average
10	1982.685	53.06	25.98	6.69	42.38	43.35	76.00	-32.65	Peak
11	2427.643	37.98	27.22	7.70	42.34	30.56	56.00	-25.44	Average
12	2427.643	50.74	27.22	7.70	42.34	43.32	76.00	-32.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

6.5 Harmonic Current Emission

Test Requirement: EN 61000-3-2:2014

Test Method: EN 61000-3-2:2014

Frequency Range: 100Hz to 2kHz

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2:2014.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

"For the following categories of equipment, limits are not specified in this standard. - equipment with a rated power of 75W or less, other than lighting equipment."

6.6 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013

Test Method: EN 61000-3-3:2013

6.6.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

6.6.2 Test Setup Diagram

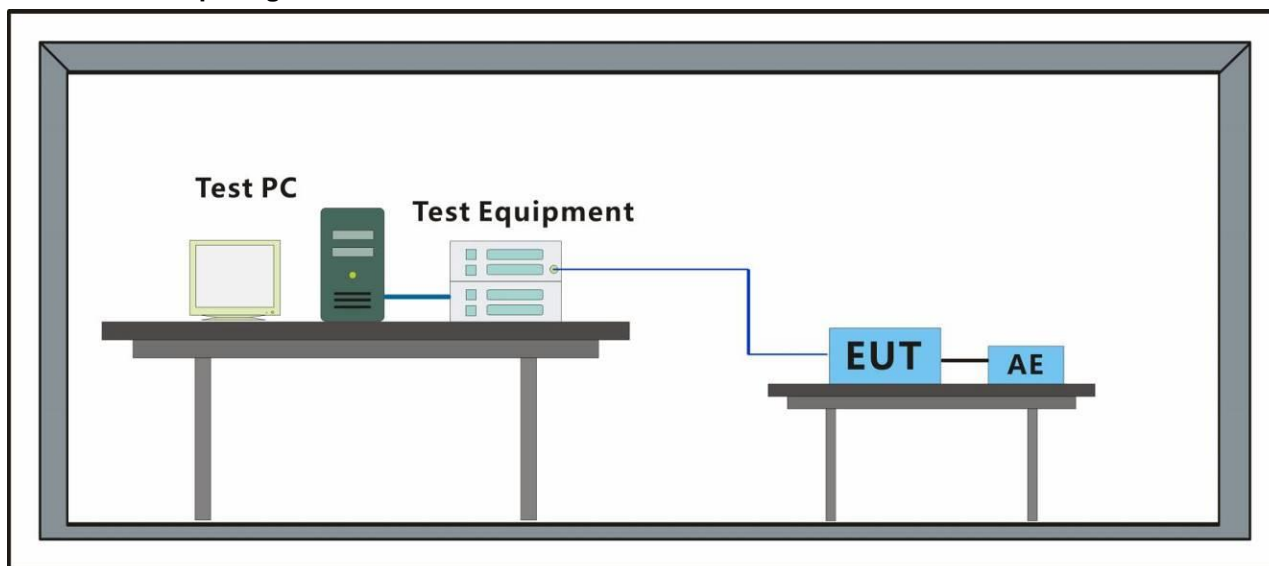

6.6.3 Measurement Data

Mode:a

Vrms at the end of test (Volt):	229.87	Test limit (mS):	500.0	Pass
T-max (mS):	0	Test limit (%):	3.30	Pass
Highest dc (%):	0.00	Test limit (%):	4.00	Pass
Highest dmax (%):	-0.36	Test limit:	1.000	Pass
Highest Pst (10 min. period):	0.207	Test limit:	0.650	Pass
Highest Plt (2 hr. period):	0.090			

Mode:b

Vrms at the end of test (Volt):	229.91	Test limit (mS):	500.0	Pass
T-max (mS):	0	Test limit (%):	3.30	Pass
Highest dc (%):	0.00	Test limit (%):	4.00	Pass
Highest dmax (%):	0.46	Test limit:	1.000	Pass
Highest Pst (10 min. period):	0.215	Test limit:	0.650	Pass
Highest Plt (2 hr. period):	0.094			

7 Immunity Test Results

7.1 Performance Criteria Description in EN 55024:2010 +A1:2015

- Criterion A** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- Criterion B** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.
During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- Criterion C** Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.
Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

7.2 Performance Criteria Description in EN 55035:2017

- Criterion A** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- Criterion B** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.
During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

7.3 Performance Criteria Description in EN 50130-4:2011 +A1:2014


There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.

7.4 Electrostatic Discharge

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-2:2009
Performance Criterion: B
Discharge Impedance: 330Ω/150pF
Number of Discharge: Minimum of four test points (a minimum of 50 discharges at each point)
Discharge Mode: Single Discharge
Discharge Period: 1 second minimum

7.4.1 Test Setup Diagram

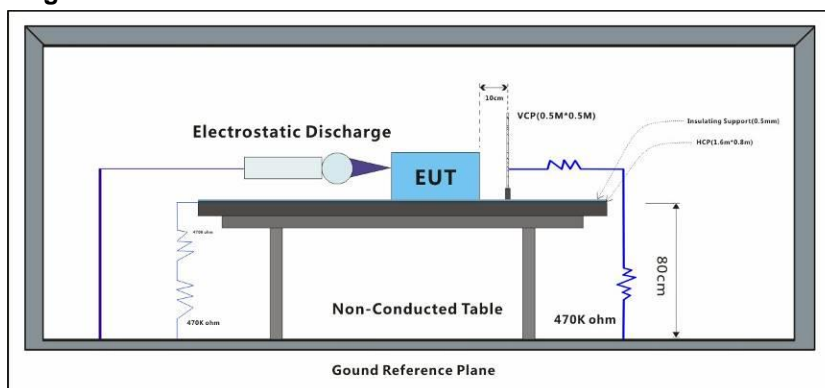

7.4.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.
b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.4.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A


Results:

A: No degradation in the performance of the EUT was observed.

7.5 Electrostatic Discharge

Test Requirement:	EN 55035:2017
Test Method:	EN 61000-4-2:2009
Performance Criterion:	B
Discharge Impedance:	330Ω/150pF
Number of Discharge:	Minimum 10 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

7.5.1 Test Setup Diagram

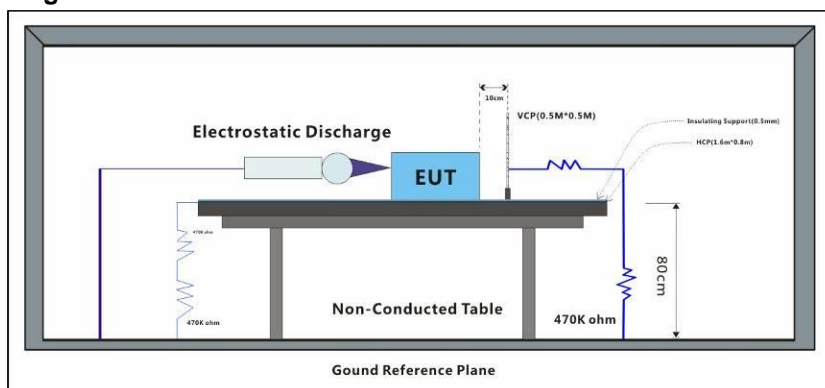

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.
b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.5.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A

Results:

A: No degradation in the performance of the EUT was observed.

7.6 Electrostatic Discharge

Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-2:2009


Number of Discharge: Minimum 10 times at each test point for Air Discharge
Minimum 50 times at each test point for Contact or VCP & HCP Discharge

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

7.6.1 Test Setup Diagram

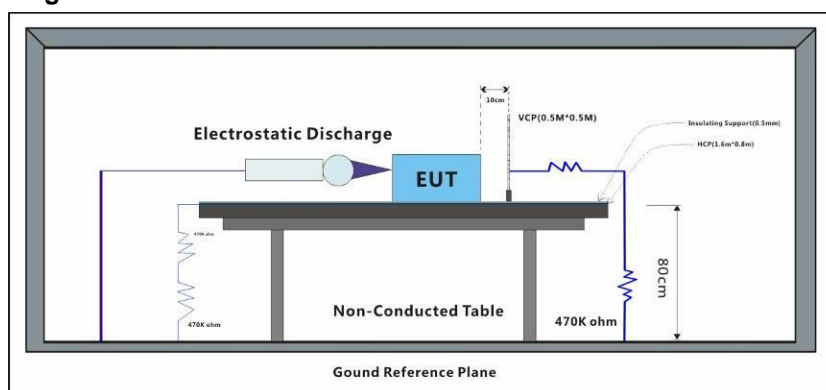

7.6.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.6.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A
Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A


Results:

A: No degradation in the performance of the EUT was observed.

7.7 Radiated Immunity (80MHz-1GHz,1800MHz,2600MHz,3500MHz,5000MHz)

Test Requirement: EN 55035:2017
Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
Performance Criterion: A
Frequency Range: 80MHz to 1GHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Antenna Polarisation: Vertical and Horizontal
Modulation: 1kHz,80% Amp. Mod,1% increment

7.7.1 Test Setup Diagram

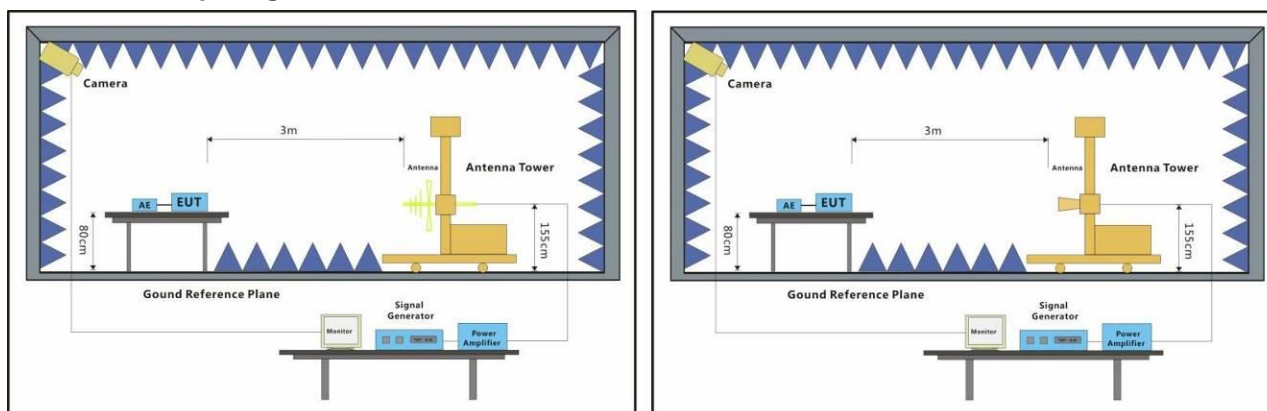

7.7.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.7.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A
80MHz-1GHz	3	Top	3s	A
80MHz-1GHz	3	Underside	3s	A
1800MHz	3	Front	3s	A
1800MHz	3	Back	3s	A
1800MHz	3	Left	3s	A
1800MHz	3	Right	3s	A
1800MHz	3	Top	3s	A
1800MHz	3	Underside	3s	A
2600MHz	3	Front	3s	A
2600MHz	3	Back	3s	A
2600MHz	3	Left	3s	A
2600MHz	3	Right	3s	A
2600MHz	3	Top	3s	A
2600MHz	3	Underside	3s	A



3500MHz	3	Front	3s	A
3500MHz	3	Back	3s	A
3500MHz	3	Left	3s	A
3500MHz	3	Right	3s	A
3500MHz	3	Top	3s	A
3500MHz	3	Underside	3s	A
5000MHz	3	Front	3s	A
5000MHz	3	Back	3s	A
5000MHz	3	Left	3s	A
5000MHz	3	Right	3s	A
5000MHz	3	Top	3s	A
5000MHz	3	Underside	3s	A

Results:

A: No degradation in the performance of the EUT was observed.

7.8 Radiated Immunity(80MHz-2.7GHz)


Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
 Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

- a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings etc.);
- b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- c) there is no observable deterioration of the picture at 1 V/m.

7.8.1 Test Setup Diagram

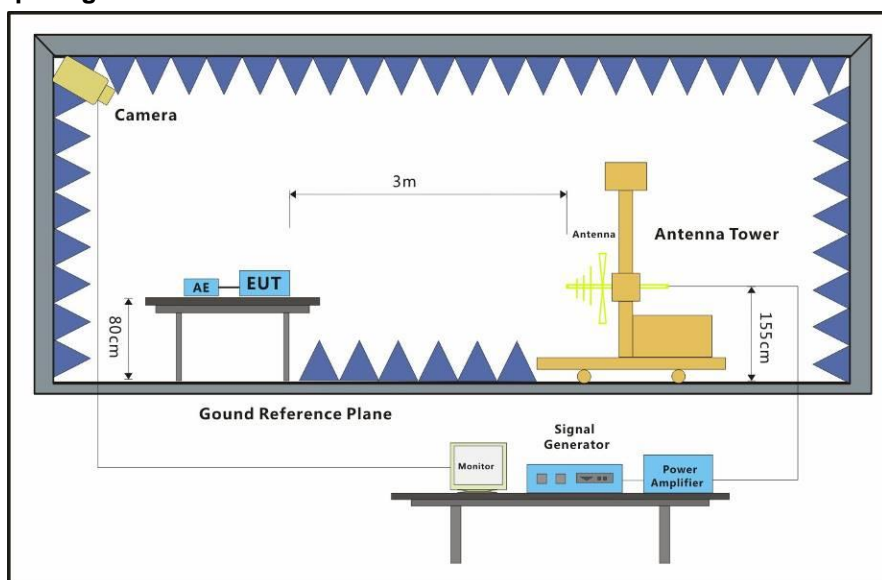

7.8.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.8.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	10	Front	3s	A
80MHz-2.7GHz	10	Back	3s	A
80MHz-2.7GHz	10	Left	3s	A
80MHz-2.7GHz	10	Right	3s	A



80MHz-2.7GHz	10	Top	3s	A
80MHz-2.7GHz	10	Underside	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.9 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
 Performance Criterion: A
 Frequency Range: 80MHz to 1GHz
 Antenna Polarisation: Vertical and Horizontal
 Modulation: 1kHz,80% Amp. Mod,1% increment

7.9.1 Test Setup Diagram

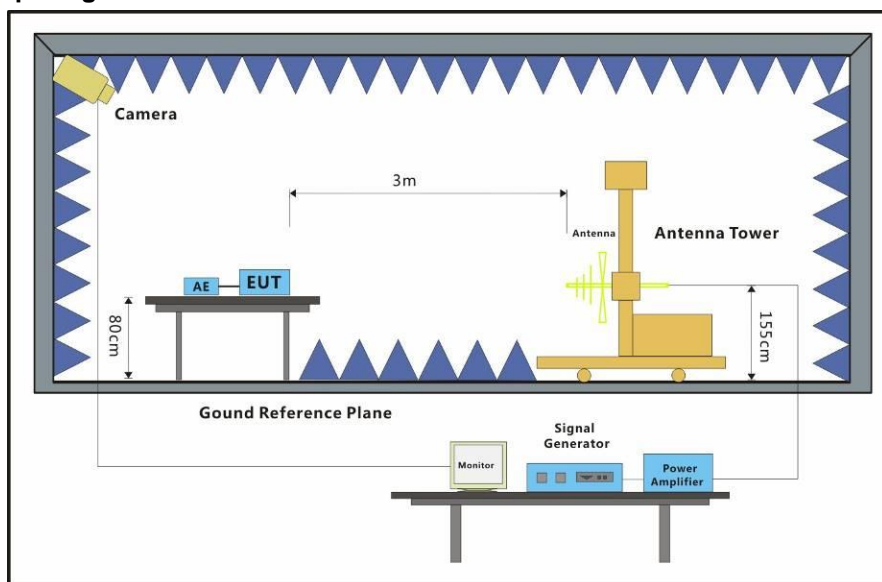

7.9.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
 a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.9.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A
80MHz-1GHz	3	Top	3s	A
80MHz-1GHz	3	Underside	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.10 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-4:2012
 Performance Criterion: B
 Repetition Frequency: 5kHz
 Burst Period: 300ms
 Test Duration: 2 minute per level & polarity

7.10.1 Test Setup Diagram

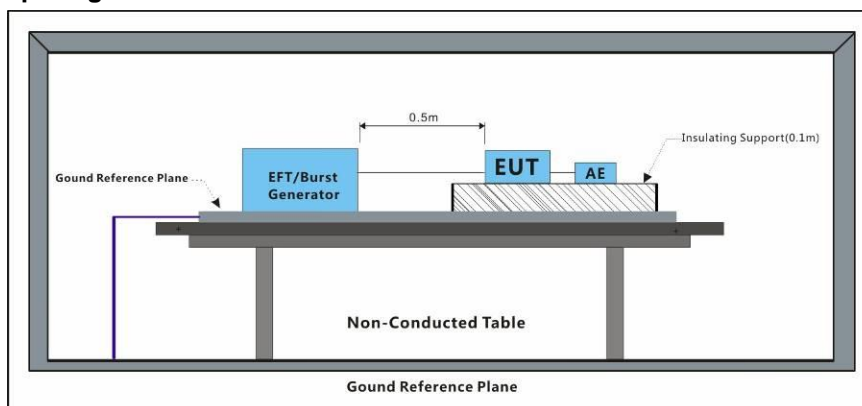

7.10.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.10.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A

Results:

A: No degradation in the performance of the EUT was observed.

7.11 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 50130-4:2011 +A1:2014


Test Method: EN 61000-4-4:2012

Repetition Frequency: 100kHz

Burst Period: 300ms

Test Duration: 1 minute per level & polarity

7.11.1 Test Setup Diagram

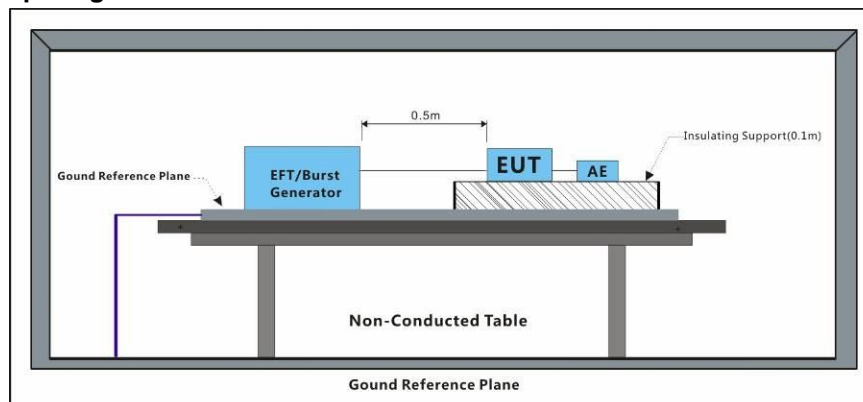

7.11.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.11.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A


Results:

A: No degradation in the performance of the EUT was observed.

7.12 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-4:2012
 Performance Criterion: B
 Repetition Frequency: 5kHz
 Burst Period: 300ms
 Test Duration: 2 minute per level & polarity

7.12.1 Test Setup Diagram

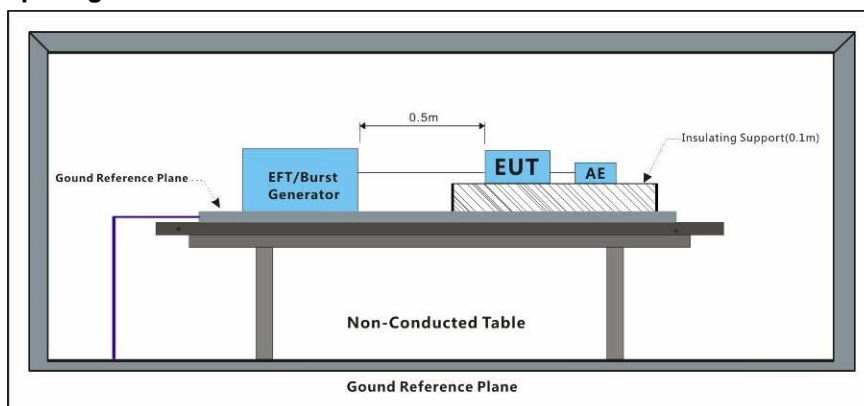

7.12.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.12.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A


Results:

A: No degradation in the performance of the EUT was observed.

7.13 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-4:2012
 Performance Criterion: B
 Repetition Frequency: 5kHz
 Burst Period: 300ms
 Test Duration: 2 minute per level & polarity

7.13.1 Test Setup Diagram

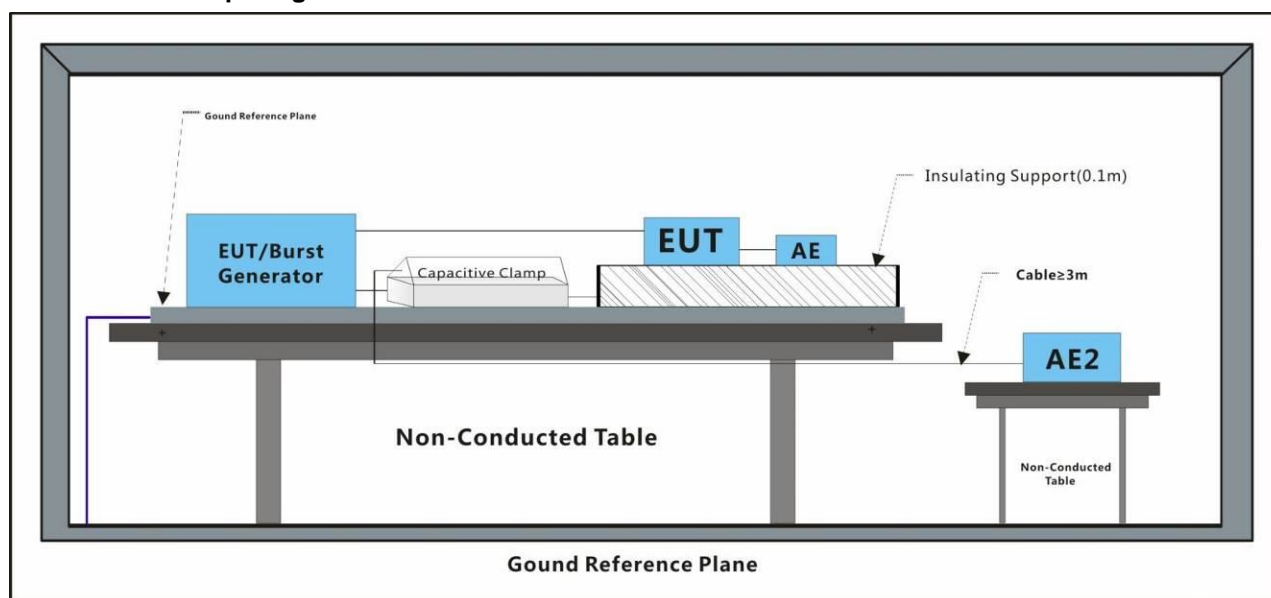

7.13.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
 a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.13.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal Port	0.5	+	Clamp	A
Signal Port	0.5	-	Clamp	A

Results:

A: No degradation in the performance of the EUT was observed.

7.14 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014


Test Method: EN 61000-4-4:2012

Repetition Frequency: 100kHz

Burst Period: 300ms

Test Duration: 1 minute per level & polarity

7.14.1 Test Setup Diagram

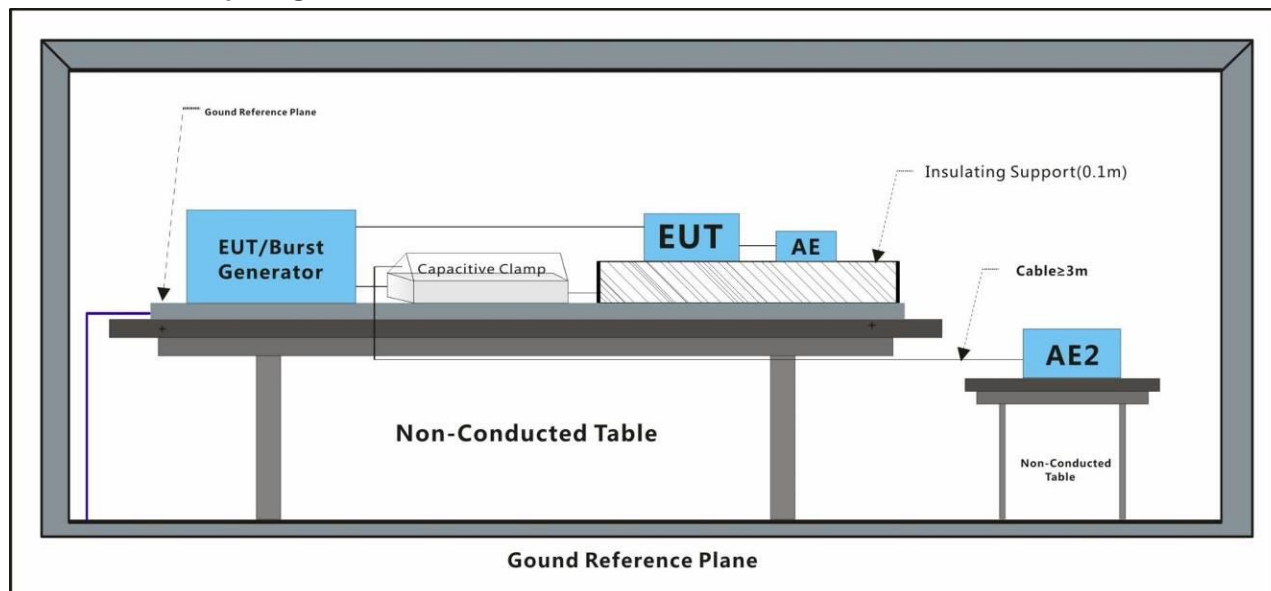

7.14.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.14.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	1	+	Clamp	A
Signal port	1	-	Clamp	A


Results:

A: No degradation in the performance of the EUT was observed.

7.15 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-4:2012
 Performance Criterion: B
 Repetition Frequency: 5kHz
 Burst Period: 300ms
 Test Duration: 2 minute per level & polarity

7.15.1 Test Setup Diagram

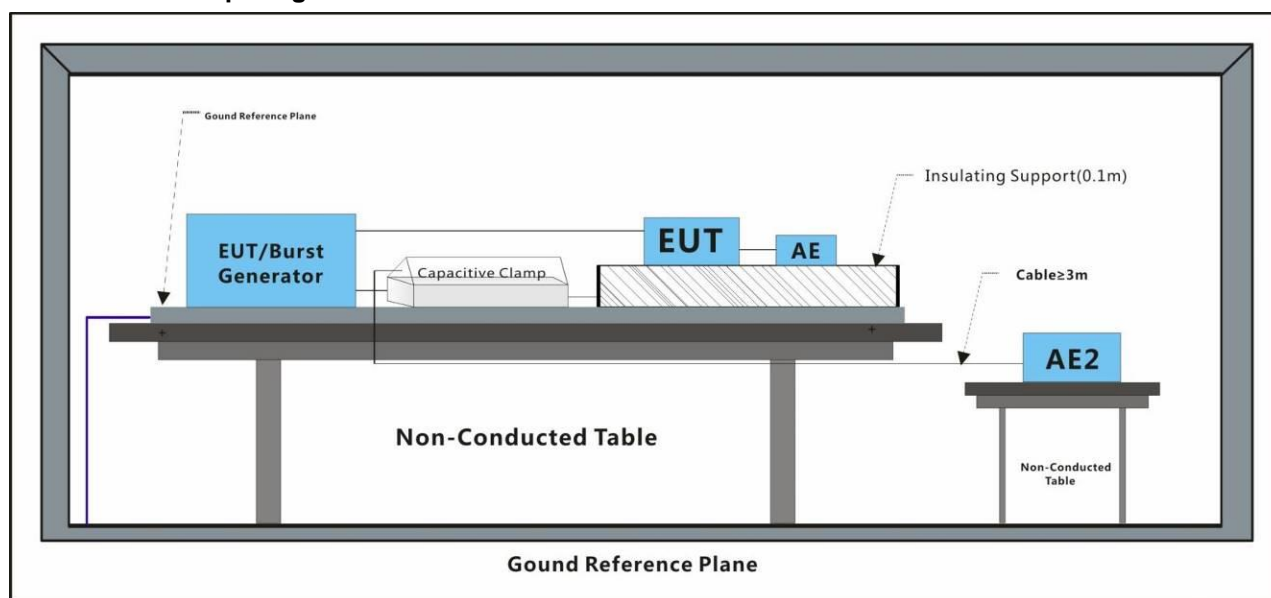

7.15.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
 a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.15.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal Port	0.5	+	Clamp	A
Signal Port	0.5	-	Clamp	A


Results:

A: No degradation in the performance of the EUT was observed.

7.16 Surge at Power Port

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-5:2014 +A1:2017
 Performance Criterion: B
 Interval: 60s between each surge
 No. of surges: 5 positive, 5 negative at 90°, 270°

7.16.1 Test Setup Diagram

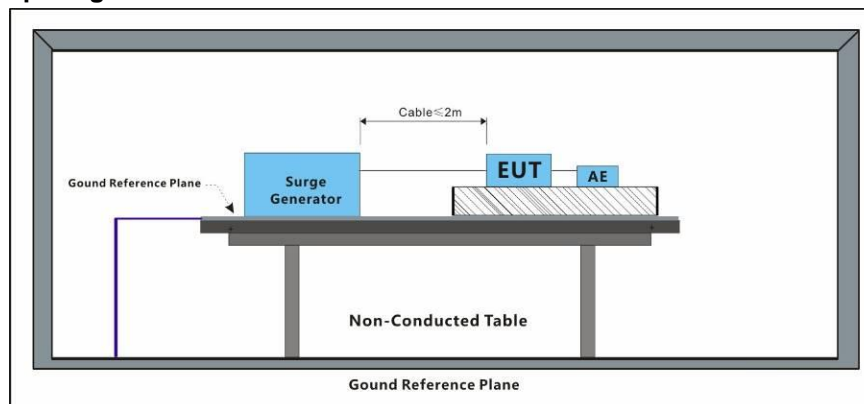

7.16.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.16.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A
L-PE	2	+	0°	A
L-PE	2	-	0°	A
L-PE	2	+	90°	A
L-PE	2	-	90°	A
L-PE	2	+	180°	A
L-PE	2	-	180°	A
L-PE	2	+	270°	A
L-PE	2	-	270°	A
N-PE	2	+	0°	A
N-PE	2	-	0°	A
N-PE	2	+	90°	A



N-PE	2	-	90°	A
N-PE	2	+	180°	A
N-PE	2	-	180°	A
N-PE	2	+	270°	A
N-PE	2	-	270°	A


Results:

A: No degradation in the performance of the EUT was observed.

7.17 Surge at Power Port

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-5:2014 +A1:2017
Interval:	60s between each surge
No. of surges:	5 positive, 5 negative
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

7.17.1 Test Setup Diagram

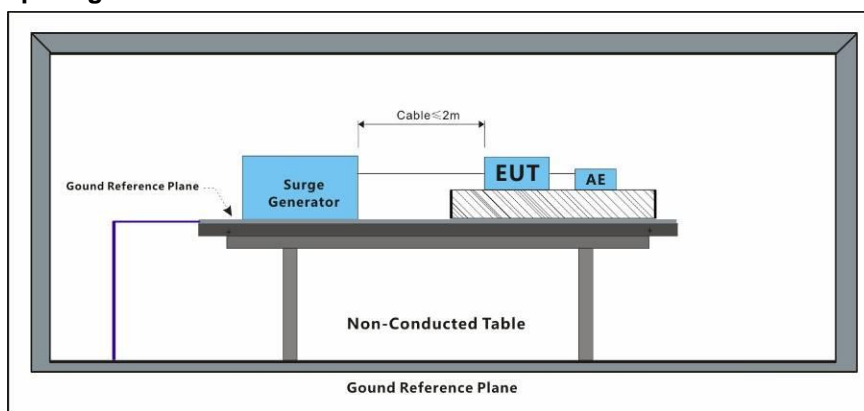

7.17.2 E.U.T. Operation

Operating Environment:								
Temperature:	22	°C	Humidity:	50	% RH	Atmospheric Pressure:	1020	mbar
Test mode:	a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.							
	b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.							

7.17.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	0.5,1	+	0°	A
L-N	0.5,1	-	0°	A
L-N	0.5,1	+	90°	A
L-N	0.5,1	-	90°	A
L-N	0.5,1	+	180°	A
L-N	0.5,1	-	180°	A
L-N	0.5,1	+	270°	A
L-N	0.5,1	-	270°	A
L-PE	0.5,1,2	+	0°	A
L-PE	0.5,1,2	-	0°	A
L-PE	0.5,1,2	+	90°	A
L-PE	0.5,1,2	-	90°	A
L-PE	0.5,1,2	+	180°	A
L-PE	0.5,1,2	-	180°	A
L-PE	0.5,1,2	+	270°	A
L-PE	0.5,1,2	-	270°	A



N-PE	0.5,1,2	+	0°	A
N-PE	0.5,1,2	-	0°	A
N-PE	0.5,1,2	+	90°	A
N-PE	0.5,1,2	-	90°	A
N-PE	0.5,1,2	+	180°	A
N-PE	0.5,1,2	-	180°	A
N-PE	0.5,1,2	+	270°	A
N-PE	0.5,1,2	-	270°	A


Results:

A: No degradation in the performance of the EUT was observed.

7.18 Surge at Power Port

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-5:2014 +A1:2017
Performance Criterion: B
Interval: 60s between each surge
No. of surges: 5 positive, 5 negative at 0°, 90°, 180°, 270°.

7.18.1 Test Setup Diagram

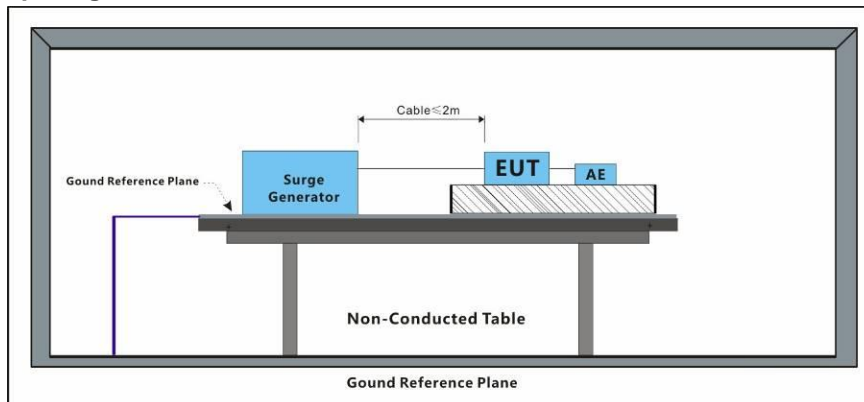

7.18.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.
b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.18.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A
L-PE	2	+	0°	A
L-PE	2	-	0°	A
L-PE	2	+	90°	A
L-PE	2	-	90°	A
L-PE	2	+	180°	A
L-PE	2	-	180°	A
L-PE	2	+	270°	A
L-PE	2	-	270°	A
N-PE	2	+	0°	A
N-PE	2	-	0°	A
N-PE	2	+	90°	A



N-PE	2	-	90°	A
N-PE	2	+	180°	A
N-PE	2	-	180°	A
N-PE	2	+	270°	A
N-PE	2	-	270°	A


Results:

A: No degradation in the performance of the EUT was observed.

7.19 Surge at Signal Port

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-5:2014 +A1:2017
 Performance Criterion: B
 Interval: 60s between each surge

7.19.1 Test Setup Diagram

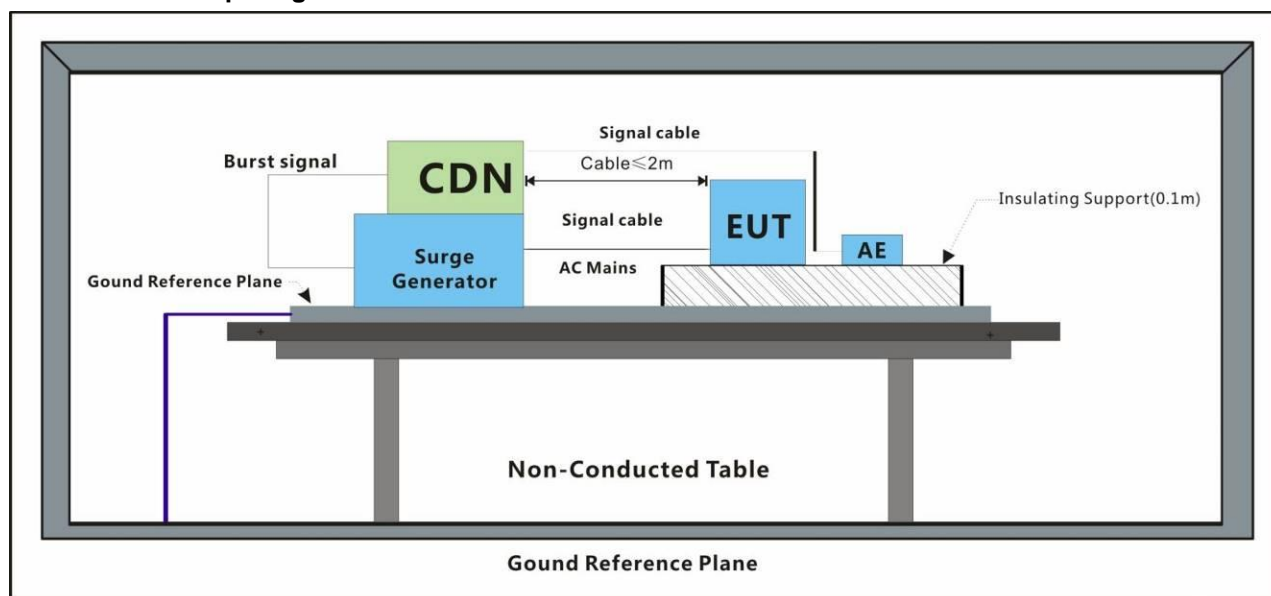

7.19.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:
 a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.19.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal Port	Line-Ground	1	+	A
Signal Port	Line-Ground	1	-	A

Results:


A: No degradation in the performance of the EUT was observed.

7.20 Surge at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-5:2014 +A1:2017

7.20.1 Test Setup Diagram

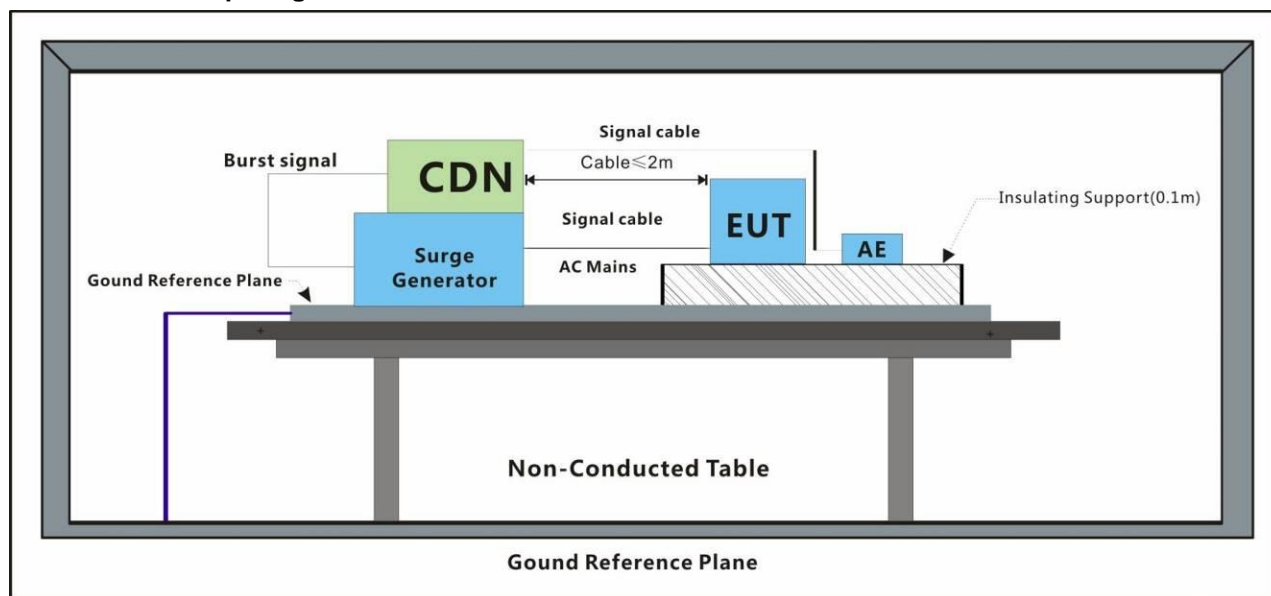

7.20.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.20.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal Port	Line-Ground	0.5	+	A
Signal Port	Line-Ground	0.5	-	A
Signal Port	Line-Ground	1	+	A
Signal Port	Line-Ground	1	-	A


Results:

A: No degradation in the performance of the EUT was observed.

7.21 Surge at Signal Port

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-5:2014 +A1:2017
 Performance Criterion: B
 Interval: 60s between each surge

7.21.1 Test Setup Diagram

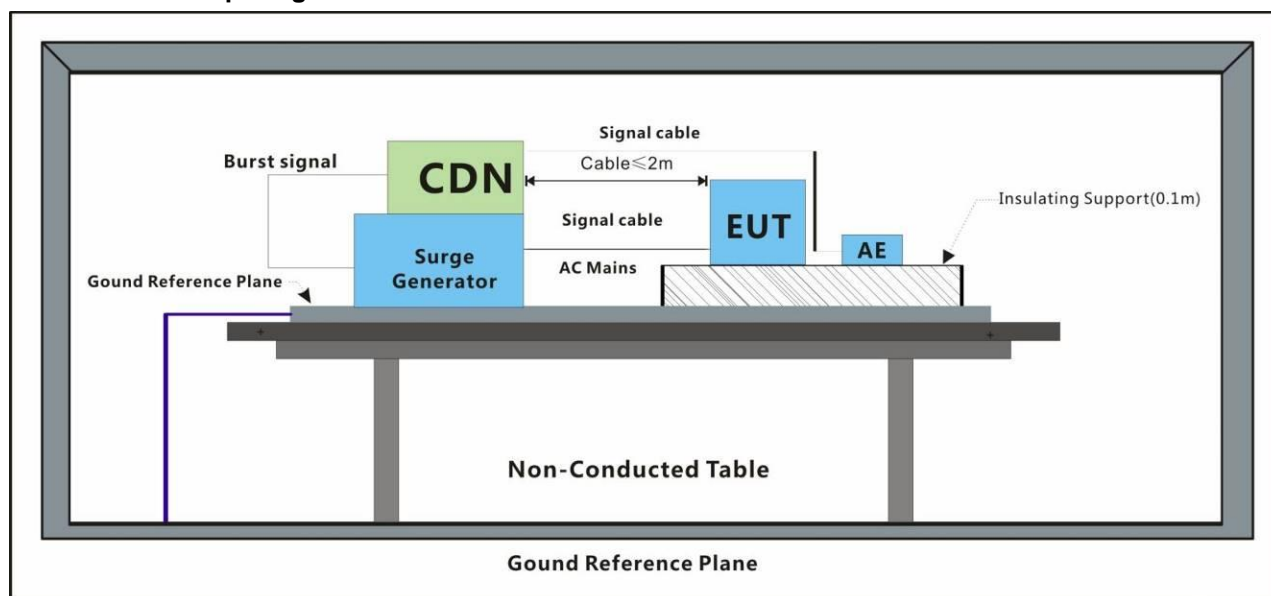

7.21.2 E.U.T. Operation

Operating Environment:
 Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar
 Test mode:
 a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.
 b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.21.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal Port	Line-Ground	1	+	A
Signal Port	Line-Ground	1	-	A


Results:

A: No degradation in the performance of the EUT was observed.

7.22 Conducted Immunity at Power Port (150kHz-80MHz)

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-6:2014
 Performance Criterion: A
 Frequency Range: 0.15MHz to 80MHz
 Modulation: 80%, 1kHz Amplitude Modulation
 Step Size: 1%

7.22.1 Test Setup Diagram

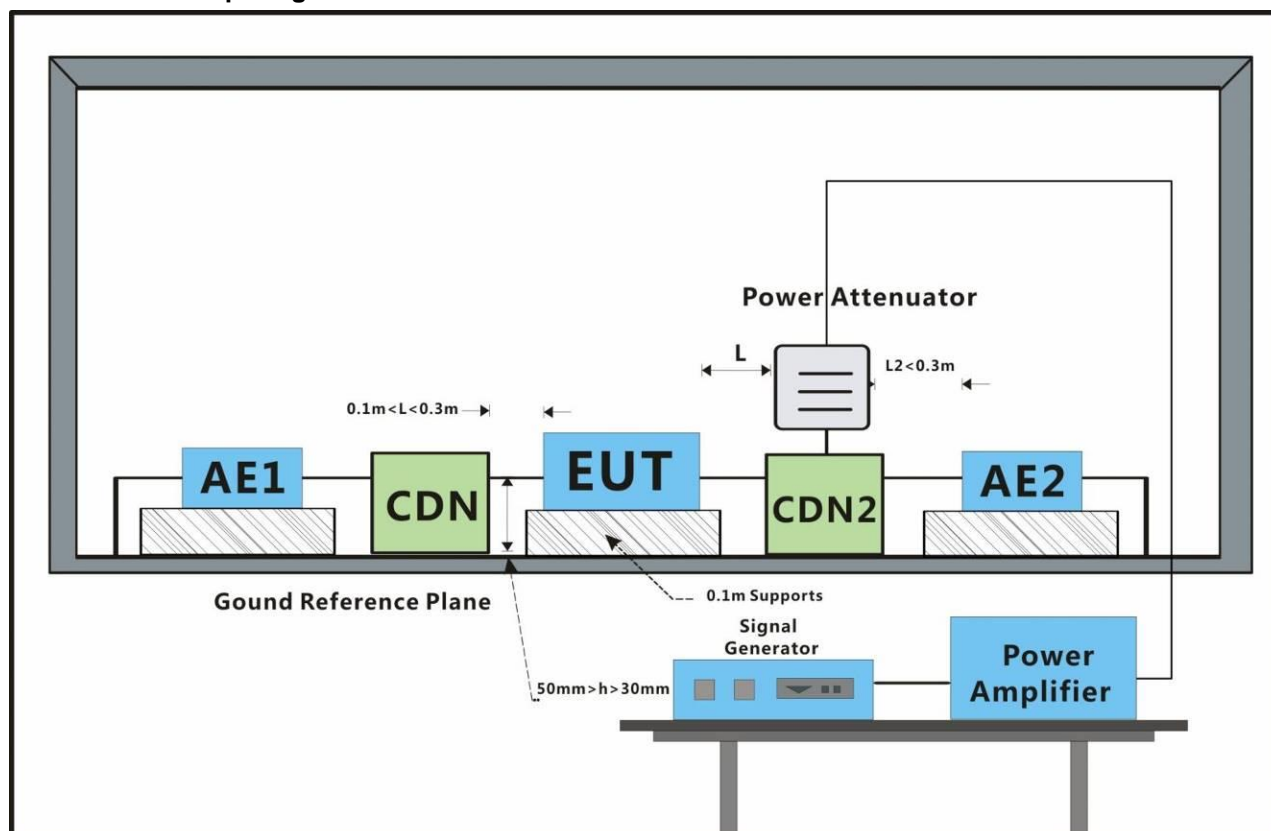

7.22.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.22.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.23 Conducted Immunity at Power Port (150kHz-80MHz)

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-6:2014
 Performance Criterion: A
 Frequency Range: 0.15MHz to 80MHz
 Modulation: 80%, 1kHz Amplitude Modulation
 Step Size: 1%

7.23.1 Test Setup Diagram

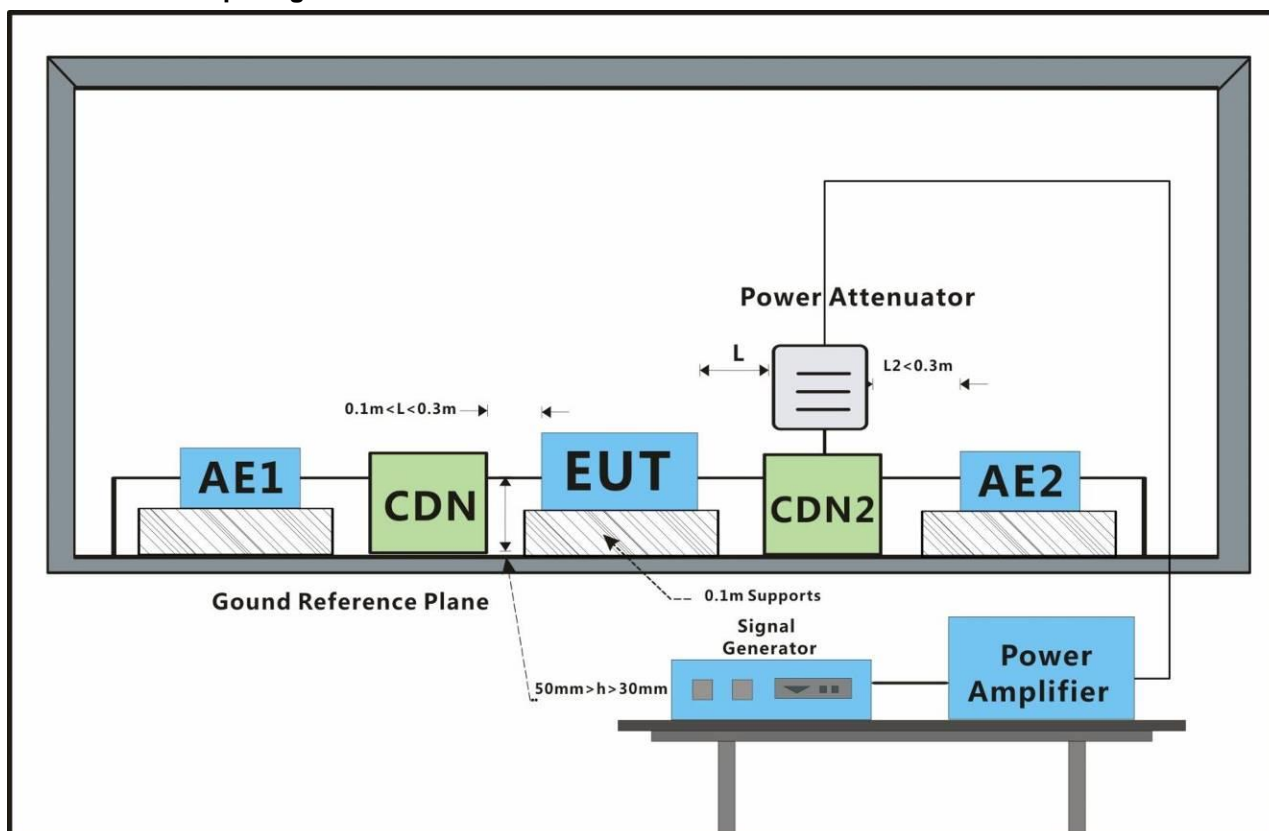

7.23.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.23.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.24 Conducted Immunity at Power Port (150kHz-100MHz)

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-6:2014
Modulation:	80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation
Criteria for compliance:	<p>There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V.</p> <p>For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V, providing.</p> <p>a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings etc.);</p> <p>b) at 3 V, any deterioration of the picture is so minor that the system could still be used; and</p> <p>c) there is no observable deterioration of the picture at 1 V.</p>

7.24.1 Test Setup Diagram

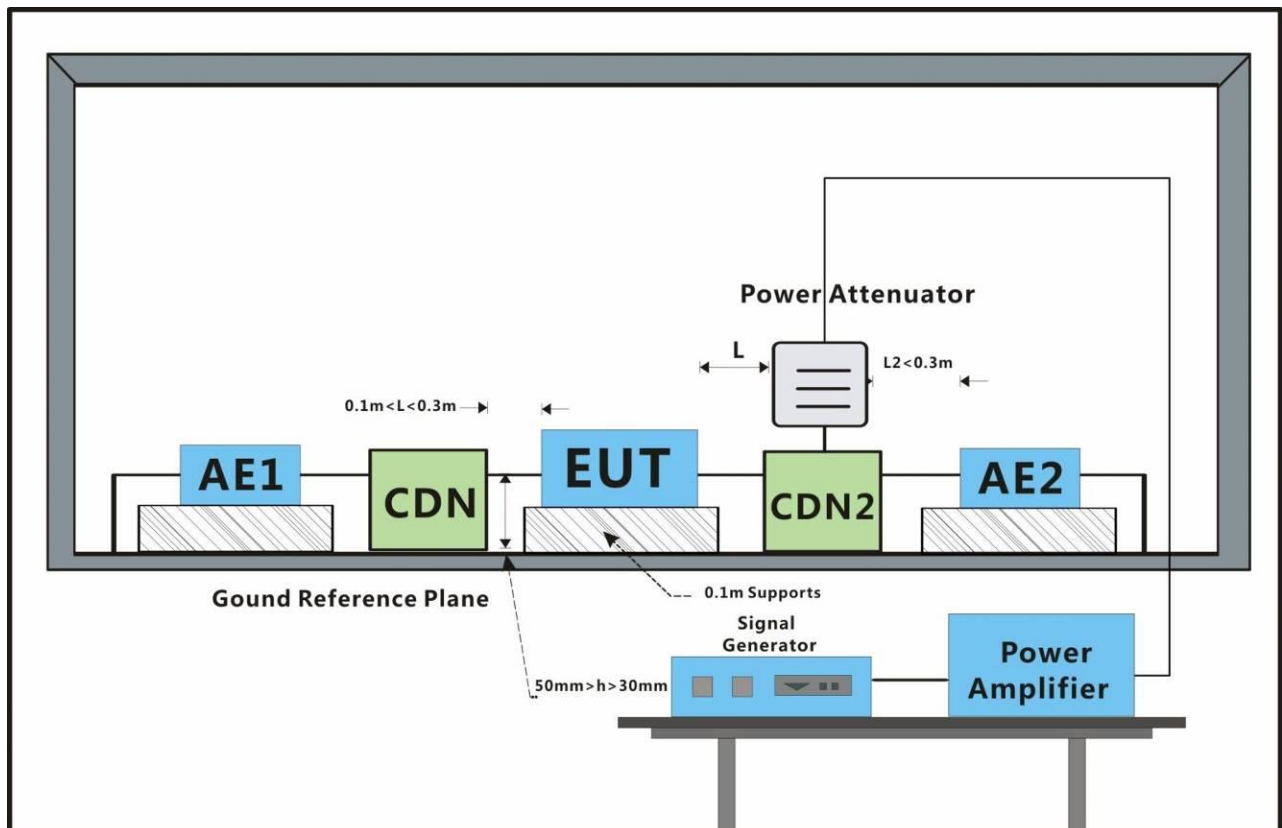

7.24.2 E.U.T. Operation

Operating Environment:					
Temperature:	22 °C	Humidity:	50 % RH	Atmospheric Pressure:	1020 mbar
Test mode:	a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.				
	b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.				



7.24.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	A
AC power port	3	CDN	3s	A
AC power port	1	CDN	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.25 Conducted Immunity at Signal Port (150kHz-80MHz)

Test Requirement: EN 55024:2010 +A1:2015
 Test Method: EN 61000-4-6:2014
 Performance Criterion: A
 Frequency Range: 0.15MHz to 80MHz
 Modulation: 80%, 1kHz Amplitude Modulation
 Step Size: 1%

7.25.1 Test Setup Diagram

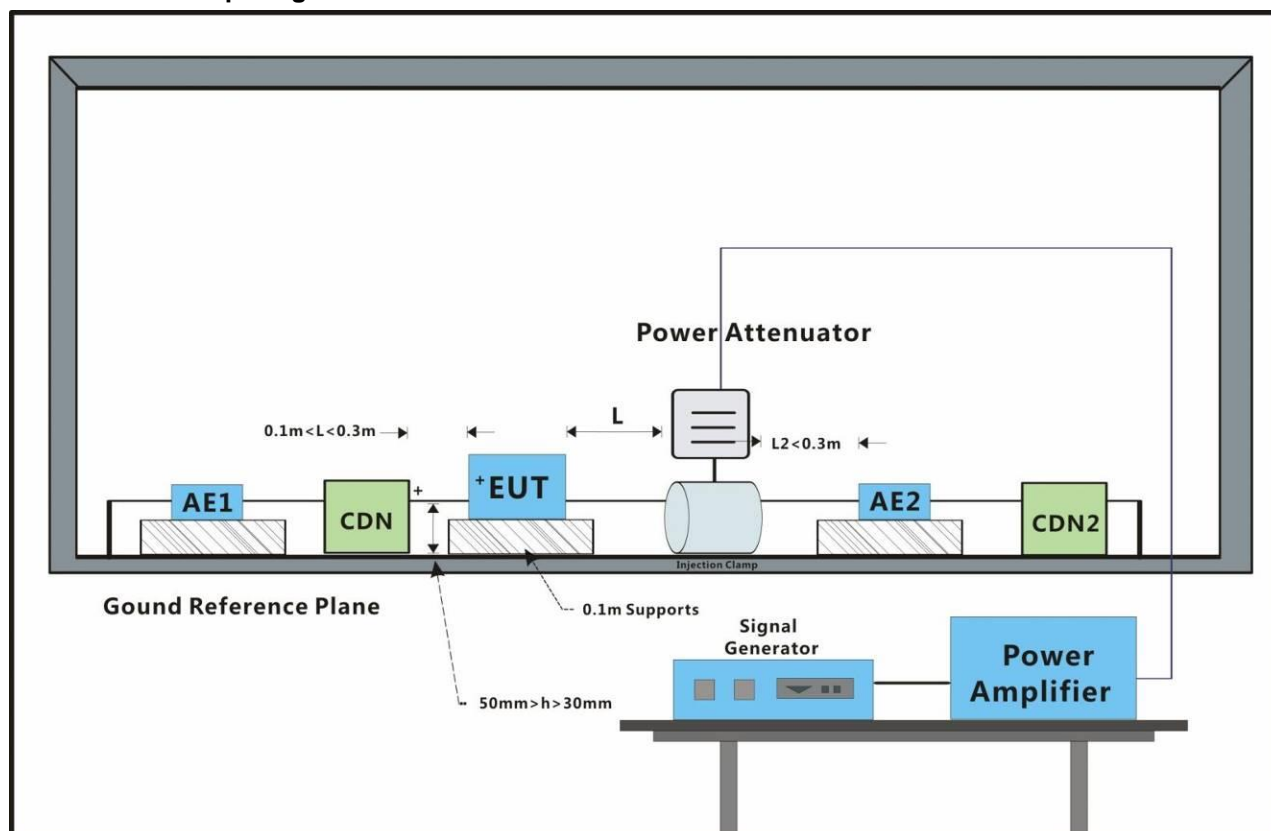

7.25.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.25.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	3	Coupling	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.26 Conducted Immunity at Signal Port (150kHz-80MHz)

Test Requirement: EN 55035:2017
 Test Method: EN 61000-4-6:2014
 Performance Criterion: A
 Frequency Range: 0.15MHz to 80MHz
 Modulation: 80%, 1kHz Amplitude Modulation
 Step Size: 1%

7.26.1 Test Setup Diagram

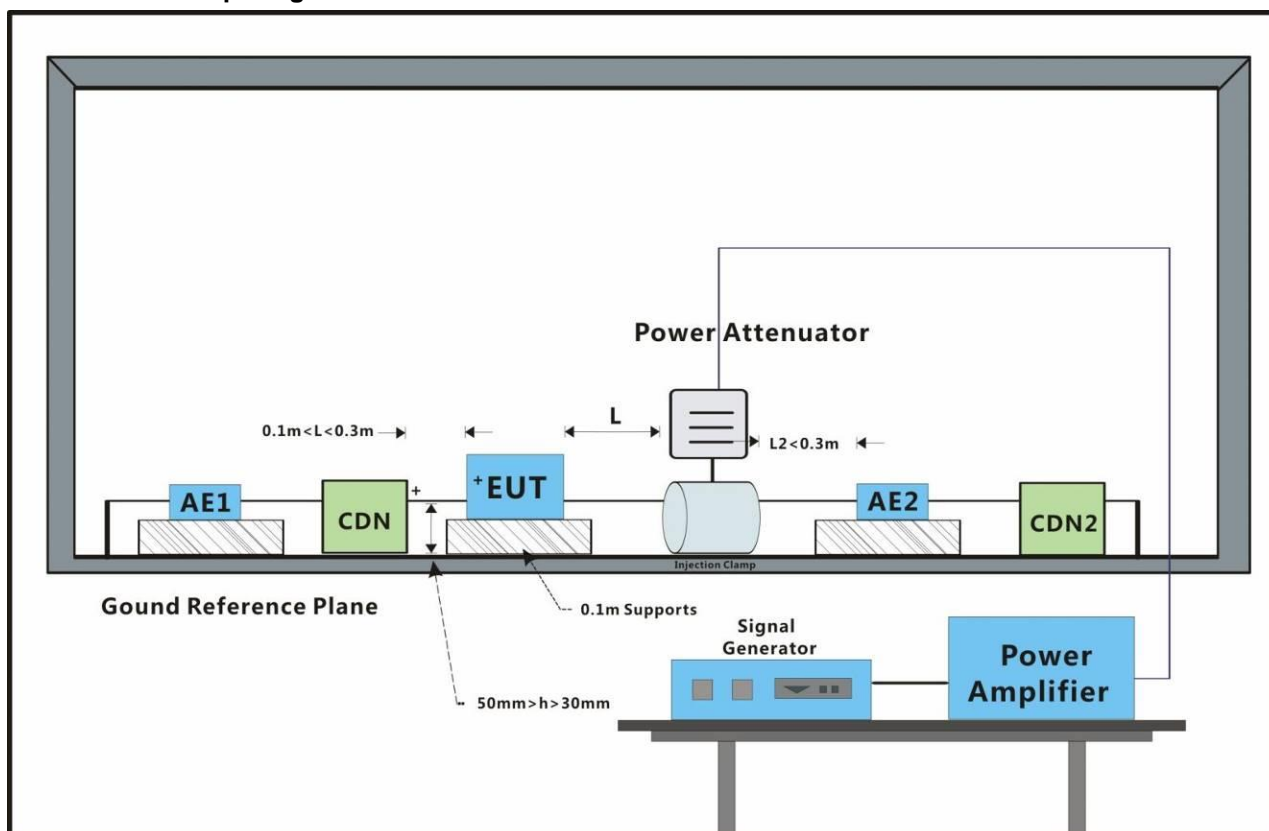

7.26.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.26.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	3(0.15MHz-10MHz)	CDN	3s	A
Signal port	3 to 1(10MHz-30MHz, Lines)	CDN	3s	A
Signal port	1(30MHz-80MHz)	CDN	3s	A

Results:

A: No degradation in the performance of the EUT was observed.

7.27 Conducted Immunity at Signal Port (150kHz-100MHz)


Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-6:2014
 Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V, providing.

- a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings etc.);
- b) at 3 V, any deterioration of the picture is so minor that the system could still be used; and
- c) there is no observable deterioration of the picture at 1 V.

7.27.1 Test Setup Diagram

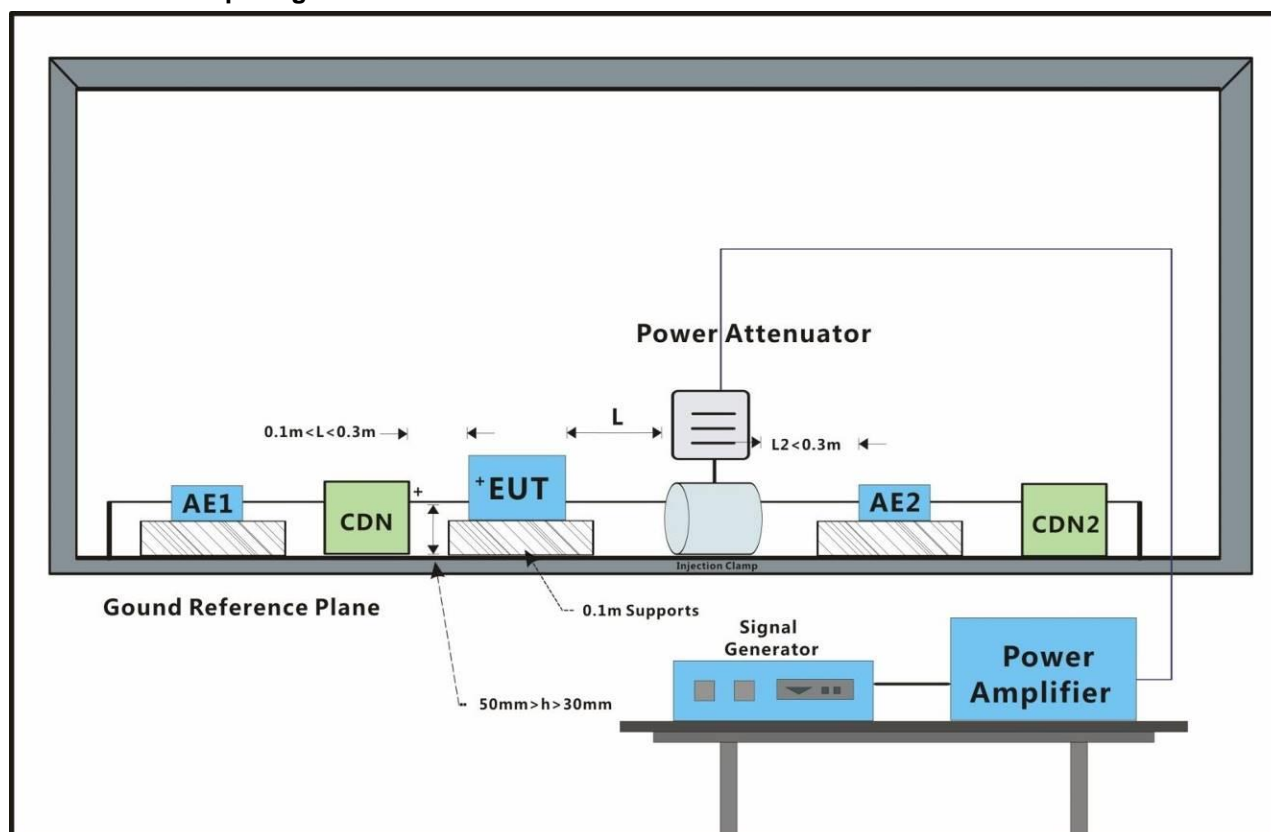

7.27.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS-65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.



7.27.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	10	Clamp	3s	A
Signal port	3	Clamp	3s	A
Signal port	1	Clamp	3s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.28 Voltage Dips and Interruptions

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-11:2004 +A1:2017
Performance Criterion: 0% of UT (Supply Voltage) for 0.5 Periods:B; 0% of UT for 250 Periods:C; 70 % of UT for 25 Periods:C
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.28.1 Test Setup Diagram

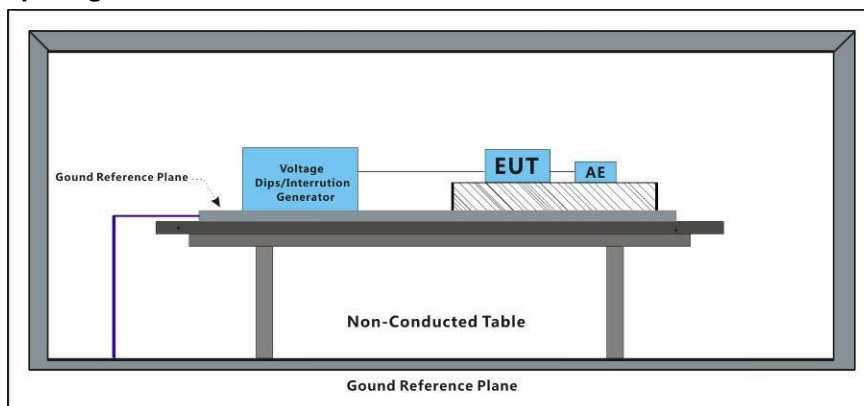

7.28.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.28.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycles	3	A
0	180°	0.5 Cycles	3	A
0	0°	250 Cycles	3	B
0	180°	250 Cycles	3	B
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A

Results:


A: No degradation in the performance of the EUT was observed.

B: During test,EUT stop work.After test,the EUT restarted automatically.

7.29 Voltage Dips and Interruptions

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-11:2004 +A1:2017
Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods; 40% of UT for 10 Periods; 70% of UT for 25 Periods; 80% of UT for 250 Periods;
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.29.1 Test Setup Diagram

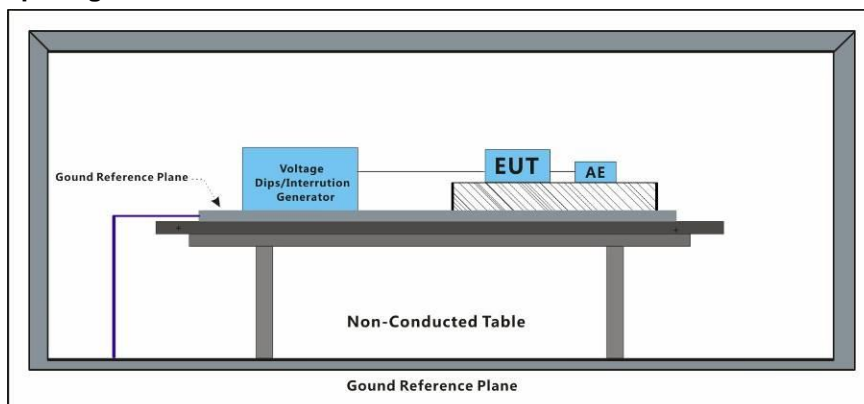

7.29.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.29.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
80	0°	250 Cycles	3	A
80	180°	250 Cycles	3	A
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A
40	0°	10 Cycles	3	A
40	180°	10 Cycles	3	A
0	0°	250 Cycles	3	B
0	180°	250 Cycles	3	B

Results:


A: No degradation in the performance of the EUT was observed.

B: During test,EUT stop work.After test,the EUT restarted automatically.

7.30 Voltage Dips and Interruptions

Test Requirement: EN 55035:2017
Test Method: EN 61000-4-11:2004 +A1:2017
Performance Criterion: <5% residual voltage for 0.5 periods: B
70% residual voltage for 25 periods: C
<5% residual voltage for 250 periods: C
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.30.1 Test Setup Diagram

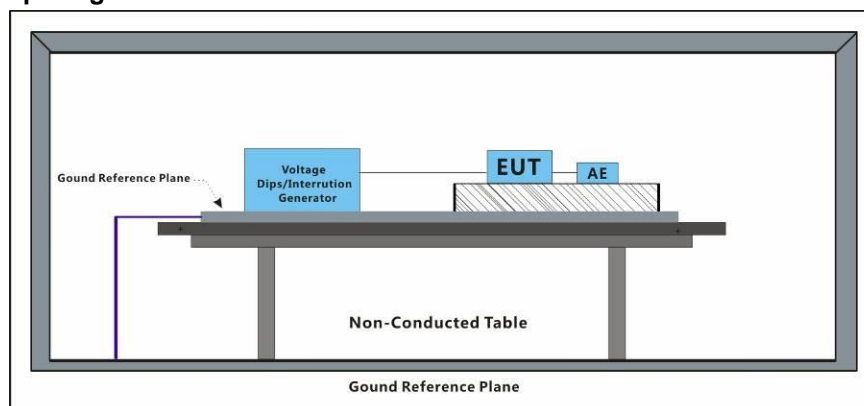

7.30.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.

b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.

7.30.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycles	3	A
0	0°	250 Cycles	3	B
70	0°	25 Cycles	3	A

Results:


A: No degradation in the performance of the EUT was observed.

B: During test,EUT stop work.After test,the EUT restarted automatically.

7.31 Mains Supply Voltage Variations-Conditioning

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 50130-4:2011+A1:2014
Voltage max.:	AC 253V (U_{max} : $U_{nom} + 10\%$)
Voltage min.:	AC 195.5V (U_{min} : $U_{nom} - 15\%$)
Unom Voltage:	AC 230V
Criteria:	There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test (see Clause 6 of EN 50130-4), during the conditioning.

7.31.1 Test Setup Diagram

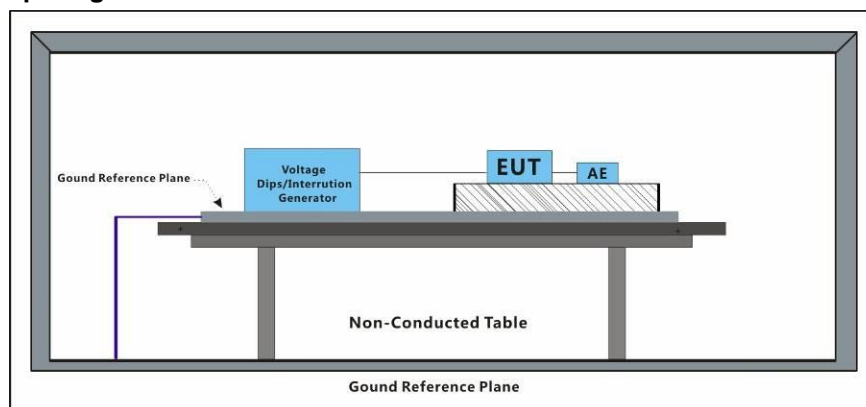

7.31.2 E.U.T. Operation

Operating Environment:								
Temperature:	22	°C	Humidity:	50	% RH	Atmospheric Pressure:	1020	mbar
Test mode:	a: keep EUT monitoring and data running continually by adapter (ADS -65HI-12N-1 12048E) support.							
	b: keep EUT monitoring and data running continually by adapter (S050-1A120400B3) support.							

7.31.3 Test Results: Pass

Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8 Photographs

8.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



8.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz) Test Setup




8.3 Radiated Emissions (30MHz-1GHz) Test Setup



8.4 Radiated Emissions (above 1GHz) Test Setup



8.5 Voltage Fluctuations and Flicker Test Setup

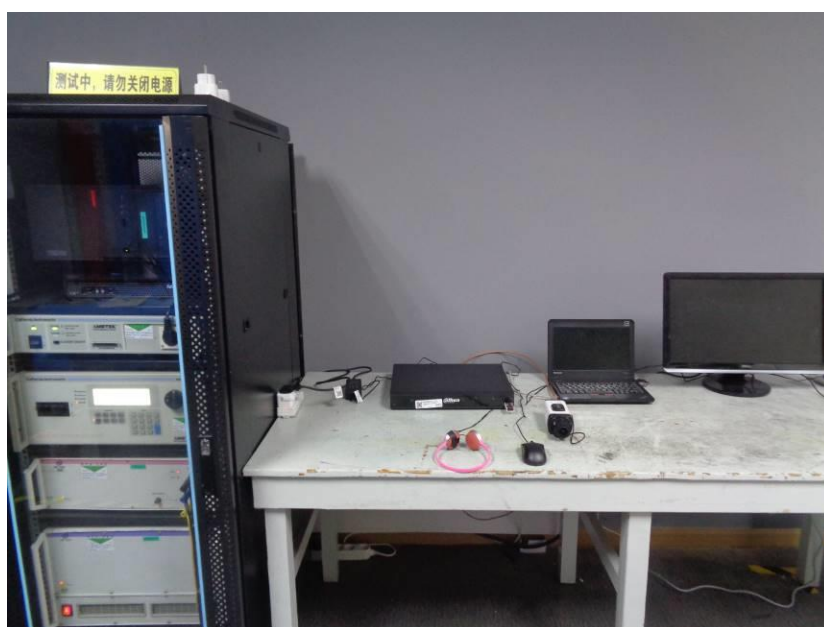

8.6 Electrostatic Discharge Test Setup





8.7 Radiated Immunity (80MHz-1GHz,1800MHz,2600MHz,3500MHz,5000MHz) Test Setup





8.8 Radiated Immunity(80MHz-2.7GHz) Test Setup



8.9 Radiated Immunity (80MHz-1GHz) Test Setup



8.10 Electrical Fast Transients/Burst at Power Port Test Setup



8.11 Electrical Fast Transients/Burst at Signal Port Test Setup



8.12 Surge at Power Port Test Setup



8.13 Surge at Signal Port Test Setup





8.14 Conducted Immunity at Power Port (150kHz-80MHz) Test Setup



8.15 Conducted Immunity at Power Port (150kHz-100MHz) Test Setup



8.16 Conducted Immunity at Signal Port (150kHz-80MHz) Test Setup



8.17 Conducted Immunity at Signal Port (150kHz-100MHz) Test Setup




8.18 Voltage Dips and Interruptions Test Setup







8.19 Mains Supply Voltage Variations-Conditioning Test Setup






8.20 EUT Constructional Details (EUT Photos)

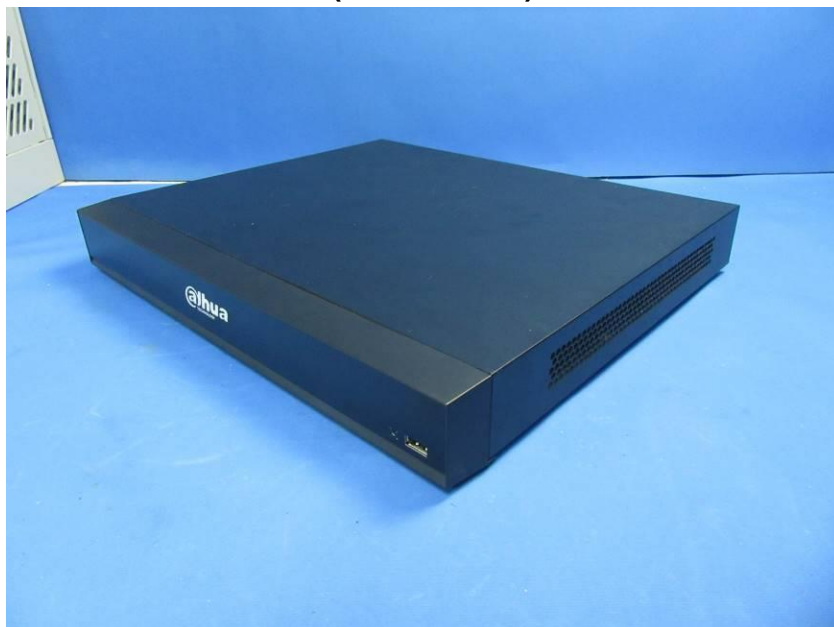

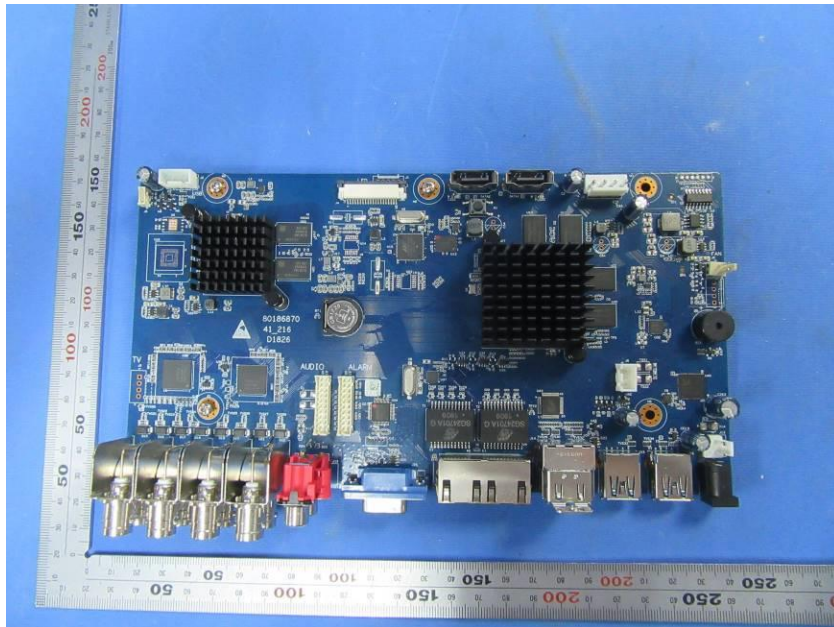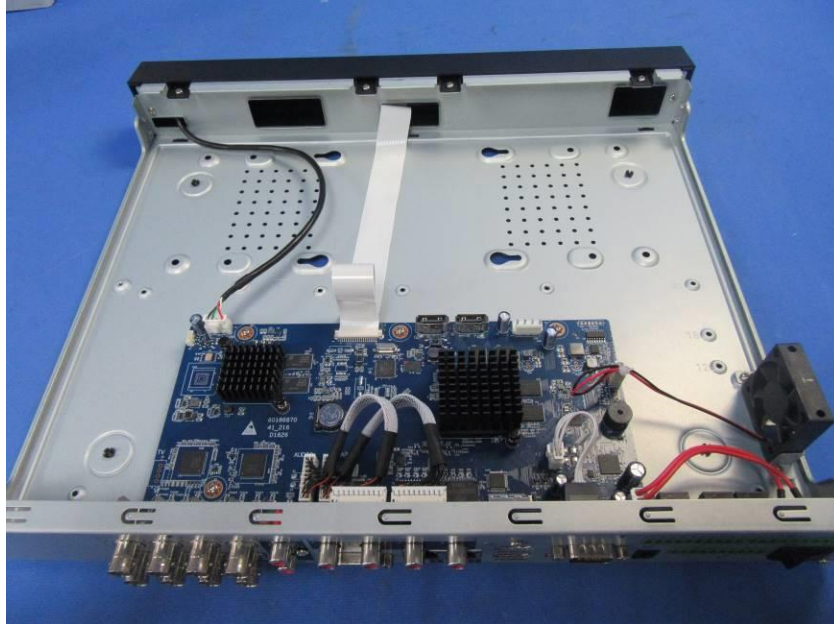

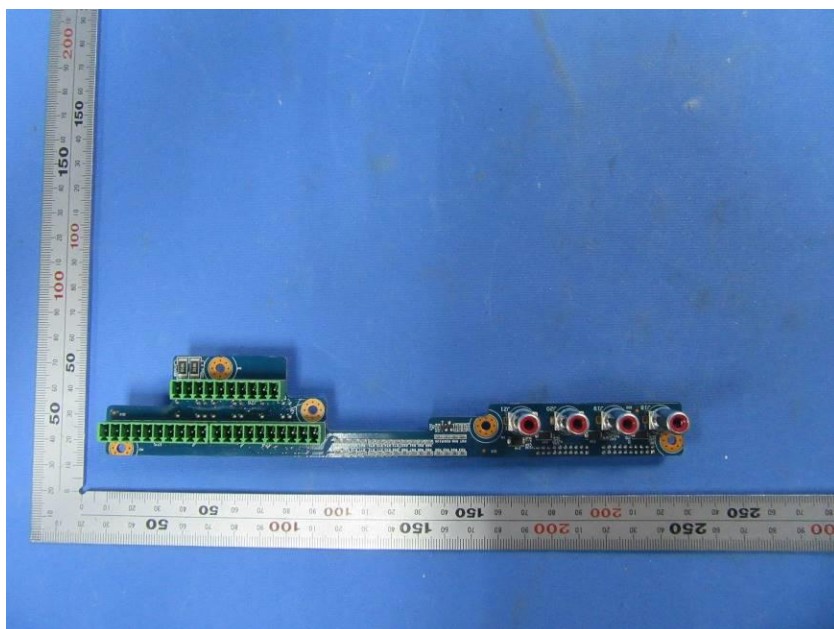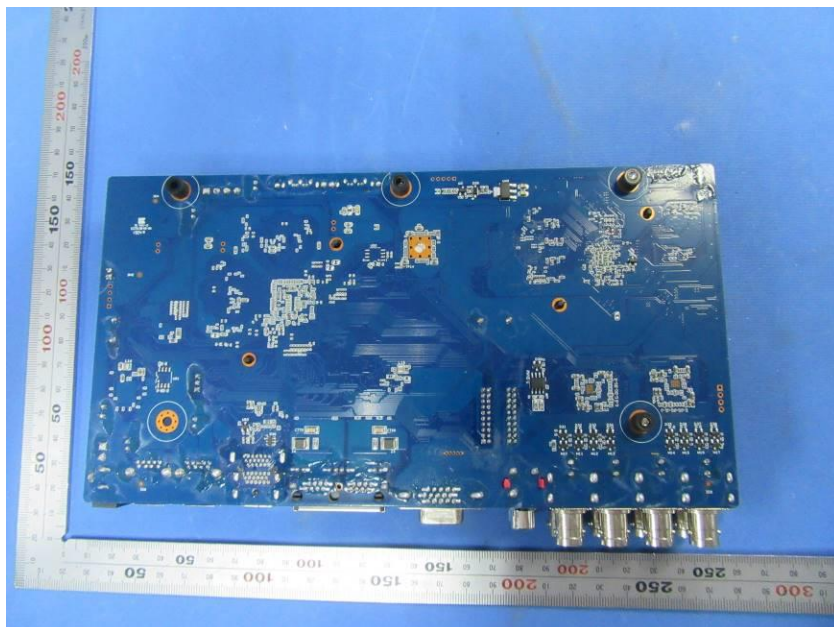

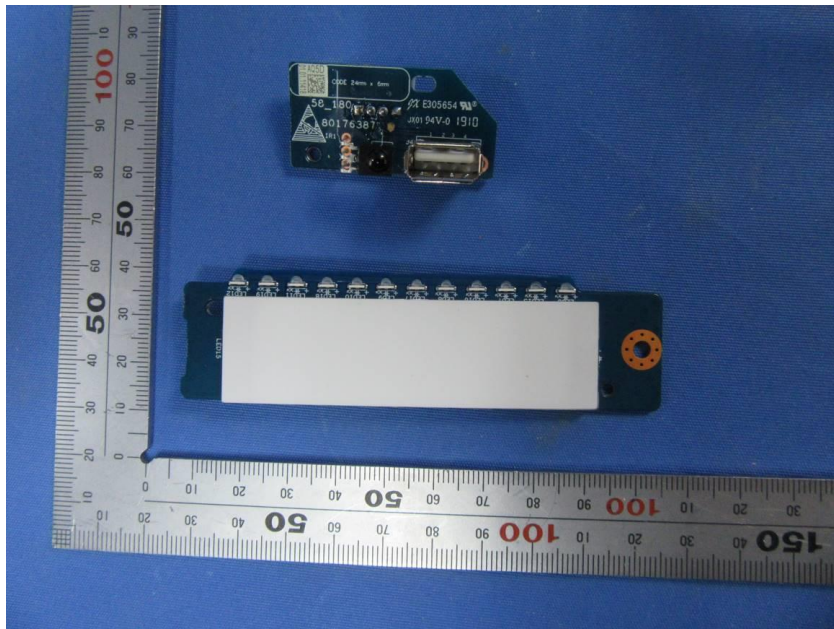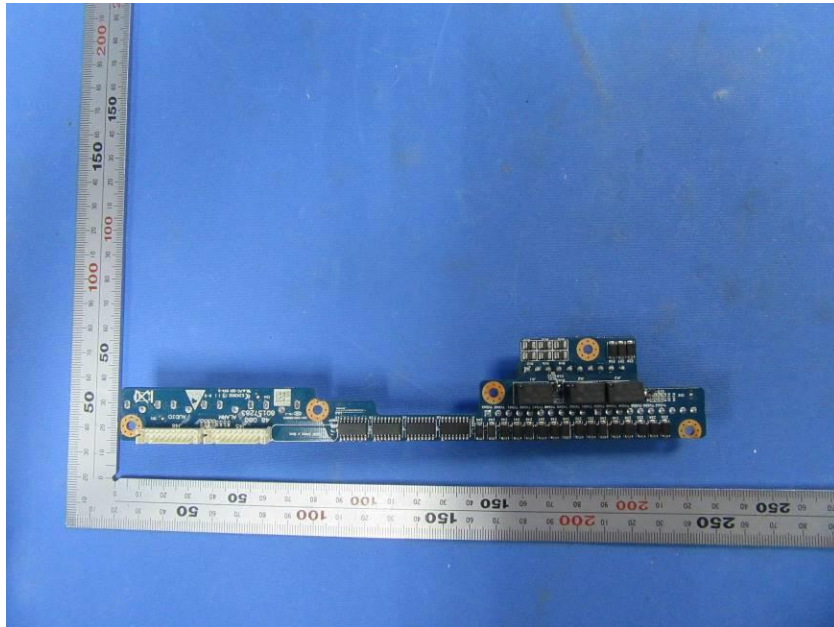

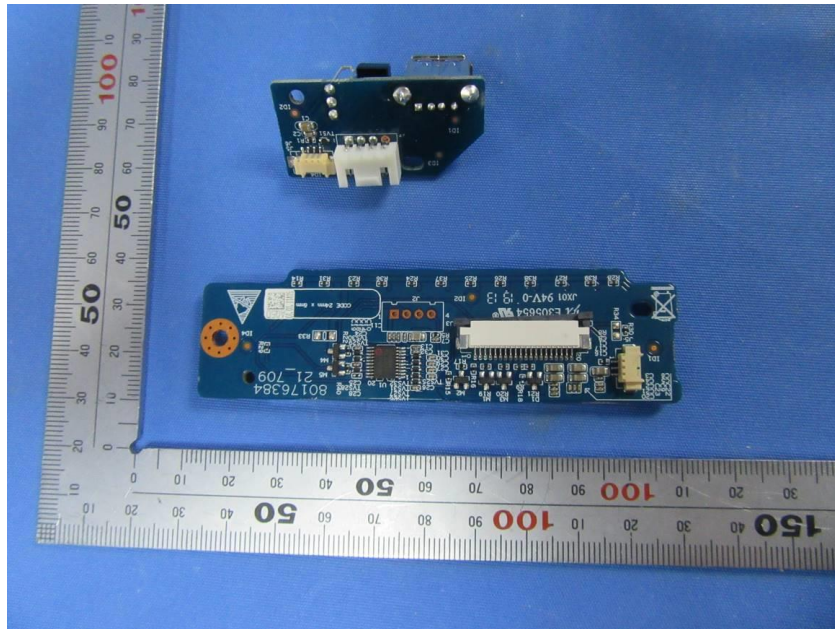





- End of the Report -