



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM151200485001
Page: 1 of 81

1 Cover Page

TEST REPORT

Application No.:	SHEM1512004850IT
Applicant:	Zhejiang Dahua Vision Technology Co., Ltd.
Equipment under Test (EUT) NOTE: The following sample(s) was/were submitted and identified by the client as.	
Product Name:	Network Video recorder
Model No.(EUT):	DHI-NVR5232-8P-4KS2, DHI-NVR5232-16P-4KS2
Add Model No.:	NVR52xx-8P-4KSy, DH-NVR52xx-8P-4KSy, DHI-NVR52xx-8P-4KSy, NVR52xx-16P-4KSy, DH-NVR52xx-16P-4KSy, DHI-NVR52xx-16P-4KSy, NVR602xx-16P-4KSy, DH-NVR602xx-16P-4KSy, DHI-NVR602xx-16P-4KSy (The "xx" can be 04, 08, 16 and 32 denote different software configuration or HDD space; "y" can be 2, 3, 4 and 5 denote different software version)
Standards:	EN 55022:2010+AC:2011, EN 55024:2010, EN 50130-4:2011+A1:2014, EN 61000-3-2:2014, EN 61000-3-3:2013, CISPR 16-2-1:2014, CISPR 16-2-3:2010+A1:2010+A2:2014, EN 61000-4-2:2009, EN 61000-4-3:2006+A1:2008+A2:2010, EN 61000-4-4:2012, EN 61000-4-5:2014, EN 61000-4-6:2014, EN 61000-4-11:2004
Date of Receipt:	December 28, 2015
Date of Test:	January 04, 2016 to February 02, 2016
Date of Issue:	March 08, 2016
Test Result:	Pass*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives.



Parham Zhan
E&E Section Manager
SGS-CSTC (Shanghai) Co., Ltd.






The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		March 08, 2016		Original

Authorized for issue by:				
Engineer		Bruce Tang		
		Print Name		
Clerk		Susie Liu		
		Print Name		
Reviewer		Keny Xu		
		Print Name		

3 Test Summary

ELECTROMAGNETIC INTERFERENCE (EMI)			
Test	Test Requirement	Test Method	Result
Conducted Emission (150kHz to 30MHz)	EN 55022:2010+AC:2011	EN 55022:2010 & CISPR 16-2-1:2014	PASS
Conducted Emission on Telecommunication (150kHz to 30MHz)	EN 55022:2010+AC:2011	EN 55022:2010 & CISPR 16-2-1:2014	PASS
Radiated Emission, (30MHz to 1GHz)	EN 55022:2010+AC:2011	EN 55022:2010 & CISPR 16-2-3:2010+ A1:2010+A2:2014	PASS
Radiated Emission (above 1 GHz)	EN 55022:2010+AC:2011	CISPR 16-2-3: 2010+A1:2010+A2:2014	PASS*
Harmonic Emission on AC, (100 Hz to 2 kHz)	EN 61000-3-2:2014	EN 61000-3-2:2014	N/A**
Flicker Emission on AC	EN 61000-3-3:2013	EN 61000-3-3:2013	PASS
Electromagnetic Susceptibility(EMS)			
Test	Test Requirement	Test Method	Result
ESD	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-2:2009	PASS
Radiated Immunity, (80MHz to 1 GHz)	EN 55024:2010	EN 61000-4-3:2006 +A1: 2008+A2:2010	PASS
Radiated Immunity, (80MHz to 2.7 GHz)	EN 50130-4:2011+A1:2014	EN 61000-4-3:2006 +A1: 2008+A2:2010	PASS
Electrical Fast Transients (EFT) on AC ports	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-4:2012	PASS
Electrical Fast Transients (EFT) on signal ports	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-4:2012	PASS
Surge Immunity on AC	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-5:2014	PASS
Surge Immunity on signal ports	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-5:2014	PASS
Injected Currents on AC ports (150kHz to 80MHz)	EN 55024:2010	EN 61000-4-6:2014	PASS
Injected Currents on signal ports (150kHz to 80MHz)	EN 55024:2010	EN 61000-4-6:2014	PASS
Injected Currents on AC ports (150kHz to 100MHz)	EN 50130-4:2011+A1:2014	EN 61000-4-6:2009	PASS
Injected Currents on signal ports (150kHz to 100MHz)	EN 50130-4:2011+A1:2014	EN 61000-4-6:2009	PASS
Power Frequency Magnetic Field	EN 55024:2010	EN 61000-4-8:2010	N/A***



Voltage Dips and Interruptions on AC	EN 55024:2010 & EN 50130-4:2011+A1:2014	EN 61000-4-11:2004	PASS
Mains supply voltage variations	EN 50130-4:2011+A1:2014	EN 50130-4:2011+A1:2014	PASS
Remark:			
EUT In this whole report EUT means Equipment Under Test.			
N/A: Not applicable,			
Note1:* The highest frequency of the internal sources of the EUT is above 1GHz, the measurement shall be made up to 5 times the highest frequency of 6GHz, whichever is less.			
Note2:** Please refer to Section 7.5 of this report for details.			
Note3:***Power-frequency magnetic field immunity test is only applicable to equipment containing devices susceptible to magnetic fields, such as CRT monitors, Hall elements, electrodynamic microphones, magnetic field sensors, etc.			
Note4: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model DHI-NVR5232-8P-4KS2, DHI-NVR5232-16P-4KS2 was tested since their differences were the model number, trade name and appearance.			

4 Contents

1	COVER PAGE	1
2	VERSION	2
3	TEST SUMMARY	3
4	CONTENTS	5
5	GENERAL INFORMATION	7
5.1	Client Information.....	7
5.2	Details of E.U.T.	7
5.3	E.U.T Operation Mode.....	7
5.4	E.U.T Operation Environment	7
5.5	Description of Support Units	8
5.6	Deviation from Standards	8
5.7	Abnormalities from Standard Conditions	8
5.8	Modification/Retest Record	8
5.9	Monitoring of EUT for All Immunity Test.....	8
5.10	Test Location.....	8
5.11	Test Facility.....	9
5.12	Measurement Uncertainty	10
6	EQUIPMENT LIST	11
7	ELECTROMAGNETIC INTERFERENCE TEST RESULTS.....	15
7.1	Conducted Emissions on Mains Terminals	15
7.2	Conducted Emissions at Telecommunication ports.....	21
7.3	Radiated Emissions, 30MHz to 1GHz	25
7.4	Radiated Emissions, 1GHz to 6GHz.....	31
7.5	Harmonics Test Result	37
7.6	Flicker Test Result	38
8	ELECTROMAGNETIC SUSCEPTIBILITY TEST RESULTS	40
8.1	Performance Criteria Description in Clause 7 of EN 55024.....	40
8.2	ESD.....	41
8.3	Radiated Immunity.....	44
8.4	Electrical Fast Transients (EFT)	48
8.5	Slow high energy voltage surge	51
8.6	Conducted Immunity	57
8.7	Voltage Dips and Interruptions	61
8.8	Mains supply voltage variations	63



9	PHOTOGRAPHS (TEST SETUP FOR THE EUT).....	64
9.1	Conducted Emissions on Mains Terminals Test Setup.....	64
9.2	Conducted Emissions on Telecommunication Terminals Test Setup	65
9.3	Radiated Emission Test Setup	66
9.4	Flicker Test Setup.....	68
9.5	ESD Test Setup	69
9.6	Radiated Immunity Test Setup	70
9.7	EFT, Surge, Voltage Dip and Interruptions on Mains Terminals Test Setup	71
9.8	EFT on Signal Terminals Test Setup	72
9.9	Surge on Signal Terminals Test Setup.....	73
9.10	Conducted Immunity on Mains Terminals Test Setup	74
9.11	Conducted Immunity on Signal Terminals Test Setup	75
10	EUT CONSTRUCTIONAL DETAILS	76
10.1	Exterior of EUT	76
10.2	Interior of EUT	79-81

5 General Information

5.1 Client Information

Applicant:	Zhejiang Dahua Vision Technology Co., Ltd.
Address of Applicant:	The 1st Floor, Building F, No.1199 Binan Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, P.R.China
Manufacturer:	Zhejiang Dahua Vision Technology Co., Ltd.
Address of Manufacturer:	The 1st Floor, Building F, No.1199 Binan Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, P.R.China
Factory:	Zhejiang Dahua Vision Technology Co., Ltd.
Address of Factory:	No.1199 Binan Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, P.R.China

5.2 Details of E.U.T.

Power Supply:	AC 100-240V, 50/60Hz
Test Voltage:	AC 230V, 50Hz
Cable Type:	N/A

5.3 E.U.T Operation Mode

Functions/Modes:	Monitoring mode
Monitoring mode	Keep EUT monitoring image continual.

5.4 E.U.T Operation Environment

Temperature Range:	20-25°C
Humidity Range:	30-60% RH
Atmospheric Pressure Range:	100-105kPa

5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Network camera	Hikvision	DS-2CD2012-1
DC power	Aoepower	BSW0127-1210002
Monitor	DELL	--
Mouse	3D Optical Mouse	--
Laptop	LENOVO	R400

5.6 Deviation from Standards

All Immunity tests to EN 55024:2010 & EN 50130-4:2011+A1:2014 were performed in accordance with EN 61000-4-2:2009, EN 61000-4-3:2006+A1:2008+A2:2010, EN 61000-4-4:2012, EN 61000-4-5:2014, EN 61000-4-6:2014, EN61000-4-11:2004 and not IEC 61000-4-x. (x=2,3,4,5,6,11).

5.7 Abnormalities from Standard Conditions

None.

5.8 Modification/Retest Record

None.

5.9 Monitoring of EUT for All Immunity Test

Audio: None.

Visual: Working status of the EUT.

5.10 Test Location

Radiated Emission(30MHz to 1GHz) tests were performed at:

Inventec Pudong EMC Center

No. 699, Puxing Rd., Shanghai, China

TEL: +86-21-6429-8888 ext: 65429

other tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

5.11 Test Facility

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively. Date of Expiry: 2017-11-16.

5.12 Measurement Uncertainty

According to CISPR 16-4-2.

Test Item	Frequency Range	Measurement Uncertainty	U_{CISPR}
Conducted Emission at mains port using AMN	9kHz-150kHz	3.2 dB	3.8 dB
Conducted Emission at mains port using AMN	150kHz-30MHz	3.0 dB	3.4 dB
Conducted Emission at mains port using VP	9kHz-30MHz	1.9 dB	3.9 dB
Conducted Emission at telecommunication port using AAN	150kHz-30MHz	2.4 dB	5.0 dB
Radiated Emission	30MHz-1000MHz	4.4 dB	6.3 dB
Radiated Emission	1GHz-18GHz	4.6 dB	5.2 dB (1GHz-6GHz)
			5.5 dB (6GHz-18GHz)
Disturbance Power	30MHz-300MHz	3.5 dB	4.5 dB
Remark: AMN – Artificial Mains Network VP – Voltage Probe ANN – Asymmetric Artificial Network			

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

6 Equipment list

Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2016-01-14	2017-01-13
2	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127490	2016-01-14	2017-01-13
3	Line impedance stabilization network	EMCO	3816/2	00034161	2016-01-14	2017-01-13
4	SCHWARZBECK CAT5 8158	SCHWARZBECK	8-Wire ISN CAT 5	CAT5-8158-0061	2016-01-14	2017-01-13

Radiated Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1.	EMI test receive	Rohde & Schwarz	ESR7	101391	2016-01-14	2017-01-13
2	CONTROLLER	INNCO	CO200	474	/	/
3	Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	9168-313	2016-01-16	2017-01-15
4	Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	9120D-679	2016-01-16	2017-01-15
5	Amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CSS(F)	10001	2016-01-14	2017-01-13
6	Low noise amplifier	TESEQ	LNA6900	71033	2016-01-14	2017-01-13

Radiated Emission (Inventec)

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Interval	Cal. Body
Bilog-antenna	TESEQ	CBL-6112D	28034	1/12/2015	3Y	ETC
Bilog-antenna	TESEQ	CBL-6112D	28035	9/04/2013	3Y	ETC
Preamplifier	Agilent	8447D	2944A11032	1/9/2016	1Y	Inventec
Preamplifier	Agilent	8447D	2944A11035	1/9/2016	1Y	Inventec
Test Receiver	R&S	ESCI	100523	1/9/2016	1Y	SIMT
Test Receiver	R&S	ESCI	100526	1/9/2016	1Y	SIMT

Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Single phase harmonics & flicker analyzer	EM test	DPA500	V0507100125	2016-01-14	2017-01-13
2	AC SOURCE 6KVA	EM test	ACS500	V0507100126	2016-01-14	2017-01-13

Electrostatic Discharge Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Electrostatic Discharge Simulator	TESEQ	NSG 437	468	2015-08-25	2016-08-24

EFT Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test machine	EMC Partner	TRA3000 F-S-D-V	1229	2016-01-14	2017-01-13
2	Capacitive coupling clamp	EM test	HFK	5040004	2015-08-06	2016-08-05

Surge Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test machine	EMC Partner	TRA3000 F-S-D-V	1229	2016-01-14	2017-01-13
2	Data coupling network 4 line	EM test	CNV 504	40200020 01	2015-08-06	2016-08-05

Radiated Immunity

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Single Generator	Rohde & Schwarz	SMJ100A	101394	2016-01-14	2017-01-13
2	Calibrated Stacked Lagarithmic-Periodic Test-Antenna	SCHWARIBFC K	STLP 9128D	9128 D 055	/	/
3	Stacked DoubleLog-Per. Antenna	SCHWARIBFC K	STLP 9149	9149-187	/	/
4	Power Amplifiers	MILMEGA	80RF1000 -250	1053058	/	/
5	Power Amplifiers	MILMEGA	AS0840-5 5-55	1053059	/	/
6	Power Meter	Rohde & Schwarz	NRP	101641	2016-01-14	2017-01-13
7	Electromagnetic Field Probe	ETS-Lindgren	HI-6113	00114591	2015-08-12	2016-08-11
8	Power sensor	Rohde & Schwarz	NRP-Z91	100647	2016-01-14	2017-01-13
9	Power sensor	Rohde & Schwarz	NRP-Z22	101096	2015-08-06	2016-08-05

Voltage dips and Interruption Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test machine	EMC Partner	TRA3000 F-S-D-V	1229	2016-01-14	2017-01-13

Conducted Immunity Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	signal generator	Rohde & Schwarz	SMJ100A	101394	2016-01-14	2017-01-13
2	PAMP Conducted RF test system	HAEFFLY	PAMP250	151708	2016-01-14	2017-01-13
3	CDN impedance and K-factor	LUTHI	L-801 M1	2116	2016-01-14	2017-01-13
4	CDN impedance and K-factor	LUTHI	L-801 M2/M3	2117	2016-01-14	2017-01-13
5	Coupling Clamp	LUTHI	EM 101	35724	2016-01-14	2017-01-13

General Equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Digital pressure meter	YONGZHI	DYM3-01	101012	2015-04-13	2016-04-12
2	Temperature& humidity recorder	ShangHai weather meter work	ZJ 1-2B	84320600 803136, F3040201 53,20101 201FS10 0A6K,201 106117	2015-08-03	2016-08-02
3	Digital Multimeter	FLUKE	17B	19720439	2016-01-14	2017-01-13
4	Autoformer regulator	Guangzhou bao de	TDGC2-5K VA-	/	/	/
5	CLAMP METER	FLUKE	316	250303097 1	2016-01-14	2017-01-13

7 Electromagnetic Interference Test Results

7.1 Conducted Emissions on Mains Terminals

Test Frequency: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth from 150 kHz to 30 MHz)

Class / Limit: Table 2-Class B for EN 55022

Frequency range (MHz)	Class B Limits (dB (μV))	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.		
Note2: The lower limit is applicable at the transition frequency.		


7.1.1 E.U.T. Operation

Test mode: Monitoring mode

Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.

7.1.2 Test Setup and Procedure

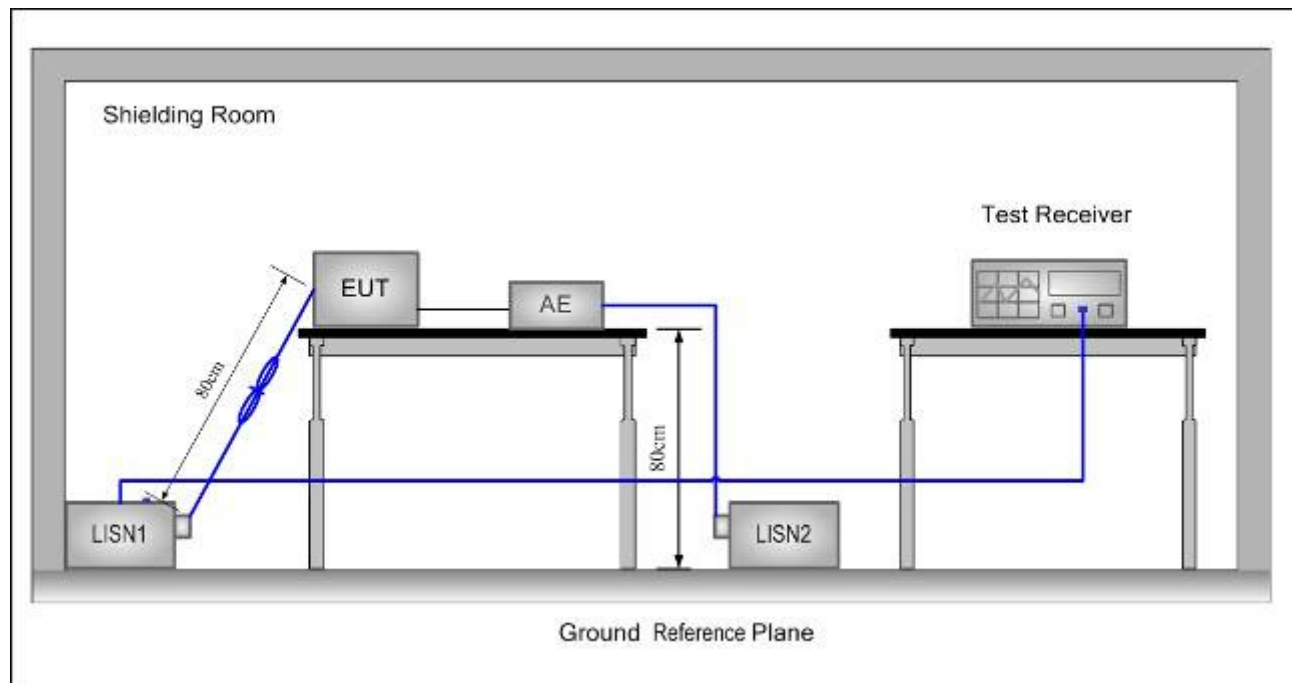


1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The Tabletop EUT was placed upon a non-metallic Table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment was at least 0,8 m from the LISN.

7.1.3 Measurement Data

DHI-NVR5232-8P-4KS2

AC power port with Live Line:


EN 55022 Table 2-Class B

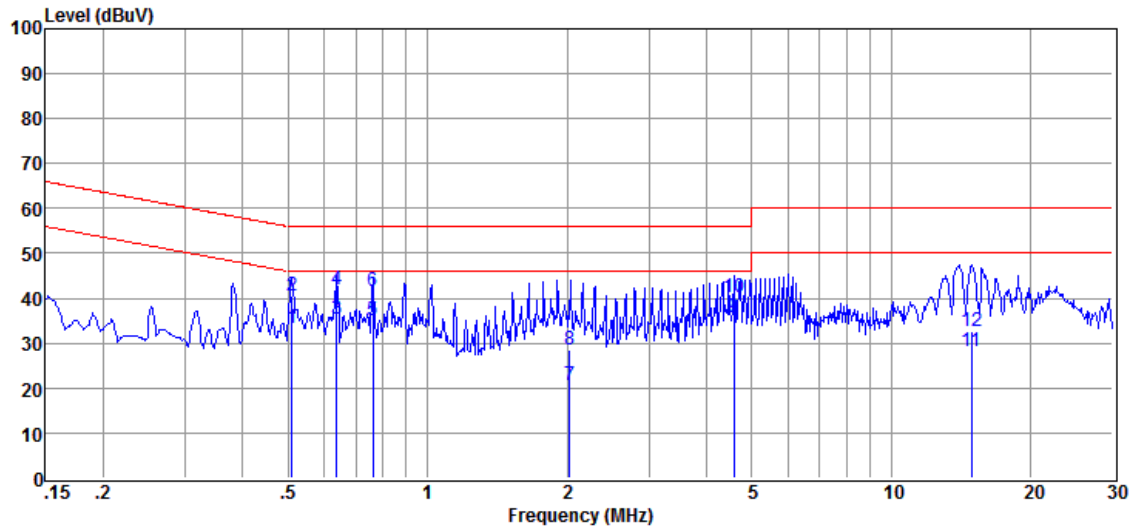

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.511	23.28	0.25	9.86	33.39	46.00	-12.61	Average
2	0.511	30.46	0.25	9.86	40.57	56.00	-15.43	QP
3	0.638	25.43	0.23	9.86	35.52	46.00	-10.48	Average
4	0.638	31.93	0.23	9.86	42.02	56.00	-13.98	QP
5	0.762	25.06	0.21	9.86	35.13	46.00	-10.87	Average
6	0.762	31.67	0.21	9.86	41.74	56.00	-14.26	QP
7	2.029	10.33	0.36	9.87	20.56	46.00	-25.44	Average
8	2.029	18.18	0.36	9.87	28.41	56.00	-27.59	QP
9	4.585	25.46	0.39	9.89	35.74	46.00	-10.26	Average
10	4.585	30.07	0.39	9.89	40.35	56.00	-15.65	QP
11	14.900	17.93	0.33	9.92	28.18	50.00	-21.82	Average
12	14.900	22.54	0.33	9.92	32.79	60.00	-27.21	QP

AC power port with Neutral Line:

EN 55022 Table 2-Class B

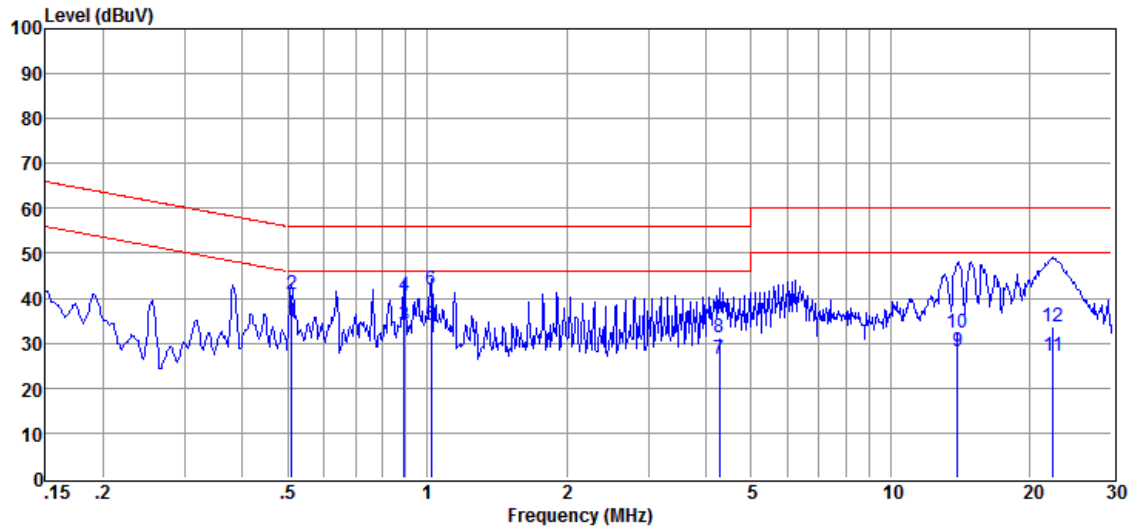


Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.510	24.41	0.29	9.86	34.56	46.00	-11.44	Average
2	0.510	30.85	0.29	9.86	41.00	56.00	-15.00	QP
3	0.893	23.96	0.22	9.87	34.05	46.00	-11.95	Average
4	0.893	30.55	0.22	9.87	40.64	56.00	-15.36	QP
5	1.019	23.92	0.25	9.87	34.04	46.00	-11.96	Average
6	1.019	31.77	0.25	9.87	41.89	56.00	-14.11	QP
7	4.280	16.06	0.52	9.89	26.47	46.00	-19.53	Average
8	4.280	20.86	0.52	9.89	31.27	56.00	-24.73	QP
9	13.956	17.91	0.38	9.91	28.20	50.00	-21.80	Average
10	13.956	21.91	0.38	9.91	32.20	60.00	-27.80	QP
11	22.441	16.88	0.46	9.97	27.31	50.00	-22.69	Average
12	22.441	23.28	0.46	9.97	33.71	60.00	-26.29	QP

DHI-NVR5232-16P-4KS2

AC power port with Live Line:


EN 55022 Table 2-Class B

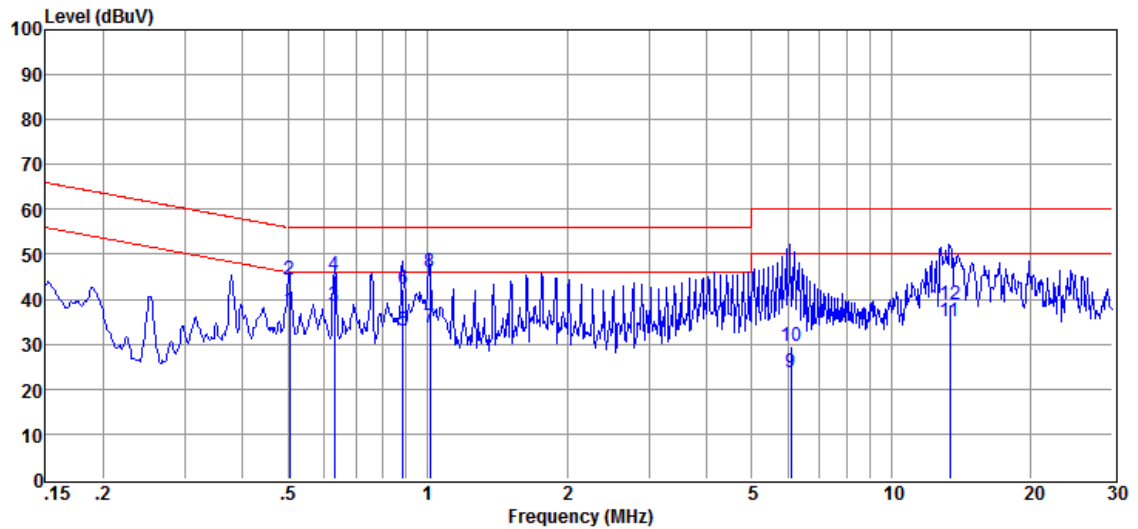

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.505	27.45	0.25	9.86	37.56	46.00	-8.44	Average
2	0.505	34.22	0.25	9.86	44.33	56.00	-11.67	QP
3	0.630	28.34	0.23	9.86	38.43	46.00	-7.57	Average
4	0.630	35.28	0.23	9.86	45.37	56.00	-10.63	QP
5	0.887	22.87	0.19	9.87	32.93	46.00	-13.07	Average
6	0.887	32.24	0.19	9.87	42.30	56.00	-13.70	QP
7	1.011	23.75	0.17	9.87	33.79	46.00	-12.21	Average
8	1.011	35.87	0.17	9.87	45.91	56.00	-10.09	QP
9	6.069	13.27	0.41	9.88	23.56	50.00	-26.44	Average
10	6.069	19.33	0.41	9.88	29.62	60.00	-30.38	QP
11	13.352	24.70	0.35	9.91	34.96	50.00	-15.04	Average
12	13.352	28.49	0.35	9.91	38.75	60.00	-21.25	QP

AC power port with Neutral Line:

EN 55022 Table 2-Class B

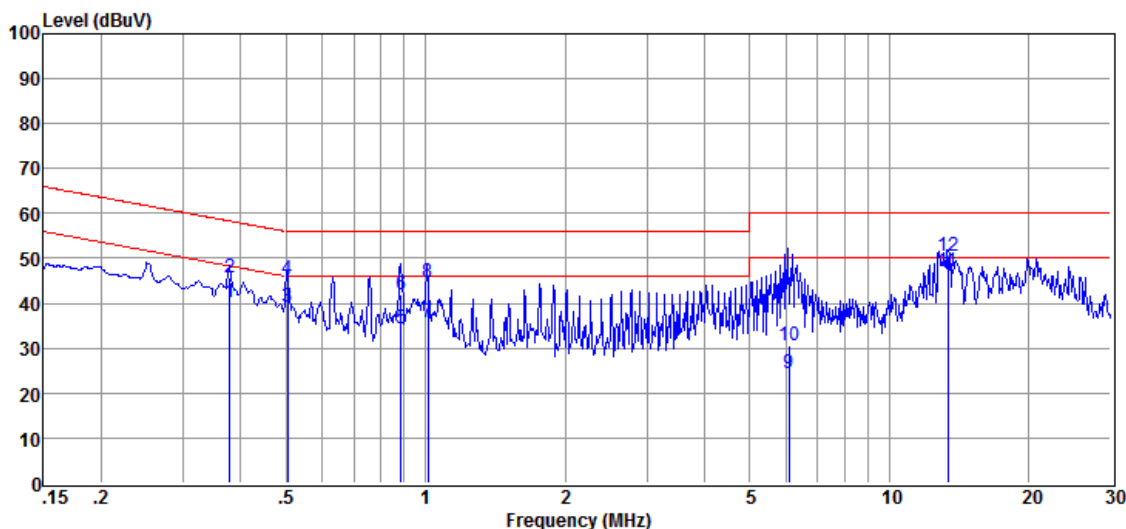

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.378	30.16	0.30	9.86	40.32	48.32	-8.00	Average
2	0.378	35.67	0.30	9.86	45.83	58.32	-12.49	QP
3	0.505	28.99	0.29	9.86	39.14	46.00	-6.86	Average
4	0.505	35.08	0.29	9.86	45.23	56.00	-10.77	QP
5	0.887	24.24	0.22	9.87	34.33	46.00	-11.67	Average
6	0.887	31.84	0.22	9.87	41.93	56.00	-14.07	QP
7	1.011	25.60	0.24	9.87	35.71	46.00	-10.29	Average
8	1.011	34.58	0.24	9.87	44.69	56.00	-11.31	QP
9	6.069	14.09	0.44	9.88	24.41	50.00	-25.59	Average
10	6.069	20.22	0.44	9.88	30.54	60.00	-29.46	QP
11	13.359	36.82	0.37	9.91	47.10	50.00	-2.90	Average
12	13.359	40.18	0.37	9.91	50.46	60.00	-9.54	QP

Level = Read Level + LISN/ISN Factor + Cable Loss

7.2 Conducted Emissions at Telecommunication ports

Test Frequency: 150 kHz to 30 MHz
 Detector: Peak for pre-scan
 Quasi-Peak and Average at frequency with maximum peak
 (9 kHz resolution bandwidth)
 Class / Limit: Table 4-Class B for EN 55022

Frequency range (MHz)	Class B Voltage limits (dB (μV))	
	Quasi-peak	Average
0.15 to 0.50	84 to 74	74 to 64
0.50 to 30	74	64

NOTE 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
 NOTE 2: The lower limit is applicable at the transition frequency.

7.2.1 E.U.T. Operation


Test mode: Monitoring mode (LAN port rate: 100M, use ratio: 10%)

Remark: Pre-tested each rate of LAN port (10M, 100M) test it since there was no worst case in this report.

Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.

7.2.2 Test Setup and Procedure

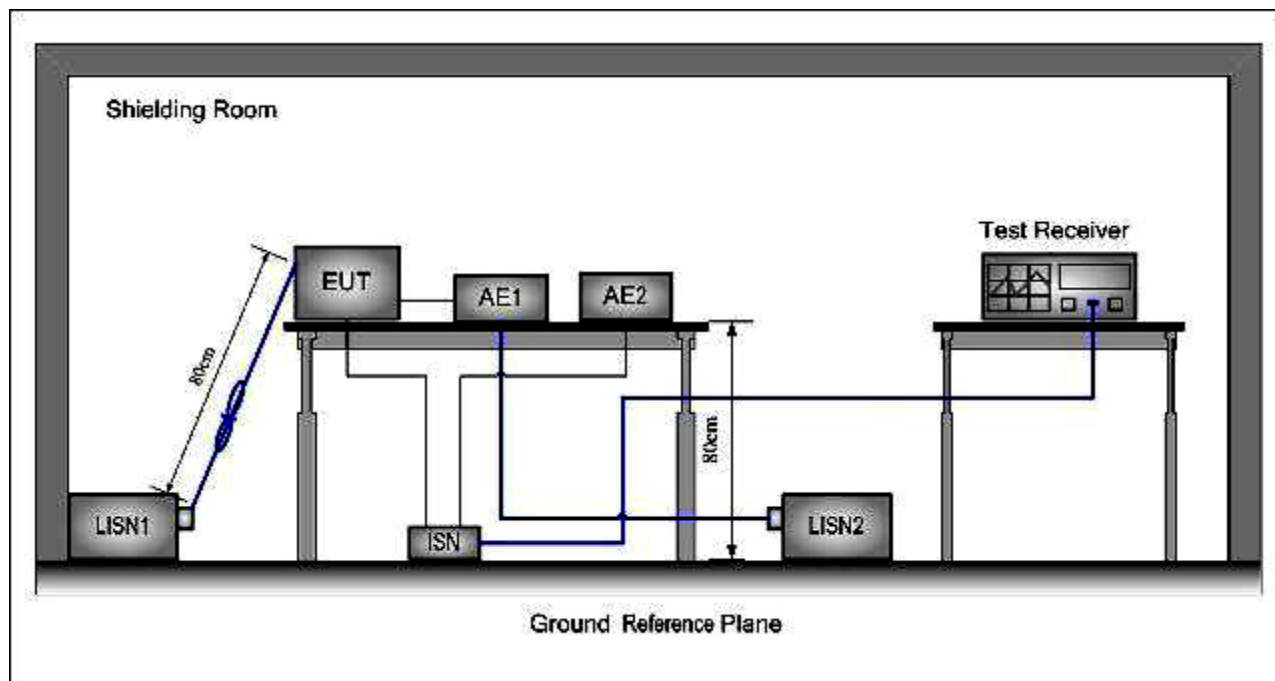


1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to nominal power supply through an LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to LISN2, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN.
5. The ISNs were used for measurements on telecom ports, they were nominally 0.8 m from the EUT and bonded to a ground reference plane. Other units of the equipment under test shall be at least 0.8 m from the ISN.

7.2.3 Measurement Data

DHI-NVR5232-8P-4KS2

LAN port:

EN 55022 table 4-Class B

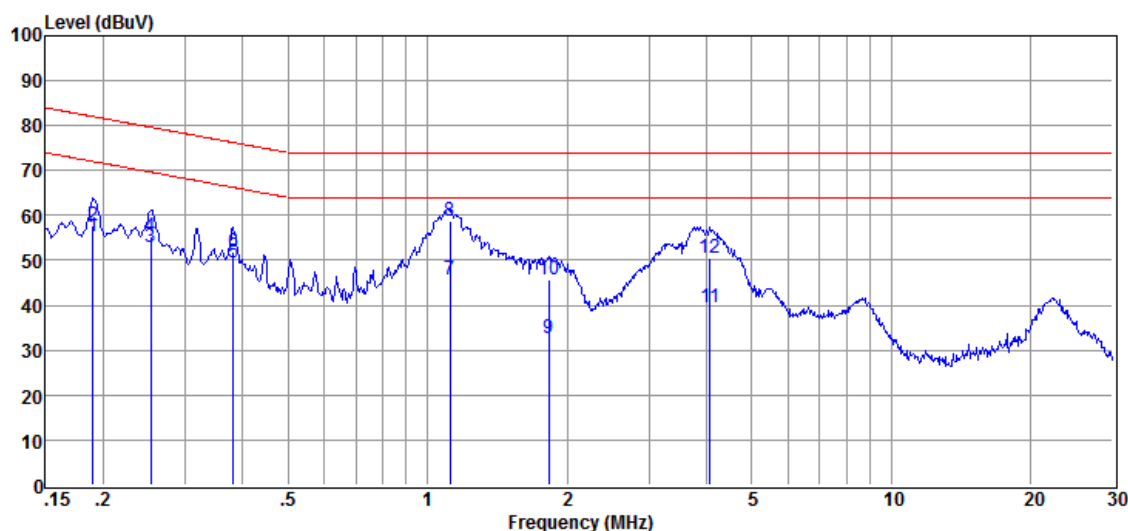


Item	Freq.	Read Level	ISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.190	35.83	9.67	9.86	55.36	72.02	-16.66	Average
2	0.190	38.32	9.67	9.86	57.85	82.02	-24.17	QP
3	0.253	33.59	9.60	9.86	53.05	69.64	-16.59	Average
4	0.253	35.72	9.60	9.86	55.18	79.64	-24.46	QP
5	0.381	30.29	9.50	9.86	49.65	66.25	-16.60	Average
6	0.381	32.55	9.50	9.86	51.91	76.25	-24.34	QP
7	1.117	26.67	9.33	9.87	45.87	64.00	-18.13	Average
8	1.117	39.66	9.33	9.87	58.86	74.00	-15.14	QP
9	1.829	13.56	9.28	9.87	32.71	64.00	-31.29	Average
10	1.829	26.43	9.28	9.87	45.58	74.00	-28.42	QP
11	4.070	20.41	9.22	9.89	39.52	64.00	-24.48	Average
12	4.070	31.32	9.22	9.89	50.43	74.00	-23.57	QP

DHI-NVR5232-16P-4KS2

LAN port:

EN 55022 table 4-Class B

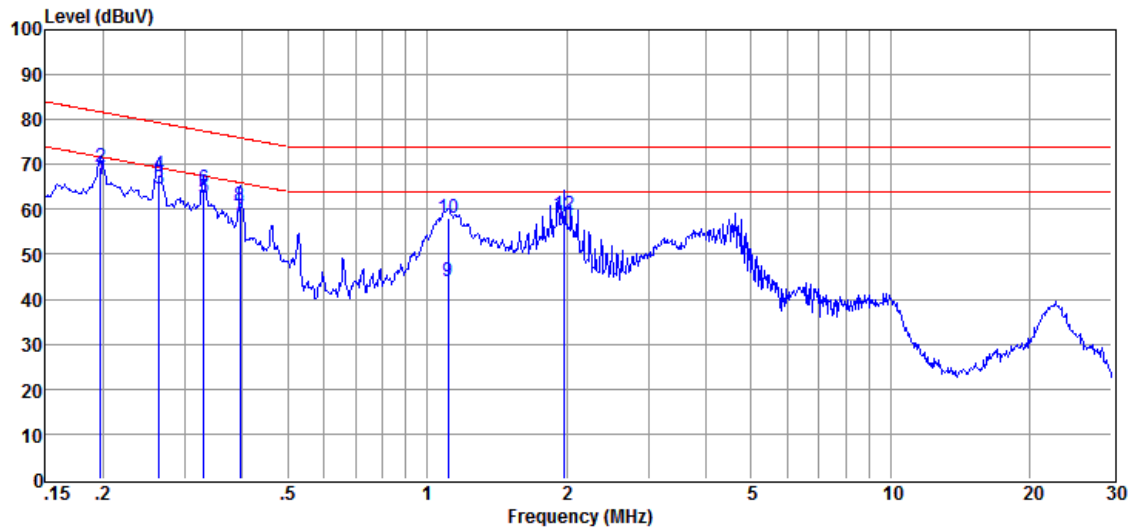

Item	Freq.	Read Level	ISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.198	47.31	9.66	9.86	66.83	71.71	-4.88	Average
2	0.198	50.04	9.66	9.86	69.56	81.71	-12.15	QP
3	0.264	45.21	9.58	9.86	64.65	69.29	-4.64	Average
4	0.264	48.19	9.58	9.86	67.63	79.29	-11.66	QP
5	0.330	43.10	9.53	9.86	62.49	67.44	-4.95	Average
6	0.330	45.29	9.53	9.86	64.68	77.44	-12.76	QP
7	0.396	38.68	9.49	9.86	58.03	65.95	-7.92	Average
8	0.396	41.52	9.49	9.86	60.87	75.95	-15.08	QP
9	1.111	24.80	9.34	9.87	44.01	64.00	-19.99	Average
10	1.111	38.84	9.34	9.87	58.05	74.00	-15.95	QP
11	1.980	37.61	9.27	9.87	56.75	64.00	-7.25	Average
12	1.980	39.61	9.27	9.87	58.75	74.00	-15.25	QP

Level = Read Level + LISN/ISN Factor + Cable Loss

7.3 Radiated Emissions, 30MHz to 1GHz

Detector: Peak for pre-scan (120 kHz resolution bandwidth)

Class / Limit: Table 6-Class B for EN 55022

For 10m

Frequency range	Quasi-peak limits (Class B)
MHz	dB (μV/m)
30 to 230	30
230 to 1000	37
At transitional frequencies the lower limit applies.	


7.3.1 E.U.T. Operation

Test mode: Monitoring mode

Pre-scan was performed with peak detected on all ports, Quasi-peak measurements was performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak test results.

7.3.2 Test Setup and Procedure

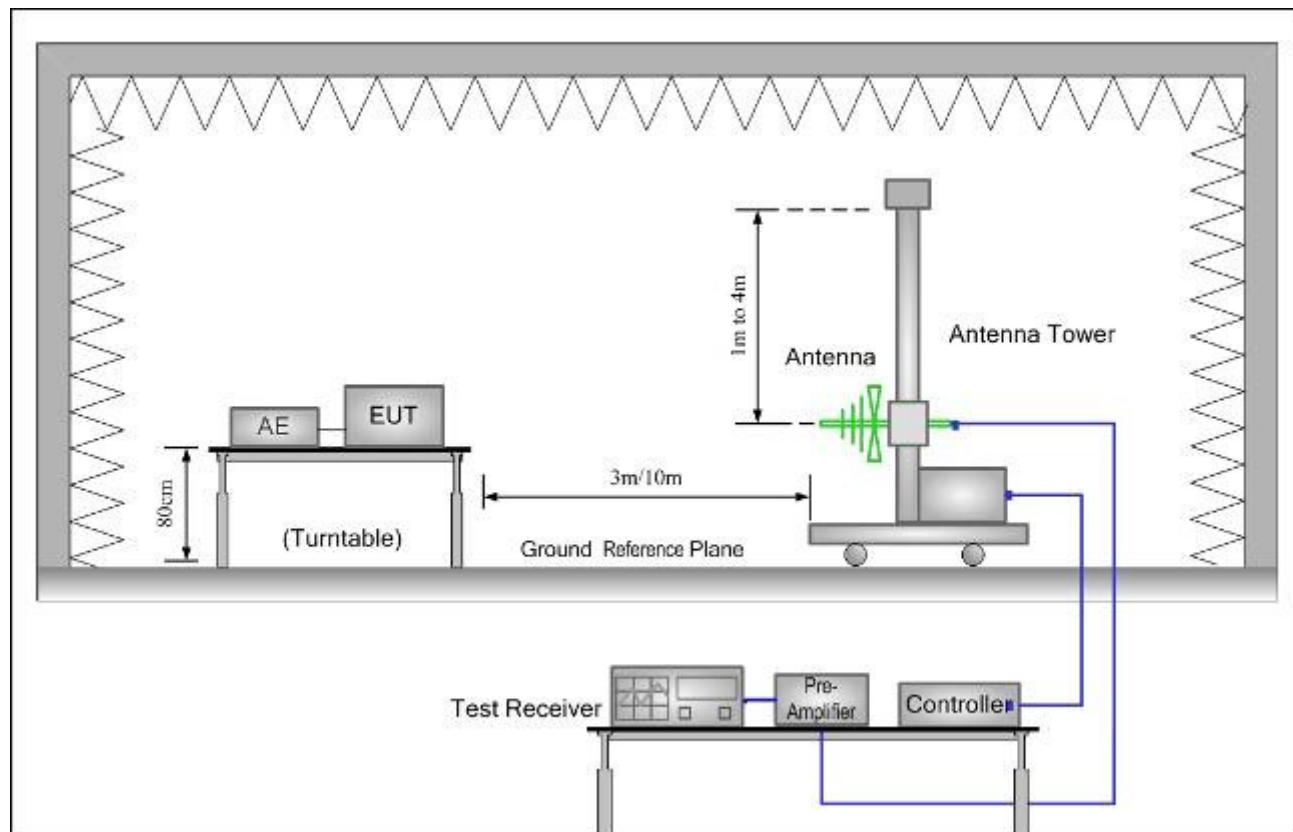


1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
3. The Tabletop EUT was placed upon a non-metallic Table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

7.3.3 Measurement Data

DHI-NVR5232-8P-4KS2

EN 55022 Table 6-Class B for 10m:


Vertical:

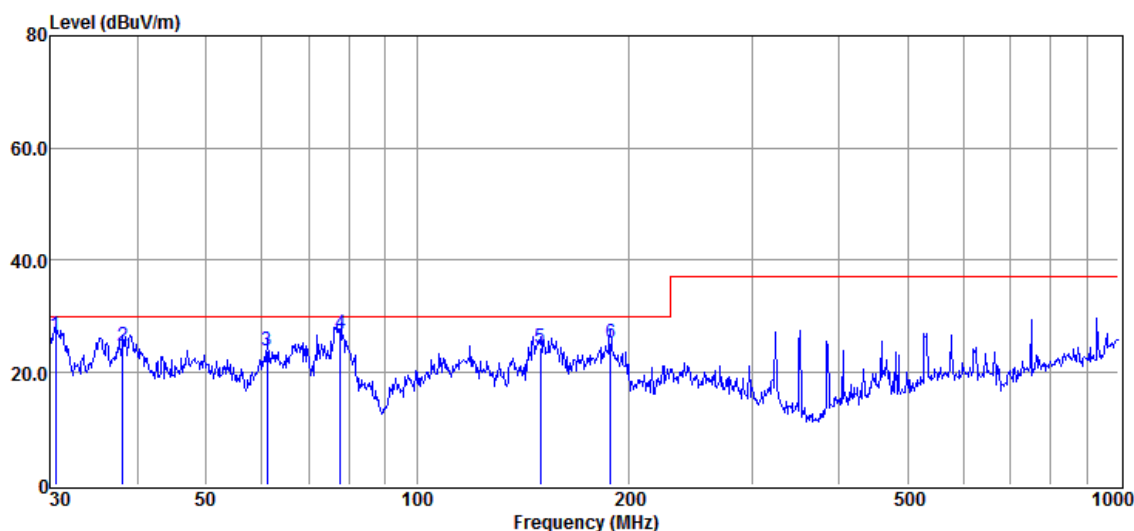

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.53	38.14	12.55	24.60	0.54	26.63	30.00	-3.37	QP
2	38.04	35.51	13.30	24.60	0.59	24.80	30.00	-5.20	QP
3	61.13	35.58	12.24	24.60	0.79	24.01	30.00	-5.99	QP
4	77.77	40.87	9.66	24.60	0.94	26.87	30.00	-3.13	QP
5	149.86	34.72	12.79	24.50	1.37	24.38	30.00	-5.62	QP
6	188.67	37.26	11.07	24.50	1.54	25.37	30.00	-4.63	QP

EN 55022 Table 6-Class B for 10m:

Horizontal:

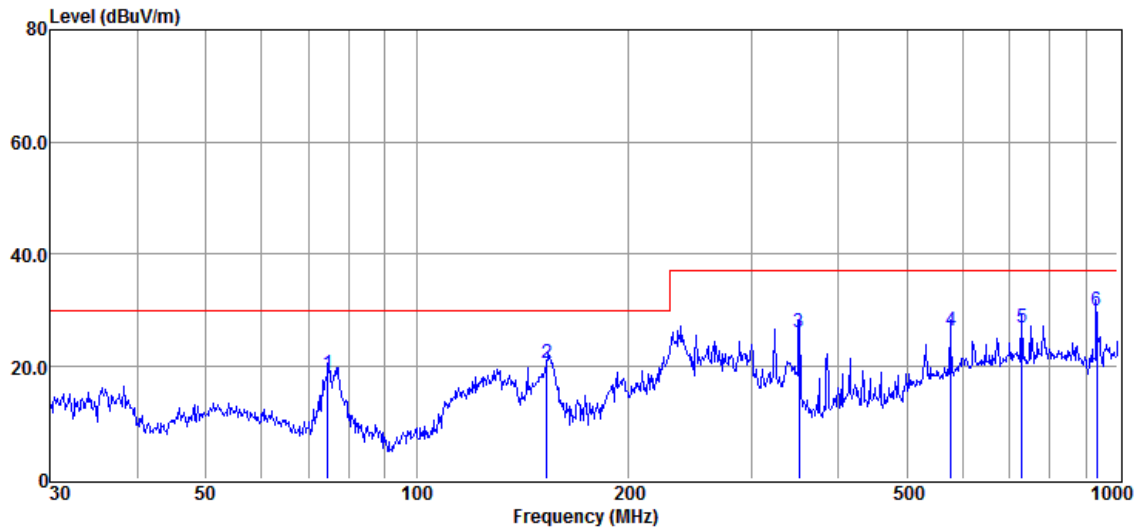


Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	74.65	31.97	10.44	24.60	0.90	18.71	30.00	-11.29	QP
2	153.28	31.09	12.57	24.50	1.38	20.54	30.00	-9.46	QP
3	350.72	35.60	12.70	24.35	2.24	26.19	37.00	-10.81	QP
4	577.92	27.37	20.24	24.13	2.96	26.44	37.00	-10.56	QP
5	730.28	26.36	21.31	24.04	3.44	27.07	37.00	-9.93	QP
6	932.53	26.55	23.40	23.92	3.95	29.98	37.00	-7.02	QP

DHI-NVR5232-16P-4KS2

EN 55022 Table 6-Class B for 10m:


Vertical:

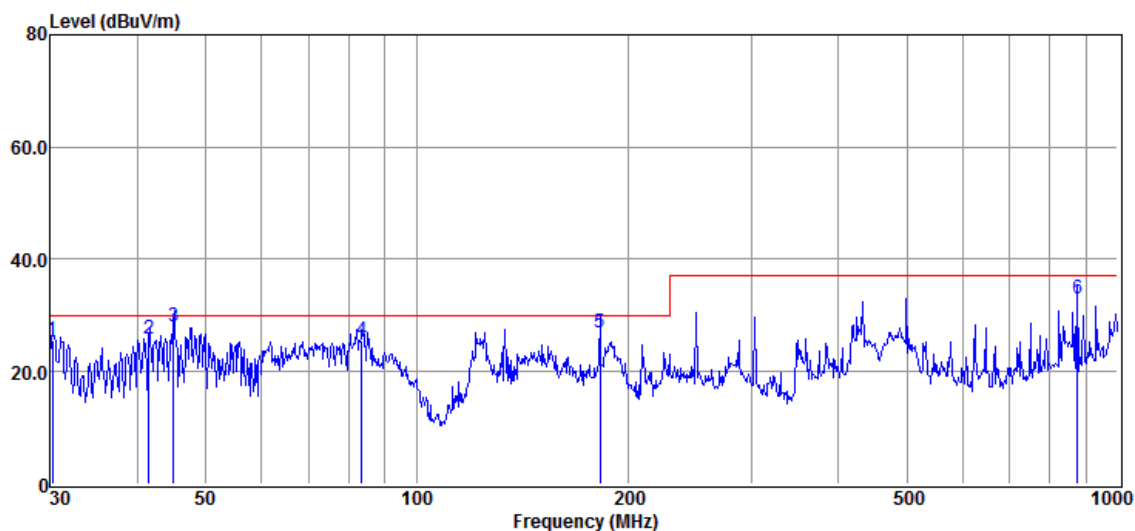

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	30.21	37.02	12.52	24.60	0.54	25.48	30.00	-4.52	QP
2	41.51	36.05	13.80	24.60	0.62	25.87	30.00	-4.13	QP
3	44.99	38.61	13.25	24.60	0.65	27.91	30.00	-2.09	QP
4	83.47	40.35	8.75	24.60	1.00	25.50	30.00	-4.50	QP
5	182.52	39.03	10.95	24.50	1.50	26.98	30.00	-3.02	QP
6	875.69	30.23	22.98	23.95	3.82	33.08	37.00	-3.92	QP

EN 55022 Table 6-Class B for 10m:

Horizontal:

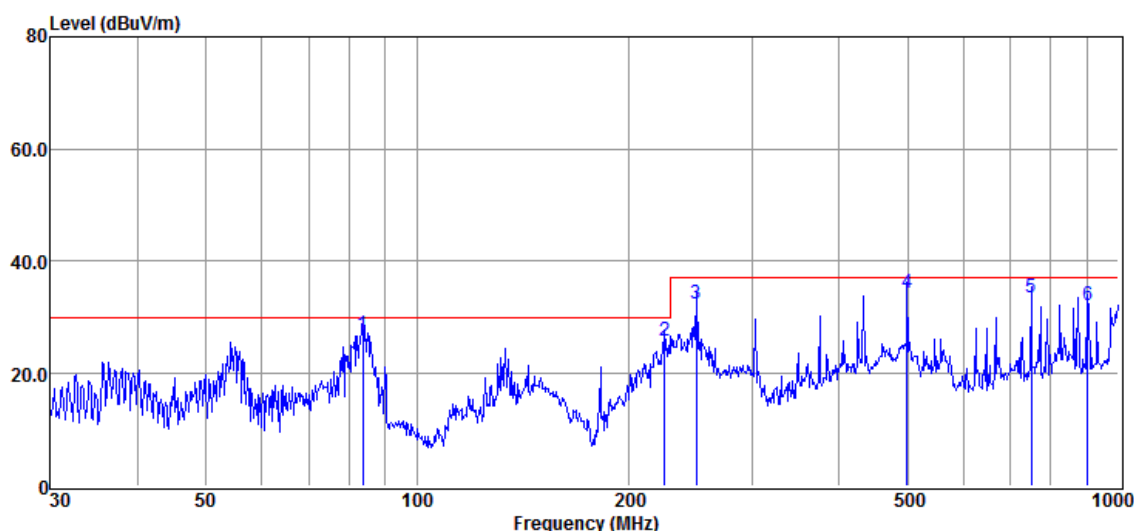

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	83.68	41.68	8.73	24.60	1.01	26.82	30.00	-3.18	QP
2	225.41	38.57	10.05	24.50	1.75	25.87	30.00	-4.13	QP
3	250.28	42.86	12.10	24.48	1.83	32.31	37.00	-4.69	QP
4	499.41	38.54	17.24	24.20	2.76	34.34	37.00	-2.66	QP
5	751.17	31.93	22.01	24.02	3.50	33.42	37.00	-3.58	QP
6	903.75	29.20	22.97	23.93	3.88	32.12	37.00	-4.88	QP

$$\text{Level} = \text{Read Level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$$

7.4 Radiated Emissions, 1GHz to 6GHz

Detector: Peak for pre-scan
Peak and Average if maximised peak within 6 dB of limit
(1 MHz resolution bandwidth)

Class / Limit: Table 8-Class B for EN 55022

Frequency range (GHz)	Class B Limits	
	Average limit (dB (μV/m))	Peak limits (dB (μV/m))
1 to 3	50	70
3 to 6	54	74
<p>At transitional frequencies the lower limit applies.</p> <p>Remark:</p> <p>The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.</p> <ol style="list-style-type: none"> 1. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. 2. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. 3. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. 4. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less. 		


7.4.1 E.U.T. Operation

Test mode: Monitoring mode

Pre-scan was performed with peak detected on all ports, Peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Peak and Average test results.

7.4.2 Test Setup and Procedure

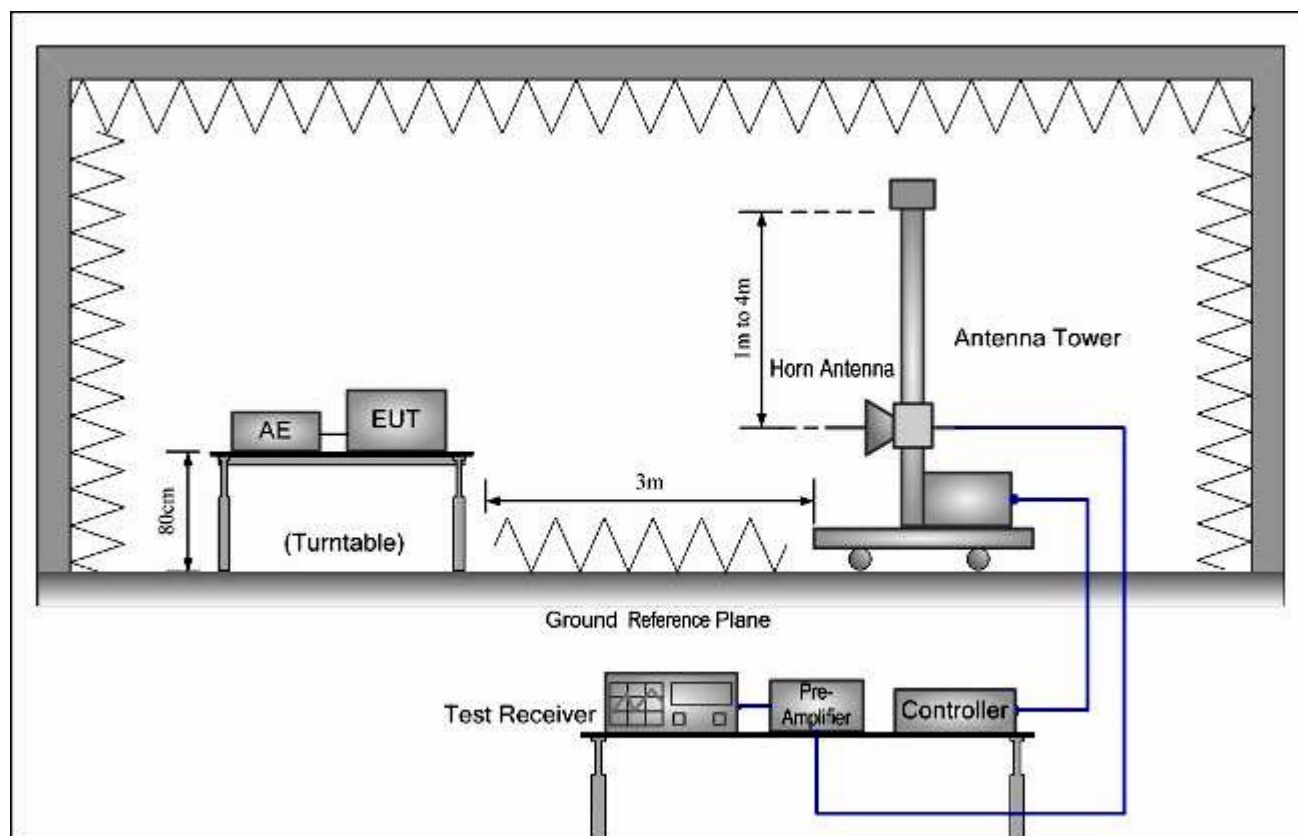


1. The radiated emissions test was conducted in a fully-anechoic chamber.
2. Horn antenna was used for the frequency above 1GHz
3. The EUT was connected to nominal power supply through a mains power outlet which was bonded to the ground reference plane; The mains cables were draped to the ground reference plane. The Tabletop EUT was placed upon a non-metallic Table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

7.4.3 Measurement Data

DHI-NVR5232-8P-4KS2

EN 55022 Table 8-Class B for 3m :


Vertical:

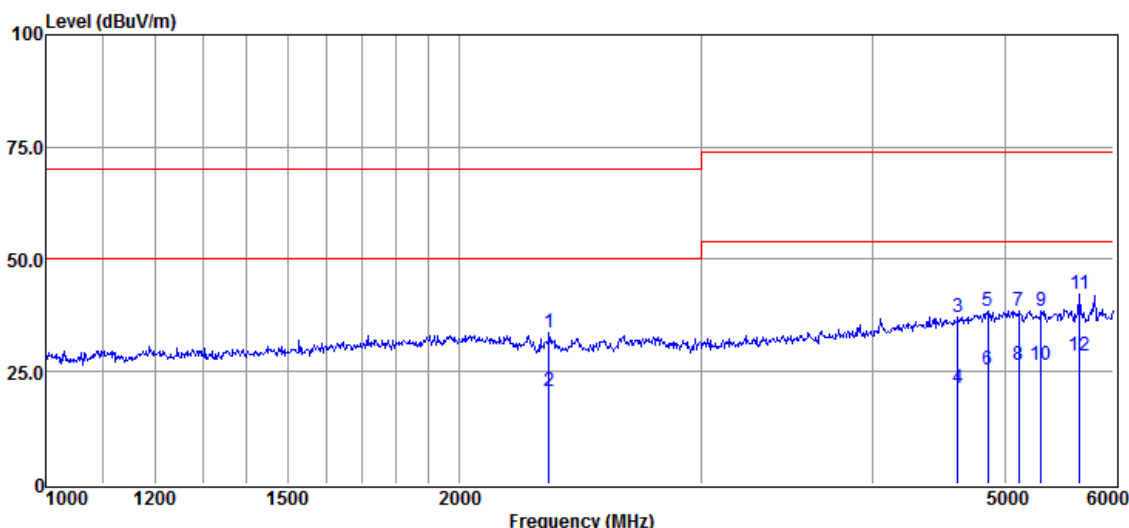

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	2325.46	39.77	27.64	41.22	7.33	33.52	70.00	-36.48	Average
2	2325.71	26.77	27.64	41.22	7.33	20.52	50.00	-29.48	Peak
3	4618.93	36.77	31.72	41.55	10.21	37.15	74.00	-36.85	Average
4	4621.35	20.74	31.74	41.55	10.22	21.15	54.00	-32.85	Peak
5	4856.57	36.96	32.16	41.68	11.06	38.50	74.00	-35.50	Average
6	4858.62	23.95	32.16	41.68	11.07	25.50	54.00	-28.50	Peak
7	5115.59	36.08	32.69	41.71	11.38	38.44	74.00	-35.56	Average
8	5117.22	24.09	32.69	41.71	11.37	26.44	54.00	-27.56	Peak
9	5311.74	36.03	33.16	41.64	11.03	38.58	74.00	-35.42	Average
10	5313.04	24.03	33.16	41.64	11.03	26.58	54.00	-27.42	Peak
11	5665.66	39.56	33.93	41.52	10.41	42.38	74.00	-31.62	Average
12	5666.31	25.56	33.93	41.52	10.41	28.38	54.00	-25.62	Peak

EN 55022 Table 8-Class B for 3m :

Horizontal:

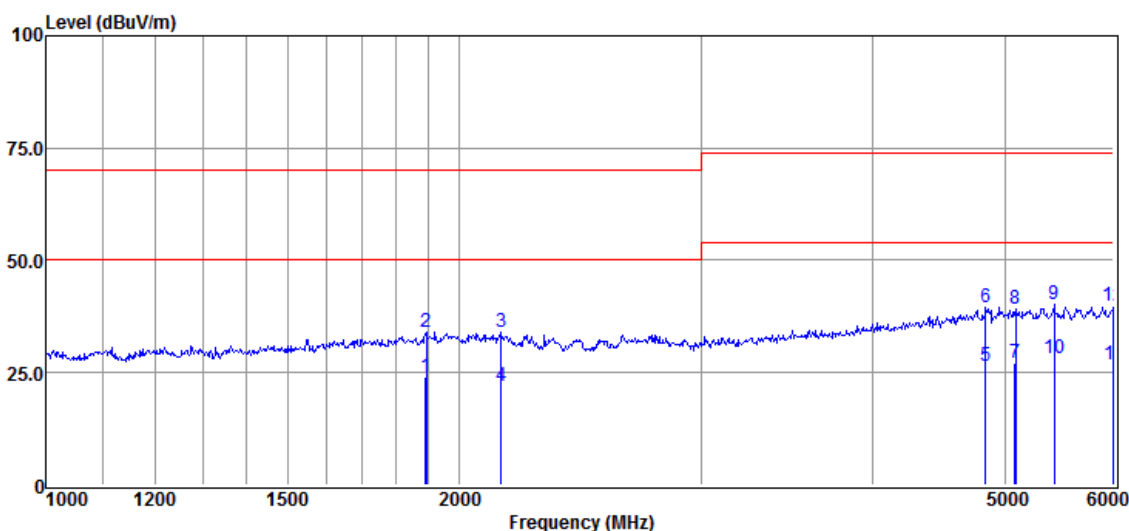


Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBUV)	(dB/m)	(dB)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
1	1890.88	31.26	26.80	40.89	6.90	24.07	50.00	-25.93	Average
2	1892.44	41.23	26.82	40.89	6.91	34.07	70.00	-35.93	Peak
3	2145.32	40.45	27.35	41.08	7.36	34.08	70.00	-35.92	Average
4	2145.49	28.45	27.35	41.08	7.36	22.08	50.00	-27.92	Peak
5	4837.86	25.12	32.11	41.66	11.00	26.57	54.00	-27.43	Average
6	4839.20	38.11	32.13	41.67	11.00	39.57	74.00	-34.43	Peak
7	5084.98	24.86	32.62	41.72	11.43	27.19	54.00	-26.81	Average
8	5088.17	36.87	32.62	41.72	11.42	39.19	74.00	-34.81	Peak
9	5427.19	37.42	33.42	41.60	10.83	40.07	74.00	-33.93	Peak
10	5431.00	25.43	33.42	41.60	10.82	28.07	54.00	-25.93	Average
11	6000.00	23.94	34.60	41.42	9.82	26.94	54.00	-27.06	Average
12	6000.00	36.94	34.60	41.42	9.82	39.94	74.00	-34.06	Peak

DHI-NVR5232-16P-4KS2

EN 55022 Table 8-Class B for 3m :


Vertical:

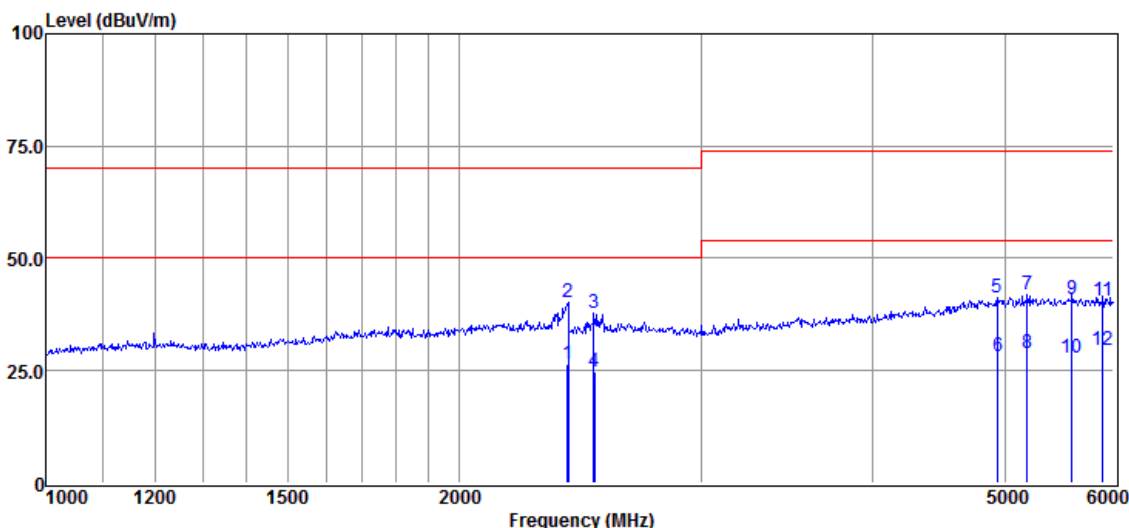

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	2399.66	32.54	27.75	41.27	7.32	26.34	50.00	-23.66	Average
2	2401.69	46.54	27.75	41.27	7.32	40.34	70.00	-29.66	Peak
3	2507.22	43.93	27.91	41.34	7.30	37.80	70.00	-32.20	Average
4	2509.26	30.93	27.91	41.34	7.30	24.80	50.00	-25.20	Peak
5	4935.52	39.30	32.28	41.71	11.35	41.22	74.00	-32.78	Average
6	4938.33	26.28	32.30	41.72	11.36	28.22	54.00	-25.78	Peak
7	5189.45	39.47	32.87	41.68	11.25	41.91	74.00	-32.09	Average
8	5191.62	26.48	32.87	41.68	11.24	28.91	54.00	-25.09	Peak
9	5595.04	37.99	33.80	41.55	10.53	40.77	74.00	-33.23	Average
10	5596.13	24.99	33.80	41.55	10.53	27.77	54.00	-26.23	Peak
11	5893.45	37.52	34.40	41.45	10.01	40.48	74.00	-33.52	Average
12	5893.67	26.52	34.40	41.45	10.01	29.48	54.00	-24.52	Peak

EN 55022 Table 8-Class B for 3m :

Horizontal:

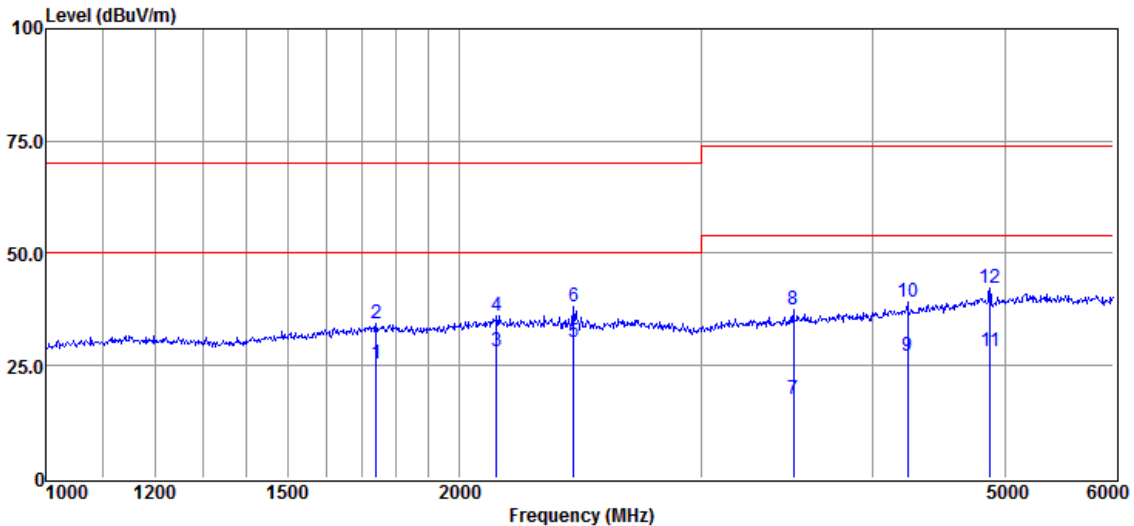

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1739.60	33.51	26.38	40.81	6.24	25.32	50.00	-24.68	Average
2	1739.60	42.51	26.38	40.81	6.24	34.32	70.00	-35.68	Peak
3	2130.00	34.53	27.33	41.07	7.36	28.15	50.00	-21.85	Average
4	2130.00	42.53	27.33	41.07	7.36	36.15	70.00	-33.85	Peak
5	2423.30	36.44	27.79	41.29	7.32	30.26	50.00	-19.74	Average
6	2423.30	44.44	27.79	41.29	7.32	38.26	70.00	-31.74	Peak
7	3505.14	21.64	28.93	41.40	8.35	17.52	54.00	-36.48	Average
8	3505.14	41.64	28.93	41.40	8.35	37.52	74.00	-36.48	Peak
9	4245.88	28.39	30.90	41.34	9.19	27.14	54.00	-26.86	Peak
10	4245.88	40.39	30.90	41.34	9.19	39.14	74.00	-34.86	Average
11	4874.00	26.69	32.18	41.68	11.13	28.32	54.00	-25.68	Average
12	4874.00	40.69	32.18	41.68	11.13	42.32	74.00	-31.68	Peak

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor

7.5 Harmonics Test Result


Measurement Time: 2.5mins

Class / Severity: Class A

7.5.1 E.U.T. Operation

Test mode: N/A

7.5.2 Test Setup and Procedure

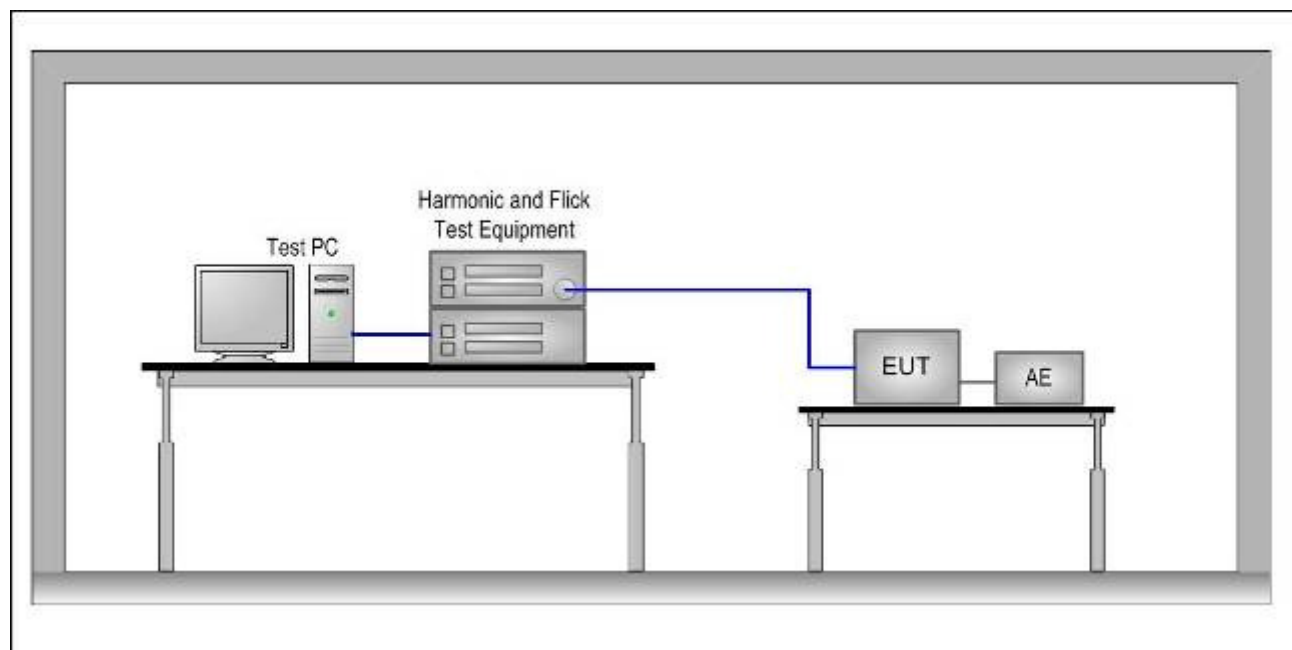

1. The EUT was tested with the equipment configured to its rated current.
2. The measurements were carried out under steady conditions. When a piece of EUT is brought into operation or is taken out of operation, manually or automatically, harmonic currents and power are not taken into account at first 10s following the switching event. EUT shall not be in standby mode for more than 10% of any observation period.
3. Harmonics of the fundamental current were measured using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system.
4. For each harmonic order, measure the 1,5 s smoothed r.m.s. harmonic current in each DFT time window and calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period. Each harmonic order, all 1.5 s smoothed r.m.s. harmonic current values and the average values for the individual harmonic currents, taken over the entire test observation period shall be less than or equal to the applicable limits.

7.5.3 Measurement Data

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2.

7.6 Flicker Test Result

Measurement Time: 120 mins
Class / Severity: Clause 5 of EN 61000-3-3

7.6.1 E.U.T. Operation


Test mode: Monitoring mode

Note: "Pst and Plt requirements shall not be applied to voltage changes caused by manual switching.

The limits shall not be applied to voltage changes associated with emergency switching or emergency interruptions."

Please also refer to Annex A (Application of limits and type test conditions) for details in EN 61000-3-3.

7.6.2 Test Setup and Procedure

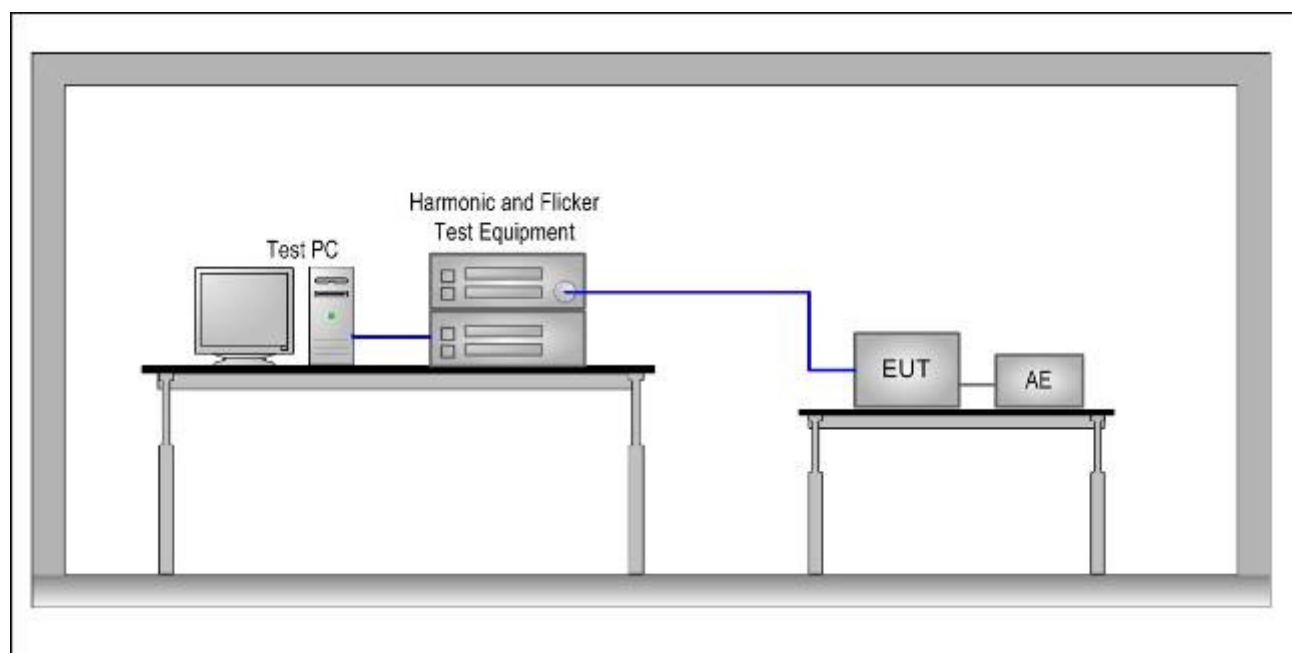

1. The test supply voltage (open-circuit voltage) was the rated voltage of the EUT. The Test voltage: was maintained within $\pm 2\%$ of the nominal value. The frequency was $50\text{ Hz} \pm 0.5\%$.
2. The voltage fluctuations and flicker were measured at the supply terminals of the EUT.
3. The observation period, T_p , for the assessment of flicker values by flicker measurement, flicker simulation, or analytical method was:
 - for Pst, $T_p = 10\text{ min}$;
 - for Plt, $T_p = 2\text{ h}$.

The observation period included that part of the whole operation cycle in which the EUT produces the most unfavorable sequence of voltage changes.

7.6.3 Measurement Data

DHI-NVR5232-8P-4KS2

Maximum Flicker results

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.136	7.00	PASS
Tmax [s]	0.000	0.50	PASS

DHI-NVR5232-16P-4KS2

Maximum Flicker results

	EUT values	Limit	Result
Pst	0.065	1.00	PASS
Plt	0.065	0.65	PASS
dc [%]	0.009	3.30	PASS
dmax [%]	0.252	7.00	PASS
Tmax [s]	0.000	0.50	PASS

8 Electromagnetic Susceptibility Test Results


8.1 Performance Criteria Description in Clause 7 of EN 55024

Criterion A:	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B:	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C:	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

8.2 ESD

Discharge Voltage:	Air Discharge:	± 2 kV, ± 4 kV, ± 8 kV
	Contact Discharge:	± 4 kV, ± 6 kV
	HCP/VCP:	± 6 kV
Polarity:	Positive & Negative	
Number of Discharge:	Minimum 10 times at each test point for Air Discharge; Minimum 50 times at each test point for Contact or VCP & HCP Discharge.	
Discharge Mode:	Single Discharge	
Discharge Period:	1 second minimum	
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. (for 50130-4:2011+A1:2014)	

8.2.1 Test Setup and Procedure

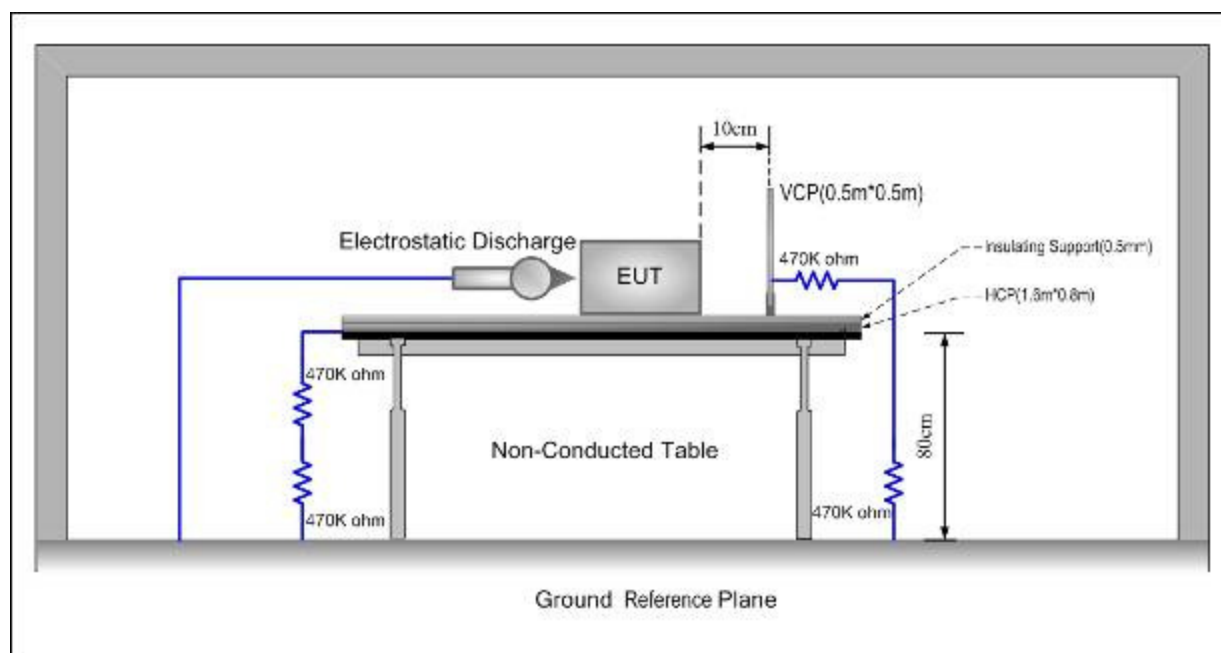

1. Contact discharge was applied only to conductive surfaces of the EUT. Air discharge was applied only to non-conducted surfaces of the EUT.
2. The EUT was put on a 0.8m high wooden Table for Table-top equipment or 0.1m high for floor standing equipment standing on the ground reference plane (GRP).
3. A horizontal coupling plane(HCP) 1.6m by 0.8m in size was placed on the Table, and the EUT with its cables were isolated from the HCP by an insulating support thick than 0.5mm. The VCP 0.5m by 0.5m in size while HCP were constructed from the same material type and thickness as that of the GRP, and connected to the GRP via a 470kΩ resistor at each end. The distance between EUT and any of the other metallic surface excepted the GRP, HCP and VCP was greater than 0.8m.
4. During the contact discharges, the tip of the discharge electrode was touch the EUT before the discharge

switch is operated. During the air discharges, the round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.

5. After each discharge, the ESD generator was removed from the EUT, the generator is then retriggered for a new single discharge. For ungrounded product, a discharge cable with two resistances were used after each discharge to remove remnant electrostatic voltage. A minimum 50 times discharges at each point of each polarity single discharge were applied to HCP and VCP.

8.2.2 Test Results

For EN 55024:2010

Direct Application Test Results

- Observations: Test Point:
1. All insulated enclosure & seams.
 2. All accessible metal parts of the enclosure.

Direct Application		Test Results			
Discharge Level (kV)	Polarity (+/-)	Test Point	Test Mode	Contact Discharge	Air Discharge
2,4,8	+/-	1	Monitoring mode	N/A	A
4	+/-	2		A	N/A

Indirect Application Test Results

- Observations: Test Point:
1. All sides.

Indirect Application		Test Results			
Discharge Level (kV)	Polarity (+/-)	Test Point	Test Mode	Horizontal Coupling	Vertical Coupling
4	+/-	1	Monitoring mode	A	A

Results:

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

N/A: Not applicable (floor mounted EUT or not requested by Standard).

For 50130-4:2011+A1:2014

Direct Application Test Results

Observations:

Test Point:

1. All insulated enclosure & seams.
2. All accessible metal parts of the enclosure.

Direct Application		Test Results			
Discharge Level (kV)	Polarity (+/-)	Test Point	Test Mode	Contact Discharge	Air Discharge
2,4,8	+/-	1	Monitoring mode	N/A	Pass
6	+/-	2		Pass	N/A

Indirect Application Test Results

Observations:

Test Point:

1. All sides.

Indirect Application		Test Results			
Discharge Level (kV)	Polarity (+/-)	Test Point	Test Mode	Horizontal Coupling	Vertical Coupling
6	+/-	1	Monitoring mode	Pass	Pass

Results: Pass

Test phenomenon description for the EUT:


1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period to detect no any change in status, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

N/A: Not applicable (not required in the standard or floor mounted the EUT)

8.3 Radiated Immunity

Frequency Range:	80 MHz to 1 GHz (For EN 55024:2010) 80 MHz to 2.7 GHz (For EN 50130-4:2011+A1:2014)
Antenna Polarization:	Horizontal & Vertical (For EN 55024:2010)
Test level:	3.0 V/m on enclosure (For EN 55024:2010) 10 V/m on enclosure (For EN 50130-4:2011+A1:2014)
Modulation:	80%, 1 kHz Amplitude Modulation (For EN 55024:2010) 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation (For EN 50130-4:2011+A1:2014)
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m. (For EN 50130-4:2011+A1:2014)

8.3.1 Test Setup and Procedure

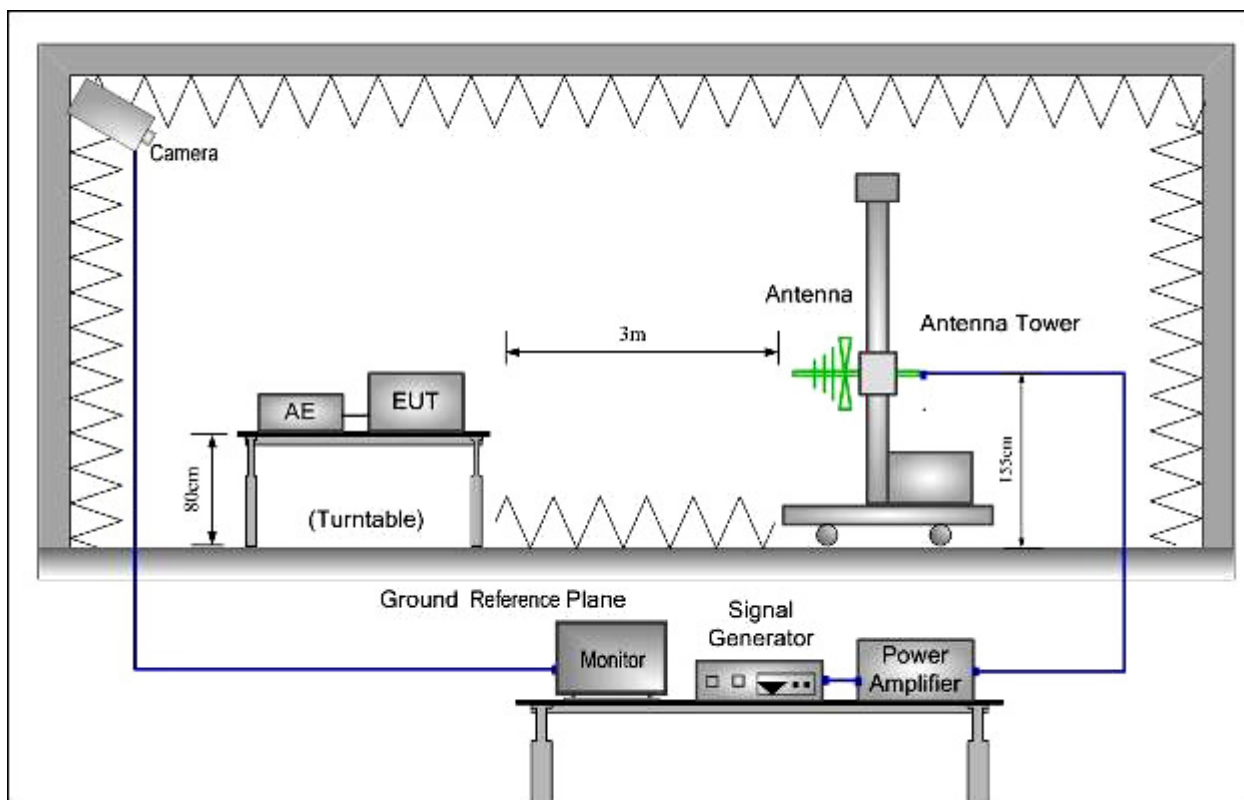

1. For Table-top equipment, the EUT was placed in the chamber on a non-conductive Table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as Table top items.
2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.
3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area).
4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Here the frequency range was swept incrementally, the step size was not exceed 1% of the preceding frequency value.
5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5 s.
6. The test normally was performed with the generating antenna facing each side of the EUT.
7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.
8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.

8.3.2 Test Results

For EN 55024:2010

Frequency	Level	Modulation	Dwell Time	Test Mode	Antenna Polarization	EUT Face	Result / Observations
80 MHz-1 GHz	3.0 V/m	1 kHz, 80% Amp. Mod, 1 % increment	3s	Monitoring mode	V	Front	A
					H		A
					V	Rear	A
					H		A
					V	Left	A
					H		A
					V	Right	A
					H		A
					V	Top	A
					H		A
					V	Bottom	A
					H		A

Remarks:

Front: the front of the EUT faces to transmitting antenna (refer to Radiated Immunity test setup photo)

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

N/A: Not applicable.

The EUT does meet the Radiated Immunity requirements of Standard.

For 50130-4:2011+A1:2014

Frequency	Level	Modulation	Test Mode	Dwell Time	Antenna Polarization	EUT Face	Result / Observations
80 MHz-2.7 GHz	10 V/m	(80%, 1kHz, A.M.)&(0.5s ON 0.5s OFF P.M.)	Monitoring mode	3s	V	Front	Pass
					H		Pass
					V	Rear	Pass
					H		Pass
					V	Left	Pass
					H		Pass
					V	Right	Pass
					H		Pass
					V	Top	Pass
					H		Pass
					V	Bottom	Pass
					H		Pass

Test phenomenon description for the EUT:


1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8.4 Electrical Fast Transients (EFT)


Test Level:	For EN 55024:2010 1.0kV on AC port 0.5 kV on Signal port For 50130-4:2011+A1:2014 ± 2.0 kV on AC port ± 1.0 kV on Signal ports
Polarity:	Positive & Negative
Repetition Frequency:	5kHz For EN 55024:2010, 100KHz For EN 50130-4:2011+A1:2014
Burst Duration:	300ms
Test Duration:	1 minute per level & polarity
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. (For EN 50130-4:2011+A1:2014)

8.4.1 Test Setup and Procedure

For AC port:

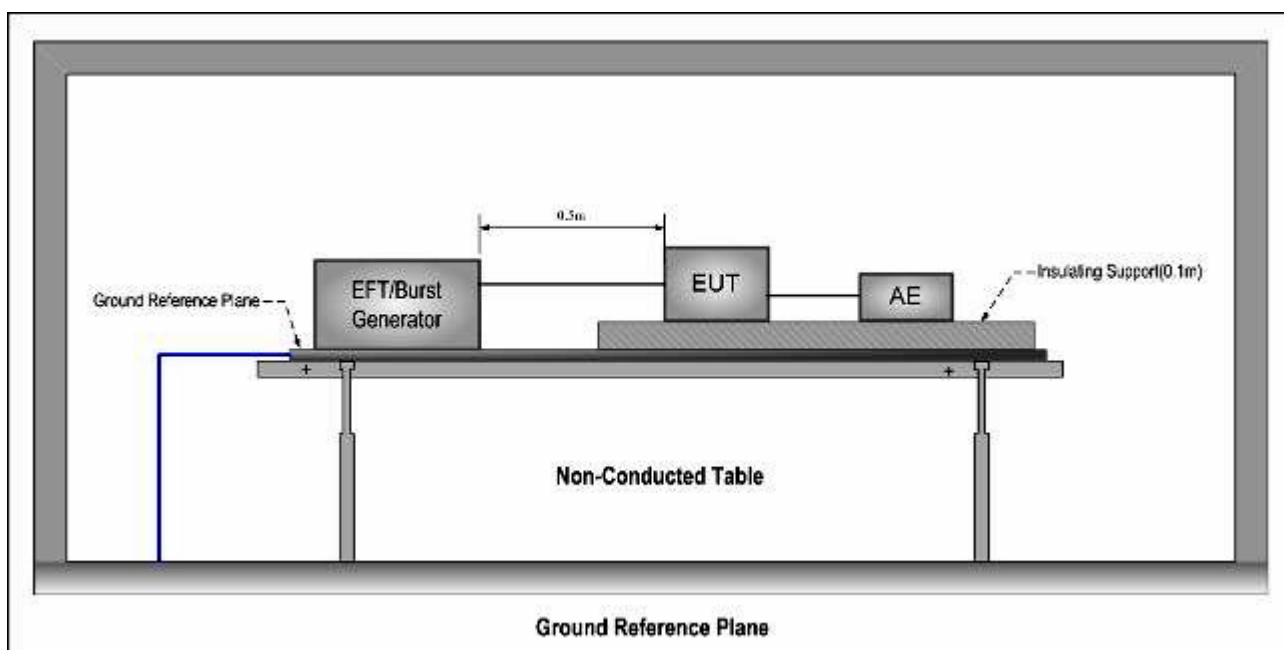

For signal port

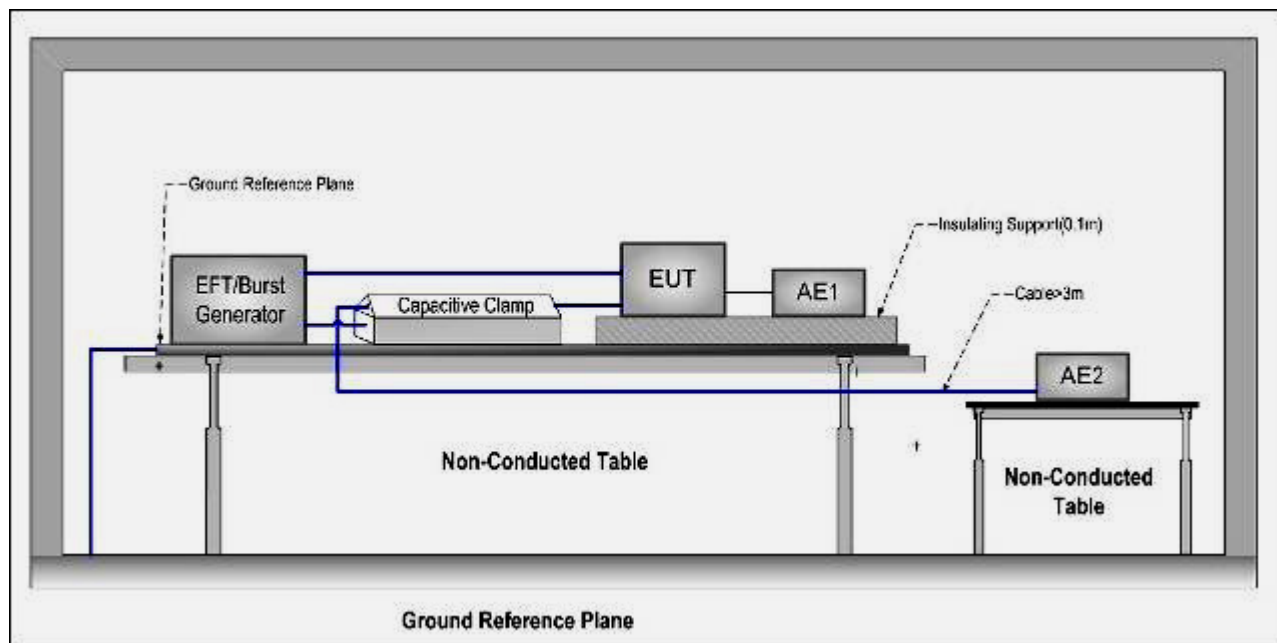

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden Table for Table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The GRP shall project beyond the EUT and the clamp by at least 0.1m on all sides. The distance between the EUT and any other of the metallic surface except the GRP was greater than 0.5m. All cables to the EUT were placed on the insulation support 0.1m above GRP. Cables not subject to EFT were routed as far as possible from cable under test to minimize the coupling between the cables.
3. The length of signal and power cable between the EUT and EFT generator was 0.5m. If the cable is a non-detachable supply cable more than 0.5m, the excess length of this cable shall be folded to avoid a flat coil and situated at a distance of 0.1m above the GRP.
4. The EUT was conducted the below specified level voltage test for line to neutral or line to neutral to earth (for clamp coupling is for the signal line), 120 seconds duration.
5. If the equipment contains identical ports, only one was tested; multiconductor cables, such as a 50-pair telecommunication cable, were tested as a single cable. Cables did not be split or divided into groups of conductors for this test; interface ports, which were intended by the manufacturer to be connected to data cables not longer than 3 m, did not be tested.

8.4.2 Test Results

For EN 55024:2010

AC port

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Test mode	Observations (Performance Criterion)
Live + Neutral + Earth	± 1.0	Direct	Monitoring mode	(A)

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

Signal port

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Test mode	Observations (Performance Criterion)
Signal cable (LAN port, Alarm port)	± 0.5	Clamp	Monitoring mode	(A)

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

For EN 50130-4:2011+A1:2014

AC port

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Test mode	Observations (Performance Criterion)
Live + Neutral + Earth	± 2.0	Direct	Monitoring mode	Pass

Signal ports

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Test mode	Observations (Performance Criterion)
Signal cable (LAN port, Alarm port)	± 1.0	Clamp	Monitoring mode	Pass

Test phenomenon description for the EUT:


1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8.5 Slow high energy voltage surge


Test Level:	For EN 55024:2010 ±1.0kV Line to Neutral ±2.0kV Line to Earth or Neutral to Earth ± 1.0 kV Line to Ground For EN 50130-4:2011+A1:2014 ±0.5, ±1.0kV Line to Line ±0.5, ±1.0, ±2.0kV Line to PE ±0.5, ±1.0kV Signal ports
Polarity:	Positive & Negative
Generator source impedance:	2 Ω on Line to Line, 12Ω for Line to Earth 42 Ω on Signal ports
Trigger Mode:	Internal
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270° for AC Mains, 5 positive, 5 negative for Signal ports.
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. (For 50130-4:2011+A1:2014)

8.5.1 Test Setup and Procedure

AC port

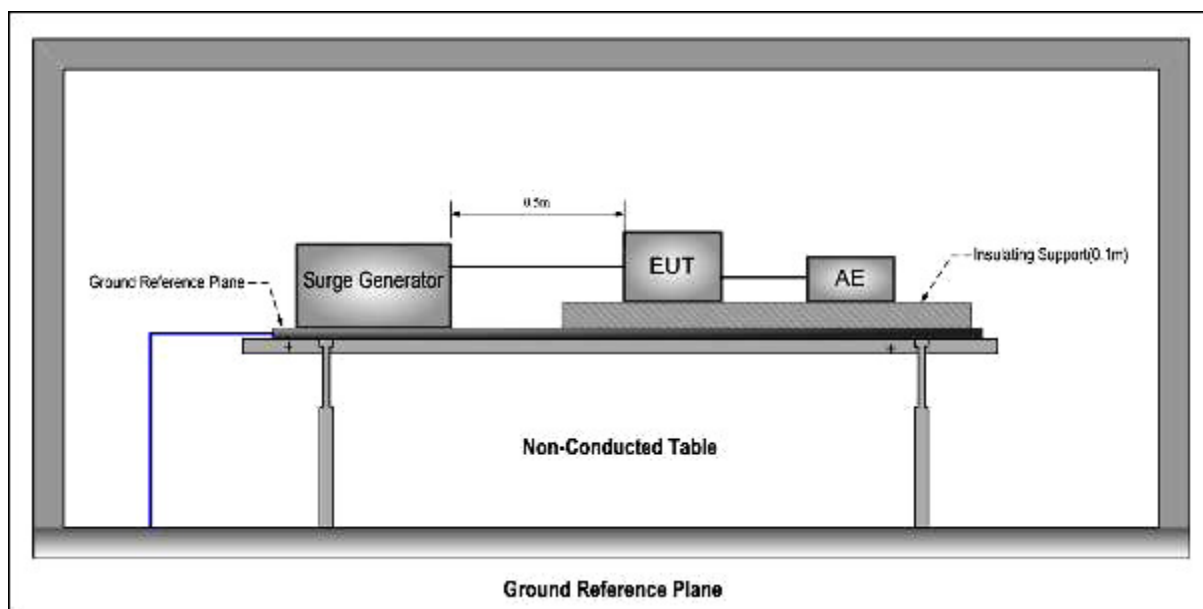

Signal port

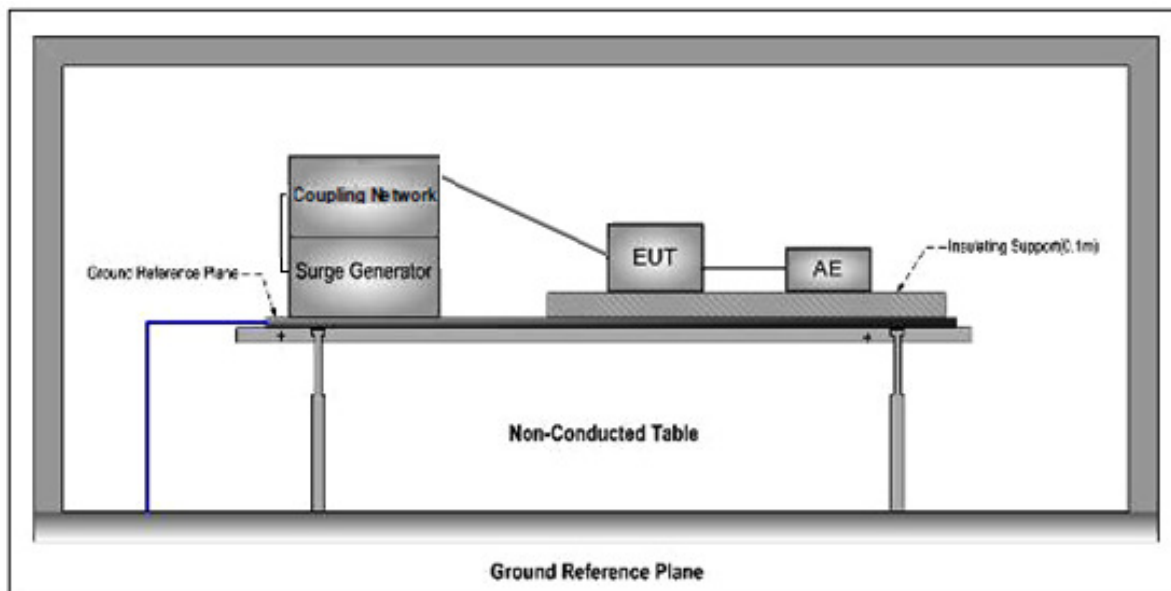

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden Table for Table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The 1,2/50 μ s surge was to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks were required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave so that the specified wave may be applied on the lines under test.
3. The power cord between the EUT and the coupling/decoupling network was not exceeding 2 m in length. The interconnection line between the EUT and the coupling/ decoupling network shall not exceed 2 m in length.
4. The EUT was conducted 0.5kV and 1kV test voltage for live to neutral and line to neutral and conducted 0.5kV, 1kV and 2kV test voltage for line to earth and neutral to earth, five positive pulses and five negative pulses each at 0°, 90°, 180° and 270° for a.c. power ports and five positive pulses and five negative surge pulses for d.c. power ports. The test levels were applied on the EUT with a 2 Ω generator source impedance for power supply terminals and 40 Ω output impedance for interconnection lines. The tests were done at repetition rate one per minute.

8.5.2 Test Results:

For EN 55024:2010

AC port

Pulse No	Line-Line	Level (kV)	Surge Interval	Phase (deg)	Test Mode	Observation (Performance Criterion)
1-5	L-N	+ 1.0	60 s	0°	Monitoring mode	(A)
6-10	L-N	- 1.0	60 s	0°		(A)
11-15	L-N	+ 1.0	60 s	90°		(A)
16-20	L-N	- 1.0	60 s	90°		(A)
21-25	L-N	+ 1.0	60 s	180°		(A)
26-30	L-N	- 1.0	60 s	180°		(A)
31-35	L-N	+ 1.0	60 s	270°		(A)
36-40	L-N	- 1.0	60 s	270°		(A)
41-45	L-PE	+ 2.0	60 s	0°		(A)
46-50	L-PE	- 2.0	60 s	0°		(A)
51-55	L-PE	+ 2.0	60 s	90°		(A)
56-60	L-PE	- 2.0	60 s	90°		(A)
61-65	L-PE	+ 2.0	60 s	180°		(A)
66-70	L-PE	- 2.0	60 s	180°		(A)
71-75	L-PE	+ 2.0	60 s	270°		(A)
76-80	L-PE	- 2.0	60 s	270°		(A)
81-85	N-PE	+ 2.0	60 s	0°		(A)
86-90	N-PE	- 2.0	60 s	0°		(A)
91-95	N-PE	+ 2.0	60 s	90°		(A)
96-100	N-PE	- 2.0	60 s	90°		(A)
101-105	N-PE	+ 2.0	60 s	180°		(A)
106-110	N-PE	- 2.0	60 s	180°		(A)
111-115	N-PE	+ 2.0	60 s	270°		(A)
116-120	N-PE	- 2.0	60 s	270°		(A)

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

Signal port

Pulse No	Line under test	Matching resistor	Level (kV)	Surge Interval	Test Mode	Observation (Performance Criterion)
1-5	Line-Ground (LAN port, Alarm port)	42 ohm	+1.0	60s	Monitoring mode	(A)
6-10	Line-Ground (LAN port, Alarm port)	42 ohm	-1.0	60s		(A)

Remarks:

A: No degradation in the performance of the E.U.T. was observed.

The EUT does meet the Surge immunity on telecommunication requirements of Standard.

For 50130-4:2011+A1:2014

AC port:

Pulse No	Line-Line	Level (kV)	Surge Interval	Phase (deg)	Test Mode	Observation (Performance Criterion)
1-10	L-N	+0.5, 1.0	60 s	0°	Monitoring mode	Pass
11-20	L-N	-0.5, 1.0	60 s	0°		Pass
21-30	L-N	+0.5, 1.0	60 s	90°		Pass
31-40	L-N	-0.5, 1.0	60 s	90°		Pass
41-50	L-N	+0.5, 1.0	60 s	180°		Pass
51-60	L-N	-0.5, 1.0	60 s	180°		Pass
61-70	L-N	+0.5, 1.0	60 s	270°		Pass
71-80	L-N	-0.5, 1.0	60 s	270°		Pass
81-95	L-PE	+0.5, 1.0, 2.0	60 s	0°		Pass
96-110	L-PE	-0.5, 1.0, 2.0	60 s	0°		Pass
111-125	L-PE	+0.5, 1.0, 2.0	60 s	90°		Pass
126-140	L-PE	-0.5, 1.0, 2.0	60 s	90°		Pass
141-155	L-PE	+0.5, 1.0, 2.0	60 s	180°		Pass
156-170	L-PE	-0.5, 1.0, 2.0	60 s	180°		Pass
171-185	L-PE	+0.5, 1.0, 2.0	60 s	270°		Pass
186-200	L-PE	-0.5, 1.0, 2.0	60 s	270°		Pass
201-215	N-PE	+0.5, 1.0, 2.0	60 s	0°		Pass
216-230	N-PE	-0.5, 1.0, 2.0	60 s	0°		Pass
231-245	N-PE	+0.5, 1.0, 2.0	60 s	90°		Pass
246-260	N-PE	-0.5, 1.0, 2.0	60 s	90°		Pass
261-275	N-PE	+0.5, 1.0, 2.0	60 s	180°		Pass
306-320	N-PE	-0.5, 1.0, 2.0	60 s	180°		Pass
321-335	N-PE	+0.5, 1.0, 2.0	60 s	270°		Pass
336-350	N-PE	-0.5, 1.0, 2.0	60 s	270°		Pass

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

Signal port:

Pulse No	Line under test	Matching resistor	Level (kV)	Surge Interval	Test Mode	Observation (Performance Criterion)
1-10	Line-Ground (LAN port, Alarm port)	42 ohm	-0.5, -1.0	60s	Monitoring mode	Pass
11-20	Line-Ground (LAN port, Alarm port)	42 ohm	+0.5, 1.0	60s		Pass

Test phenomenon description for the EUT:


1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8.6 Conducted Immunity


Frequency Range:	For EN 55024:2010 0.15 MHz to 80 MHz For 50130-4:2011+A1:2014 0.15 MHz to 100 MHz
Test level:	For EN 55024:2010 3.0V r.m.s on AC Ports (unmodulated emf into 150 Ω) & 3.0V r.m.s on Signal Ports (unmodulated emf into 150 Ω) For 50130-4:2011+A1:2014 10V r.m.s on AC Ports (unmodulated emf into 150 Ω) & 10V r.m.s on Signal Ports (unmodulated emf into 150 Ω)
Modulation:	80%, 1kHz Amplitude Modulation For EN 55024:2010 80%, 1kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation For 50130-4:2011+A1:2014
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at $U_0 = 130$ dBuV.

8.6.1 Test Setup and Procedure

For AC port

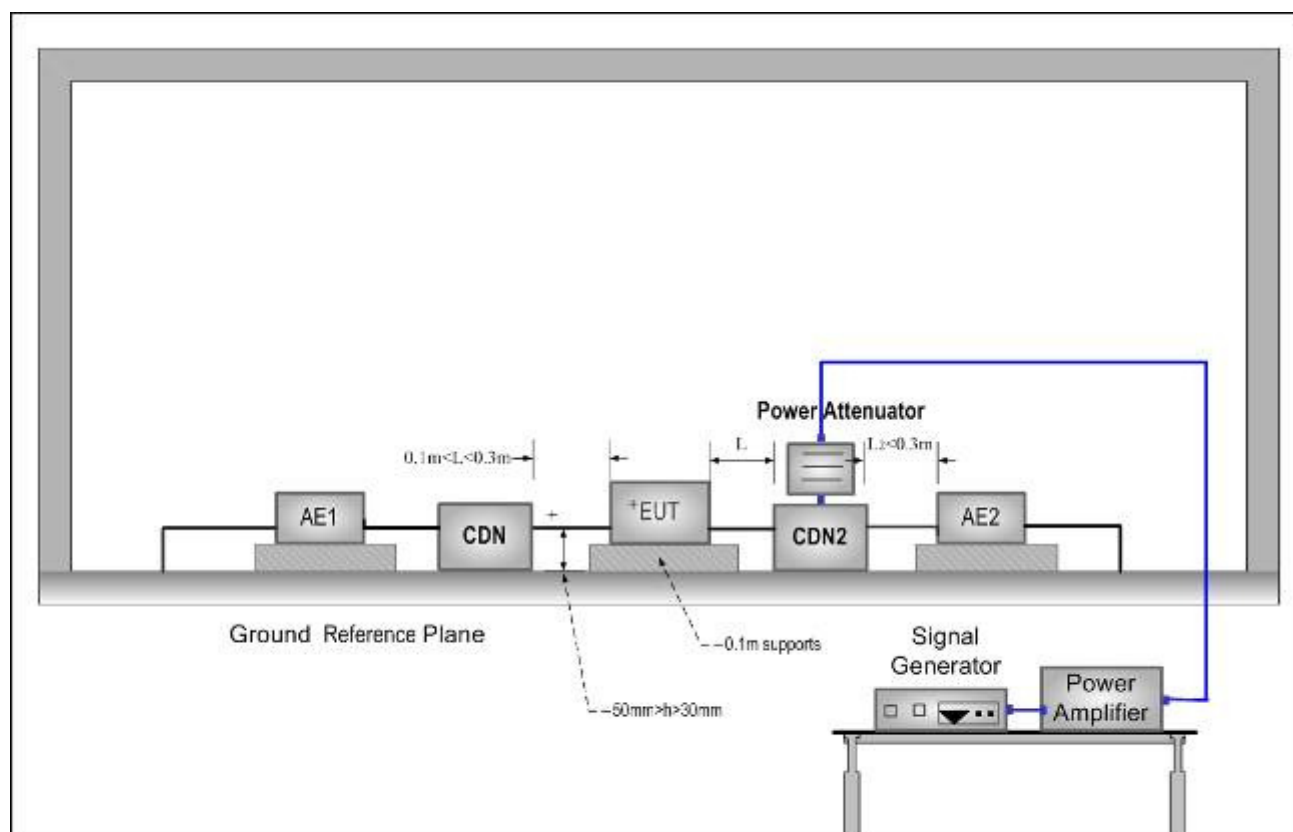

For Signal port

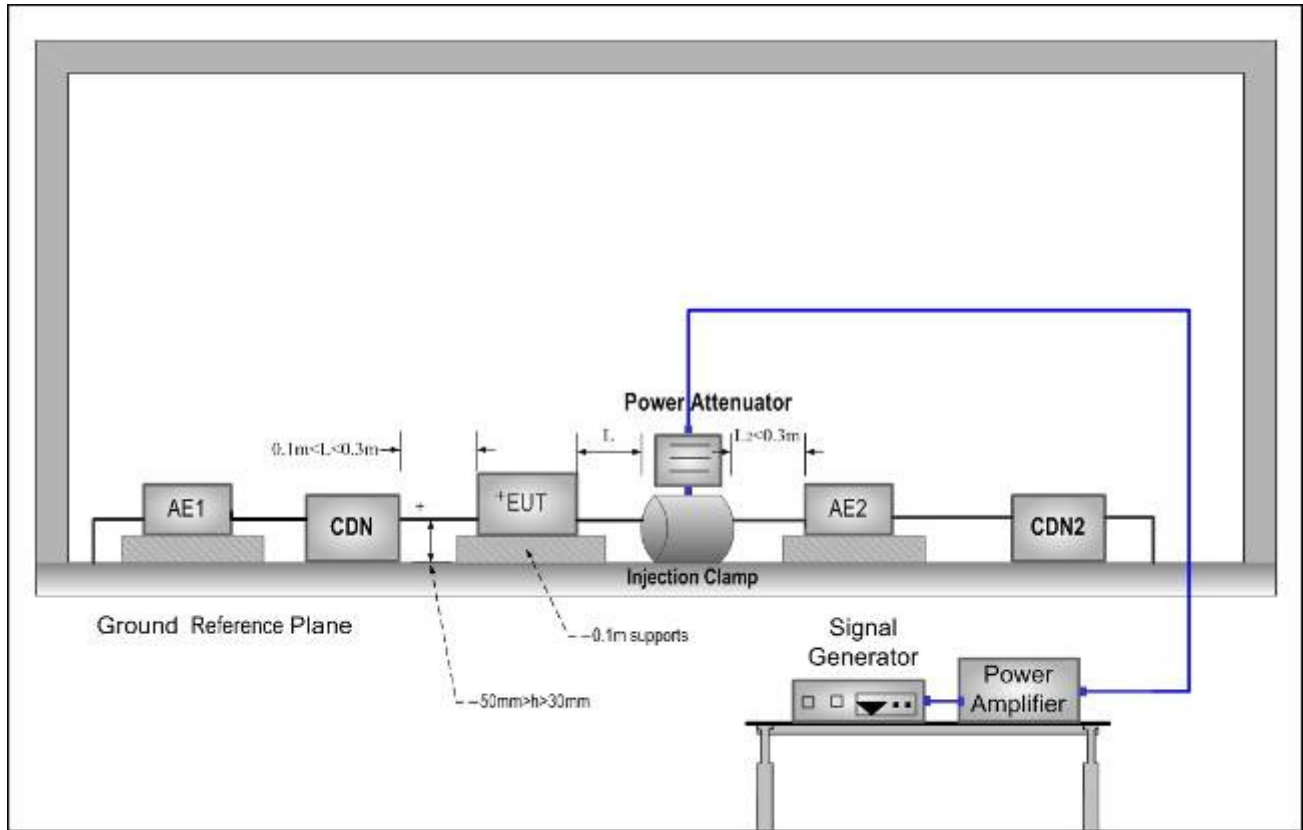

1. The EUT was placed on an insulating support of 0.1m height above a ground reference Plane, arranged and connected to satisfy its functional requirement. All cables exiting the EUT was supported at a height of at least 30 mm above the ground reference plane.
2. The coupling and decoupling devices were required, they were located between 0,1 m and 0,3 m from the EUT. This distance was to be measured horizontally from the projection of the EUT on to the ground reference plane to the coupling and decoupling device.
3. Each AE, used with clamp injection, shall be placed on an insulating support 0,1 m above the ground reference plane. A decoupling network shall be installed on each cable between the EUT and AE except the cable under test. All cables connected to each AE, other than those being connected to the EUT, shall be provided with decoupling networks. The decoupling networks connected to each AE (except those on cables between the EUT and AE) shall be applied no further than 0,3 m from the AE. The cable(s) between the AE and the decoupling network (s) or in between the AE and the injection clamp shall not be bundled nor wrapped and shall be kept between 30 mm and 50 mm above the ground reference plane.
4. The frequency range was swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or to change coupling devices as necessary. Where the frequency was swept incrementally, the step size do not exceed 1% of the preceding frequency value. The dwell time of the amplitude modulated carrier at each frequency was not less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5 s.
5. If the interface ports, which were intended by the manufacturer to be connected to data cables not longer than 3 m, did not be tested.

8.6.2 Test Results:

For EN 55024:2010

AC Port

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Test Mode	Observation (Performance Criterion)
150 kHz to 80 MHz	3 Wires Supply Cable	3.0V r.m.s	80%, 1 kHz Amp. Mod.	1%	3s	Monitoring mode	No Loss of Function (A)

Signal Port

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Test Mode	Observation (Performance Criterion)
150 kHz to 80 MHz	Signal Cable (LAN port, Alarm port)	3.0V r.m.s	80%, 1 kHz Amp. Mod.	1%	3s	Monitoring mode	No Loss of Function (A)

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

The EUT does meet the Conducted Immunity requirements of Standard.

For 50130-4:2011+A1:2014

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Test Mode	Test Results
150kHz to 100MHz	AC Mains	10Vr.m.s	80%, 1kHz Amp. Mod.	1%	3s	Monitoring mode	Pass
150kHz to 100MHz	AC Mains	10Vr.m.s	0.5s ON, 0.5s OFF P.M. Mod.	1%	3s		Pass
150kHz to 100MHz	Signal ports (LAN port, Alarm port)	10Vr.m.s	80%, 1kHz Amp. Mod. Clamp	1%	3s		Pass
150kHz to 100MHz	Signal ports (LAN port, Alarm port)	10Vr.m.s	0.5s ON, 0.5s OFF P.M. Mod. Clamp	1%	3s		Pass


Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected ripples in states at signal ports testing, during the conditioning, then could be recovered after test.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8.7 Voltage Dips and Interruptions

Test voltage:	Refer to U_T
Test Level:	For EN 55024:2010 0% of U_T (Supply Voltage) for 0.5 Periods 0% of U_T (Supply Voltage) for 250 Periods 70 % of U_T (Supply Voltage) for 25 Periods For 50130-4:2011+A1:2014 0 % U_T for 250 period 40 % U_T for 10 period 70 % U_T for 25 period 80 % U_T for 250 period (U_T is the nominal supply voltage.)
No. of Dips / Interruptions:	3 per Level For EN 55024:2010
Criteria:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. For 50130-4:2011+A1:2014

8.7.1 Test Setup and Procedure

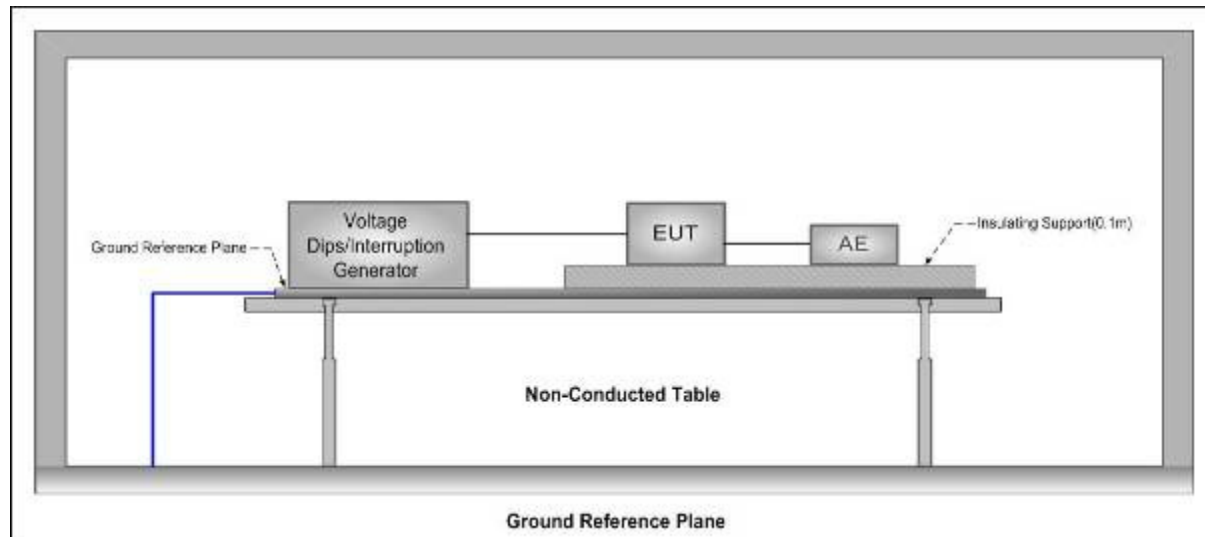

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden Table for Table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The test was performed with the EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer.
3. The EUT was tested for each selected combination of test level and duration with a sequence of three dips /interruptions with intervals of 10 s minimum. Each representative mode of operation was tested.
4. For EUT with more than one power cord, each power cord was tested individually.

8.7.2 Test Results

For EN 55024:2010

U_T AC 230V

Test Level % U_T	Phase	Duration of drop out in Periods	No of drop out	Time between drop out	Test Mode	OBSERVATIONS (PERFORMANCE CRITERION)
0	0°,180°	0.5	3	10s	Monitoring mode	(A)
0	0°,180°	250	3	10s		(C)
70	0°,180°	25	3	10s		(A)

Remark:

U_T the nominal supply voltage.

A: During test, no degradation in the performance of the EUT was observed; After test, no degradation in the performance of the EUT was observed.

C: During test, the EUT stop working, After test, it's restarted by operator.

The EUT does meet the Voltage Dips and Interruptions requirements of Standard.

For 50130-4:2011+A1:2014

U_T AC 230V

Test Level % U_T	Phase	Duration of drop out in Periods	No. of drop out	Time between drop out	Test Mode	Test Results
0	0°,180°	250	3	10s	Monitoring mode	Pass
40	0°,180°	10	3	10s		Pass
70	0°,180°	25	3	10s		Pass
80	0°,180°	250	3	10s		Pass

Remark:

According to the client's requirement, we used a UPS as ancillary equipment to meet the requirements of this clause during test.

U_T the nominal supply voltage.

Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8.8 Mains supply voltage variations


Voltage max.	AC 253V ($U_{max} = U_{nom} + 10\%$)
Voltage min.	AC 195.55V ($U_{min} = U_{nom} - 15\%$)
U_{nom} Voltage:	AC 230V
Criteria:	There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test (see Clause 6 of EN 50130-4), during the conditioning.

8.8.1 Test Results:Pass

Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

Test Setup:

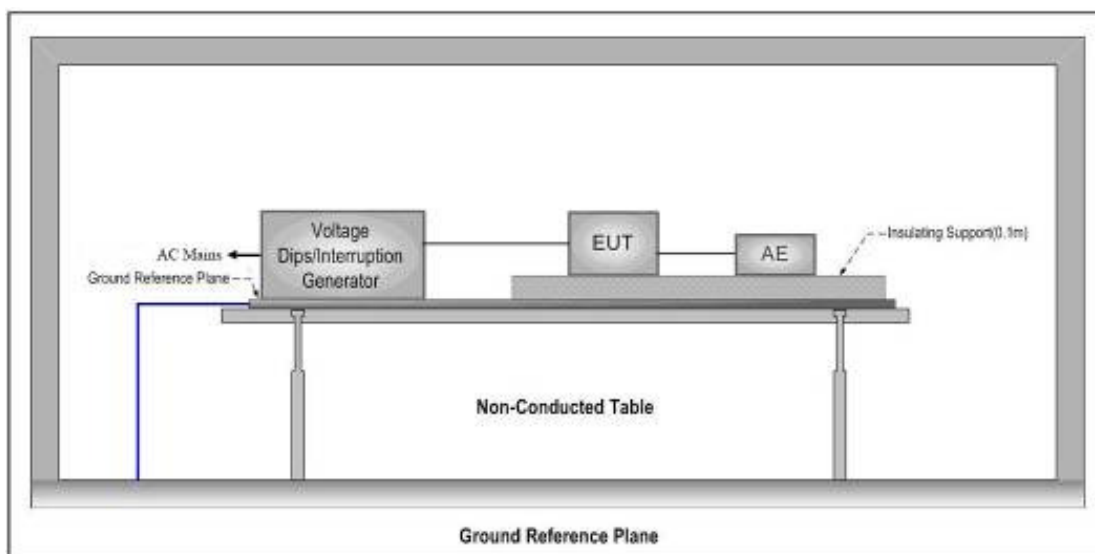

9 Photographs (Test Setup For the EUT)

9.1 Conducted Emissions on Mains Terminals Test Setup

DHI-NVR5232-8P-4KS2



DHI-NVR5232-16P-4KS2



9.2 Conducted Emissions on Telecommunication Terminals Test Setup

DHI-NVR5232-8P-4KS2



DHI-NVR5232-16P-4KS2



9.3 Radiated Emission Test Setup

DHI-NVR5232-8P-4KS2

30MHz to 1GHz




1GHz to 6GHz



DHI-NVR5232-16P-4KS2

30MHz to 1GHz

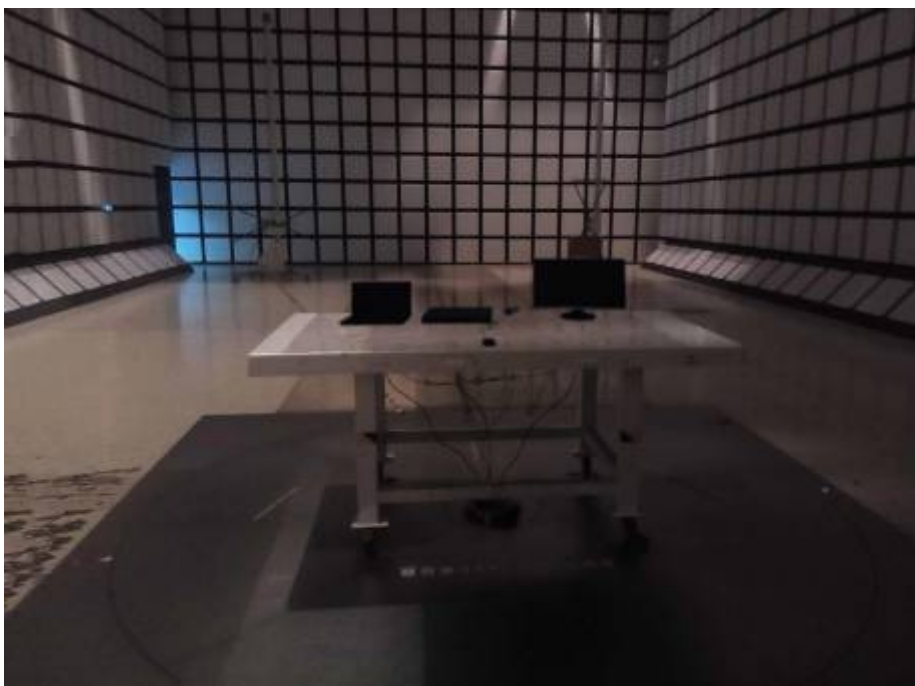

1GHz to 6GHz



9.4 Flicker Test Setup

DHI-NVR5232-8P-4KS2



DHI-NVR5232-16P-4KS2



9.5 ESD Test Setup

DHI-NVR5232-8P-4KS2

- Contact discharge
- Air discharge



DHI-NVR5232-16P-4KS2

- Contact discharge
- Air discharge



9.6 Radiated Immunity Test Setup

DHI-NVR5232-8P-4KS2



DHI-NVR5232-16P-4KS2




9.7 EFT, Surge, Voltage Dip and Interruptions on Mains Terminals Test Setup

DHI-NVR5232-8P-4KS2




DHI-NVR5232-16P-4KS2

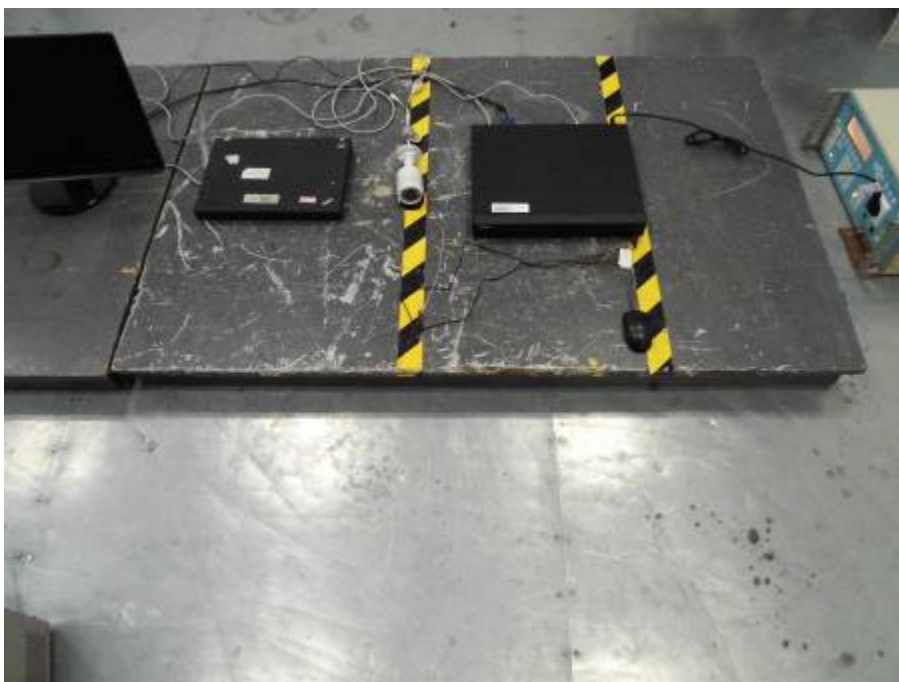

9.8 EFT on Signal Terminals Test Setup

DHI-NVR5232-8P-4KS2

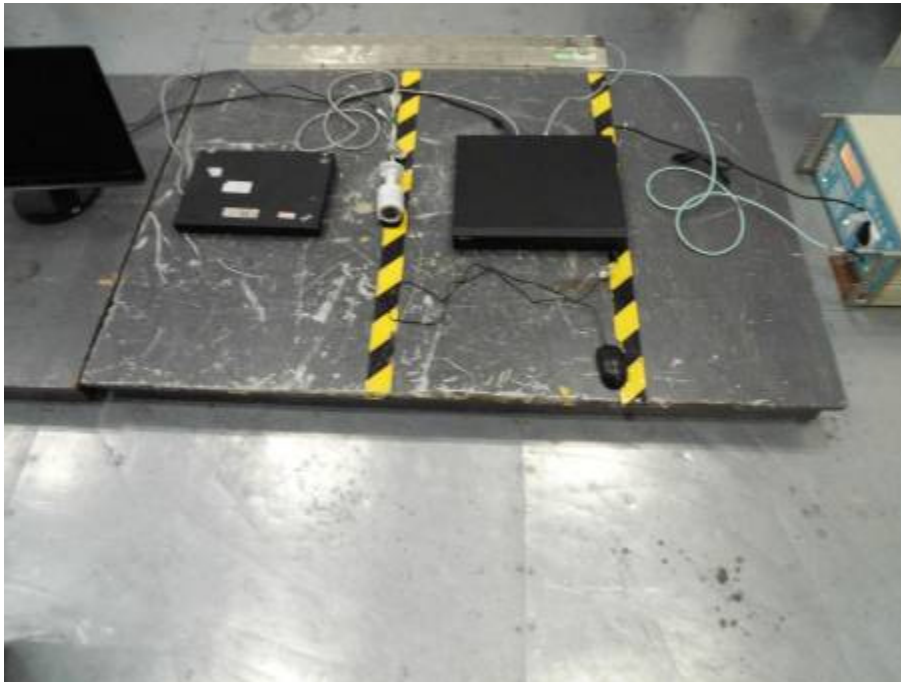


DHI-NVR5232-16P-4KS2



9.9 Surge on Signal Terminals Test Setup

DHI-NVR5232-8P-4KS2

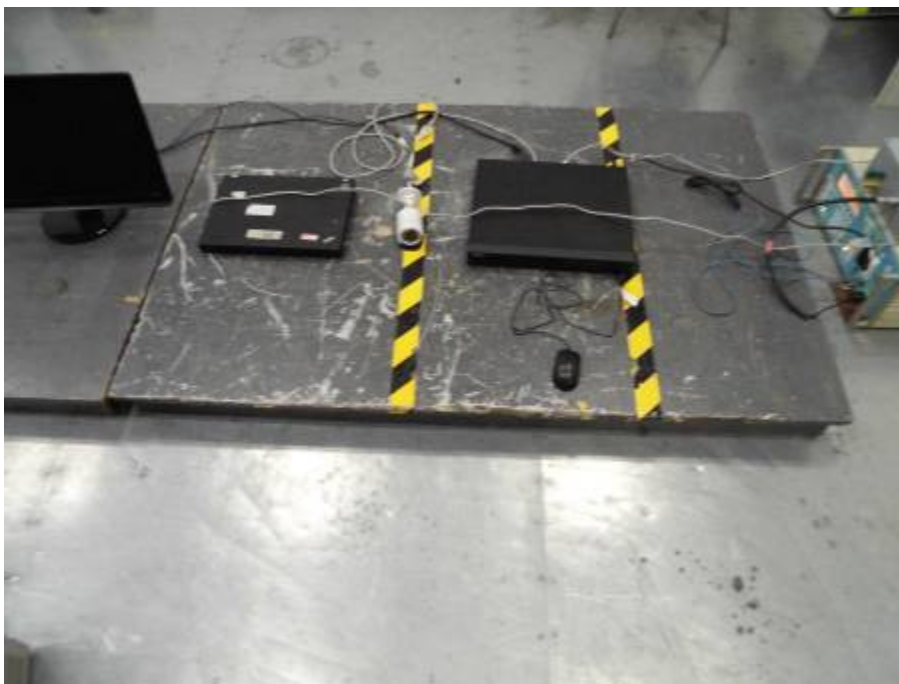


DHI-NVR5232-16P-4KS2




9.10 Conducted Immunity on Mains Terminals Test Setup

DHI-NVR5232-8P-4KS2

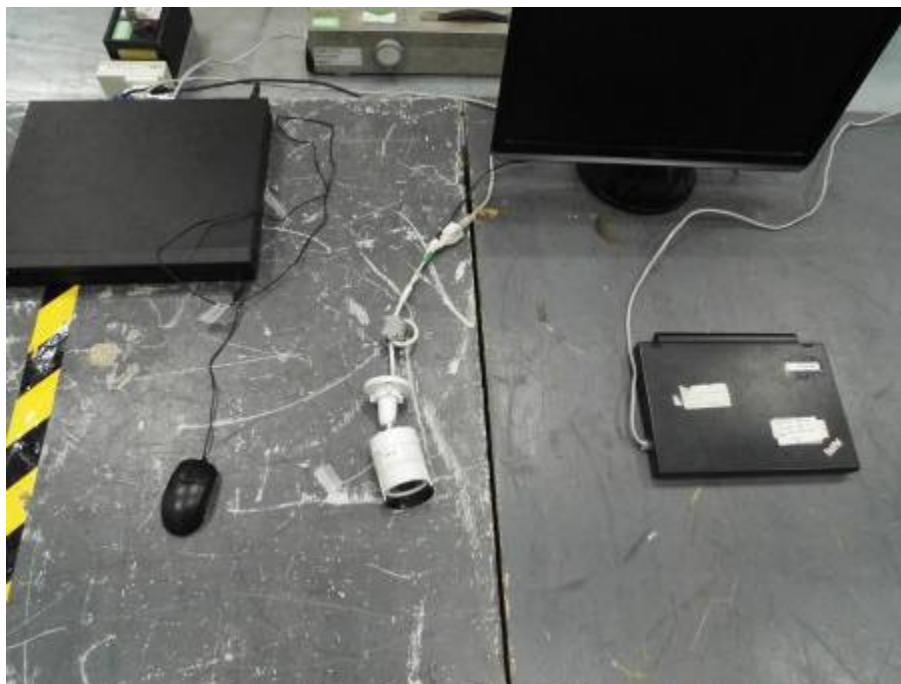

DHI-NVR5232-16P-4KS2

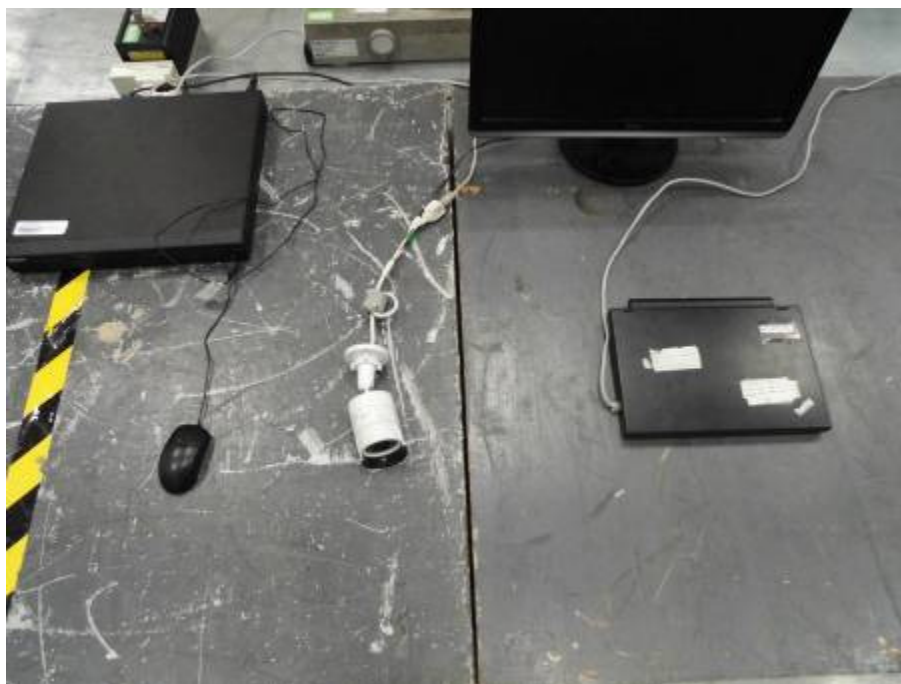


9.11 Conducted Immunity on Signal Terminals Test Setup

DHI-NVR5232-8P-4KS2



DHI-NVR5232-16P-4KS2

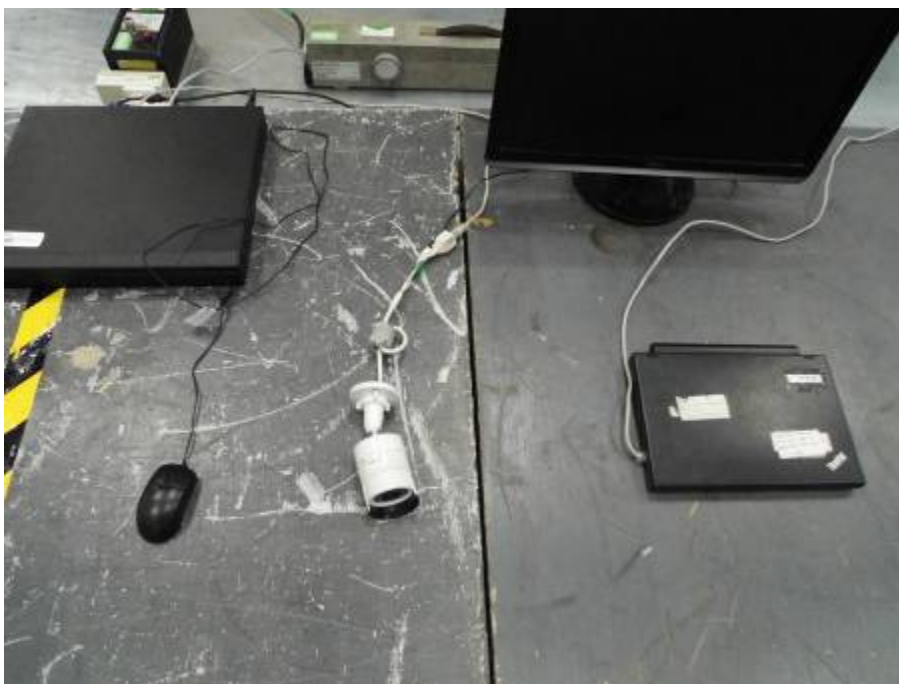

10 EUT Constructional Details

10.1 Exterior of EUT

DHI-NVR5232-8P-4KS2





DHI-NVR5232-16P-4KS2






10.2 Interior of EUT


DHI-NVR5232-8P-4KS2



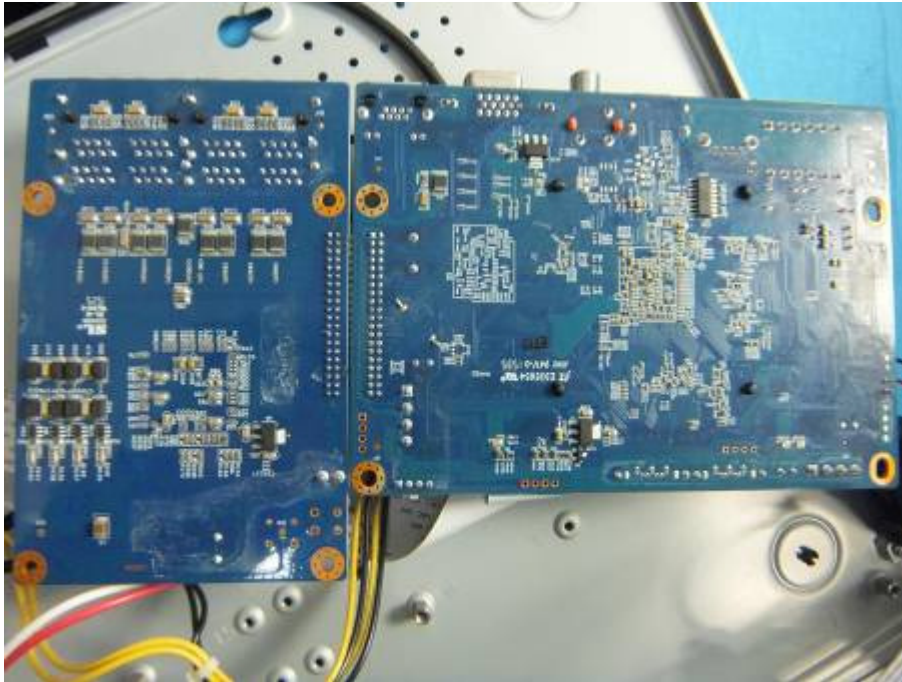

DHI-NVR5232-16P-4KS2



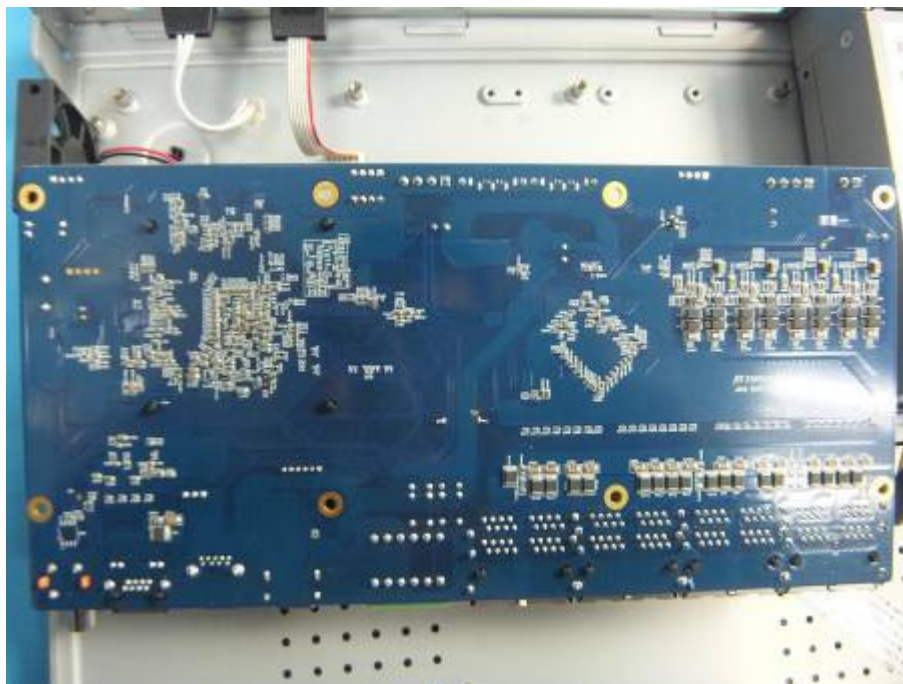

--End of the Report--