

DH-PFB300C

Ceiling Mount Bracket



- Built of aluminum alloy and PC material, it is cost-effective.
- Suitable for a variety of cameras and is elegant.



Series Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from $-40\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F}$ to $+140\text{ }^{\circ}\text{F}$) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	Aluminum alloy, PC
Product Dimensions	$\Phi 133.6\text{ mm} \times 235.5\text{ mm}$ ($\Phi 5.26'' \times 9.27''$)
Appearance Color	White
Net Weight	0.77 kg (1.70 lb)
Gross Weight	0.89 kg (1.96 lb)
Load Bearing	7.0 kg (15.43 lb)
Installation	Ceiling mount
Screw Thread Type	G1 1/2
Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	$252\text{ mm} \times 137\text{ mm} \times 137\text{ mm}$ ($9.92'' \times 5.39'' \times 5.39''$) (L x W x H)


Environment

Operating Temperature	$-40\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F}$ to $+140\text{ }^{\circ}\text{F}$)
Operating Humidity	<90% (RH)
Storage Temperature	$-40\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F}$ to $+140\text{ }^{\circ}\text{F}$)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection


Ordering Information

Type	Model	Description
Camera Mount	DH-PFB300C	Ceiling Mount Bracket

Installation

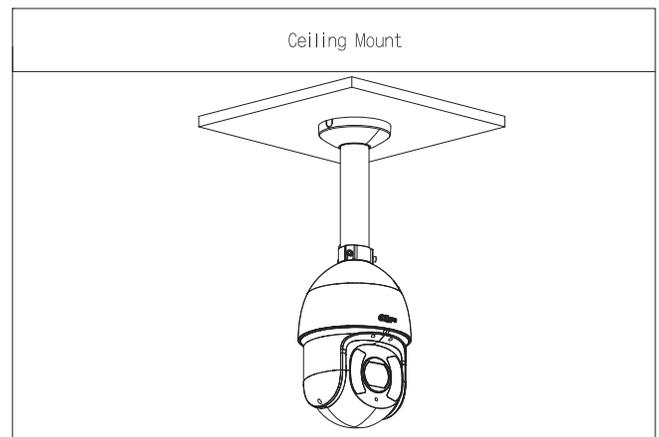

Dimensions (mm[inch])

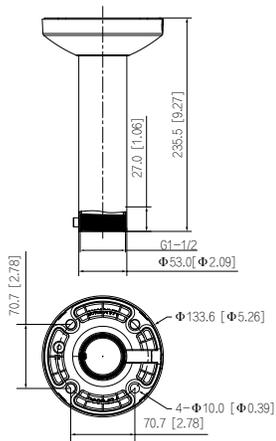

Package Information

- Ceiling mount bracket × 1