



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM170300171901
Page: 1 of 33

1 Cover Page

TEST REPORT

Application No.: SHEM1703001719IT

Applicant: Zhejiang Dahua Vision Technology Co., Ltd.

Equipment under Test (EUT)

NOTE: The following sample(s) was/were submitted and identified by the client as.

Product Name: IP CAMERA

Model No.(EUT): DH-IPC-HDB4431GP-AS

Add Model No.: DH-IPC-HDB4231GN-AS, DH-IPC-HDB4231GP-AS, IPC-HDB4231GP-AS, IPC-HDB4231GN-AS, DH-IPC-HDP4231GN-AS, DH-IPC-HDP4231GP-AS, IPC-HDP4231GP-AS, IPC-HDP4231GN-AS, DH-IPC-HDB4431GP-AS, DH-IPC-HDB4431GN-AS, IPC-HDB4431GP-AS, IPC-HDB4431GN-AS, DH-IPC-HDP4431GP-AS, DH-IPC-HDP4431GN-AS, IPC-HDP4431GP-AS, IPC-HDP4431GN-AS

Standards: ICES-003 Issue 6: 2016

Date of Receipt: 2017-03-30

Date of Test: 2017-04-01 to 2017-04-10

Date of Issue: 2017-04-17

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.





Parlam Zhan
E&E Section Manager
SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2017-04-17		Original

Authorized for issue by:				
Tested By		 Bruce Tang /Project Engineer		2017-03-31 Date
Checked By		 Zenger Zhang /Reviewer		2017-04-11 Date

2 Test Summary

ELECTROMAGNETIC INTERFERENCE (EMI)			
Test	Test Requirement	Test Method	Result
Conducted Emission (150kHz to 30MHz)	ICES-003 Issue 6: 2016	ANSI C63.4: 2014	PASS
Radiated Emission, (30MHz to 1GHz)	ICES-003 Issue 6: 2016	ANSI C63.4: 2014	PASS
Radiated Emission above 1 GHz	ICES-003 Issue 6: 2016	ANSI C63.4: 2014	PASS*
<p>Remark:</p> <p>N/A: Not Applicable.</p> <p>Note1:* The highest frequency of the internal sources of the EUT is above 1GHz, the measurement shall be made up to 5 times the highest frequency of 6GHz, whichever is less.</p> <p>Note2: There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-IPC-HDB4431GP-AS was tested since their differences are pixel and sales area.</p>			

3 Contents

1	COVER PAGE	1
2	TEST SUMMARY	3
3	CONTENTS.....	4
4	GENERAL INFORMATION	5
4.1	Client Information.....	5
4.2	Details of E.U.T.	5
4.3	E.U.T Operation Mode.....	5
4.4	E.U.T Operation Environment	5
4.5	Description of Support Units	5
4.6	Deviation from Standards	5
4.7	Abnormalities from Standard Conditions	5
4.8	Modification/Retest Record	5
4.9	Test Location.....	6
4.10	Test Facility.....	6
5	EQUIPMENT LIST	7
6	ELECTROMAGNETIC INTERFERENCE TEST RESULTS.....	9
6.1	Conducted Emissions on Mains Terminals	9
6.2	Radiated Emissions, 30MHz to 1GHz	15
6.3	Radiated Emissions, 1GHz to 6GHz.....	21
7	PHOTOGRAPHS (TEST SETUP FOR THE EUT).....	27
7.1	Conducted Emissions on Mains Terminals Test Setup.....	27
7.2	Radiated Emission Test Setup.....	28
8	EUT CONSTRUCTIONAL DETAILS	30
8.1	Exterior of EUT	30
8.2	Interior of EUT	32-33

4 General Information

4.1 Client Information

Applicant: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Applicant: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
 Manufacturer: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Manufacturer: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
 Factory: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Factory: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

4.2 Details of E.U.T.

Power Supply: DC12V,0.5A / POE: 48V 150mA

4.3 E.U.T Operation Mode

Functions/Modes: a; DC12V Monitoring mode
 b: PoE monitoring mode
 Mode:a Powered by DC12V, keep EUT monitoring continual.
 Mode:b Powered by Poe adapter, keep EUT monitoring continual.

4.4 E.U.T Operation Environment

Temperature Range: 20-25°C
 Humidity Range: 30-60% RH
 Atmospheric Pressure Range: 100-105kPa

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Laptop 1	LENOVO	R400

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Modification/Retest Record

None.

4.9 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

4.10 Test Facility

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively. Date of Expiry: 2017-11-16.

5 Equipment list

Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2016-12-29	2017-12-28
2	Line impedance stabilization network	SCHWARZB ECK	NSLK 8127	8127490	2016-12-29	2017-12-28
3	Line impedance stabilization network	EMCO	3816/2	00034161	2016-12-29	2017-12-28

Radiated Emission(30M-1G)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	SHEM 051-1	2016-08-12	2017-08-11
2	CONTROLLER	INNCO	CO200	SHEM 047-1	N/A	N/A
3	ANTENNA MAST	INNCO	MA400-EP	SHEM 047-2	N/A	N/A
4	TURN DEVICE	INNCO	DE 3600-RH	SHEM 047-3	N/A	N/A
5	Broadband UHF-VHF ANTENNA	SCHWARZB ECK	VULB 9168	SHEM 048-1	2016-12-29	2017-12-28
6	Low Frequency Amplifier	CLAVIIO	BDLNA-0 001-4120 10	SHEM 164-1	2016-08-12	2017-08-11
7	Semi/Fully Anechoic	ST	11*6*6M	SHEM 078-2	2016-08-17	2017-08-16

Radiated Emission (above1G)

Item	Test Equipment	Manufacturer	Model No	Serial No.	Cal. Date	Cal.Due date
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU40	SHEM051-1	2016-08-12	2017-08-11
2	CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
3	ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
4	TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
5	DOUBLE RIDGED BROADBAND HORN ANTENNA	SCHWARZBECK	BBHA 9120D	SHEM050-1	2017-01-16	2018-01-15
6	HIGH-AMPLIFIER	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2017-01-14	2018-01-13
7	SEMI/FULLY ANECHOIC	ST	11*6*6M	SHEM078-2	2016-08-17	2017-08-16

General used equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
1	Digital pressure meter	YONGZHI	DYM3-01	101012	2017-03-02	2018-03-01
2	Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	84320600 803136, F304020153 ,20101201F S100A6K,20 1106117	2016-08-03	2017-08-02
3	Digital Multimeter	FLUKE	17B	19720439	2017-01-13	2018-01-12
4	Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	/	/	/
5	CLAMP METER	FLUKE	316	2503030971	2017-01-13	2018-01-12

6 Electromagnetic Interference Test Results

6.1 Conducted Emissions on Mains Terminals

Test Frequency: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth from 150 kHz to 30 MHz)

Limit:

Frequency range (MHz)	Class B Limits (dB (μV))	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.		
Note2: The lower limit is applicable at the transition frequency.		


6.1.1 E.U.T. Operation

Test mode: a; DC12V Monitoring mode: Powered by DC12V , keep EUT monitoring continual.
b: PoE monitoring mode: Powered by Poe adapter, keep EUT monitoring continual.

Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.


6.1.2 Test Setup and Procedure

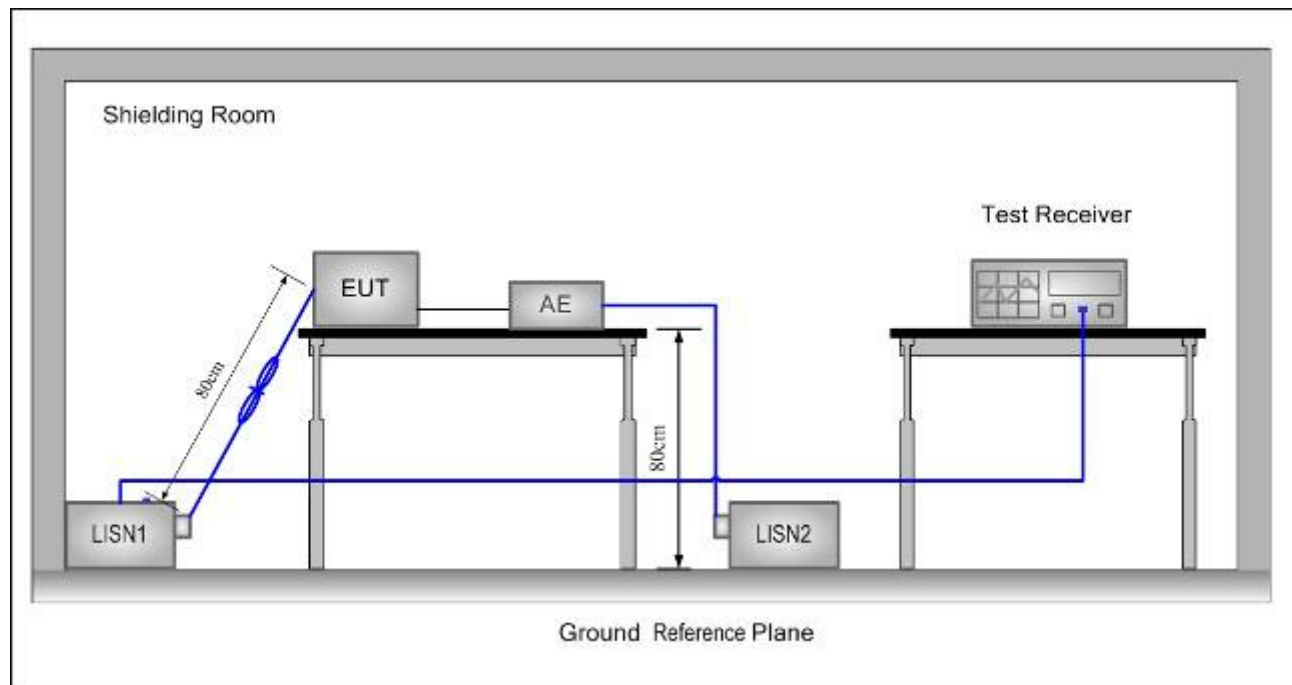

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment was at least 0,8 m from the LISN.


6.1.3 Measurement Data

Mode:a:Live Line:

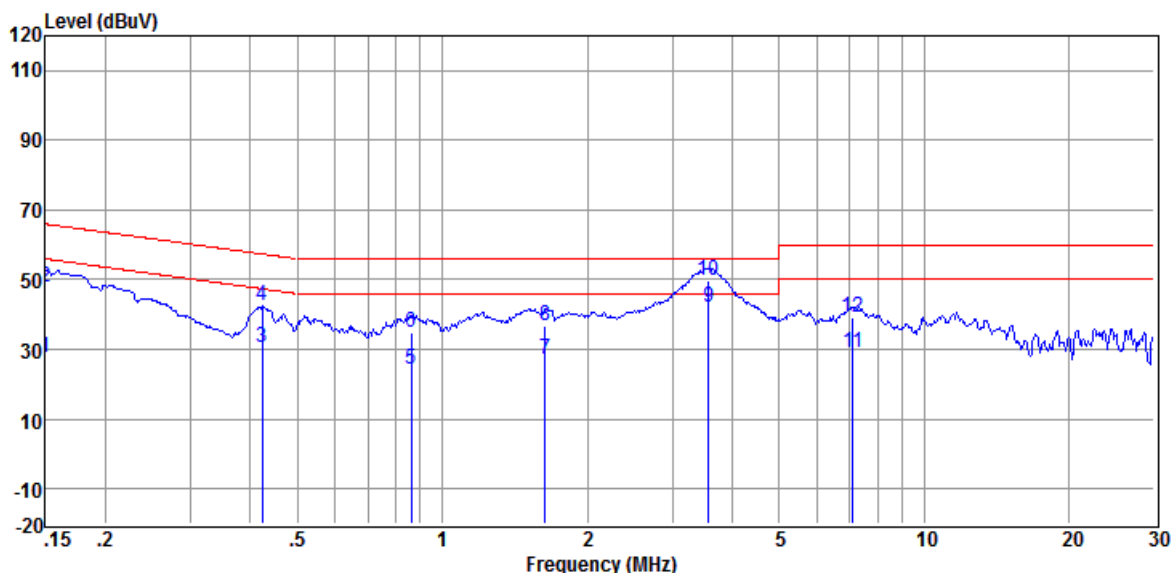

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.150	17.36	0.05	10.15	27.56	56.00	-28.44	Average
2	0.150	37.86	0.05	10.15	48.06	66.00	-17.94	QP
3	0.424	20.14	0.10	10.17	30.41	47.37	-16.96	Average
4	0.424	32.06	0.10	10.17	42.33	57.37	-15.04	QP
5	0.862	14.03	0.09	10.18	24.30	46.00	-21.70	Average
6	0.862	24.58	0.09	10.18	34.85	56.00	-21.15	QP
7	1.636	17.01	0.08	10.19	27.28	46.00	-18.72	Average
8	1.636	26.65	0.08	10.19	36.92	56.00	-19.08	QP
9	3.565	31.62	0.12	10.21	41.95	46.00	-4.05	Average
10	3.565	39.41	0.12	10.21	49.74	56.00	-6.26	QP
11	7.100	18.75	0.17	10.28	29.20	50.00	-20.80	Average
12	7.100	28.74	0.17	10.28	39.19	60.00	-20.81	QP


Mode:a:Neutral Line:

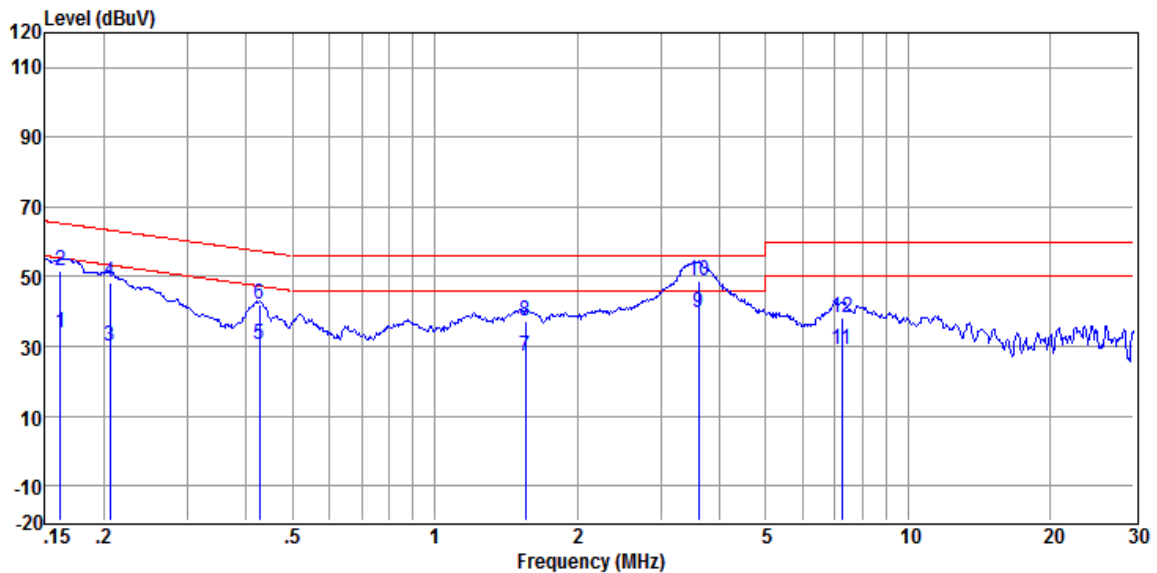

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.162	23.80	0.05	10.15	34.00	55.38	-21.38	Average
2	0.162	41.38	0.05	10.15	51.58	65.38	-13.80	QP
3	0.206	19.63	0.05	10.15	29.83	53.36	-23.53	Average
4	0.206	37.98	0.05	10.15	48.18	63.36	-15.18	QP
5	0.426	20.22	0.04	10.17	30.43	47.33	-16.90	Average
6	0.426	32.02	0.04	10.17	42.23	57.33	-15.10	QP
7	1.552	16.82	0.06	10.19	27.07	46.00	-18.93	Average
8	1.552	26.91	0.06	10.19	37.16	56.00	-18.84	QP
9	3.603	29.32	0.14	10.21	39.67	46.00	-6.33	Average
10	3.603	38.45	0.14	10.21	48.80	56.00	-7.20	QP
11	7.252	18.77	0.19	10.29	29.25	50.00	-20.75	Average
12	7.252	27.56	0.19	10.29	38.04	60.00	-21.96	QP


Level = Read Level + LISN/ISN Factor + Cable Loss

Mode:b:Live Line:

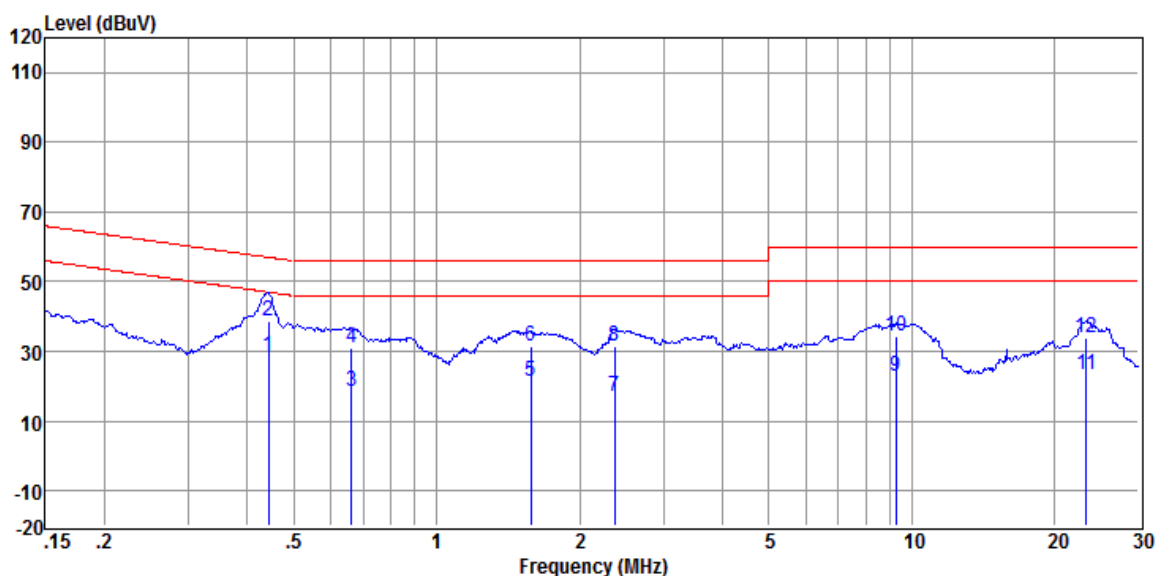

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.442	18.41	0.10	10.17	28.68	47.02	-18.34	Average
2	0.442	28.26	0.10	10.17	38.53	57.02	-18.49	QP
3	0.661	8.10	0.10	10.17	18.37	46.00	-27.63	Average
4	0.661	20.88	0.10	10.17	31.15	56.00	-24.85	QP
5	1.577	11.19	0.08	10.19	21.46	46.00	-24.54	Average
6	1.577	21.24	0.08	10.19	31.51	56.00	-24.49	QP
7	2.371	6.75	0.09	10.19	17.03	46.00	-28.97	Average
8	2.371	21.28	0.09	10.19	31.56	56.00	-24.44	QP
9	9.253	12.52	0.19	10.19	22.90	50.00	-27.10	Average
10	9.253	24.10	0.19	10.19	34.48	60.00	-25.52	QP
11	23.263	12.75	0.36	10.40	23.51	50.00	-26.49	Average
12	23.263	23.05	0.36	10.40	33.81	60.00	-26.19	QP

Mode:b:Neutral Line:

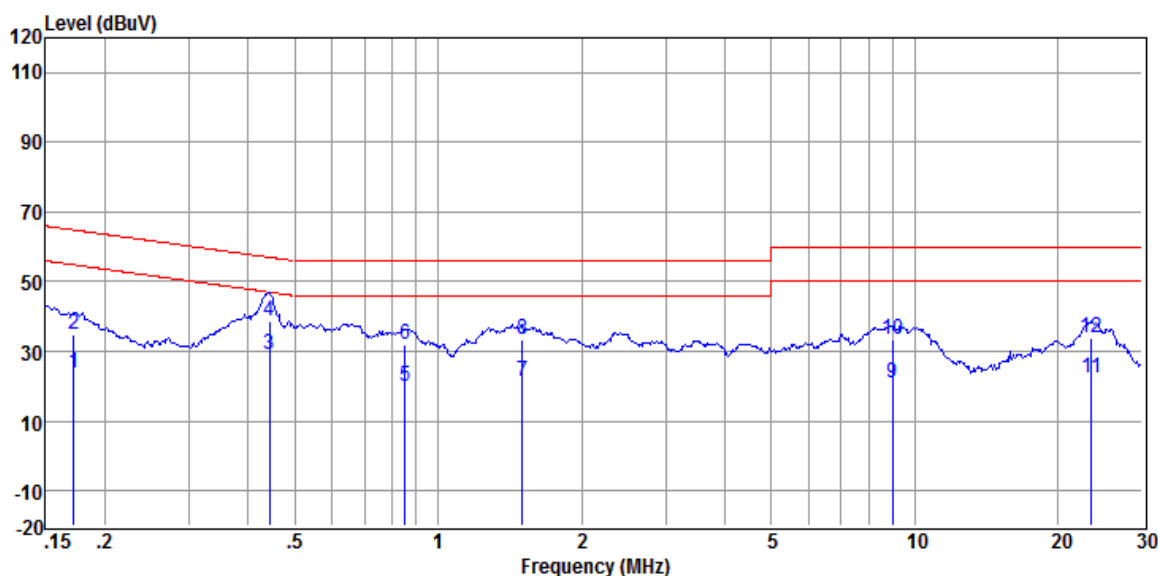

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.172	13.75	0.05	10.15	23.95	54.86	-30.91	Average
2	0.172	24.81	0.05	10.15	35.01	64.86	-29.85	QP
3	0.442	18.66	0.04	10.17	28.87	47.02	-18.15	Average
4	0.442	28.38	0.04	10.17	38.59	57.02	-18.43	QP
5	0.853	9.76	0.05	10.18	19.99	46.00	-26.01	Average
6	0.853	21.83	0.05	10.18	32.06	56.00	-23.94	QP
7	1.503	11.26	0.06	10.19	21.51	46.00	-24.49	Average
8	1.503	22.98	0.06	10.19	33.23	56.00	-22.77	QP
9	8.964	10.54	0.20	10.23	20.97	50.00	-29.03	Average
10	8.964	22.91	0.20	10.23	33.34	60.00	-26.66	QP
11	23.511	11.49	0.36	10.41	22.26	50.00	-27.74	Average
12	23.511	23.32	0.36	10.41	34.09	60.00	-25.91	QP

Level = Read Level + LISN/ISN Factor + Cable Loss

6.2 Radiated Emissions, 30MHz to 1GHz

Detector: Peak for pre-scan (120 kHz resolution bandwidth)

Limit: For 3m

For 3m

Frequency range (MHz)	Quasi-peak limits (dB (μV/m))
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54
Note: At transitional frequencies the lower limit applies.	


6.2.1 E.U.T. Operation

Test mode: a; DC12V Monitoring mode: Powered by DC12V , keep EUT monitoring continual.
b: PoE monitoring mode: Powered by Poe adapter, keep EUT monitoring continual.

Pre-scan was performed with peak detected on all ports, Quasi-peak measurements was performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak test results.


6.2.2 Test Setup and Procedure

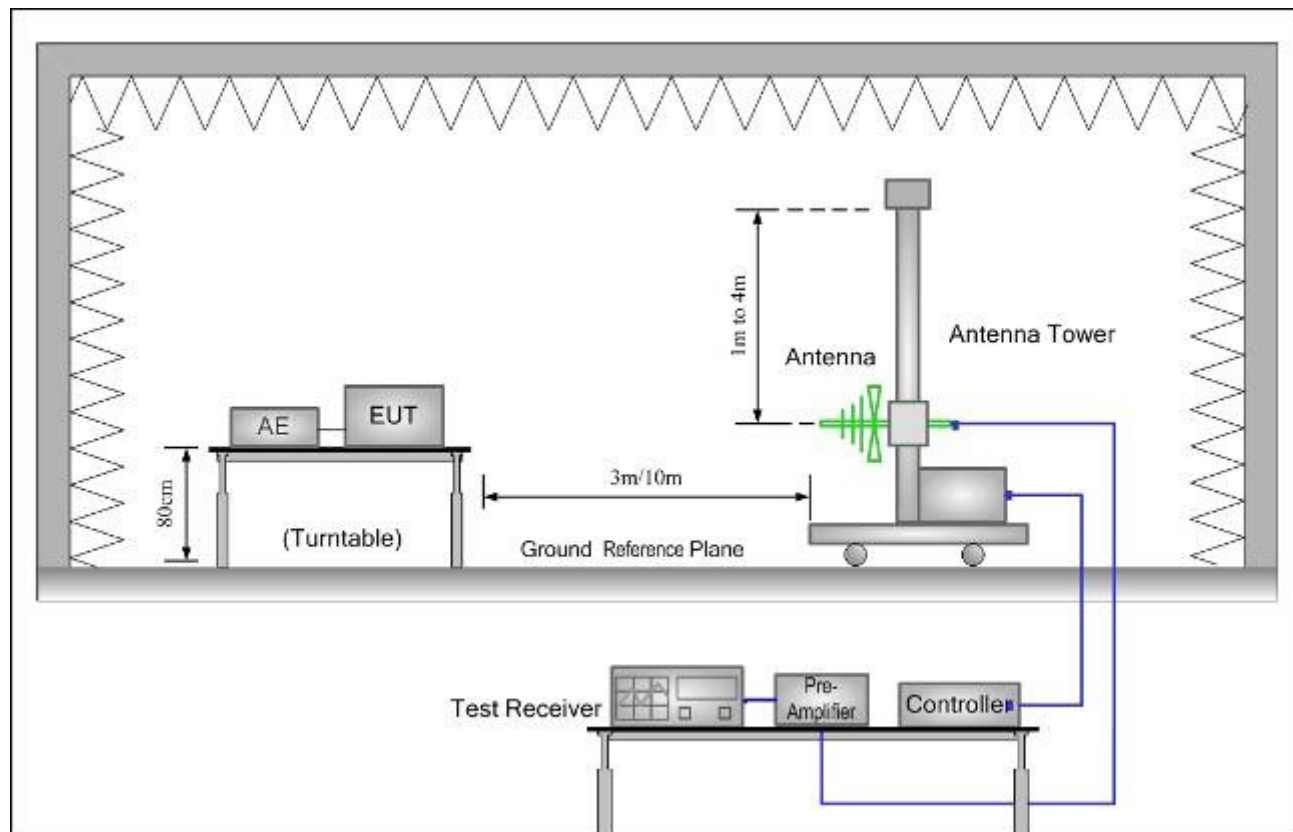

1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.


6.2.3 Measurement Data

Mode:a: Vertical

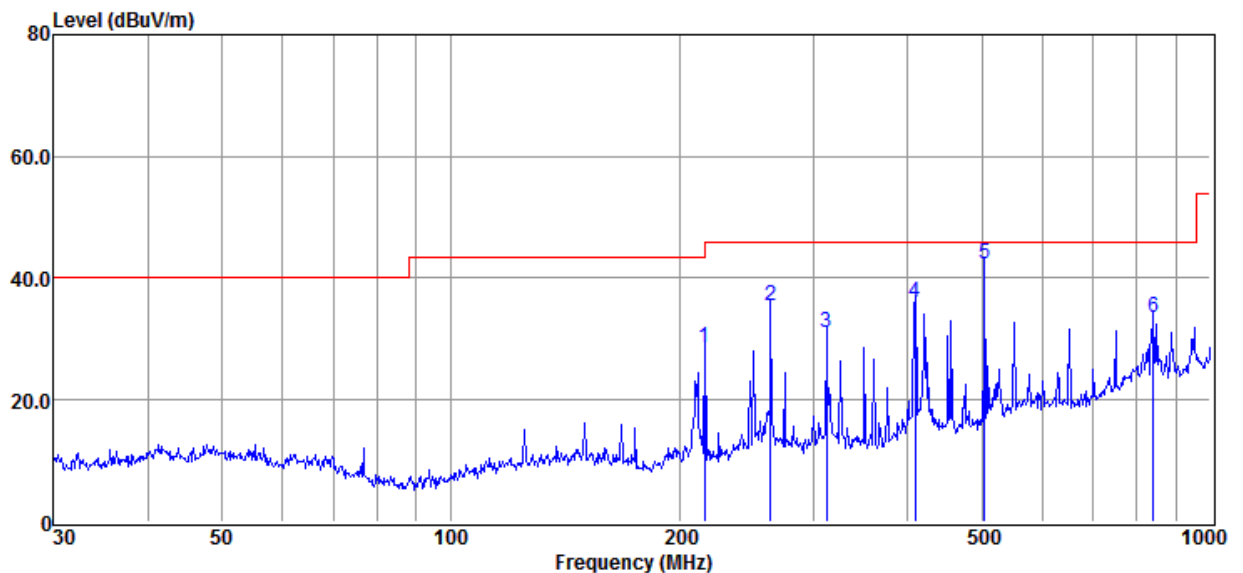

	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	216.02	45.92	10.14	28.10	0.72	28.68	46.00	-17.32	QP
2	263.82	50.31	12.24	27.90	0.79	35.44	46.00	-10.56	QP
3	312.18	44.77	13.38	28.01	0.86	31.00	46.00	-15.00	QP
4	408.95	48.49	15.35	28.74	1.01	36.11	46.00	-9.89	QP
5	504.71	53.13	17.32	29.20	1.20	42.45	46.00	-3.55	QP
6	842.13	36.84	23.64	29.04	2.21	33.65	46.00	-12.35	QP


Mode:a: Horizontal

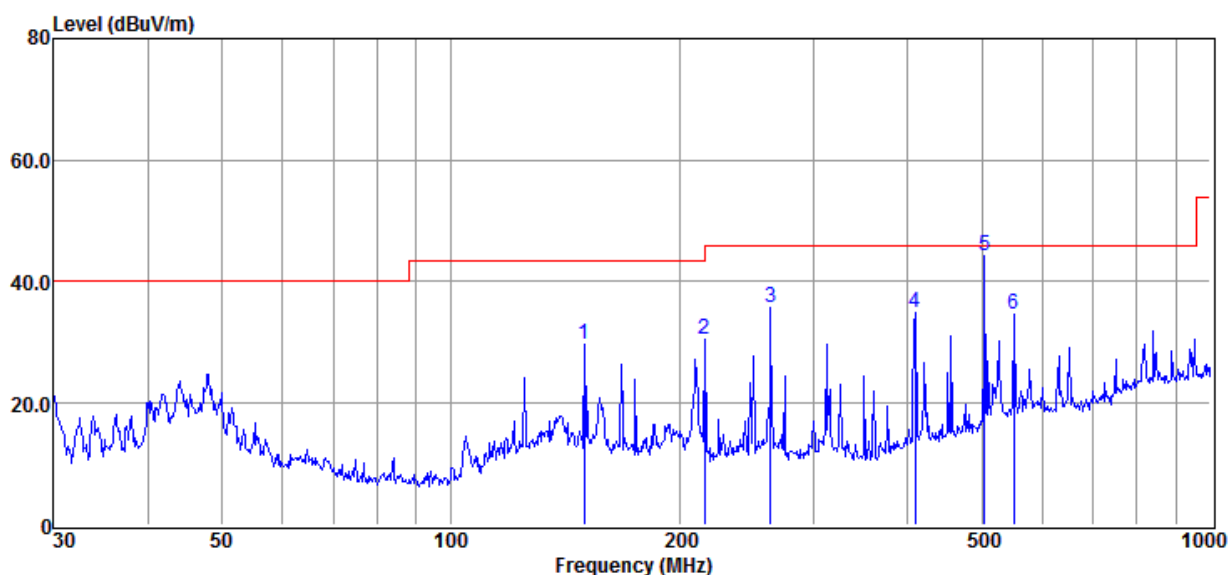

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	150.01	44.74	12.80	28.40	0.62	29.76	43.50	-13.74	QP
2	216.02	47.87	10.14	28.10	0.72	30.63	46.00	-15.37	QP
3	263.82	50.57	12.24	27.90	0.79	35.70	46.00	-10.30	QP
4	408.95	47.33	15.35	28.74	1.01	34.95	46.00	-11.05	QP
5	504.71	54.94	17.32	29.20	1.20	44.26	46.00	-1.74	QP
6	550.95	43.49	19.20	29.23	1.28	34.74	46.00	-11.26	QP


Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor

Mode:b: Vertical

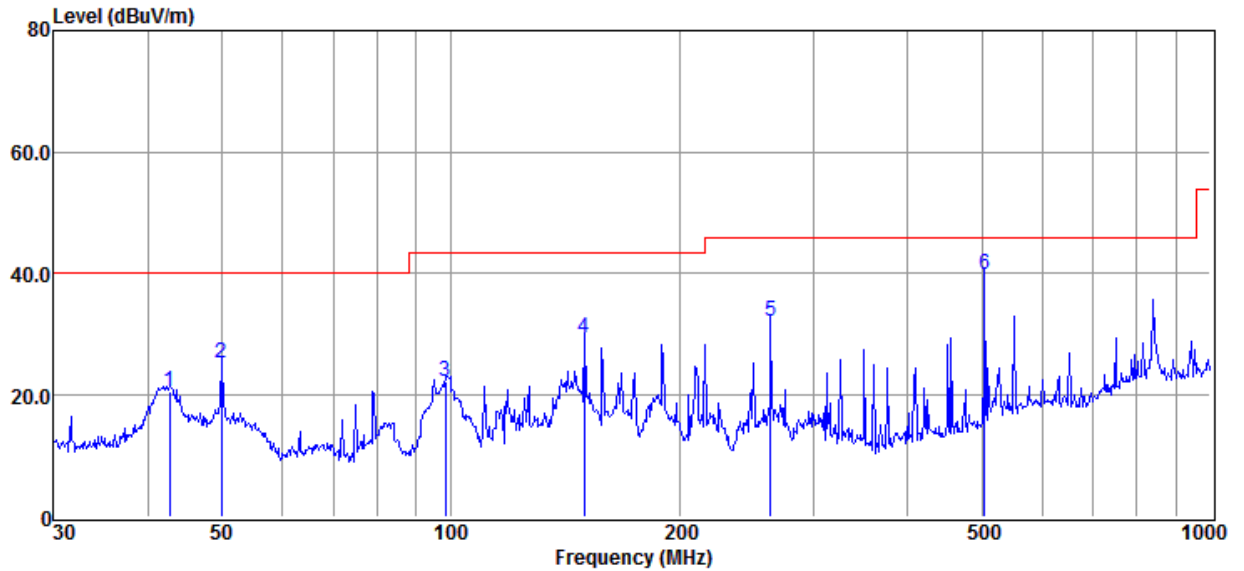

	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	42.60	35.52	13.72	28.80	0.23	20.67	40.00	-19.33	QP
2	49.88	40.00	13.81	28.80	0.26	25.27	40.00	-14.73	QP
3	98.49	41.19	9.15	28.60	0.45	22.19	43.50	-21.31	QP
4	150.01	44.29	12.80	28.40	0.62	29.31	43.50	-14.19	QP
5	263.82	47.11	12.24	27.90	0.79	32.24	46.00	-13.76	QP
6	504.71	50.48	17.32	29.20	1.20	39.80	46.00	-6.20	QP

Mode:b: Horizontal

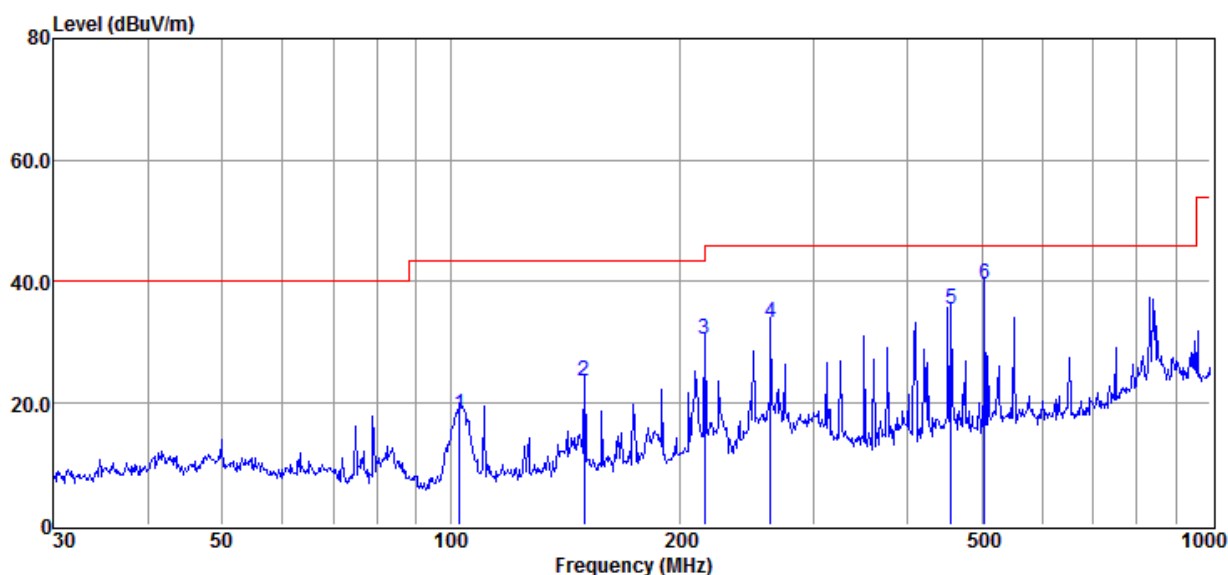

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	102.72	36.50	9.69	28.60	0.47	18.06	43.50	-25.44	QP
2	150.01	38.56	12.80	28.40	0.62	23.58	43.50	-19.92	QP
3	216.02	47.74	10.14	28.10	0.72	30.50	46.00	-15.50	QP
4	263.82	48.06	12.24	27.90	0.79	33.19	46.00	-12.81	QP
5	455.91	46.98	16.58	29.10	1.10	35.56	46.00	-10.44	QP
6	504.71	50.37	17.32	29.20	1.20	39.69	46.00	-6.31	QP

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor

6.3 Radiated Emissions, 1GHz to 6GHz

Detector: Peak for pre-scan (120 kHz resolution bandwidth)

Limit: For 3m

1GHz-6GHz 74 dB(μV/m) peak, 54 dB(μV/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

Remark: The spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower


6.3.1 E.U.T. Operation

Test mode: a; DC12V Monitoring mode: Powered by DC12V , keep EUT monitoring continual.
b: PoE monitoring mode: Powered by Poe adapter, keep EUT monitoring continual.

Pre-scan was performed with peak detected on all ports, Peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Peak and Average test results.


6.3.2 Test Setup and Procedure

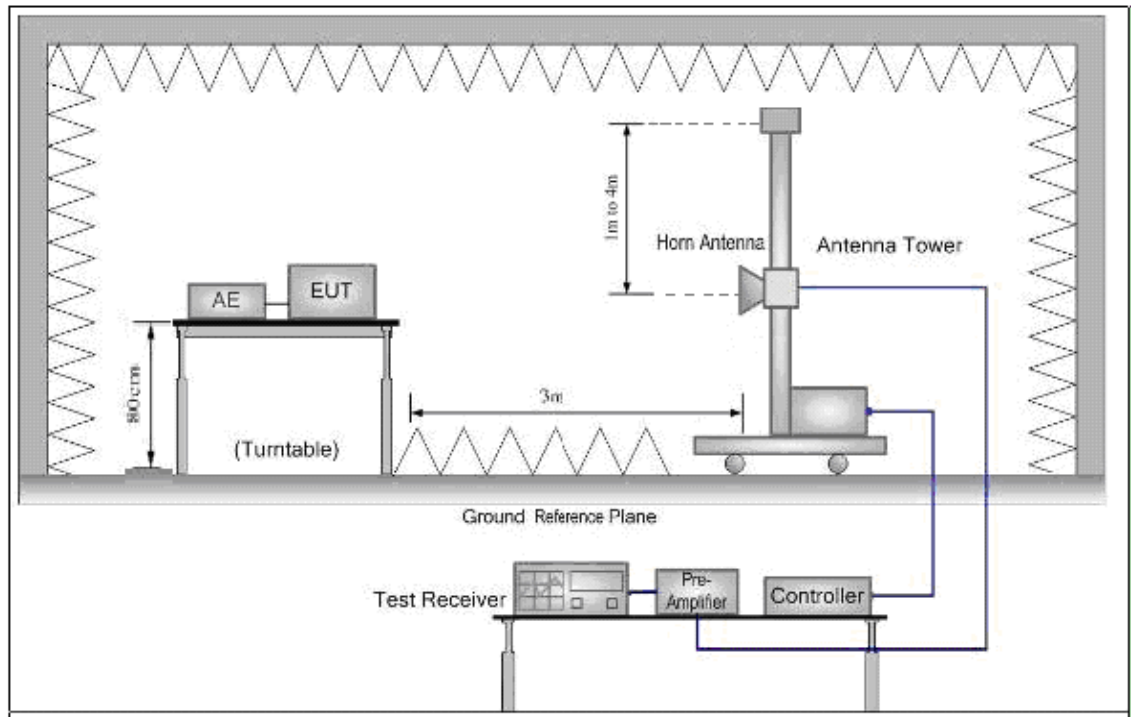

6. The radiated emissions test was conducted in a semi-anechoic chamber.
7. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
8. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
9. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.
10. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.


6.3.3 Measurement Data

Mode:a:Vertical

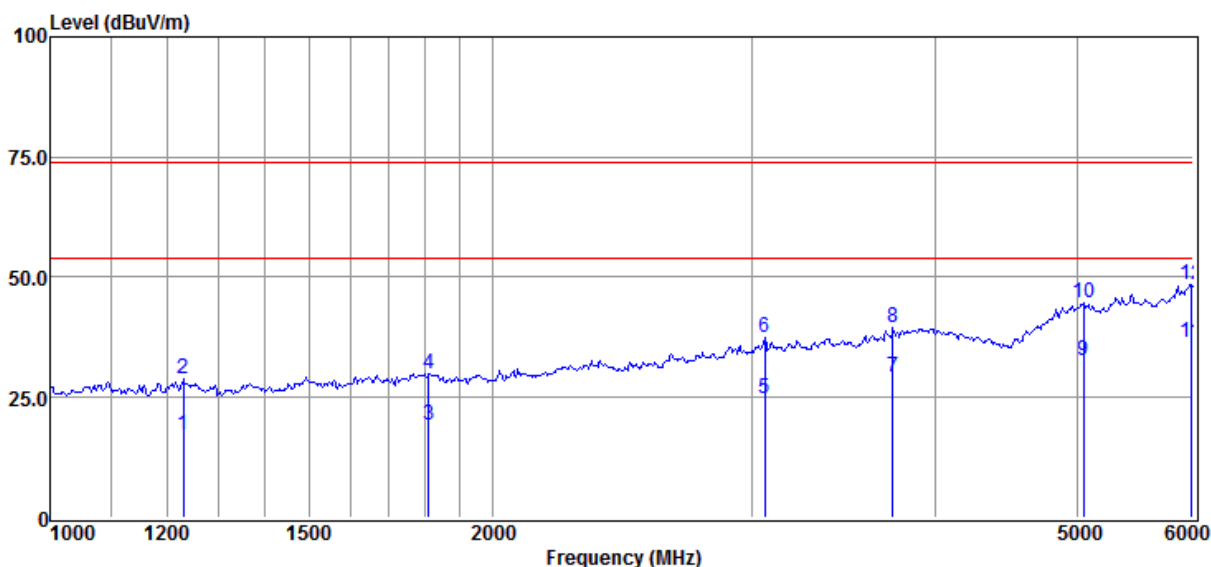

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1231.02	29.68	24.76	40.66	3.43	17.21	54.00	-36.79	Average
2	1231.02	41.36	24.76	40.66	3.43	28.89	74.00	-45.11	Peak
3	1809.54	29.68	26.36	40.98	4.23	19.29	54.00	-34.71	Average
4	1809.54	40.30	26.36	40.98	4.23	29.91	74.00	-44.09	Peak
5	3064.39	29.99	29.55	40.78	5.85	24.61	54.00	-29.39	Average
6	3064.39	42.72	29.55	40.78	5.85	37.34	74.00	-36.66	Peak
7	3745.39	30.80	31.97	40.28	6.60	29.09	54.00	-24.91	Average
8	3745.39	41.39	31.97	40.28	6.60	39.68	74.00	-34.32	Peak
9	5051.83	28.38	37.93	41.69	8.19	32.81	54.00	-21.19	Average
10	5051.83	40.20	37.93	41.69	8.19	44.63	74.00	-29.37	Peak
11	5978.54	32.45	35.94	40.23	8.42	36.58	54.00	-17.42	Average
12	5978.54	44.36	35.94	40.23	8.42	48.49	74.00	-25.51	Peak


Mode:a:Horizontal

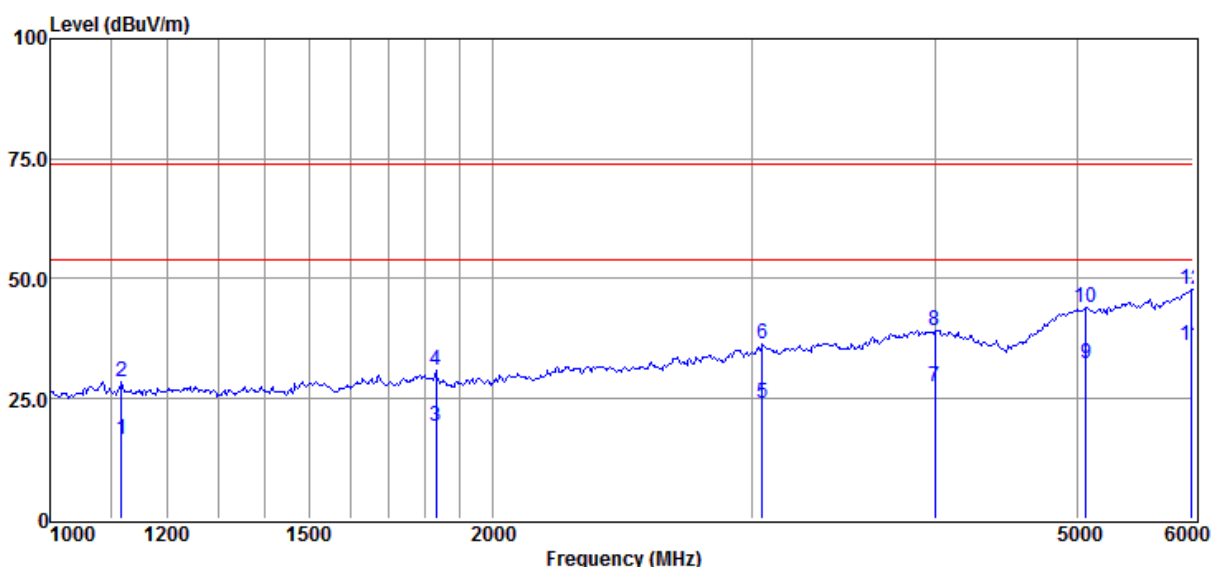

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1117.50	29.16	24.64	40.72	3.25	16.33	54.00	-37.67	Average
2	1117.50	41.47	24.64	40.72	3.25	28.64	74.00	-45.36	Peak
3	1829.10	29.63	26.45	41.01	4.23	19.30	54.00	-34.70	Average
4	1829.10	41.17	26.45	41.01	4.23	30.84	74.00	-43.16	Peak
5	3053.43	29.37	29.51	40.78	5.85	23.95	54.00	-30.05	Average
6	3053.43	41.81	29.51	40.78	5.85	36.39	74.00	-37.61	Peak
7	4002.11	28.01	32.70	40.05	6.99	27.65	54.00	-26.35	Average
8	4002.11	39.64	32.70	40.05	6.99	39.28	74.00	-34.72	Peak
9	5069.97	28.14	37.68	41.68	8.21	32.35	54.00	-21.65	Average
10	5069.97	39.74	37.68	41.68	8.21	43.95	74.00	-30.05	Peak
11	5978.54	31.99	35.94	40.23	8.42	36.12	54.00	-17.88	Average
12	5978.54	43.73	35.94	40.23	8.42	47.86	74.00	-26.14	Peak


Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor

Mode:b:Vertical

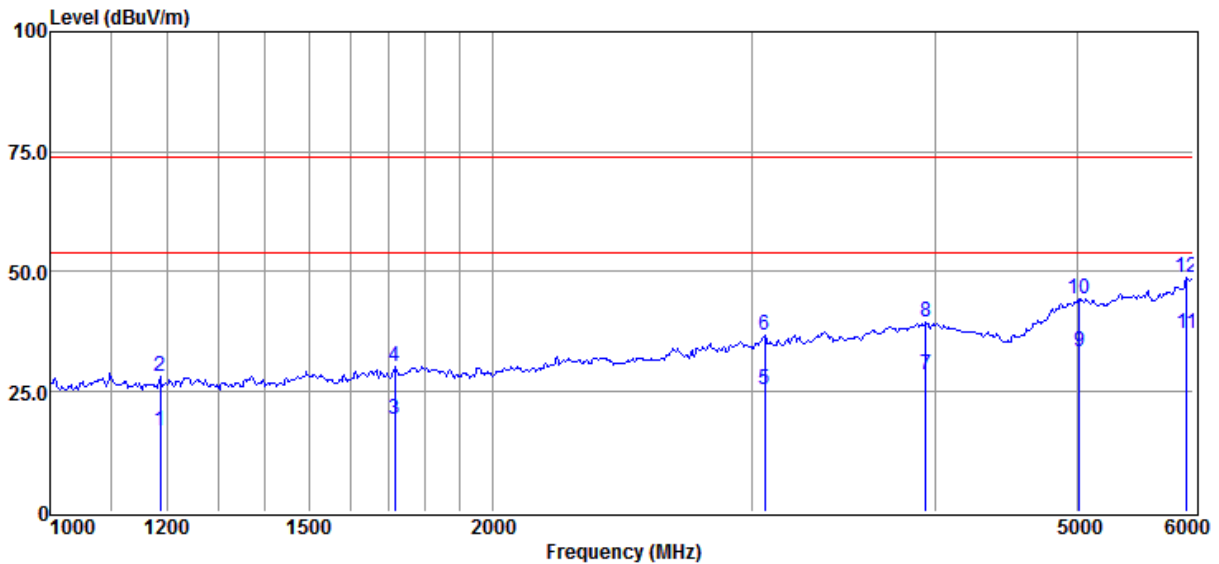

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1187.69	29.31	24.71	40.68	3.37	16.71	54.00	-37.29	Average
2	1187.69	40.79	24.71	40.68	3.37	28.19	74.00	-45.81	Peak
3	1714.84	29.87	25.99	40.85	4.10	19.11	54.00	-34.89	Average
4	1714.84	40.90	25.99	40.85	4.10	30.14	74.00	-43.86	Peak
5	3064.39	30.70	29.55	40.78	5.85	25.32	54.00	-28.68	Average
6	3064.39	42.10	29.55	40.78	5.85	36.72	74.00	-37.28	Peak
7	3945.15	29.18	32.54	40.10	6.90	28.52	54.00	-25.48	Average
8	3945.15	40.21	32.54	40.10	6.90	39.55	74.00	-34.45	Peak
9	5015.75	28.70	38.18	41.71	8.19	33.36	54.00	-20.64	Average
10	5015.75	39.75	38.18	41.71	8.19	44.41	74.00	-29.59	Peak
11	5935.84	33.23	35.76	40.36	8.42	37.05	54.00	-16.95	Average
12	5935.84	45.04	35.76	40.36	8.42	48.86	74.00	-25.14	Peak

Mode:b:Horizontal

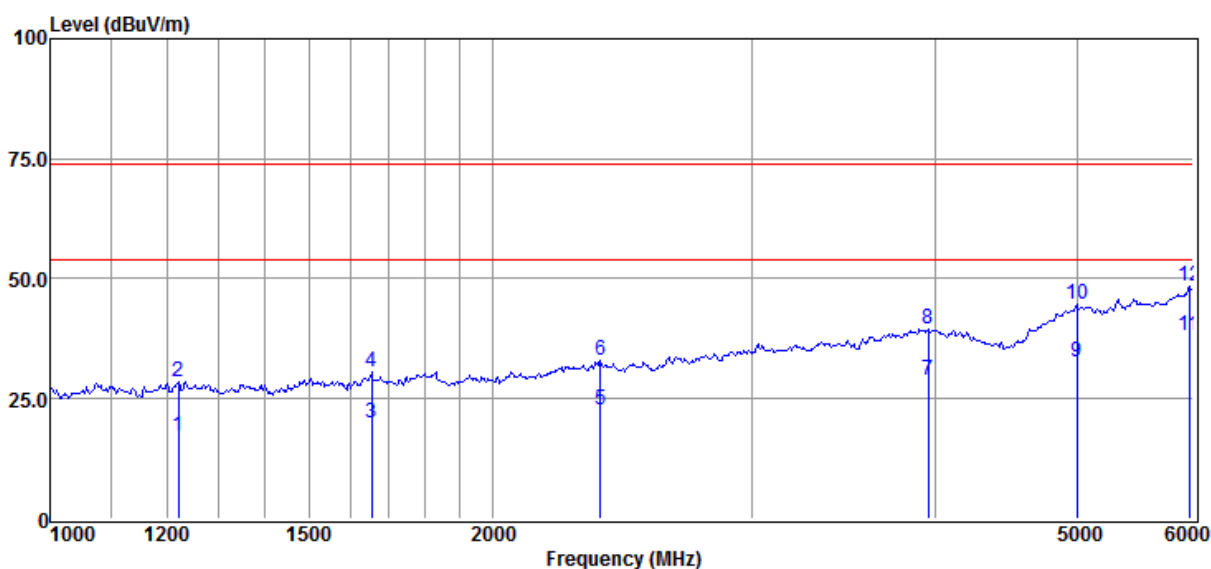

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1222.23	29.54	24.75	40.66	3.43	17.06	54.00	-36.94	Average
2	1222.23	41.10	24.75	40.66	3.43	28.62	74.00	-45.38	Peak
3	1654.48	30.93	25.71	40.76	4.01	19.89	54.00	-34.11	Average
4	1654.48	41.54	25.71	40.76	4.01	30.50	74.00	-43.50	Peak
5	2367.50	30.91	27.63	41.02	5.12	22.64	54.00	-31.36	Average
6	2367.50	41.18	27.63	41.02	5.12	32.91	74.00	-41.09	Peak
7	3959.32	29.28	32.57	40.09	6.99	28.75	54.00	-25.25	Average
8	3959.32	39.99	32.57	40.09	6.99	39.46	74.00	-34.54	Peak
9	4997.81	27.98	38.30	41.72	8.19	32.75	54.00	-21.25	Average
10	4997.81	39.98	38.30	41.72	8.19	44.75	74.00	-29.25	Peak
11	5957.15	34.06	35.82	40.31	8.42	37.99	54.00	-16.01	Average
12	5957.15	44.69	35.82	40.31	8.42	48.62	74.00	-25.38	Peak

$$\text{Level} = \text{Read Level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$$

7 Photographs (Test Setup For the EUT)

7.1 Conducted Emissions on Mains Terminals Test Setup



7.2 Radiated Emission Test Setup

30MHz to 1GHz



1GHz to 6GHz



8 EUT Constructional Details

8.1 Exterior of EUT





8.2 Interior of EUT





--End of the Report--