

# DH-XVR5104HS-4KL-I3(1TB)

4CH Penta-brid 4K Value/5MP Compact 1U 1SSD 1TB WizSense Digital Video Recorder



**Wiz Sense**

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

## Series Overview

Dahua Technology, a world-leading video-centric smart IoT solution and service provider, debuted its new S-XVR series, XVR5000-4KL-I3 Series featuring max.full-channel SMD Plus to benefit customers from AI upgrade (The number of channels differs depending on the model. Please refer to the specifications below for information on the number of channels.). This series has been developed to reduce false-alarm rates and the cost of human surveillance, thus bringing great value to customers in search of products with accurate human/vehicle alarm to raise the security level of various indoor and outdoor facilities.

## Functions

### Internal SSD

Unlike the traditional XVR, S-XVR comes with the SSD preinstalled in the device. It is more energy efficient, and has stronger vibration resistance and better heat dissipation. S-XVR also saves you time on selecting the type of hard disk and installing it, greatly increasing your efficiency.

### Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database.

\*Face Recognition conflicts with SMD Plus and Perimeter Protection.

### Perimeter Protection


Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

### SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

**\* The information below only applies to hardware version 3.0 of the product.**

- Comes with an internal 1TB SSD, and can record videos for about 18 days.
- 4-channel SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles.
- 4-channel perimeter protection for analog channels which supports tripwire and intrusion detection powered by AI.
- 2-channel face recognition for analog channels which supports face comparison.
- 4-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 8-channel IP camera input and each channel can be up to 8 MP. The incoming bandwidth reaches 64 Mbps.
- Smart H.265+ and Smart H.265 dual-stream video compression.
- IoT and POS capabilities.

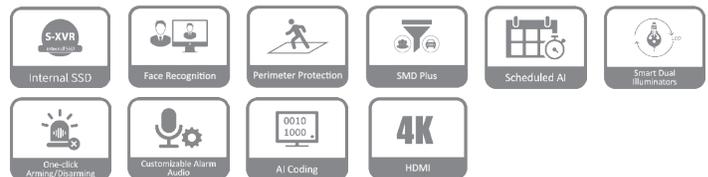

### Scheduled AI

This technology allows multiple AI functions to be set for one channel based on time frames, eliminating the need to manually configure the system to switch between functions each time. Scheduled AI greatly increases efficiency and widens the number of scenarios that the device can be used in.

### Smart Dual Illuminators

With Smart Dual Illuminators technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual illumination technology can meet the requirements of a wide variety of scenes.

### One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

### Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

**AI Coding**

Compared with H.265/H.264, AI coding can reduce more than 50% bit rate and storage requirements without loss of decoding compatibility, providing clear human and vehicle details.

**Technical Specification**

**System**

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

**Perimeter Protection**

Perimeter Performance AI by Recorder (Number of Channels)	Advanced Model: 2 channels, 10 IVS rules for each channel General Model: 4 channels, 10 IVS rules for each channel
---	---

**Face Detection**

Face Attributes	6 attributes
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 8 face images/s each channel)

**Face Recognition**

Face Database Capacity	Up to 10 face databases with 20,000 face images in total.
Face Recognition Performance of AI by Recorder (Number of Channels)	2 channels

**SMD Plus**

SMD Plus by Recorder	4 channels: Secondary filtering for human and motor vehicle , reducing false alarms caused by leaves, rain and lighting condition change
----------------------	--

**Audio and Video**

Analog Camera Input	4 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	1. CVI: 4K@25/30 fps; 6 MP@20 fps; 5 MP@20 fps; 5 MP@25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps. 2. TVI: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps
IP Camera Input	Up to 8 channels of IPC access 4 IP channels by default + 4 channels (analog channels are converted to IP channels) incoming bandwidth: 64 Mbps, recording bandwidth: 64 Mbps and outgoing bandwidth: 64 Mbps *After IP extension is enabled, the AI Function (IVS, SMD, FACE) will be disabled.
Encoding Capacity	Main stream: 4K@(1 fps-7 fps); 6 MP@(1 fps-10 fps); 5 MP@(1 fps-12 fps); 4K-N, 4 MP, 3 MP@(1 fps-15 fps); 4M-N, 1080p, 720p, 960H, D1,CIF@(1 fps-25/30 fps); Sub stream: 960H@(1 fps-15 fps); D1/CIF@(1 fps-25/30 fps)
Dual-stream	Yes

Video Bit Rate	32 kbps-6144 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/8/9
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Samsung

**Compression Standard**

Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM

**Network**

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.12(Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; Firefox; IE
Network Mode	Single-address mode

**Recording Playback**

Record Mode	General; motion detection; intelligent; alarm; POS
Recording Playback	1/4
Backup Method	USB device and network
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback (face and motion detection)

**Alarm**

General Alarm	Motion detection; alarm box; camera external alarm; network alarm; PIR alarm
Anomaly Alarm	Error (no disk, disk error, low space, low quota space; network disconnection; IP conflict; MAC conflict) ;video loss; video tampering; camera offline
Intelligent Alarm	Face detection; face recognition; perimeter protection
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; audio; buzzer; log, preset; email

**Ports**


Audio Input	1-channel RCA 4-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Yes (share the same audio input with the first channel)
HDD Interface	1 SSD:1TB(replaceable with 256 GB or 512 GB) Stores for 18 days under default settings.
RS-485	1 port, for PTZ control
USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)

HDMI	1
VGA	1
Network Port	1 (10/100 Mbps Ethernet port, RJ-45)
<b>General</b>	
Power Supply	12 VDC , 2 A
Power Consumption	<7 W (with SSD)
Net Weight	0.96 kg (2.12 lb)
Gross Weight	1.37 kg (3.03 lb)
Product Dimensions	260.0 mm × 237.9 mm × 47.6 mm (10.24" × 9.37" × 1.87") (W × D × H)
Packaging Dimensions	333.0 mm × 89.0 mm × 315.0 mm (13.12" × 3.51" × 12.41") (W × D × H)
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	≤93% (RH)
Installation	Rack or desktop
Certifications	CE: CE-LVD: IEC 62368-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024, EN 55035 FCC: Part 15 Subpart B


**Ordering Information**

Type	Model	Description
DIGITAL VIDEO RECORDER	DH-XVR5104HS-4KL-I3(1TB)	4CH Penta-brid 4K Value/5MP Compact 1U 1SSD 1TB WizSense Digital Video Recorder

**Dimensions (mm[inch])**

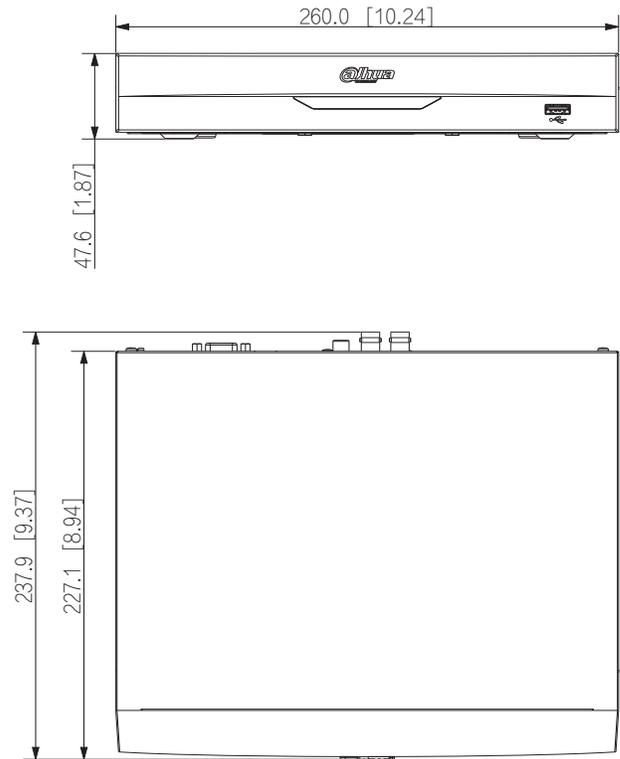

**Panels**

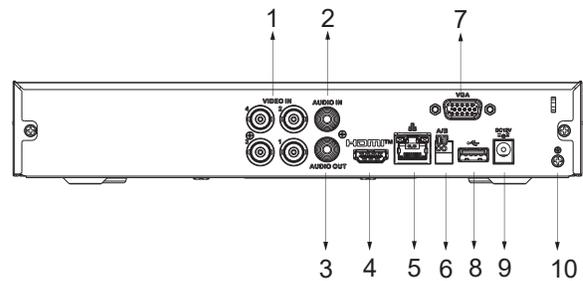

- 1 VIDEO IN
- 2 AUDIO IN, RCA Connector
- 3 AUDIO OUT, RCA Connector
- 4 HDMI Port
- 5 Network Port
- 6 RS-485 Port
- 7 VGA Port
- 8 USB Port
- 9 Power Input
- 10 Ground