

HD PRO SERIES

Series dedicated to the installer who's looking for a high-level camera making the difference in terms of image quality.



DAI-350A-MVF

40M IR 5MP PRO HD ANALOG MOTORIZED VARI-FOCAL LENS ANTI VANDAL DOME CAMERA

Equipped with a 2.8-12mm motorized lens and a protective dome, This 5MP camera is designed for medium distance surveillance (up to 40m) for both indoor and outdoor scenarios. This camera is designed to monitor high-security areas (such as banks, hotels, chain stores and more) and to capture crimes in the act, with full confidence that the camera is protected against vandalism attempts. The vandal-proof IK10 protection makes it extremely hard to sabotage.



MAIN FEATURES


- 5MP
- Pro Series
- 2592x1944 Resolution
- 2.8-12mm motorized Vari-Focal (84°-32°)
- 3D-DNR
- 4 in 1 (AHD/TVI/CVI/CVBS Selectable)
- IP67, Ik10
- COC support



SPECIFICATIONS

Image Sensor	1/2.7" 5MP Sensor
Image Format	5MP - 4:3. 4MP - 16:9
Effective Pixels	2608x1960
Scanning System	Progressive
Resolution	5MP: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL
FPS	25/30FPS
Min. Illumination	Color: 0.01lux @F1.2, AGC ON B/W: 0lux with IR
D&N	True Day&Night-ICR
IR LED	3 LED Array (40m)
OSD Menu	Available via CoC Only
CoC Support	Yes
Day & Night Mode	Ext/Auto/Day/Night
Backlight Compensation	BLC
S/N Ratio	≥52dB (AGC OFF)
White Balance	Auto / Auto->Set
Noise Reduction	3D-DNR
Video Output	5MP / 4MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS (Selectable)
Privacy Mask	No
D-Effect	Mirror + Flip
WDR	Digital
Lens (Field Of View)	2.8-12mm Mega-Pixel Motorized Vari-Focal (84°-32°)
Power	DC12V/600mA
Operation Temperature	-30° ~ 50°, 10% ~ 90% humidity
Protection Rate	IP67, IK10
Dimensions	Φ140.9*100.3mm
Net Weight	805g
Junction Box	PR-JBA14IP66

DIMENSIONS

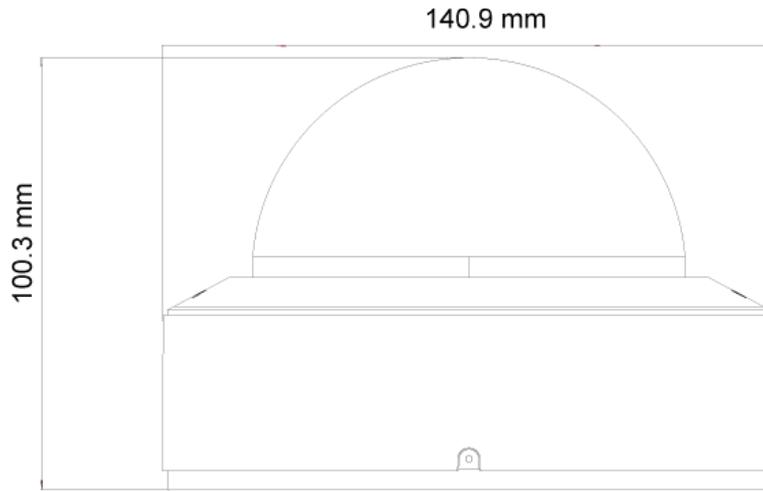

ACCESSORIES



PR-JBA14IP66
Large Water-proof Junction Box