

# DH-HAC-HDW1801T-Z-A

## 4K Starlight HDCVI Motorized Vari-focal IR Eyeball Camera



\* The parameters and datasheets below can only be applied to 1801-S2 series.

- Max. 15 fps@4K.
- 120 dB true WDR, 3D NR.
- Smart IR Illumination.
- 60 m illumination distance.
- Super Adapt.
- Built-in MIC.
- Auto focus, 2.7 mm–13.5 mm motorized lens.
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



### System Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

### Functions

#### Wide Dynamic Range

With its advanced Wide Dynamic Range technology (WDR), the camera captures highly detailed images and produces high-definition recordings in high-contrast lighting conditions, and in scenes with backlighting or shadows.

#### Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

#### Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

#### Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

### 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio\*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

\* Audio input is available for select HDCVI camera models.

### Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes. Wide voltage: The camera has  $\pm 30\%$  input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.


### Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.


Technical Specification								
Camera								
Pixel	8 MP							
Image Sensor	4K CMOS							
Max. Resolution	3840 (H) x 2160 (V)							
Scanning System	Progressive							
Electronic Shutter Speed	PAL: 1/25 s~1/100000 s NTSC: 1/30 s~1/100000 s							
Min. Illumination	0.01 lux@F1.5 (Color, 30 IRE) 0.001 lux@F1.5 (B/W, 30 IRE) 0 lux (Illuminator on)							
S/N Ratio	>65 dB							
Illumination Distance	60 m (196.85 ft)							
Illuminator On/Off Control	Auto/Manual							
Illuminator Number	2 (IR light)							
Pan/Tilt/Rotation Range	Pan: 0°~360° Tilt: 0°~78° Rotation: 0°~360°							
Lens								
Lens Type	Motorized Vari-focal							
Auto Focus	Yes							
Lens Mount	φ14							
Focal Length	2.7 mm~13.5 mm							
Max. Aperture	F1.5							
Field of View	Horizontal: 114°~32° Vertical: 58°~17° Diagonal: 138°~36°							
Iris Control	Fixed							
Close Focus Distance	0.8m							
DORI Distance	Lens	Detect	Observe	Recognize				
	W	85.3 m (279.86 ft)	34.1 m (111.88 ft)	17.1 m (56.10 ft)				
	T	280.0 m (918.64 ft)	112.0 m (367.45 ft)	56.0 m (183.73 ft)				
	Identify  *DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.							
Video								
Video Frame Rate	CVI: PAL: 4K@15 fps; 5M@25 fps; 4M@25 fps; 1080p@25 fps NTSC: 4K@15 fps; 5M@25 fps; 4M@30 fps; 1080p@30 fps TVI: PAL: 4K@15 fps NTSC: 4K@15 fps AHD: PAL: 4K@15 fps NTSC: 4K@15 fps CVBS: PAL: 960H NTSC: 960H							
Resolution								
4K (3840 x 2160); 5M (2880 x 1620); 4M (2560 x 1440); 1080P (1920 x 1080); 960H (960 x 576/960 x 480)								
Day/Night								
Auto(ICR)/Color/B/W								
BLC								
BLC; HLC; WDR; HLC-Pro								
WDR								
120 dB								
White Balance								
Auto/Area white balance								
Gain Control								
Auto/Manual								
Noise Reduction								
3D NR								
Motion Detection								
Yes								
Illumination Mode								
Smart IR								
Defog								
Electronic defog								
Digital Zoom								
4x								
Mirror								
Yes								
Privacy Masking								
Off/On (8 areas, rectangle)								
Certification								
CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; FCC: 47 CFR FCC Part 15, Subpart B; UL: UL62368-1 + CAN/CSA C22.2 No. 62368-1-14								
Port								
Video Output								
Video output choices of CVI/TVI/AHD/CVBS by one BNC port								
Audio Input								
One channel built-in MIC (-A)								
Power								
Power Supply								
12 VDC ± 30% (It is recommended to use a power adapter to supply the power for one camera)								
Power Consumption								
Max 7.9W (12 VDC, IR on)								
Environment								
Operating Temperature								
-30 °C to +60 °C (-22 °F to +140 °F)								
Operating Humidity								
<95% (RH), non-condensing								
Storage Temperature								
-30 °C to +60 °C (-22 °F to +140 °F)								
Protection								
IP67								
Structure								
Casing Material								
Metal								
Product Dimensions								
Φ122.0 mm x 104.8 mm (Φ4.80" x 4.13")								
Net Weight								
0.57 kg (1.26 lb)								
Gross Weight								
0.74 kg (1.63 lb)								
Installation								
Wall mount; ceiling mount; vertical pole mount								

### Ordering Information

Type	Part Number	Description
4K Camera	DH-HAC-HDW1801TP-Z-A	4K HDCVI IR Eyeball Camera, PAL
	DH-HAC-HDW1801TN-Z-A	4K HDCVI IR Eyeball Camera, NTSC
Accessories (Optional)	PFA130-E	Water-proof Junction Box
	PFB203W	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFA106	Adapter Plate of Mini Dome & Eyeball Camera
	PFB220C	Ceiling Mount Bracket of Mini Dome & Eyeball Camera
	PFM800-4K	1-CH Passive Video Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

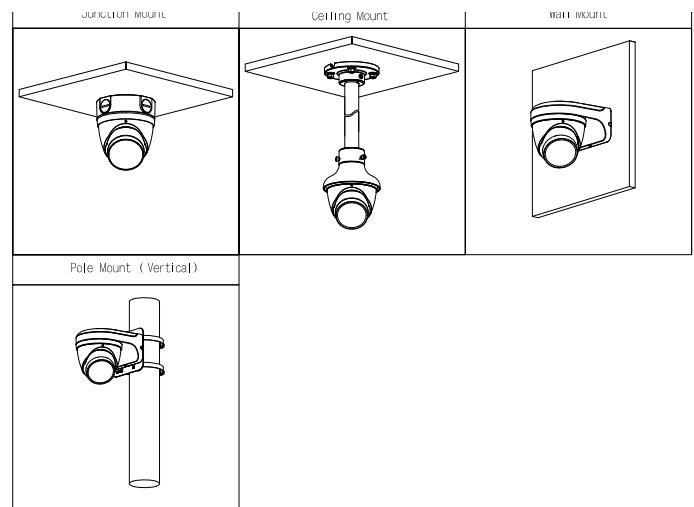

### Dimensions (mm[inch])

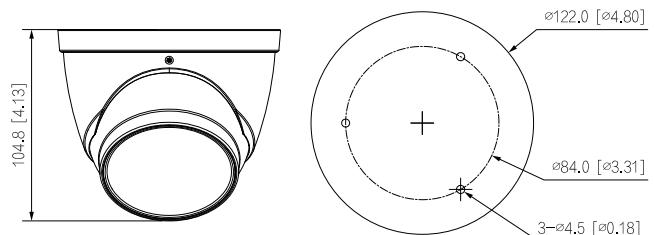

### Accessories

Optional:



PFA130-E  
Water-proof  
Junction Box



PFB203W  
Wall Mount  
Bracket



PFA152-E  
Pole Mount  
Bracket



PFA106  
Adapter Plate of  
Mini Dome & Eyeball  
Camera



PFB220C  
Ceiling Mount Bracket  
of Mini Dome & Eyeball  
Camera



PFM800-4K  
1-CH Passive  
Video Balun



PFM321D  
12V 1A Power  
Adapter



PFM904  
Integrated Mount  
Tester