



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM16120079201
Page: 1 of 26

1 Cover Page

TEST REPORT

Application No.:	SHEM1612007920IT
Applicant:	Zhejiang Dahua Vision Technology Co., Ltd.
Equipment under Test (EUT) NOTE: The following sample(s) was/were submitted and identified by the client as.	
Product Name:	HDCVI CAMERA
Model No.(EUT):	DH-HAC-HDW2231EMP
Add Model No.:	HAC-HDW2231EMP, HAC-HDW2231EMN, DH-HAC-HDW2231EMN, A22BG52, A22BG53, A22BG56
Standards:	CFR 47 Part 15 subpart B, 2015
Date of Receipt:	2016-12-12
Date of Test:	2016-12-13
Date of Issue:	2016-12-26
Test Result:	Pass*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Test Summary

ELECTROMAGNETIC INTERFERENCE (EMI)			
Test	Test Requirement	Test Method	Result
Conducted Emission (150kHz to 30MHz)	CFR 47 Part 15 subpart B, 2015	ANSI C63.4: 2014	PASS
Radiated Emission, (30MHz to 1GHz)	CFR 47 Part 15 subpart B, 2015	ANSI C63.4: 2014	PASS
Radiated Emission above 1 GHz	CFR 47 Part 15 subpart B, 2015	ANSI C63.4: 2014	PASS*
<p>Remark:</p> <p>Note1:* The highest frequency of the internal sources of the EUT is above 1GHz, the measurement shall be made up to 5 times the highest frequency of 6GHz, whichever is less.</p> <p>Note2: There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-HAC-HDW2231EMP was tested since their differences of sales area and software.</p>			

3 Contents

1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS.....	3
4	GENERAL INFORMATION	4
4.1	Client Information.....	4
4.2	Details of E.U.T.	4
4.3	E.U.T Operation Mode.....	4
4.4	E.U.T Operation Environment	4
4.5	Description of Support Units	4
4.6	Deviation from Standards	4
4.7	Abnormalities from Standard Conditions	5
4.8	Modification/Retest Record	5
4.9	Test Location.....	5
4.10	Test Facility.....	5
5	EQUIPMENT LIST	6
6	ELECTROMAGNETIC INTERFERENCE TEST RESULTS.....	8
6.1	Conducted Emissions on Mains Terminals	8
6.2	Radiated Emissions, 30MHz to 1GHz	12
6.3	Radiated Emissions, 1GHz to 6GHz.....	16
7	PHOTOGRAPHS (TEST SETUP FOR THE EUT).....	20
7.1	Conducted Emissions on Mains Terminals Test Setup.....	20
7.2	Radiated Emission Test Setup.....	21
8	EUT CONSTRUCTIONAL DETAILS	22
8.1	Exterior of EUT	22
8.2	Interior of EUT	24-26

4 General Information

4.1 Client Information

Applicant: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Applicant: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
 Manufacturer: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Manufacturer: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
 Factory: Zhejiang Dahua Vision Technology Co., Ltd.
 Address of Factory: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

4.2 Details of E.U.T.

Power Supply: DC 12V;
 Adapter : Input : AC100V-240V Output :DC12V 1A
 Test Voltage: AC 120V, 60Hz

4.3 E.U.T Operation Mode

Functions/Modes: a; Monitoring mode
 Monitoring mode To establish contact between EUT, PC and monitor, keep EUT monitoring image.

4.4 E.U.T Operation Environment

Temperature Range: 20-25°C
 Humidity Range: 30-60% RH
 Atmospheric Pressure Range: 100-105kPa

4.5 Description of Support Units

None.

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Modification/Retest Record

None.

4.9 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

4.10 Test Facility

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively. Date of Expiry: 2017-11-16.

5 Equipment list

Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2016-01-14	2017-01-13
2	Line impedance stabilization network	SCHWARZBECK	NSLK 8127	8127490	2016-01-14	2017-01-13
3	Line impedance stabilization network	EMCO	3816/2	00034161	2016-01-14	2017-01-13
4	SCHWARZBECK CAT5 8158	SCHWARZBECK	8-Wire ISN CAT 5	CAT5-8158-0061	2016-01-14	2017-01-13

Radiated Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1.	EMI test receive	Rohde & Schwarz	ESR7	101391	2016-01-14	2017-01-13
2	CONTROLLER	INNCO	CO200	474	/	/
3	Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	9168-313	2016-01-16	2017-01-15
4	Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	9120D-679	2016-01-16	2017-01-15
5	Amplifier	SCHWARZBECK	SCU-F011 8-G40-BZ 4-CSS(F)	10001	2016-01-14	2017-01-13
6	Low noise amplifier	TESEQ	LNA6900	71033	2016-01-14	2017-01-13

General used equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
1	Digital pressure meter	YONGZHI	DYM3-01	101012	2016-03-03	2017-03-02
2	Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	84320600 803136, F304020153 ,20101201F S100A6K,20 1106117	2016-08-03	2017-08-02
3	Digital Multimeter	FLUKE	17B	19720439	2016-01-14	2017-01-13
4	Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	/	/	/
5	CLAMP METER	FLUKE	316	2503030971	2016-01-14	2017-01-13

6 Electromagnetic Interference Test Results

6.1 Conducted Emissions on Mains Terminals

Test Frequency: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth from 150 kHz to 30 MHz)

Limit:

Frequency range (MHz)	Class B Limits (dB (μV))	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.
Note2: The lower limit is applicable at the transition frequency.


6.1.1 E.U.T. Operation

Test mode: a; Monitoring mode: To establish contact between EUT, PC and monitor, keep EUT monitoring image.

Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.


6.1.2 Test Setup and Procedure

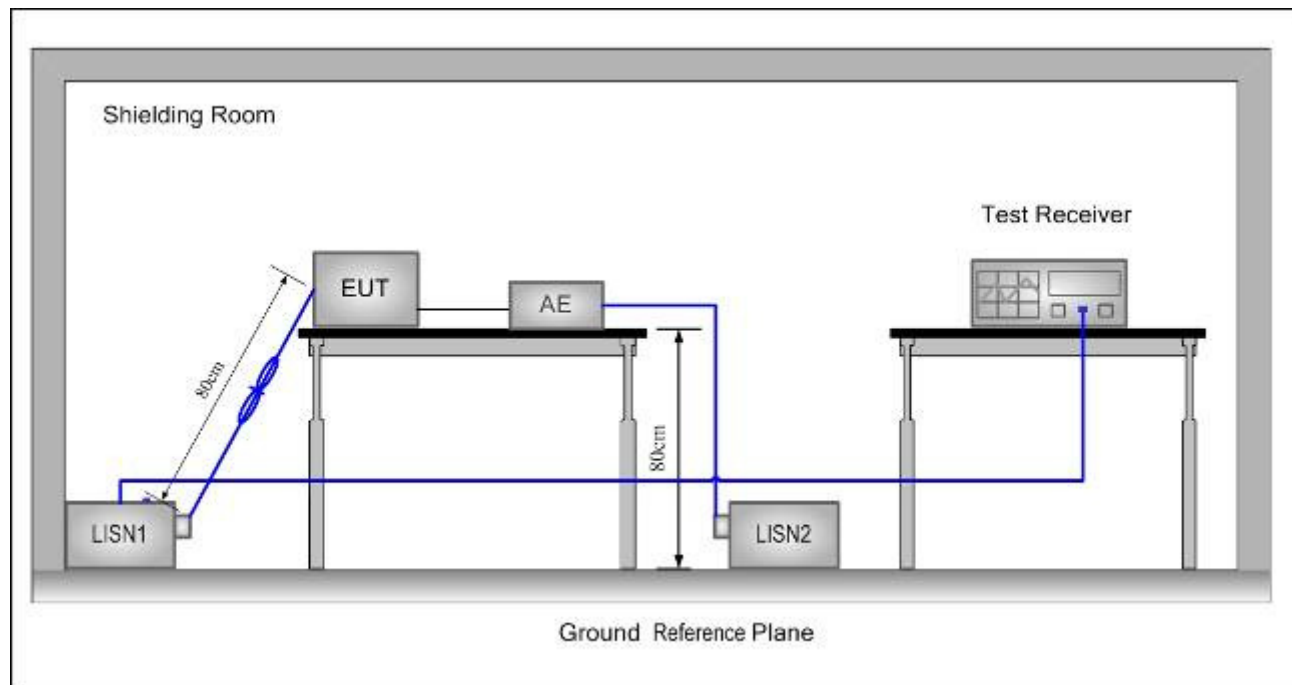

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment was at least 0,8 m from the LISN.


6.1.3 Measurement Data

Live Line:

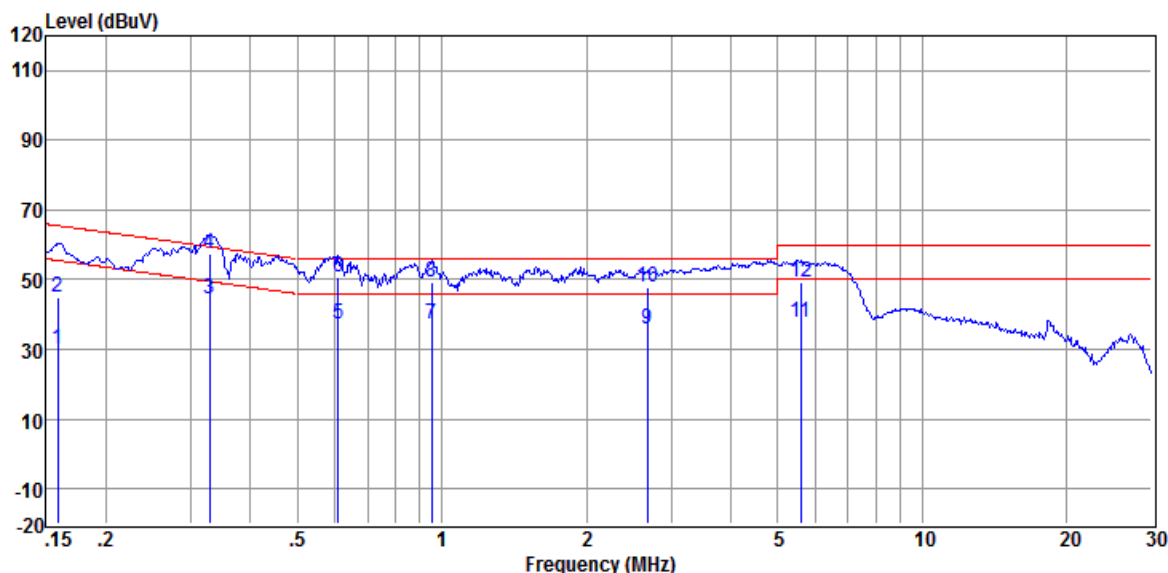

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.159	19.85	0.06	10.15	30.06	55.52	-25.46	Average
2	0.159	34.57	0.06	10.15	44.78	65.52	-20.74	QP
3	0.329	34.10	0.09	10.16	44.35	49.49	-5.14	Average
4	0.329	46.98	0.09	10.16	57.23	59.49	-2.26	QP
5	0.608	26.77	0.10	10.17	37.04	46.00	-8.96	Average
6	0.608	40.25	0.10	10.17	50.52	56.00	-5.48	QP
7	0.953	27.15	0.08	10.18	37.41	46.00	-8.59	Average
8	0.953	38.90	0.08	10.18	49.16	56.00	-6.84	QP
9	2.678	25.29	0.10	10.20	35.59	46.00	-10.41	Average
10	2.678	37.57	0.10	10.20	47.87	56.00	-8.13	QP
11	5.594	27.42	0.16	10.26	37.84	50.00	-12.16	Average
12	5.594	38.88	0.16	10.26	49.30	60.00	-10.70	QP

Neutral Line:

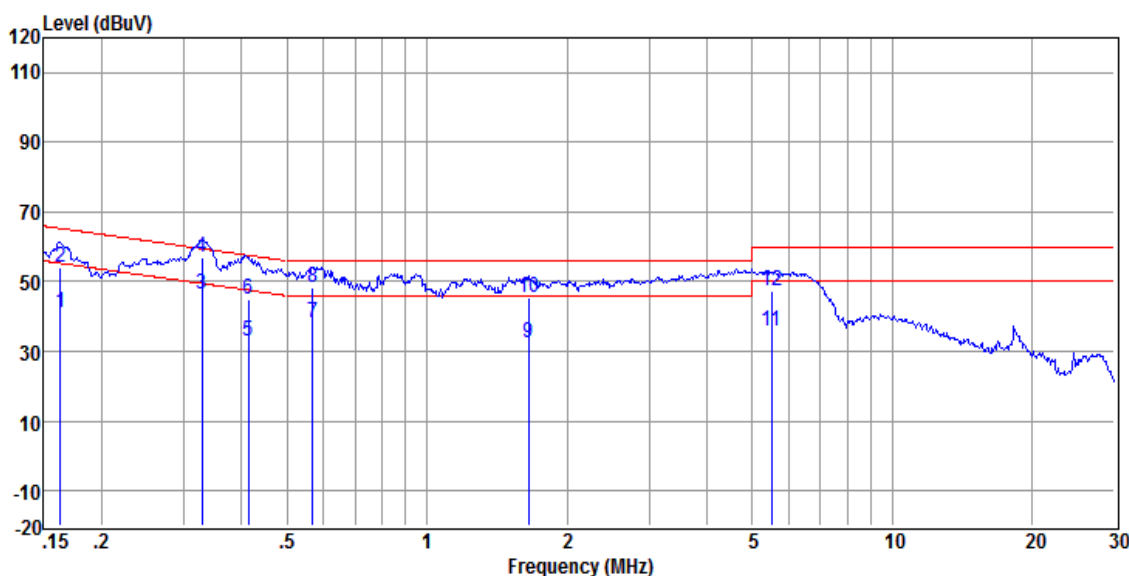

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.163	30.85	0.05	10.15	41.05	55.30	-14.25	Average
2	0.163	44.05	0.05	10.15	54.25	65.30	-11.05	QP
3	0.329	36.13	0.04	10.16	46.33	49.49	-3.16	Average
4	0.329	46.97	0.04	10.16	57.17	59.49	-2.32	QP
5	0.413	22.61	0.04	10.16	32.81	47.59	-14.78	Average
6	0.413	34.88	0.04	10.16	45.08	57.59	-12.51	QP
7	0.567	27.82	0.04	10.17	38.03	46.00	-7.97	Average
8	0.567	38.24	0.04	10.17	48.45	56.00	-7.55	QP
9	1.654	22.33	0.06	10.19	32.58	46.00	-13.42	Average
10	1.654	35.21	0.06	10.19	45.46	56.00	-10.54	QP
11	5.505	25.57	0.18	10.26	36.01	50.00	-13.99	Average
12	5.505	36.84	0.18	10.26	47.28	60.00	-12.72	QP

Level = Read Level + LISN/ISN Factor + Cable Loss

6.2 Radiated Emissions, 30MHz to 1GHz

Detector: Peak for pre-scan (120 kHz resolution bandwidth)

Limit: For 3m

Frequency range (MHz)	Quasi-peak limits (dB (μV/m))
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Note: At transitional frequencies the lower limit applies.


6.2.1 E.U.T. Operation

Test mode: a; Monitoring mode: To establish contact between EUT, PC and monitor, keep EUT monitoring image.

Pre-scan was performed with peak detected on all ports, Quasi-peak measurements was performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak test results.


6.2.2 Test Setup and Procedure

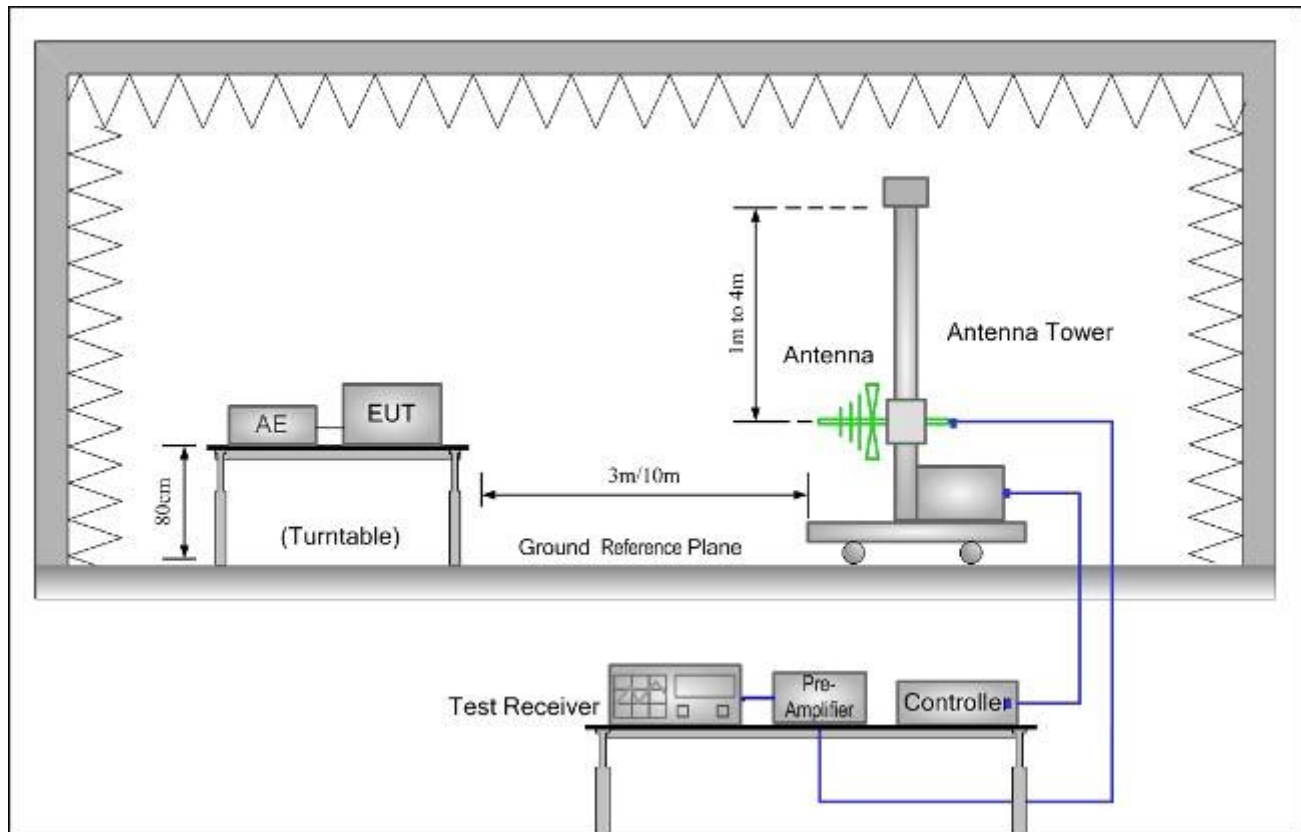

1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. The EUT was connected to DC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.


6.2.3 Measurement Data

Vertical:

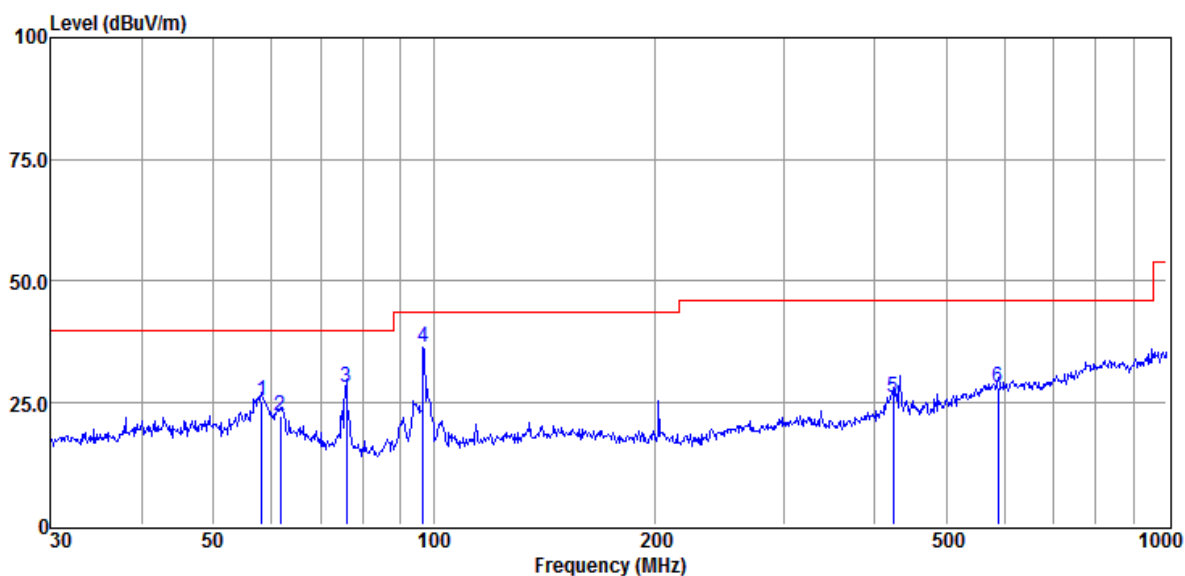

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	58.20	40.34	12.55	28.80	1.19	25.28	40.00	-14.72	QP
2	61.78	37.49	12.32	28.80	1.20	22.21	40.00	-17.79	QP
3	75.98	45.43	10.09	28.80	1.32	28.04	40.00	-11.96	QP
4	96.78	54.35	9.08	28.60	1.47	36.30	43.50	-7.20	QP
5	423.54	36.50	15.82	28.85	2.74	26.21	46.00	-19.79	QP
6	588.91	34.09	20.29	29.24	3.20	28.34	46.00	-17.66	QP

Horizontal:

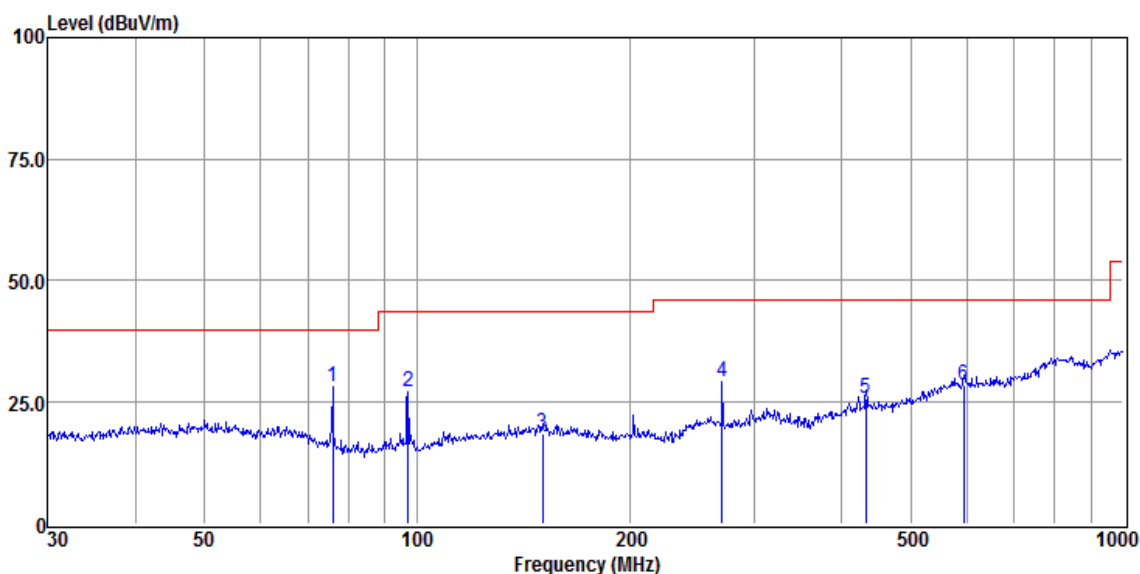

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	75.98	45.65	10.09	28.80	1.32	28.26	40.00	-11.74	QP
2	97.12	45.14	9.10	28.60	1.47	27.11	43.50	-16.39	QP
3	150.54	32.60	12.76	28.40	1.49	18.45	43.50	-25.05	QP
4	270.38	42.72	12.30	27.90	2.10	29.22	46.00	-16.78	QP
5	432.55	35.67	16.11	28.92	2.76	25.62	46.00	-20.38	QP
6	595.13	34.30	20.27	29.25	3.23	28.55	46.00	-17.45	QP

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor

6.3 Radiated Emissions, 1GHz to 6GHz

Detector: Peak for pre-scan (120 kHz resolution bandwidth)

Limit:

Remark: The spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower


6.3.1 E.U.T. Operation

Test mode: a; Monitoring mode: To establish contact between EUT, PC and monitor, keep EUT monitoring image.

Pre-scan was performed with peak detected on all ports, Peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Peak and Average test results.


6.3.2 Test Setup and Procedure

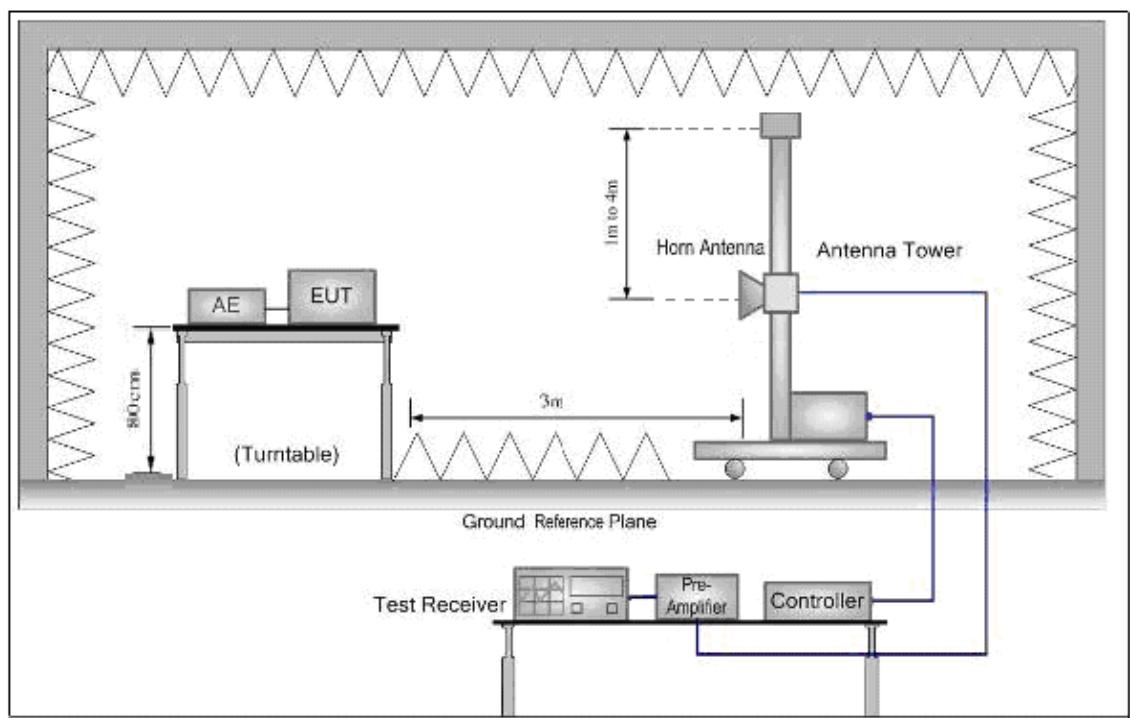

6. The radiated emissions test was conducted in a semi-anechoic chamber.
7. The EUT was connected to DC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
8. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
9. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT.
10. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.


6.3.3 Measurement Data

Vertical:

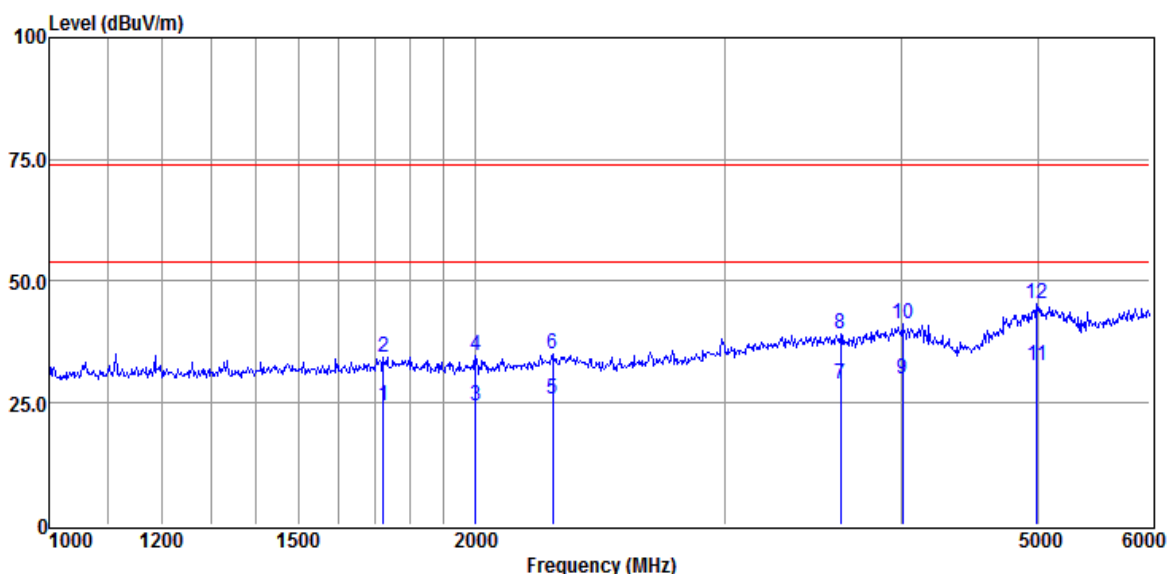

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	1721.00	34.96	26.01	40.86	4.14	24.25	54.00	-29.75	Average
2	1721.00	45.08	26.01	40.86	4.14	34.37	74.00	-39.63	Peak
3	2000.53	34.12	27.10	41.23	4.45	24.44	54.00	-29.56	Average
4	2000.53	44.28	27.10	41.23	4.45	34.60	74.00	-39.40	Peak
5	2267.85	34.36	27.49	41.07	5.04	25.82	54.00	-28.18	Average
6	2267.85	43.51	27.49	41.07	5.04	34.97	74.00	-39.03	Peak
7	3626.53	32.34	31.61	40.38	5.33	28.90	54.00	-25.10	Peak
8	3626.53	42.46	31.61	40.38	5.33	39.02	74.00	-34.98	Average
9	4009.29	30.36	32.70	40.05	6.96	29.97	54.00	-24.03	Peak
10	4009.29	41.54	32.70	40.05	6.96	41.15	74.00	-32.85	Average
11	4988.86	29.14	38.08	41.71	7.04	32.55	54.00	-21.45	Average
12	4988.86	42.08	38.08	41.71	7.04	45.49	74.00	-28.51	Peak

Horizontal:

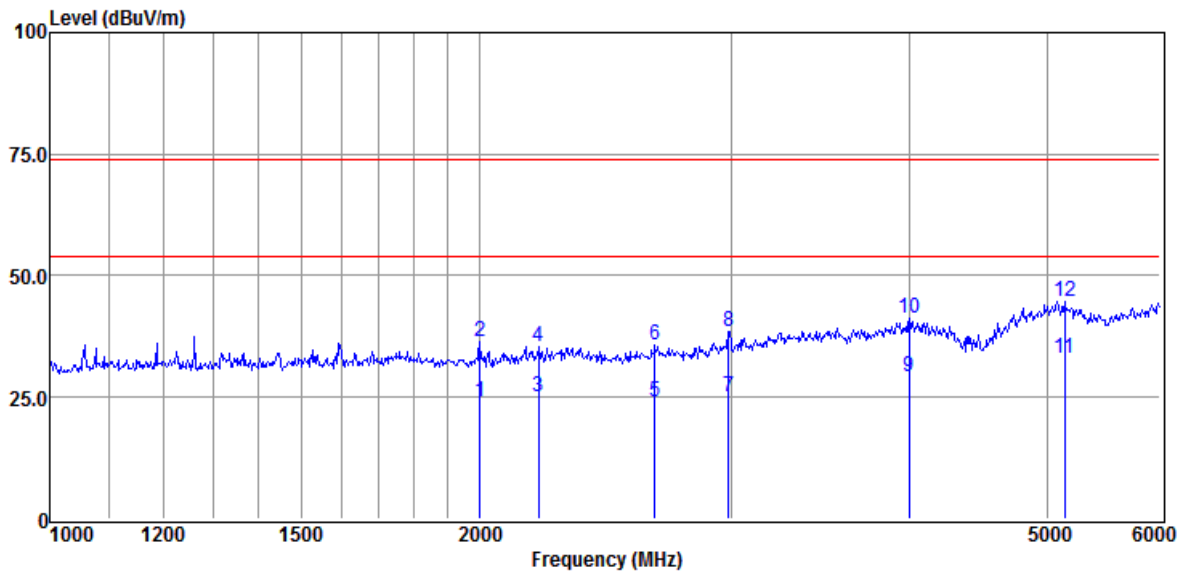

Item	Freq.	Read Level	Antenna Factor	Preamplifier Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	2000.53	33.62	27.10	41.23	4.45	23.94	54.00	-30.06	Average
2	2000.53	46.19	27.10	41.23	4.45	36.51	74.00	-37.49	Peak
3	2199.82	34.27	27.40	41.11	4.49	25.05	54.00	-28.95	Average
4	2199.82	44.57	27.40	41.11	4.49	35.35	74.00	-38.65	Peak
5	2655.17	32.23	27.96	40.91	4.82	24.10	54.00	-29.90	Average
6	2655.17	43.76	27.96	40.91	4.82	35.63	74.00	-38.37	Peak
7	2988.48	31.26	29.26	40.82	5.35	25.05	54.00	-28.95	Average
8	2988.48	44.86	29.26	40.82	5.35	38.65	74.00	-35.35	Peak
9	4002.11	29.56	32.70	40.05	6.96	29.17	54.00	-24.83	Average
10	4002.11	41.51	32.70	40.05	6.96	41.12	74.00	-32.88	Peak
11	5143.16	30.24	37.06	41.64	7.21	32.87	54.00	-21.13	Average
12	5143.16	42.19	37.06	41.64	7.21	44.82	74.00	-29.18	Peak

Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor

7 Photographs (Test Setup For the EUT)

7.1 Conducted Emissions on Mains Terminals Test Setup



7.2 Radiated Emission Test Setup

Below 1G:



Above 1G:





8 EUT Constructional Details


8.1 Exterior of EUT





8.2 Interior of EUT

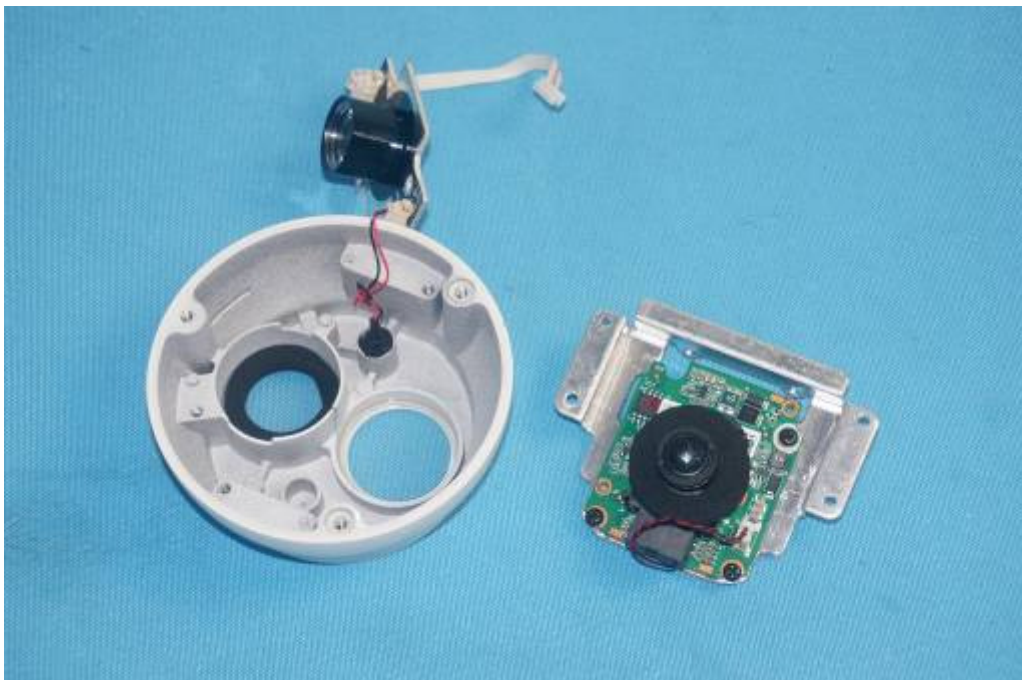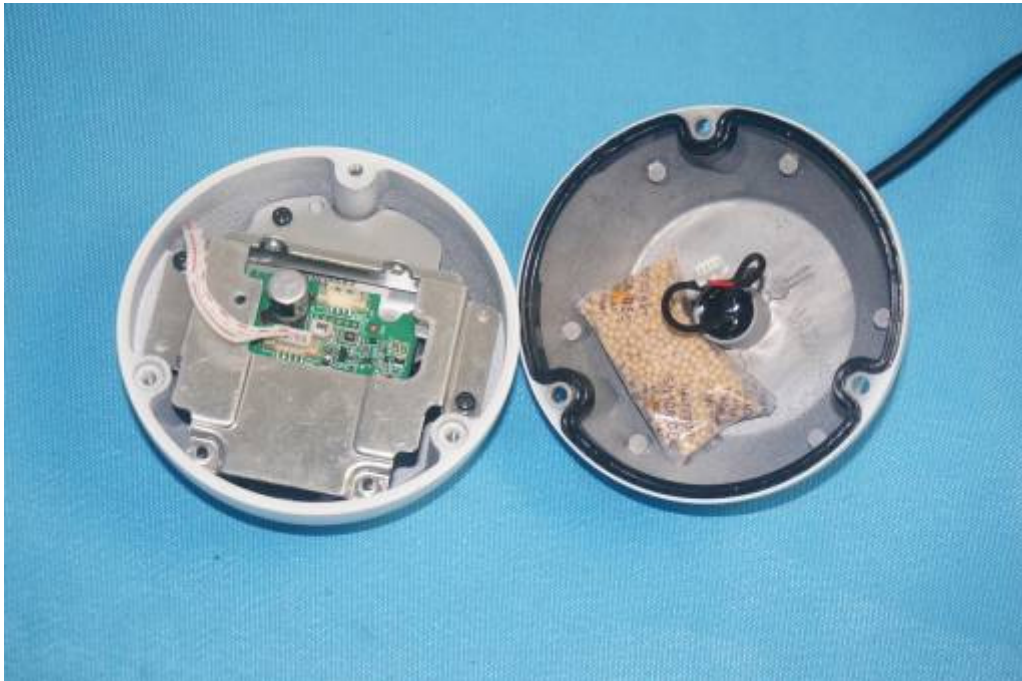

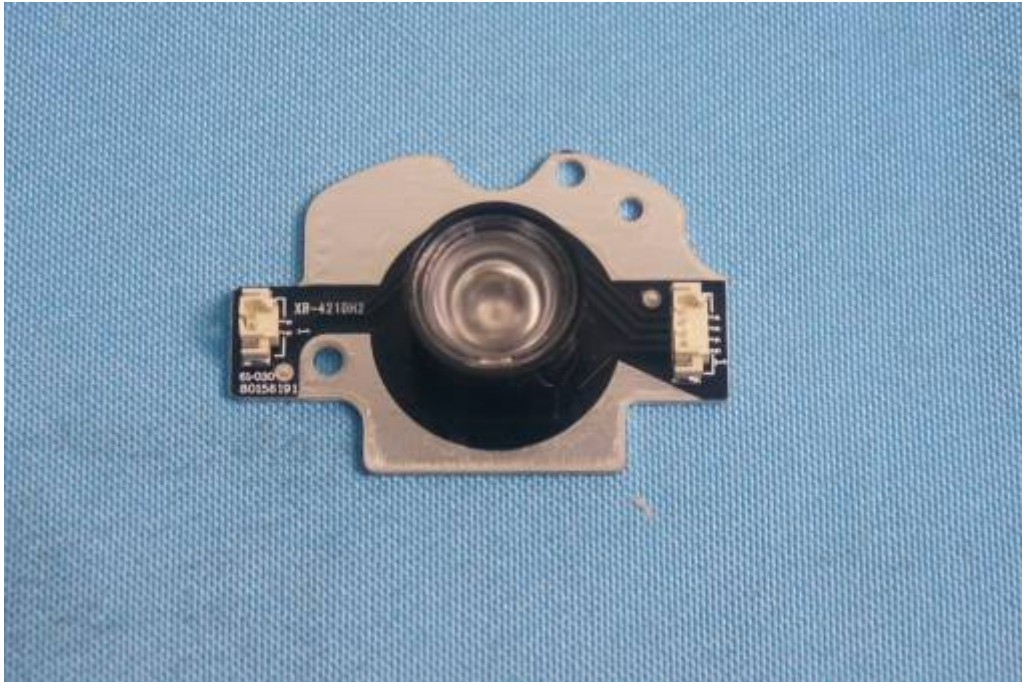



--End of the Report--