



EMC TEST REPORT

Authorized under **Declaration of Conformity**

According to

EN 55022:2010	EN 55024 : 2010
EN 61000-6-3: 2007	EN 50130-4: 2011
EN 61000-3-2: 2006+A2: 2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
	IEC 61000-4-4 : 2012
	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant : Zhejiang Dahua Vision Technology Co., Ltd.

Address : The 1st floor, building F, No.1199 Bin'an road, Changhe
Street, Binjiang District, Hangzhou, P.R. China.

Equipment : HDCVI CAMERA

Model No. : HAC-HF3101P, HAC-HF3101N,
DH-HAC-HF3101P, DH-HAC-HF3101N

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology (Suzhou) Corp.** the test report shall not be reproduced except in full.
- This test report is only applicable to European Community.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

CERTIFICATE OF COMPLIANCE	5
1. Summary of Test Procedure and Test Results	6
2. Immunity Testing Performance Criteria Definition	7
3. Test Configuration of Equipment under Test	8
3.1. Manufacturer	8
3.2. Feature of Equipment under Test.....	8
3.3. Test Software and Test Mode	8
3.4. Description of Support Unit	9
3.5. General Information of Test.....	10
3.6. Measurement Uncertainty	10
4. Test of Conducted Emission.....	11
4.1. Test Limit	11
4.2. Test Procedures	12
4.3. Typical Test Setup	12
4.4. Measurement equipment	13
4.5. Test Data and Result.....	14
4.6. Test Photographs	20
5. Test of Radiated Emission	24
5.1. Test Limit	24
5.2. Test Procedures	25
5.3. Typical test Setup.....	26
5.4. Measurement equipment	27
5.5. Test Result and Data (30MHz ~ 1000MHz)	28
5.6. Test Result and Data (1000MHz ~ 6000MHz)	32
5.7. Test Photographs (30MHz ~ 1000MHz).....	36
5.8. Test Photographs (1000MHz ~ 6000MHz).....	38
6. Harmonics Test	40
6.1. Limits of Harmonics Current Measurement	40
6.2. Measurement equipment	40
6.3. Test Result and Data.....	42
6.1. Test Photographs	46
7. Voltage Fluctuations Test	48
7.1. Test Procedure	48
7.2. Measurement equipment	48
7.3. Test Result and Data.....	49
7.4. Test Photographs	53
8. Electrostatic Discharge Immunity Test	55
8.1. Test Procedure	55
8.2. Test Setup for Tests Performed in Laboratory.....	56
8.3. Test Severity Levels	57
8.4. Measurement equipment	57
8.5. Test Result and Data.....	58



8.6. Test Photographs	61
9. Radio Frequency electromagnetic field immunity test.....	66
9.1. Test Procedure	66
9.2. Test Severity Levels	67
9.3. Measurement equipment	67
9.4. Test Result and Data	68
9.5. Test Photographs	70
10. Electrical Fast Transient/ Burst Immunity Test	72
10.1. Test Procedure	72
10.2. Test Severity Levels	73
10.3. Measurement equipment	73
10.4. Test Result and Data	74
10.5. Test Photographs	77
11. Surge Immunity Test	81
11.1. Test Procedure	81
11.2. Test Severity Level	82
11.3. Measurement equipment	82
11.4. Test Result and Data	83
11.5. Test Photographs	87
12. Conduction Disturbances induced by Radio-Frequency Fields.....	89
12.1. Test Procedure	89
12.2. Test Severity Levels	90
12.3. Measurement equipment	90
12.4. Test Result and Data	91
12.5. Test Photographs	93
13. Power Frequency Magnetic Field Immunity Tests	95
13.1. Test Setup	95
13.2. Test Severity Levels	95
13.1. Measurement equipment	95
13.1. Test Result and Data	96
13.2. Test Photographs	97
14. Voltage Dips and Voltage Interruptions Immunity Test Setup	99
14.1. Test Conditions	99
14.2. Measurement equipment	99
14.3. Test Result and Data	100
14.4. Test Photographs	103
15. EUT Photographs.....	105

History of this test report

■ ORIGINAL.

☐ Additional attachment as following record:

[illegible]



CERTIFICATE OF COMPLIANCE

According to

EN 55022:2010	EN 55024 : 2010
EN 61000-6-3: 2007	EN 50130-4: 2011
EN 61000-3-2: 2006+A2: 2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
	IEC 61000-4-4 : 2012
	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant : Zhejiang Dahua Vision Technology Co., Ltd.

Address : The 1st floor, building F, No.1199 Bin'an road, Changhe
Street, Binjiang District, Hangzhou, P.R. China.

Equipment : HDCVI CAMERA

Model No. : HAC-HF3101P, HAC-HF3101N,
DH-HAC-HF3101P, DH-HAC-HF3101N

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **EUROPEAN COUNCIL DIRECTIVE 2004/108/EC**.

The test was carried out on Jan 25, 2014 at **Cerpass Technology(Suzhou) Corp.**

Signature

Miro Chueh/ Technical director



1. Summary of Test Procedure and Test Results

EMISSION(EN 55022:2010 / EN 61000-6-3: 2007)		
Test Item	Normative References	Test Result
Conducted Emission	EN 55022 : 2010 EN 61000-6-3: 2007	PASS
Radiated Emission	EN 55022 : 2010 EN 61000-6-3: 2007	PASS
Harmonics	EN 61000-3-2: 2006+A2: 2009	PASS
Voltage Fluctuations	EN 61000-3-3: 2008	PASS

IMMUNITY (EN 55024 : 2010)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	± 4 kV (contact discharge, HCP/VPC) ± 8 kV (Air discharge)	PASS
Radio Frequency electromagnetic field immunity test (RS)	80-1000 MHz, 3V/m, 80%AM(1KHz)	PASS
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: ± 1 kV, Signal Port: ± 0.5 kV	PASS
Surge Immunity Test	AC Power Ports: Line to Line: ± 1 kV Line to earth: ± 2 kV Signal and telecommunication port: ± 1 kV	PASS
Conduction Disturbances induced by Radio-Frequency Fields	0.15-80MHz, 3V, 80%AM(1KHz)	PASS
Power Frequency Magnetic Field Immunity Test	50Hz, 1A/m	PASS
Voltage Dips and Voltage Interruptions Immunity Test	Voltage dips: >95% Reduction, 0.5 Durations (Cycle)	PASS
	30% Reduction, 25 Durations (Cycle)	PASS
	Voltage interruptions: >95% Reduction, 250 Durations (Cycle)	PASS



IMMUNITY (EN 50130-4: 2011)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	± 6 kV (contact discharge ,HCP/VPC) ± 8 kV (Air discharge)	PASS
Radio Frequency electromagnetic field immunity test (RS)	80-2700 MHz, 10V/m, 80%AM(1KHz)	PASS
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: ± 2.0 kV, Signal Port: ± 1.0 kV	PASS
Surge Immunity Test	AC Power Ports: line to line: ± 0.5 , ± 1 kV line to earth: ± 0.5 , ± 1 , ± 2 kV Signal Port: ± 0.5 , ± 1 kV	PASS
Conduction Disturbances induced by Radio-Frequency Fields	0.15-100MHz, 10V, 80%AM(1KHz)	PASS
Voltage Dips and Voltage Interruptions Immunity Test	Voltage Interruptions: 100% Reduction, 250 Cycle	PASS
	Voltage Dips: 60% Reduction, 10 Cycle 30% Reduction, 25 Cycle 20% Reduction, 250 Cycle	PASS

2. Immunity Testing Performance Criteria Definition

- A. Normal performance within limits specified by the manufacture, requestor or purchaser;
- B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- C. Temporary loss of function or degradation of performance, the correction of which requires operation intervention;
- D. Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.



3. Test Configuration of Equipment under Test

3.1. Manufacturer

Zhejiang Dahua Vision Technology Co., Ltd.

The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.

3.2. Feature of Equipment under Test

HDCVI CAMERA	Model No.:	HAC-HF3101P, HAC-HF3101N, DH-HAC-HF3101P, DH-HAC-HF3101N
Remark	Hardware circuit and the shell structure are the same, they are only different in internal procedures or whether the shell with logo or not. HAC-HF3101P was selected as the test model and its data have been recorded in this report.	
Adapter	Model No.:	ADS-24RD-12 1224G
	Input Rating:	100-240V~ 50/60Hz Max. 0.7A
	Output Rating:	12V 2.0A
Adapter	Model No.:	HKA-A24150-230
	Input Rating:	230V~ 50Hz 88W
	Output Rating:	24V 1500mA 36VA

3.3. Test Software and Test Mode

Test Software

- During testing, the interface cables and equipment positions were varied according to Europe Standard.
- Turn on the power of all equipment.
- The complete test system included Monitor, DVR, DVD and EUT for EMC test.

The pre-test modes

Test Mode 1: Normal Operation with ADS-24RD-12 1224G

Test Mode 2: Normal Operation with HKA-A24150-230

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Normal Operation with ADS-24RD-12 1224G

Test Mode 2: Normal Operation with HKA-A24150-230

**3.4. Description of Support Unit**

No	Device	Manufacturer	Model No.	Description
1	Monitor	PTS	PTS-1401C	Unshielded, 1.8m
2	DVR	DAHUA	DVR5208	Unshielded, 1.8m
3	DVD	Pioneer	DV-600AV-S	Unshielded, 1.8m

No	Cable	Quantity	Description
A	BNC Cable	1	Shielded, >3.0m
B	BNC Cable	1	Shielded, >3.0m
C	BNC Cable	1	Shielded, >3.0m



3.5. General Information of Test

Test Site:	Cerpass Technology (Suzhou) Co.,Ltd
Test Site Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 6GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

LABORATORY ACCREDITATION



3.6. Measurement Uncertainty

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ± 3.59 dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.89 dB
(1G-6GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 61000-6-3. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

Table 1 Class B Line Conducted Emission Limits:

Frequency range (MHz)	Limits (dB μ V)	
	Quasi Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5. to 30.	60	50
Note 1: The lower limits shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to .50MHz.		


Table 2 - Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment.

Frequency range (MHz)	Voltage limits dB(μ V)		Current limits dB(μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 to 30	74	64	30	20
Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 to 0.5 MHz.				
Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication under test (conversion factor is $20 \log_{10} 150/1 = 44\text{dB}$).				

4.2. Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

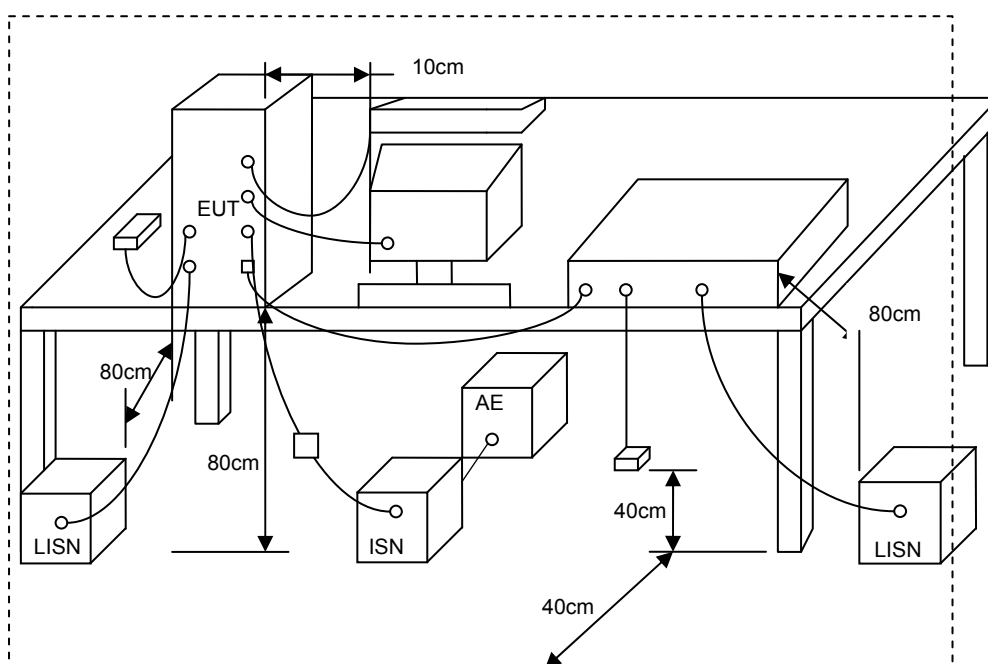




4.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2013.03.10	2014.03.09
AMN	R&S	ESH2-Z5	100182	2013.09.11	2014.09.10
Two-Line V-Network	R&S	ENV216	100325	2013.03.10	2014.03.09
ISN	FCC	FCC-TLISN-T2-02	20379	2013.06.25	2014.06.24
ISN	FCC	FCC-TLISN-T4-02	20380	2013.06.25	2014.06.24
ISN	FCC	FCC-TLISN-T8-02	20381	2013.07.09	2014.07.08
ISN	TESEQ	ISN ST08	30175	2013.09.11	2014.09.10
Current Probe	R&S	EZ-17	100303	2013.03.10	2014.03.09
Passive Voltage Probe	R&S	ESH2-Z3	100026	2013.03.10	2014.03.09
Pulse Limiter	R&S	ESH3-Z2	100529	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



4.5. Test Data and Result

Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

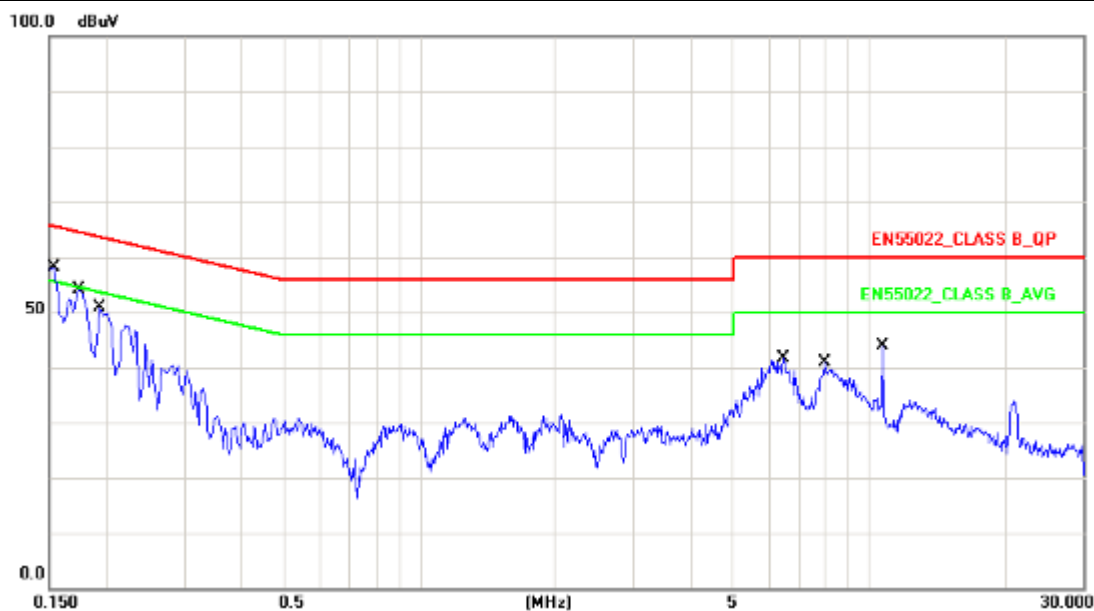


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	10.13	44.48	54.61	65.78	-11.17	QP
2	0.1539	10.13	26.63	36.76	55.78	-19.02	AVG
3	0.1749	10.12	41.92	52.04	64.72	-12.68	QP
4	0.1749	10.12	26.93	37.05	54.72	-17.67	AVG
5	0.1945	10.12	38.49	48.61	63.84	-15.23	QP
6	0.1945	10.12	21.93	32.05	53.84	-21.79	AVG
7	6.4620	10.25	24.43	34.68	60.00	-25.32	QP
8	6.4620	10.25	13.45	23.70	50.00	-26.30	AVG
9	7.9980	10.25	27.14	37.39	60.00	-22.61	QP
10	7.9980	10.25	22.06	32.31	50.00	-17.69	AVG
11	10.7420	10.29	16.67	26.96	60.00	-33.04	QP
12	10.7420	10.29	7.35	17.64	50.00	-32.36	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

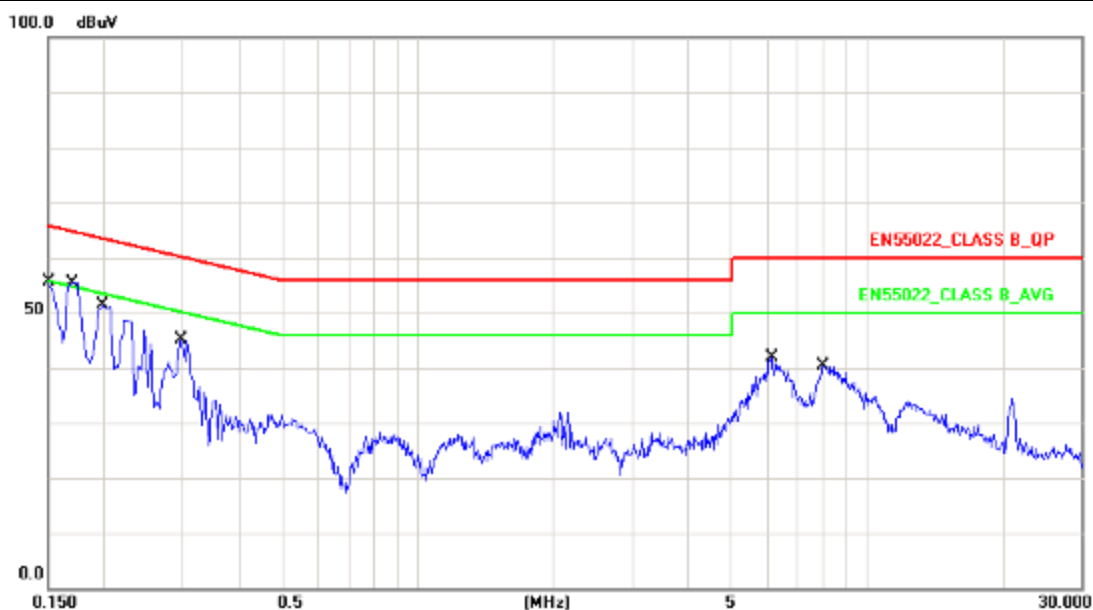


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.13	46.79	56.92	65.99	-9.07	QP
2	0.1500	10.13	32.41	42.54	55.99	-13.45	AVG
3	0.1700	10.13	42.37	52.50	64.96	-12.46	QP
4	0.1700	10.13	28.02	38.15	54.96	-16.81	AVG
5	0.1980	10.13	38.84	48.97	63.69	-14.72	QP
6	0.1980	10.13	25.40	35.53	53.69	-18.16	AVG
7	0.2980	10.14	32.13	42.27	60.30	-18.03	QP
8	0.2980	10.14	24.58	34.72	50.30	-15.58	AVG
9	6.1380	10.27	26.59	36.86	60.00	-23.14	QP
10	6.1380	10.27	15.00	25.27	50.00	-24.73	AVG
11	8.0020	10.26	28.04	38.30	60.00	-21.70	QP
12	8.0020	10.26	22.67	32.93	50.00	-17.07	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

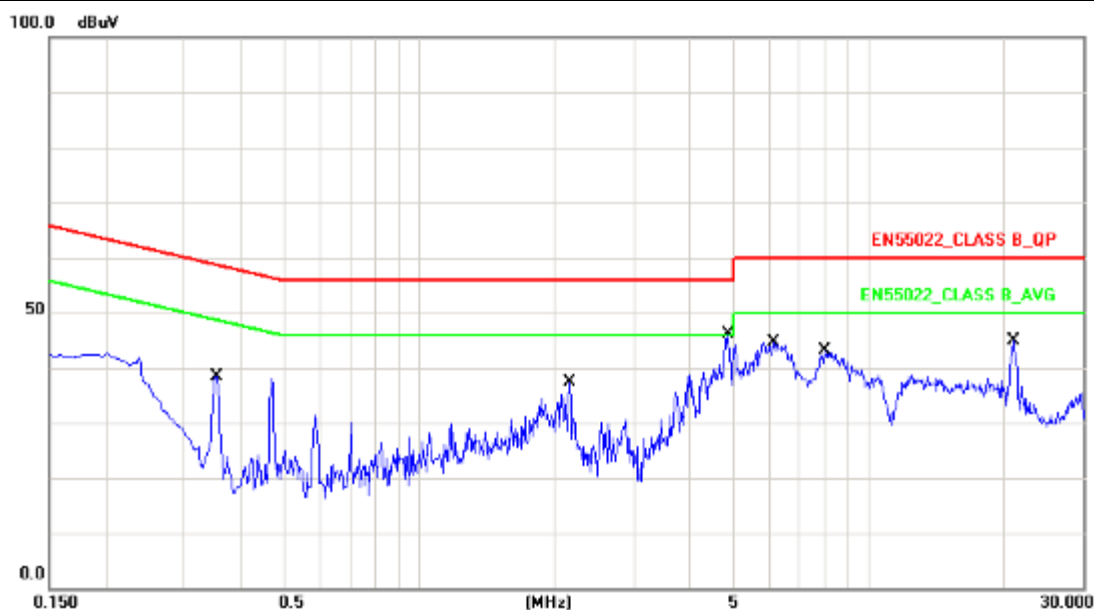


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3540	10.15	25.82	35.97	58.87	-22.90	QP
2	0.3540	10.15	25.18	35.33	48.87	-13.54	AVG
3	2.1619	10.17	21.47	31.64	56.00	-24.36	QP
4	2.1619	10.17	7.98	18.15	46.00	-27.85	AVG
5	4.8580	10.24	27.30	37.54	56.00	-18.46	QP
6	4.8580	10.24	13.29	23.53	46.00	-22.47	AVG
7	6.1460	10.25	30.05	40.30	60.00	-19.70	QP
8	6.1460	10.25	18.32	28.57	50.00	-21.43	AVG
9	8.0020	10.25	30.57	40.82	60.00	-19.18	QP
10	8.0020	10.25	24.57	34.82	50.00	-15.18	AVG
11	20.9820	10.36	32.10	42.46	60.00	-17.54	QP
12	20.9820	10.36	31.90	42.26	50.00	-7.74	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

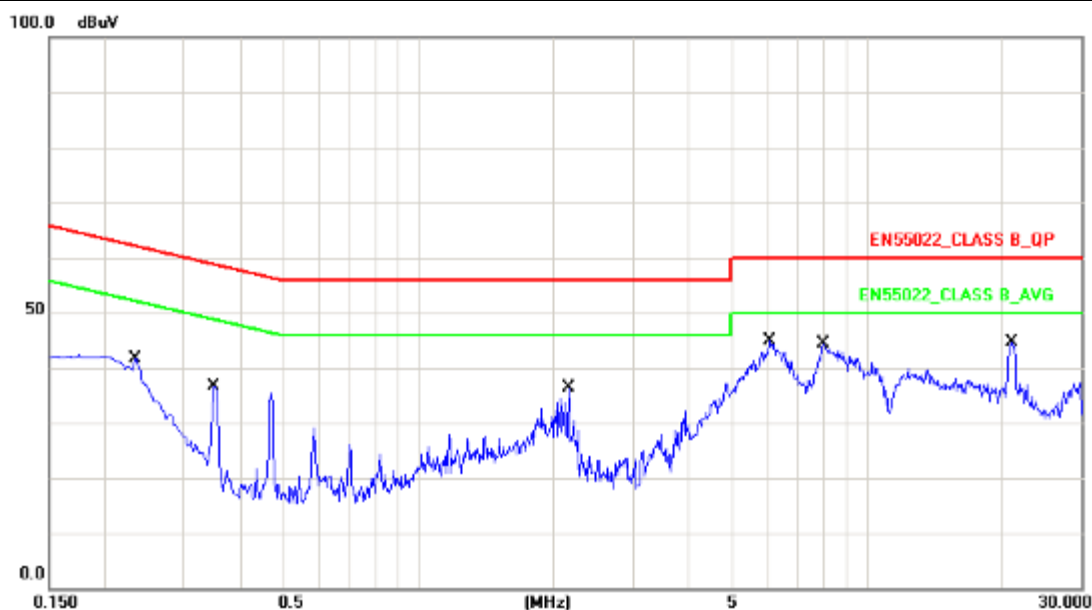

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2340	10.13	23.75	33.88	62.30	-28.42	QP
2	0.2340	10.13	20.35	30.48	52.30	-21.82	AVG
3	0.3500	10.14	25.39	35.53	58.96	-23.43	QP
4	0.3500	10.14	24.92	35.06	48.96	-13.90	AVG
5	2.1660	10.18	18.41	28.59	56.00	-27.41	QP
6	2.1660	10.18	5.99	16.17	46.00	-29.83	AVG
7	6.0580	10.27	29.63	39.90	60.00	-20.10	QP
8	6.0580	10.27	18.20	28.47	50.00	-21.53	AVG
9	8.0020	10.26	30.57	40.83	60.00	-19.17	QP
10	8.0020	10.26	24.82	35.08	50.00	-14.92	AVG
11	20.9260	10.43	31.36	41.79	60.00	-18.21	QP
12	20.9260	10.43	30.95	41.38	50.00	-8.62	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25



No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.1900	4.80	-6.39	-1.59	38.03	-39.62	QP
2	0.1900	4.80	-16.47	-11.67	28.03	-39.70	AVG
3	1.7700	9.30	-12.35	-3.05	30.00	-33.05	QP
4	1.7700	9.30	-22.59	-13.29	20.00	-33.29	AVG
5	3.3980	9.48	-7.47	2.01	30.00	-27.99	QP
6	3.3980	9.48	-20.16	-10.68	20.00	-30.68	AVG
7	5.4180	9.38	-9.82	-0.44	30.00	-30.44	QP
8	5.4180	9.38	-22.64	-13.26	20.00	-33.26	AVG
9	7.9980	9.64	-6.62	3.02	30.00	-26.98	QP
10	7.9980	9.64	-14.38	-4.74	20.00	-24.74	AVG
11	9.1780	9.77	-7.55	2.22	30.00	-27.78	QP
12	9.1780	9.77	-13.62	-3.85	20.00	-23.85	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temperature :	26°C	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25



No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.2020	5.23	-6.95	-1.72	37.52	-39.24	QP
2	0.2020	5.23	-16.51	-11.28	27.52	-38.80	AVG
3	0.4620	6.80	-14.29	-7.49	30.66	-38.15	QP
4	0.4620	6.80	-22.16	-15.36	20.66	-36.02	AVG
5	1.8980	9.48	-13.12	-3.64	30.00	-33.64	QP
6	1.8980	9.48	-23.62	-14.14	20.00	-34.14	AVG
7	3.2700	9.49	-6.42	3.07	30.00	-26.93	QP
8	3.2700	9.49	-18.67	-9.18	20.00	-29.18	AVG
9	5.3380	9.37	-8.73	0.64	30.00	-29.36	QP
10	5.3380	9.37	-22.39	-13.02	20.00	-33.02	AVG
11	7.9580	9.64	-6.90	2.74	30.00	-27.26	QP
12	7.9580	9.64	-16.77	-7.13	20.00	-27.13	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben



4.6. Test Photographs

Main(ADS-24RD-12 1224G)

Front View



Rear View





Main(HKA-A24150-230)

Front View



Rear View





BNC(ADS-24RD-12 1224G)

Front View



Rear View





BNC(HKA-A24150-230)

Front View



Rear View





5. Test of Radiated Emission

5.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 61000-6-3. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 10 m

Frequency range MHz	Quasi-peak limits dB(μ V/m)
30 to 230	30
230 to 1000	37
NOTE 1 The lower limit shall apply at the transition frequency.	
NOTE 2 Additional provisions may be required for cases where interference occurs.	

The EUT shall meet the limits of below Table when measured in accordance with the method described in European Standard EN 61000-6-3 and the conditional testing procedure described below.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 3 m

Frequency range GHz	Average limit dB(μ V/m)	Peak limits dB(μ V/m)
1 to 3	50	70
3 to 6	54	74
NOTE The lower limit applies at the transition frequency.		

• Conditional testing procedure:

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.




5.2. Test Procedures

- a. The EUT was placed on a relatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.




5.3. Typical test Setup

Below 1GHz Test Setup

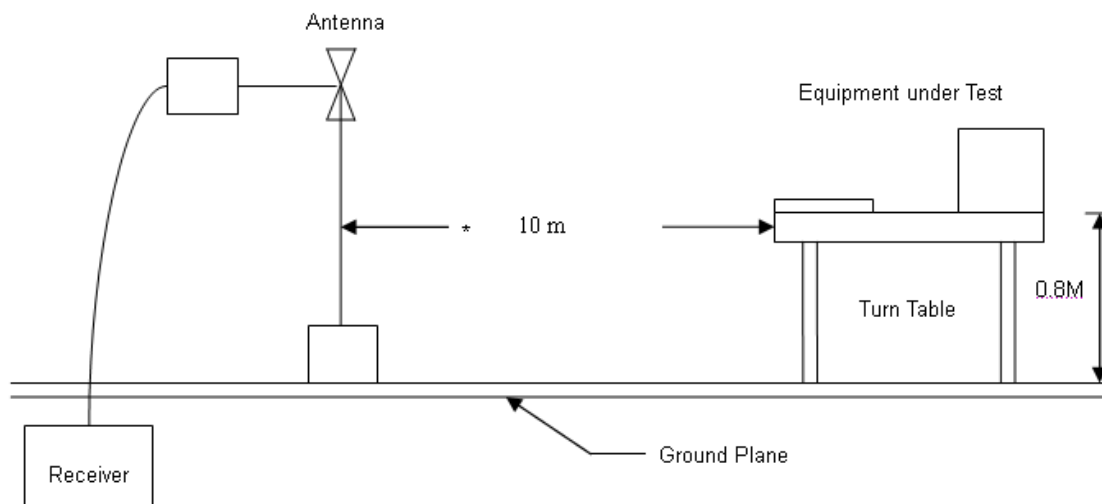

Above 1GHz Test Setup

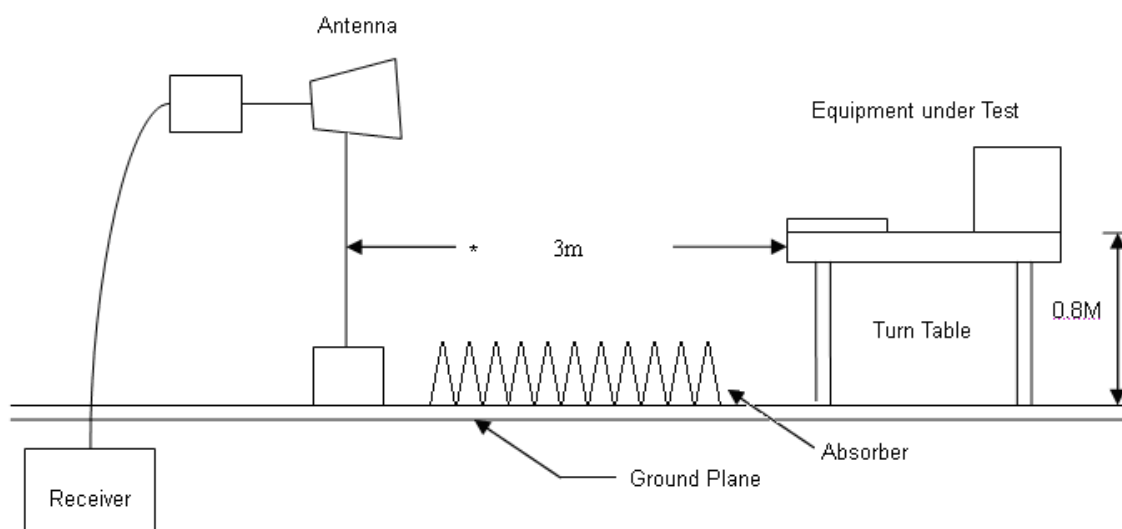


**5.4. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2013.03.10	2014.03.09
Preamplifier	Agilent	87405B	My39500554	2013.03.10	2014.03.09
Preamplifier	Agilent	8449B	3008A02342	2013.03.10	2014.03.09
Ultra Broadband Antenna	R&S	HL562	100363	2013.05.02	2014.05.01
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2013.05.02	2014.05.01
Spectrum Analyzer	R&S	FSP40	100324	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2013.03.10	2014.03.09



5.5. Test Result and Data (30MHz ~ 1000MHz)

Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/13

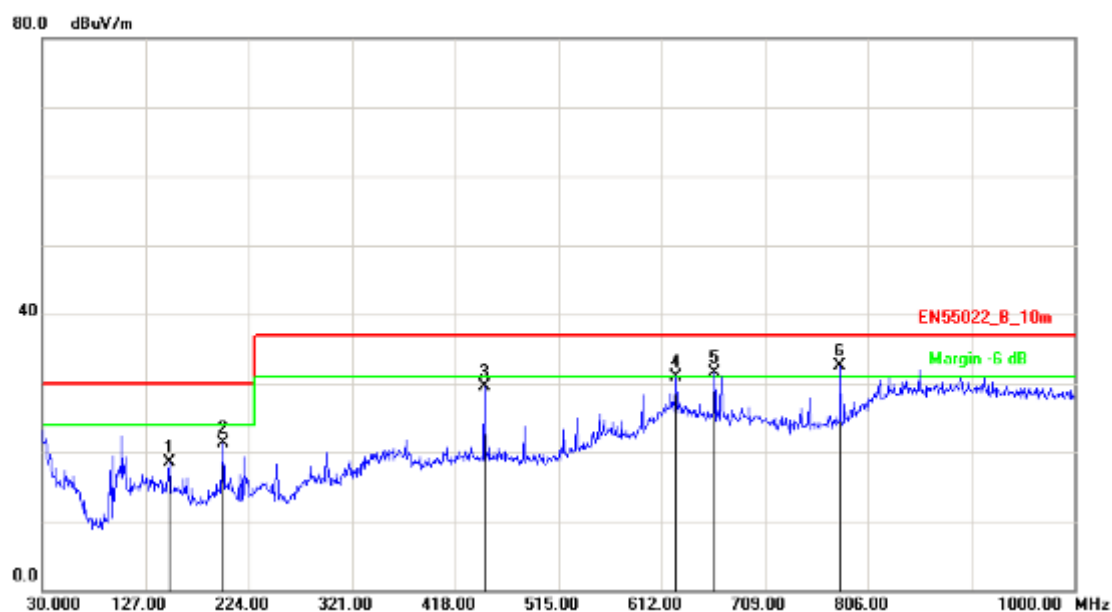


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	149.3100	-10.60	29.14	18.54	30.00	-11.46	QP	399	96
2	199.7500	-10.00	31.36	21.36	30.00	-8.64	QP	399	77
3	445.1600	-5.44	34.93	29.49	37.00	-7.51	QP	200	193
4	625.5800	1.28	29.72	31.00	37.00	-6.00	QP	100	80
5	661.4699	0.30	31.27	31.57	37.00	-5.43	QP	100	96
6	779.8099	-0.63	33.16	32.53	37.00	-4.47	QP	100	100

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/13

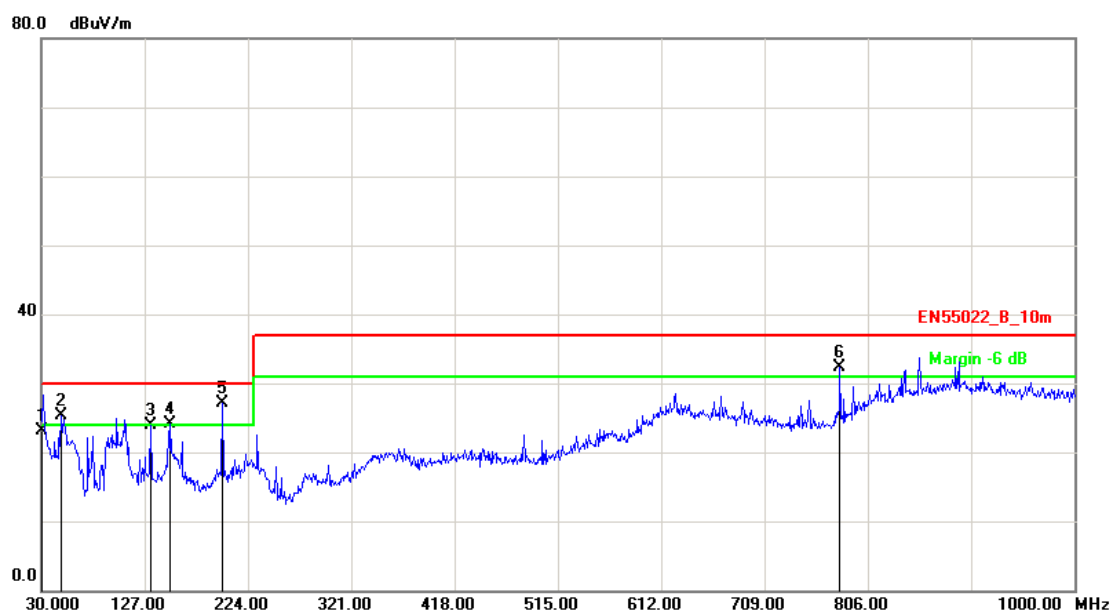


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.1800	-2.58	25.68	23.10	30.00	-6.90	QP	139	360
2	48.4300	-10.55	35.78	25.23	30.00	-4.77	QP	204	0
3	132.8200	-9.83	33.73	23.90	30.00	-6.10	QP	174	360
4	151.2500	-10.76	34.79	24.03	30.00	-5.97	QP	115	360
5	199.7500	-10.00	37.07	27.07	30.00	-2.93	QP	100	248
6	779.8098	-0.63	33.03	32.40	37.00	-4.60	QP	300	176

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/13

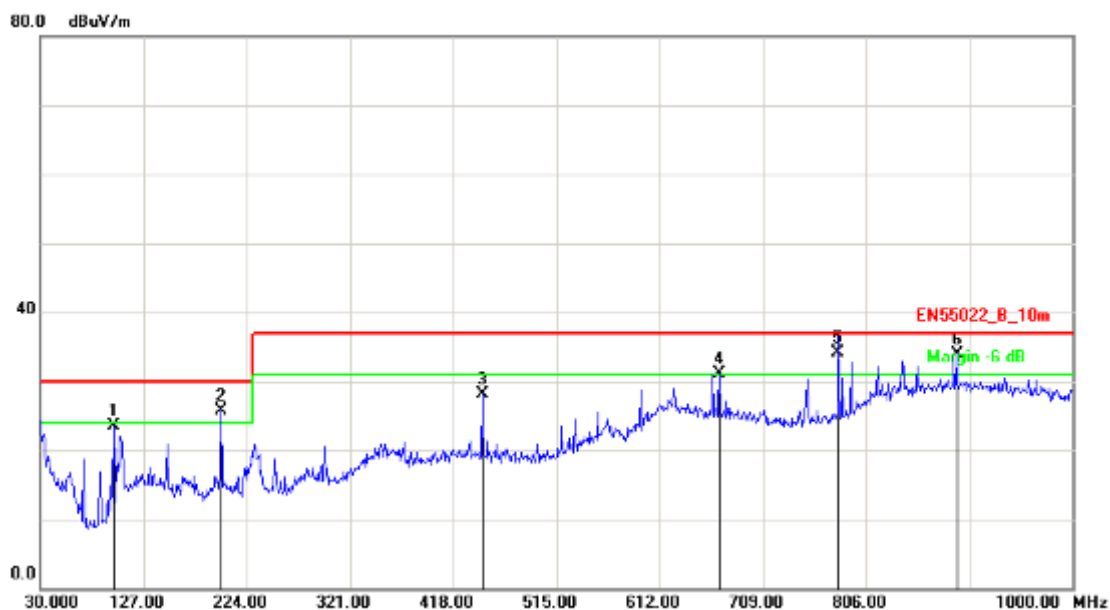


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	98.8700	-13.06	36.56	23.50	30.00	-6.50	QP	250	0
2	199.7500	-10.00	35.70	25.70	30.00	-4.30	QP	400	116
3	445.1600	-5.44	33.55	28.11	37.00	-8.89	QP	200	228
4	668.2599	0.23	30.94	31.17	37.00	-5.83	QP	100	74
5	779.6299	-0.63	34.73	34.10	37.00	-2.90	QP	400	344
6	891.3600	4.17	29.81	33.98	37.00	-3.02	QP	100	336

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/13

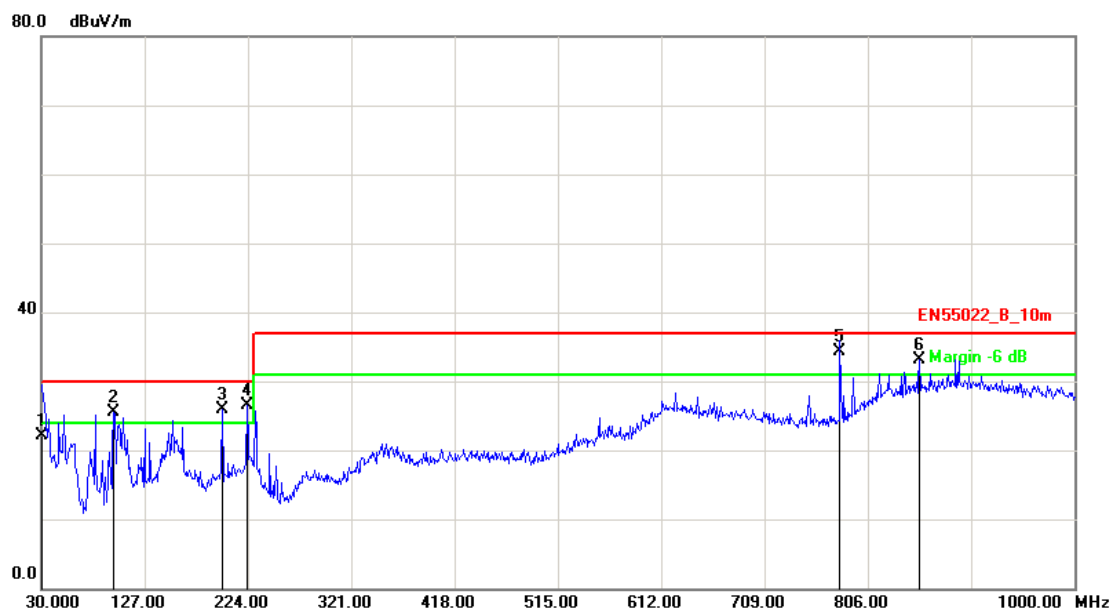


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.2600	-2.63	24.73	22.10	30.00	-7.90	QP	200	141
2	97.9000	-13.30	38.77	25.47	30.00	-4.53	QP	104	360
3	199.7500	-10.00	35.96	25.96	30.00	-4.04	QP	100	34
4	223.0300	-12.15	38.68	26.53	30.00	-3.47	QP	107	360
5	779.6210	-0.63	34.93	34.30	37.00	-2.70	QP	200	164
6	854.5000	3.80	29.37	33.17	37.00	-3.83	QP	300	129

Note: Measurement Level = Reading Level + Correct Factor



5.6. Test Result and Data (1000MHz ~ 6000MHz)

Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

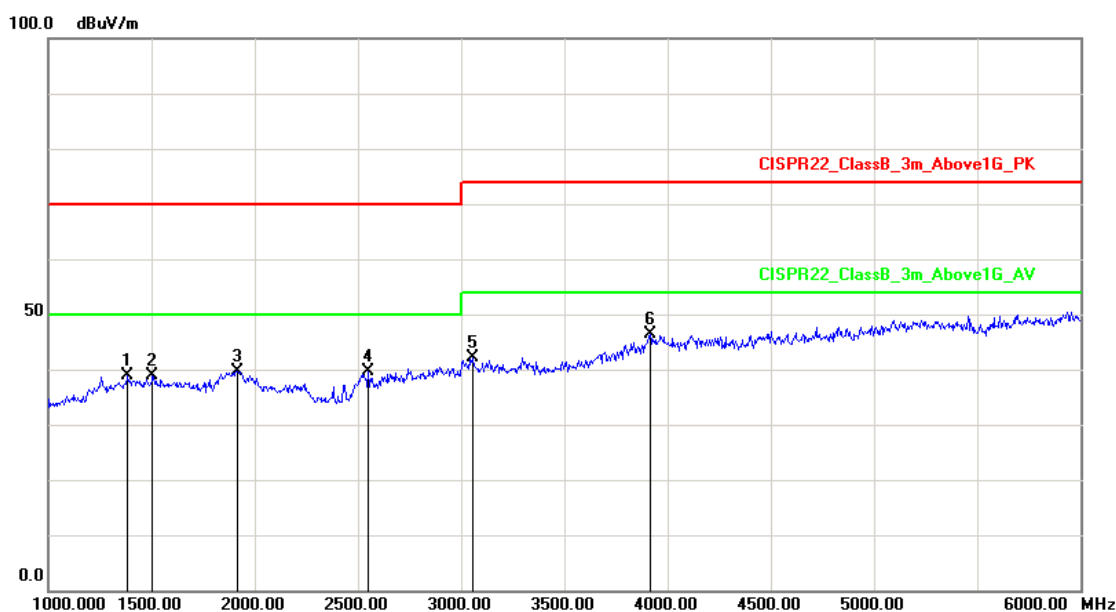


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1385.000	-11.48	50.40	38.92	70.00	-31.08	peak	100	89
2	1505.000	-10.66	49.50	38.84	70.00	-31.16	peak	200	12
3	1915.000	-8.21	47.84	39.63	70.00	-30.37	peak	200	56
4	2550.000	-3.64	43.18	39.54	70.00	-30.46	peak	300	0
5	3055.000	-3.07	45.12	42.05	74.00	-31.95	peak	121	33
6	3915.000	0.94	45.36	46.30	74.00	-27.70	peak	400	149

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation with ADS-24RD-12 1224G		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

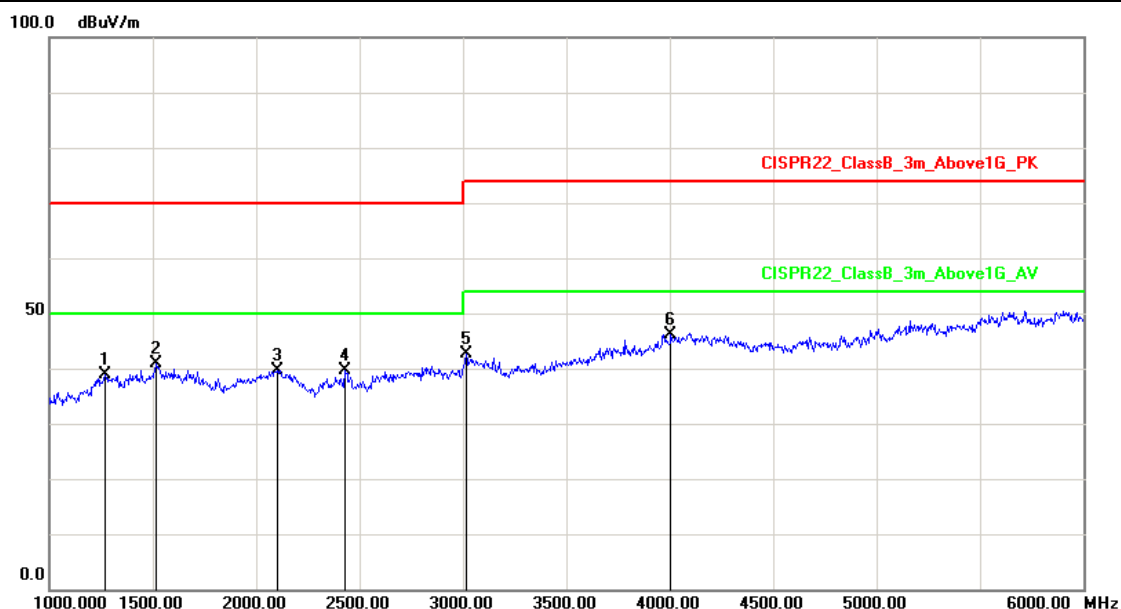


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1270.000	-12.47	51.44	38.97	70.00	-31.03	peak	200	146
2	1515.000	-10.60	51.53	40.93	70.00	-29.07	peak	100	163
3	2105.000	-5.62	45.24	39.62	70.00	-30.38	peak	100	225
4	2430.000	-4.05	43.58	39.53	70.00	-30.47	peak	201	308
5	3015.000	-3.03	45.76	42.73	74.00	-31.27	peak	300	81
6	4005.000	1.86	44.30	46.16	74.00	-27.84	peak	100	2

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

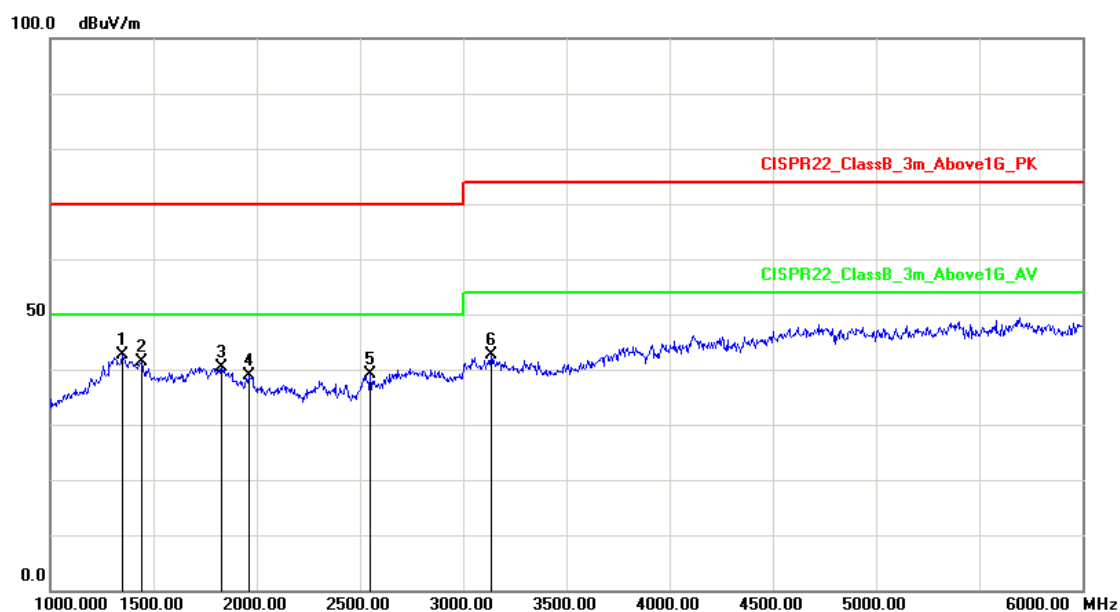


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1350.000	-11.78	54.53	42.75	70.00	-27.25	peak	200	94
2	1445.000	-11.06	52.37	41.31	70.00	-28.69	peak	100	267
3	1830.000	-10.29	50.68	40.39	70.00	-29.61	peak	100	135
4	1965.000	-6.99	45.99	39.00	70.00	-31.00	peak	400	14
5	2550.000	-3.64	42.68	39.04	70.00	-30.96	peak	129	78
6	3135.000	-3.13	45.76	42.63	74.00	-31.37	peak	300	63

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	HAC-HF3101P
Temp :	26	Humidity :	60%
Pressure(mbar) :	1002	Date :	2014/01/25

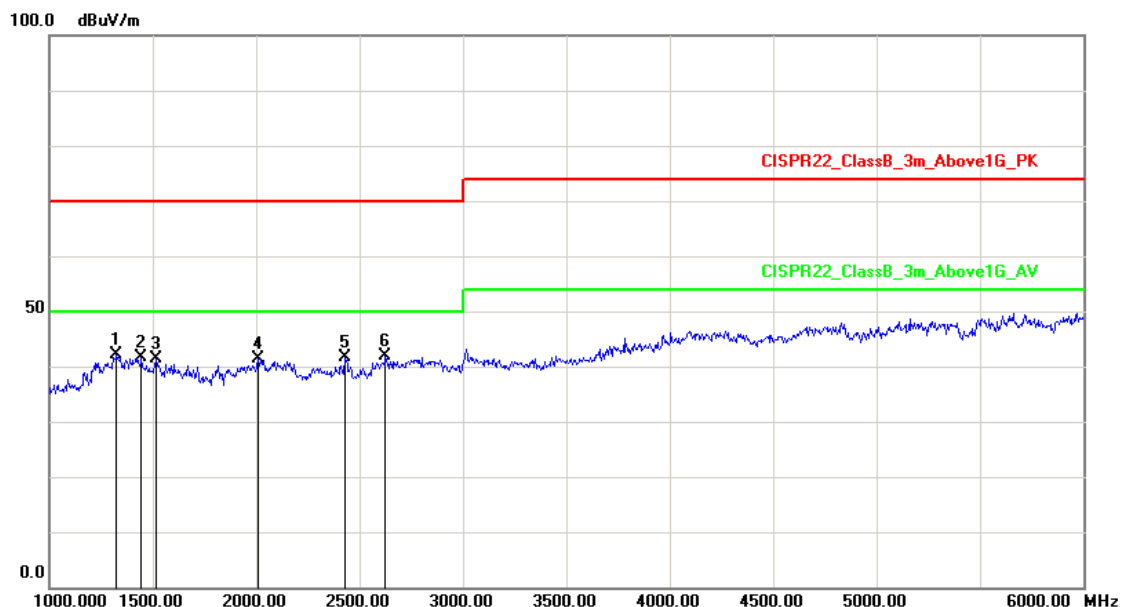

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1325.000	-11.99	54.19	42.20	70.00	-27.80	peak	200	28
2	1445.000	-11.06	52.62	41.56	70.00	-28.44	peak	101	348
3	1515.000	-10.60	52.03	41.43	70.00	-28.57	peak	100	194
4	2010.000	-6.08	47.56	41.48	70.00	-28.52	peak	300	67
5	2430.000	-4.05	45.58	41.53	70.00	-28.47	peak	200	261
6	2625.000	-3.54	45.43	41.89	70.00	-28.11	peak	100	87

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben



5.7. Test Photographs (30MHz ~ 1000MHz)

ADS-24RD-12 1224G

Front View



Rear View






HKA-A24150-230

Front View



Rear View

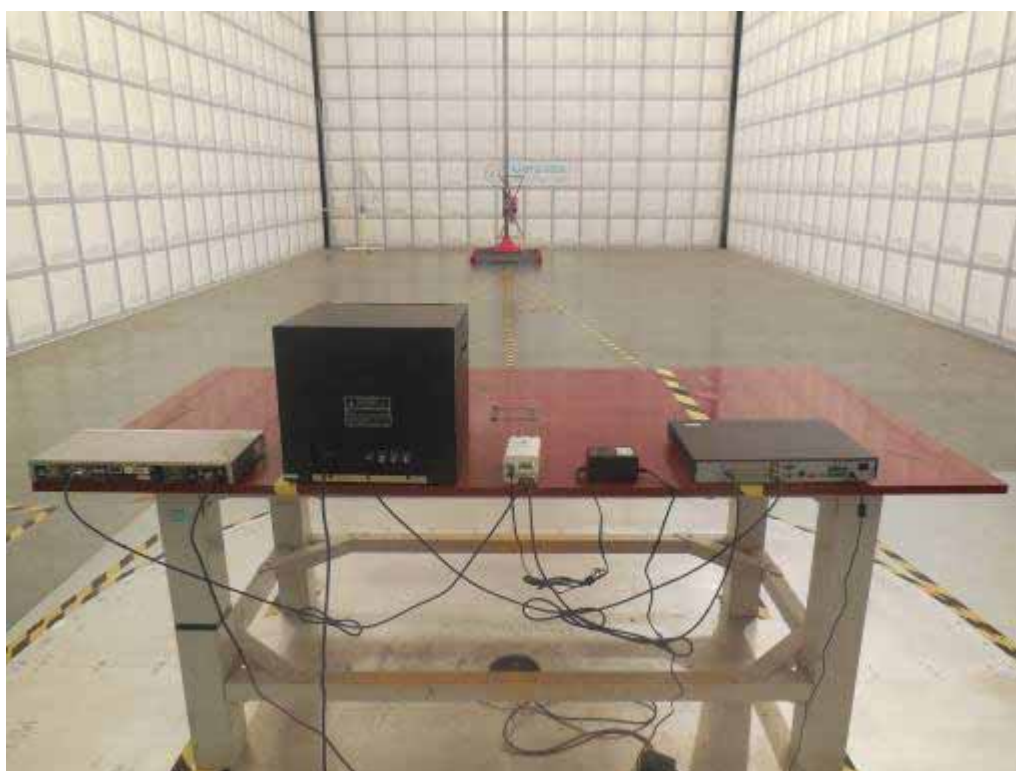




5.8. Test Photographs (1000MHz ~ 6000MHz)

ADS-24RD-12 1224G

Front View



Rear View

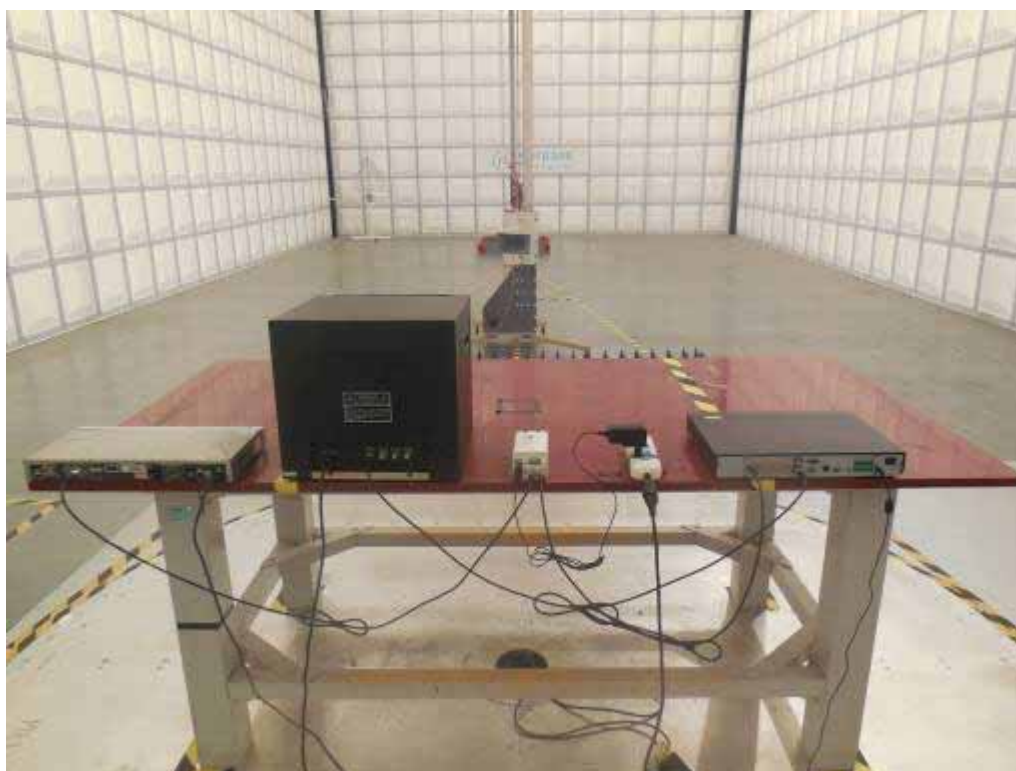




HKA-A24150-230

Front View



Rear View

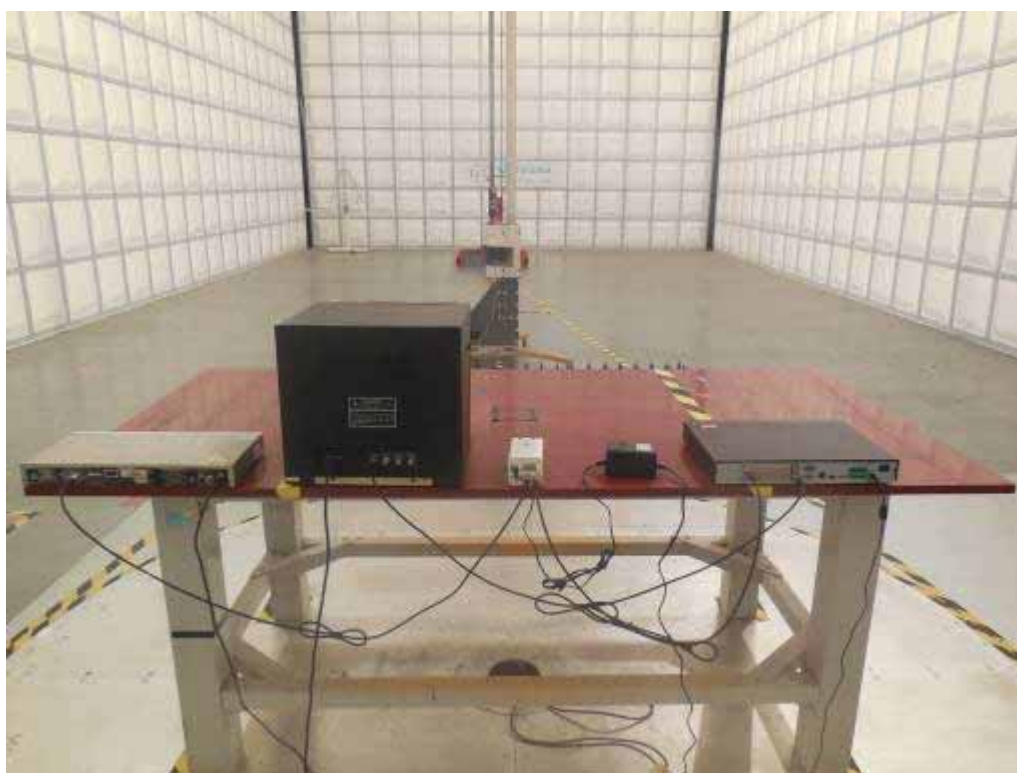



6. Harmonics Test

6.1. Limits of Harmonics Current Measurement

(a) Limits for Class A equipment

Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8<=n<=40	0.23x8/n
11	0.33		
13	0.21		
15<=n<=39	0.15x15/n		

(b) Limits for Class B equipment

For Class B equipment, the harmonics of the input current shall not exceed the values given in Table that is the limit of Class A multiplied by a factor of 1,5.

(c) Limits for Class C equipment

Harmonics Order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
11<n<39 (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits for Class D equipment

Harmonics Order n	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
11 < n < 39 (odd harmonics only)	3.85/n	See limit of Class A


NOTE: According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

**6.2. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2013.04.20	2014.04.19
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09

**6.3. Test Result and Data**

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	HAC-HF3101P
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 20, 2014

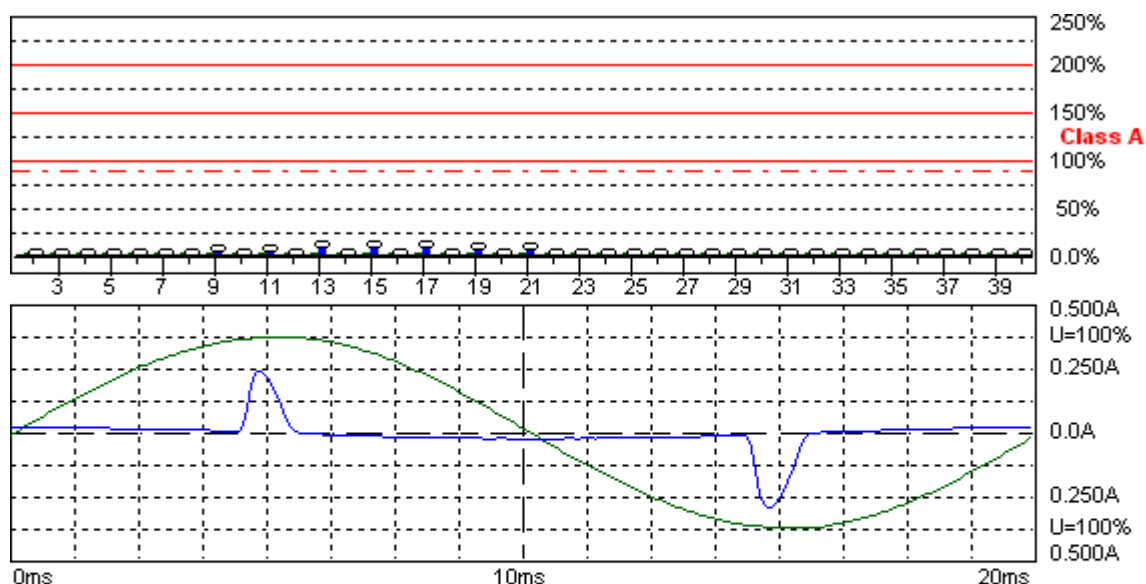

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2014-1-20 12:10:48 harmonic.hsu

Urms = 230.7 V P = 5.951 W THC = 0.058 A
 Irms = 0.064 A pf = 0.405

Range: 0.5 A
 V-nom: 230 V
 TestTime: 15 min (100%)

HAC-HF3101P
 MODE1

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.7V Freq = 50.013 Range: 0.5 A

Irms = 0.064A Ipk = 0.304A cf = 4.774

P = 5.951W S = 14.70VA pf = 0.405

THDi = 88.1 % THDu = 0.80 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]	Status
1	50	0.0309		0.0313			
2	100	0.0045	0.4126	0.0051	0.4747	1.0800	
3	150	0.0247	1.0721	0.0250	1.0867	2.3000	
4	200	0.0041	0.9581	0.0048	1.1142	0.4300	
5	250	0.0234	2.0559	0.0237	2.0827	1.1400	
6	300	0.0040	1.3326	0.0045	1.5157	0.3000	
7	350	0.0221	2.8694	0.0223	2.9012	0.7700	
8	400	0.0037	1.6188	0.0042	1.8443	0.2300	
9	450	0.0204	5.0964	0.0206	5.1422	0.4000	
10	500	0.0032	1.7581	0.0038	2.0400	0.1840	
11	550	0.0182	5.5302	0.0184	5.5671	0.3300	
12	600	0.0028	1.8510	0.0032	2.1097	0.1533	
13	650	0.0161	7.6439	0.0162	7.7021	0.2100	
14	700	0.0025	1.9273	0.0029	2.1827	0.1314	
15	750	0.0135	8.9925	0.0136	9.0739	0.1500	
16	800	0.0022	1.9107	0.0025	2.2026	0.1150	
17	850	0.0112	8.4622	0.0114	8.5775	0.1324	
18	900	0.0020	1.9405	0.0023	2.2092	0.1022	
19	950	0.0089	7.5250	0.0091	7.6538	0.1184	
20	1000	0.0019	2.0898	0.0022	2.3883	0.0920	
21	1050	0.0068	6.3517	0.0069	6.4657	0.1071	
22	1100	0.0019	2.2258	0.0021	2.5177	0.0836	
23	1150	0.0049	5.0537	0.0051	5.1785	0.0978	
24	1200	0.0020	2.5476	0.0022	2.8262	0.0767	
25	1250	0.0035	3.8656	0.0036	4.0012	0.0900	
26	1300	0.0019	2.7167	0.0022	3.1048	0.0708	
27	1350	0.0026	3.1494	0.0027	3.1860	0.0833	
28	1400	0.0020	2.9721	0.0022	3.3437	0.0657	
29	1450	0.0023	3.0287	0.0024	3.0680	0.0776	
30	1500	0.0019	3.0849	0.0022	3.5327	0.0613	
31	1550	0.0025	3.4478	0.0026	3.5319	0.0726	
32	1600	0.0019	3.2906	0.0021	3.6621	0.0575	
33	1650	0.0027	3.8940	0.0027	3.9836	0.0682	
34	1700	0.0017	3.2143	0.0020	3.7218	0.0541	
35	1750	0.0028	4.4149	0.0029	4.5098	0.0643	
36	1800	0.0017	3.3437	0.0019	3.7019	0.0511	
37	1850	0.0028	4.5668	0.0029	4.7173	0.0608	
38	1900	0.0016	3.2773	0.0018	3.7185	0.0484	
39	1950	0.0025	4.3376	0.0026	4.4434	0.0577	
40	2000	0.0016	3.3835	0.0017	3.7815	0.0460	

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	HDCVI CAMERA
Model No.	:	HAC-HF3101P
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 20, 2014

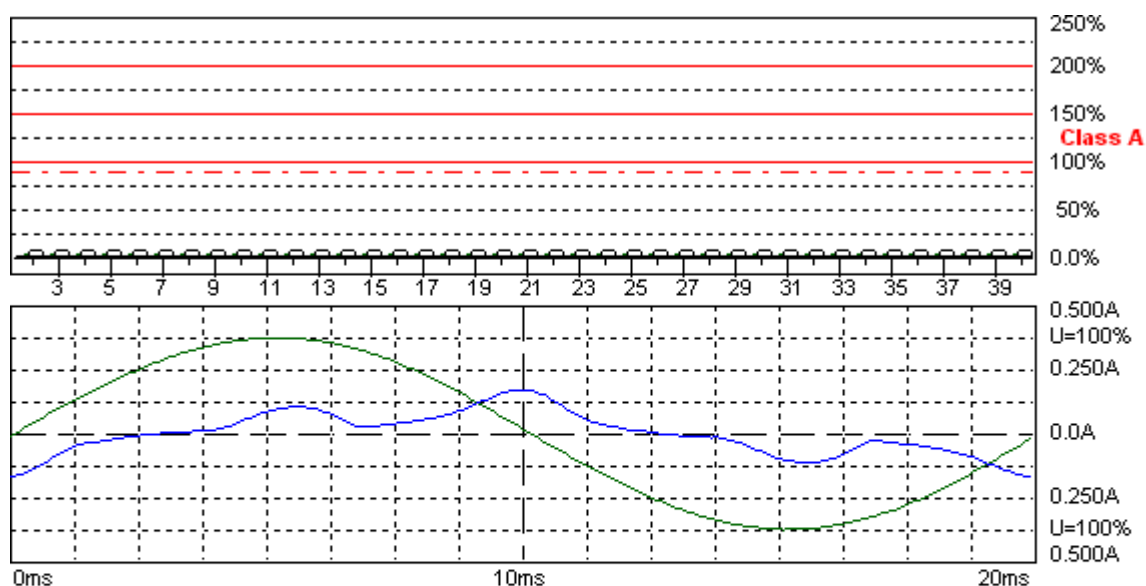**Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)**

2014-1-20 13:40:06 harmonic.hsu

Urms = 230.7 V P = 8.946 W THC = 0.040 A
 Irms = 0.082 A pf = 0.471

Range: 0.5 A
 V-nom: 230 V
 TestTime: 15 min (100%)

HAC-HF3101P
 MODE2

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.7V Freq = 49.987 Range: 0.5 A

Irms = 0.082A Ipk = 0.171A cf = 2.074

P = 8.946W S = 18.98VA pf = 0.471

THDi = 48.2 % THDu = 0.90 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED



Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]	Status
1	50	0.0724		0.0965			
2	100	0.0018	0.1639	0.0028	0.2628	1.0800	
3	150	0.0277	1.2048	0.0366	1.5922	2.3000	
4	200	0.0005	0.1065	0.0007	0.1632	0.4300	
5	250	0.0269	2.3584	0.0357	3.1294	1.1400	
6	300	0.0008	0.2543	0.0013	0.4272	0.3000	
7	350	0.0035	0.4558	0.0047	0.6143	0.7700	
8	400	0.0003	0.1194	0.0004	0.1858	0.2300	
9	450	0.0081	2.0218	0.0109	2.7237	0.4000	
10	500	0.0001	0.0663	0.0002	0.1161	0.1840	
11	550	0.0013	0.3884	0.0017	0.5086	0.3300	
12	600	0.0002	0.0995	0.0002	0.1592	0.1533	
13	650	0.0014	0.6685	0.0019	0.9155	0.2100	
14	700	0.0001	0.0929	0.0002	0.1858	0.1314	
15	750	0.0013	0.8341	0.0017	1.1597	0.1500	
16	800	0.0001	0.0531	0.0001	0.1061	0.1150	
17	850	0.0007	0.5073	0.0009	0.6917	0.1324	
18	900	0.0001	0.0597	0.0001	0.1194	0.1022	
19	950	0.0006	0.4896	0.0008	0.6443	0.1184	
20	1000	0.0001	0.0995	0.0001	0.1327	0.0920	
21	1050	0.0005	0.4842	0.0007	0.6551	0.1071	
22	1100	0.0001	0.0730	0.0001	0.1095	0.0836	
23	1150	0.0004	0.3743	0.0005	0.5303	0.0978	
24	1200	0.0001	0.0796	0.0001	0.1194	0.0767	
25	1250	0.0002	0.2374	0.0003	0.3730	0.0900	
26	1300	0.0001	0.0862	0.0001	0.1294	0.0708	
27	1350	0.0003	0.4028	0.0004	0.5127	0.0833	
28	1400	0.0001	0.0929	0.0001	0.1858	0.0657	
29	1450	0.0002	0.2753	0.0003	0.3933	0.0776	
30	1500	0.0001	0.0995	0.0001	0.1990	0.0613	
31	1550	0.0002	0.2523	0.0003	0.3784	0.0726	
32	1600	0.0001	0.1592	0.0001	0.2123	0.0575	
33	1650	0.0002	0.2686	0.0002	0.3581	0.0682	
34	1700	0.0001	0.1692	0.0001	0.2256	0.0541	
35	1750	0.0002	0.2848	0.0002	0.3798	0.0643	
36	1800	0.0001	0.1791	0.0001	0.2388	0.0511	
37	1850	0.0002	0.3011	0.0002	0.3513	0.0608	
38	1900	0.0001	0.1891	0.0001	0.2521	0.0484	
39	1950	0.0002	0.2645	0.0002	0.3703	0.0577	
40	2000	0.0001	0.1990	0.0001	0.2654	0.0460	

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.

Test engineer: Seben




6.1. Test Photographs

ADS-24RD-12 1224G





HKA-A24150-230

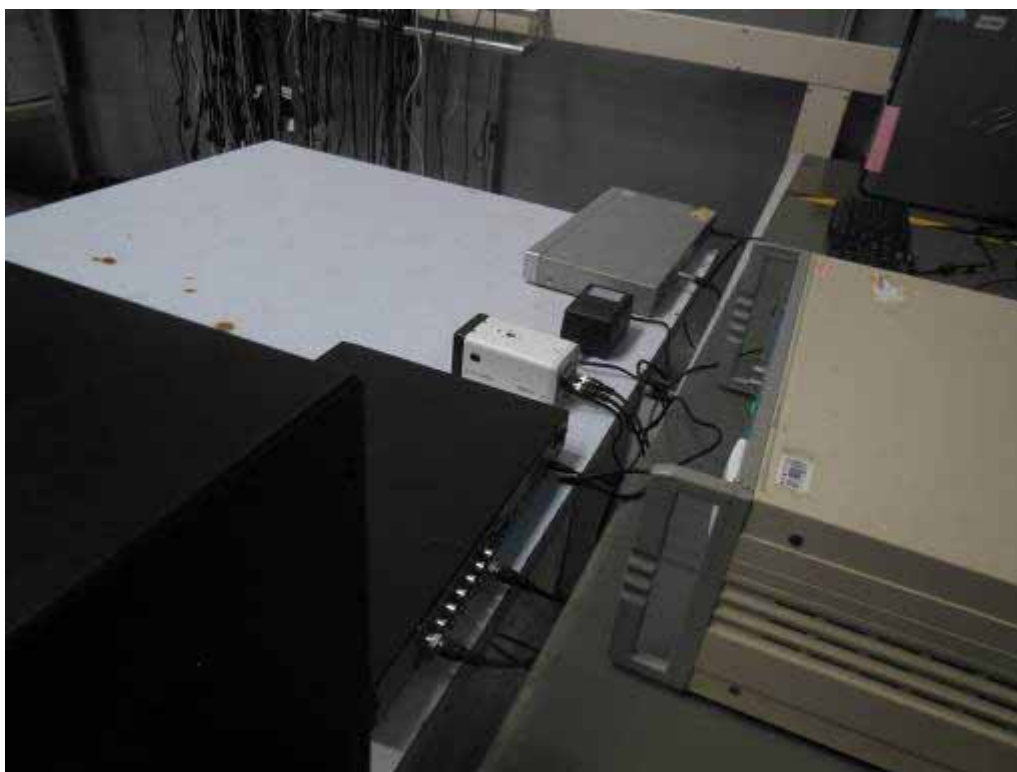



7. Voltage Fluctuations Test

7.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

7.2. Measurement equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2013.04.20	2014.04.19
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



7.3. Test Result and Data

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	HAC-HF3101P
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 20, 2014

Flickermeter 1000-4-15 for 230V/50Hz

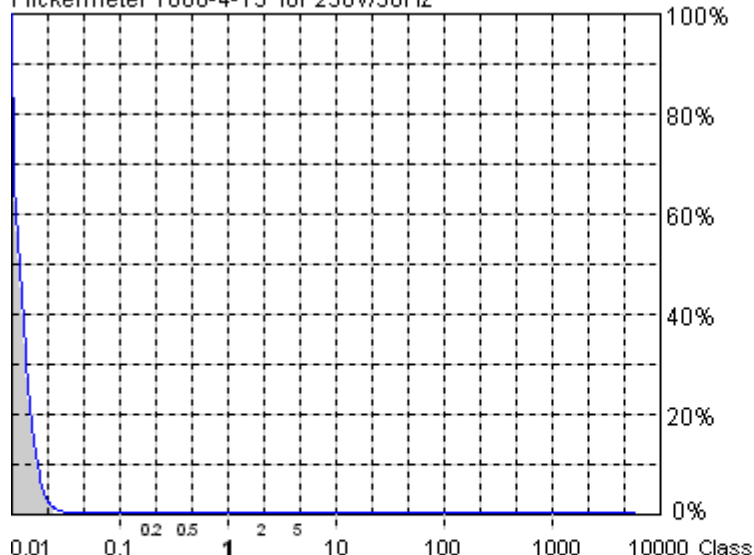**Actual Flicker (Fli): 0.02****Short-term Flicker (Pst): 0.10**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.10

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.11%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-1-20 13:20:23 harmonic.hsu

Urms = 230.7 V P = 5.878 W

Range: 0.5 A

Irms = 0.063 A pf = 0.403

V-nom: 230 V

TestTime: 10 min (100%)

HAC-HF3101P

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.7V Freq = 50.000 Range: 0.5 A
Irms = 0.063A Ipk = 0.304A cf = 4.803
P = 5.878W S = 14.59VA pf = 0.403

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	HDCVI CAMERA
Model No.	:	HAC-HF3101P
Temperature	:	20
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 20, 2014

Flickermeter 1000-4-15 for 230V/50Hz

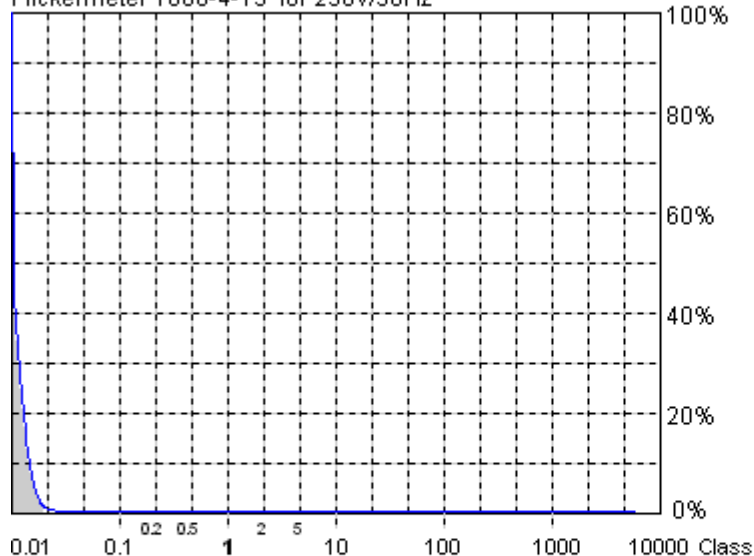**Actual Flicker (Fli): 0.02****Short-term Flicker (Pst): 0.09**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.09

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.13%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-1-20 13:54:52 harmonic.hsu

Urms = 230.9 V P = 8.995 W

Irms = 0.083 A pf = 0.472

Range: 0.25 A

V-nom: 230 V

TestTime: 10 min (100%)

HAC-HF3101P

Test completed, Result: PASSED

MODE2

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.9V Freq = 50.000 Range: 0.25 A
Irms = 0.083A Ipk = 0.171A cf = 2.071
P = 8.995W S = 19.05VA pf = 0.472

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Test engineer: Seben




7.4. Test Photographs

ADS-24RD-12 1224G





HKA-A24150-230

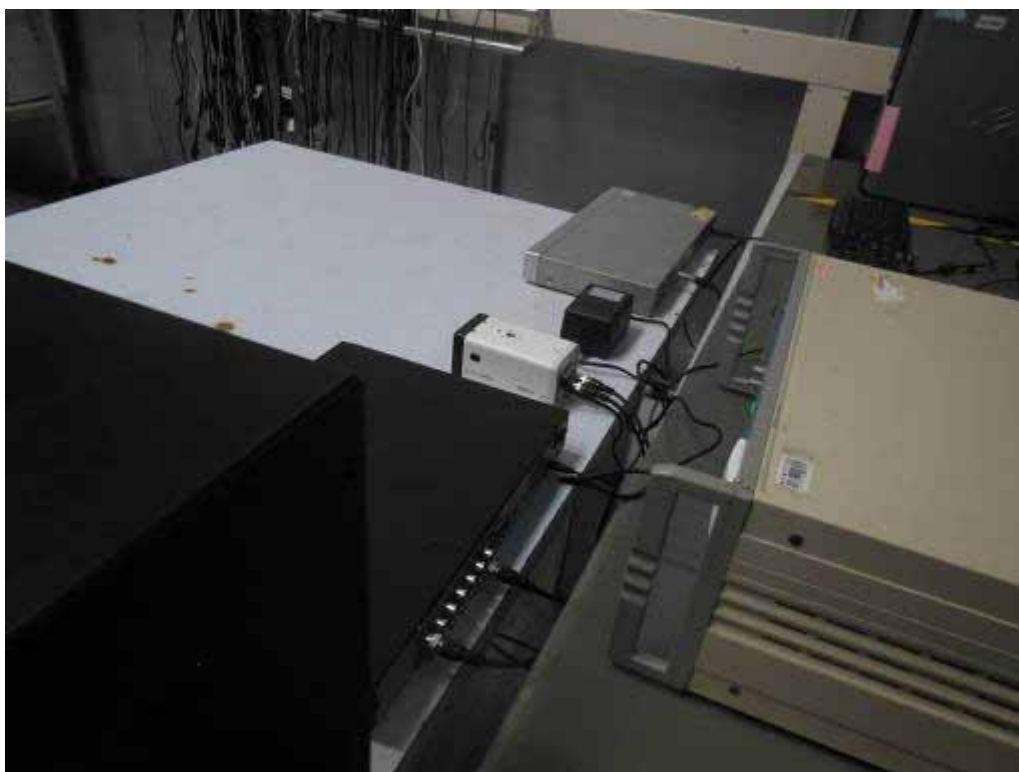




8. Electrostatic Discharge Immunity Test

8.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15 to 35 ;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 hPa) to 106 KPa (1060 hPa).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - ✧ If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - ✧ Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - ✧ The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.



8.2. Test Setup for Tests Performed in Laboratory

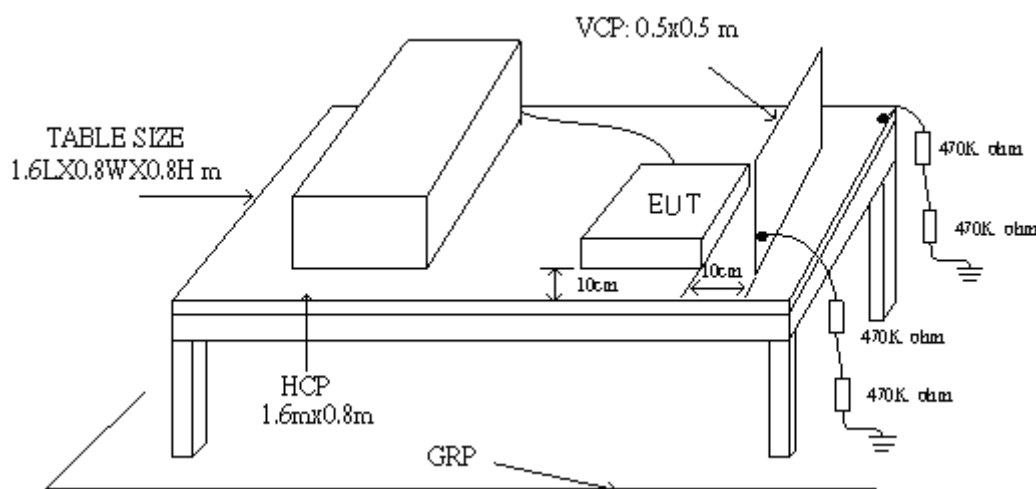

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the following manner :

- Contact Discharge to the conductive surfaces and to coupling plane;
- Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the Exclusive Certification Corp., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.



8.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (KV) of Contact discharge	Level	Test Voltage (KV) of Air Discharge
1	± 2	1	± 2
2	± 4	2	± 4
3	± 6	3	± 8
4	± 8	4	± 15
X	Specified	X	Specified
Remark: "X" is an open level.			

8.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESD Simulator	EM Test	dito	V0714102399	2013.03.10	2014.03.09
ESD Simulator	EMC PARTNER	ESD3000	292	2013.02.01	2014.01.31
Tonometer	shanghaifengyun	DYM3	3251	2013.03.22	2014.03.21
Dehumidifier	ZEDO	ZD-220LB	CEP-TH-01	N/A	N/A
Humidifier	YADU	YZ-DS251C	CEP-TH-02	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	102	2013.03.10	2014.03.09

**8.5. Test Result and Data**

Basic Standard : IEC 61000-4-2
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : HAC-HF3101P
 Final Test Result : PASS
 Temperature : 18°C
 Relative Humidity : 50 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 24, 2014

For EN 55024: 2010

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1 , 2 , 3 , 4 , 5 , 6 , 7	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
8 , 9	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
10 , 11 , 12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
14 , 15	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
16	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
17 , 18 , 19 , 20 , 21 , 22 , 23	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
24 , 25 , 26 , 27 , 28 , 29 , 30 , 31 , 32 , 33 , 34 , 35 , 36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
37 , 38 , 39 , 40 , 41,42	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1, 2, 3, 4, 5, 6, 7	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
8, 9	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
10, 11, 12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
14, 15	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
16	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
17, 18, 19, 20, 21, 22, 23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
37, 38, 39, 40, 41, 42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1, 2, 3, 4, 5, 6, 7	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
8, 9	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
10, 11, 12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
14, 15	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
16	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
17, 18, 19, 20, 21, 22, 23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24, 25, 26, 27, 28, 29, 30, 31, 32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



33 , 34 , 35 , 36																
37 , 38 , 39 , 40 , 41,42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1 , 2 , 3 , 4 , 5 , 6 , 7	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
8 , 9	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
10 , 11 , 12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
14 , 15	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
16	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
17 , 18 , 19 , 20 , 21 , 22 , 23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24 , 25 , 26 , 27 , 28 , 29 , 30 , 31 , 32 , 33 , 34 , 35 , 36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
37 , 38 , 39 , 40 , 41,42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---

Test engineer:



C E


ADS-24RD-12 1224G







HKA-A24150-230



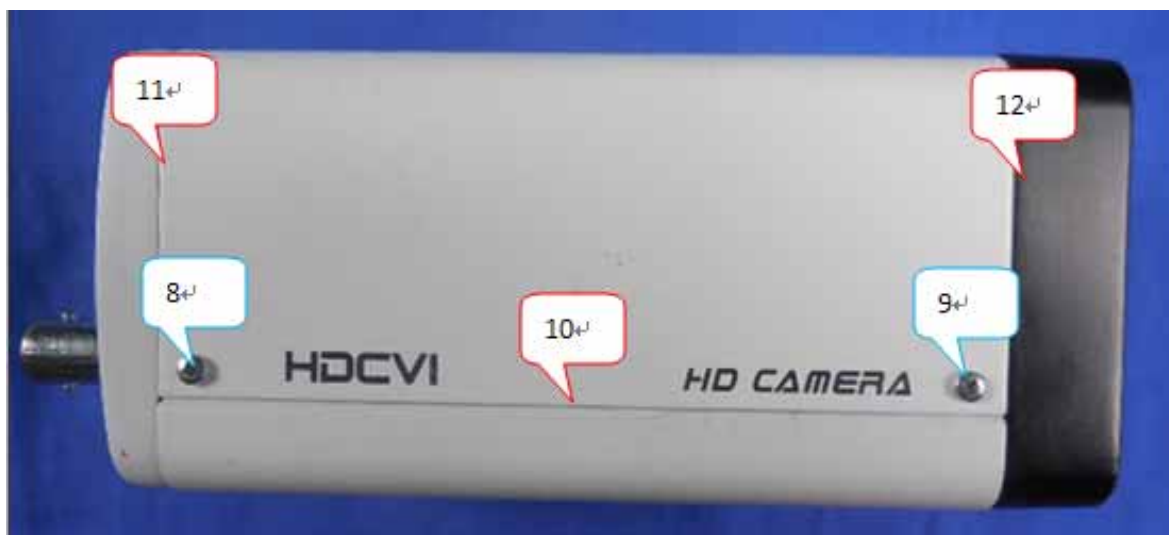

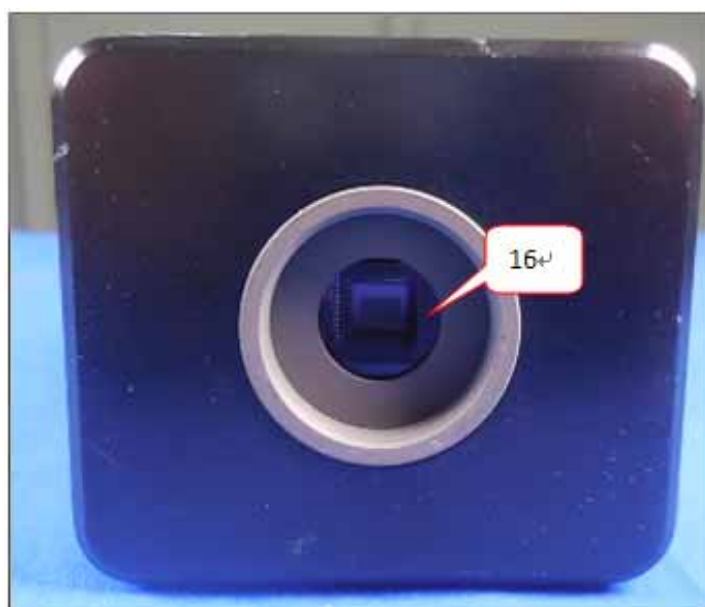

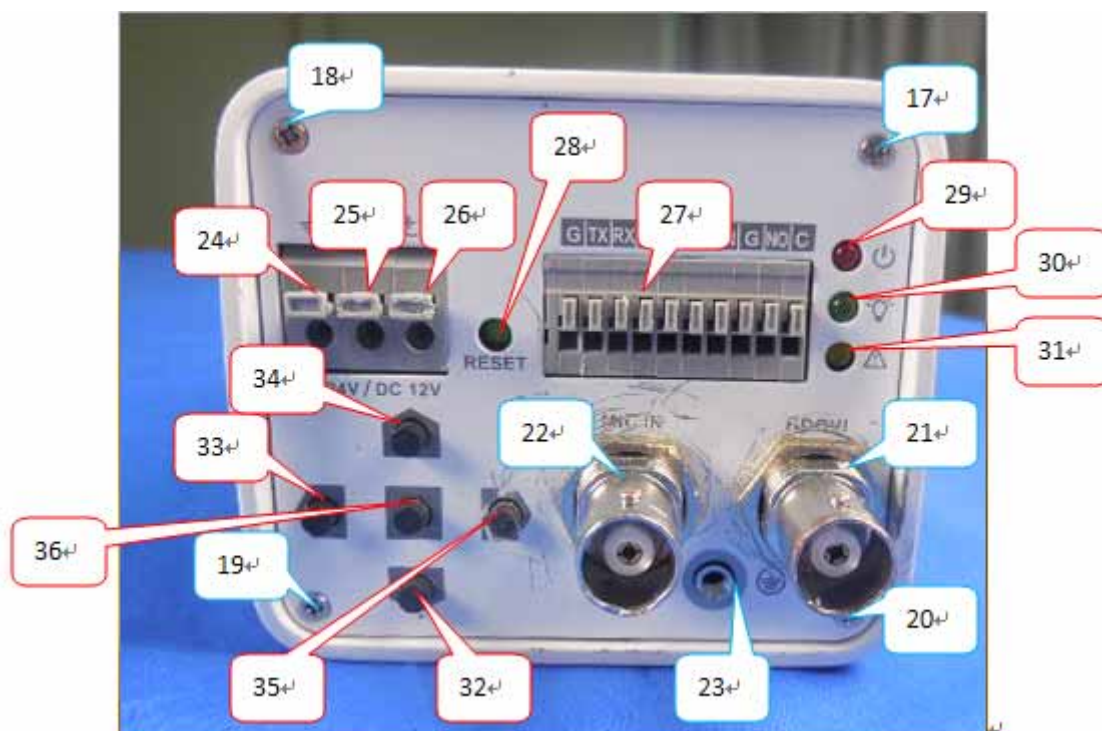



9. Radio Frequency electromagnetic field immunity test

9.1. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-2700 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.



9.2. Test Severity Levels

	Condition of Test	Remarks
1.	Field Strength	10 V/m
2.	Radiated Signal	AM 80% Modulated with 1kHz Pulse modulation 1Hz (0.5s ON; 0.5s OFF)
3.	Scanning Frequency	80MHz - 2700MHz
4.	Dwell Time	3 Seconds
5.	Frequency step size Δf :	1%
6.	The rate of Swept of Frequency	1.5 x 10 ⁻³ decades/s

9.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Signal Generator	R&S	SML03	103287	2013.03.10	2014.03.09
Power Sensor	R&S	NR P-Z91	100383	2013.03.10	2014.03.09
Power Sensor	R&S	NRP-Z91	100384	2013.03.10	2014.03.09
Power Meter	R&S	NRP	101206	2013.03.10	2014.03.09
Power Amplifier	BONN	BLWA0830-16 0/100/40D	076659	2013.04.03	2014.04.02
Istropic Electric Field Probe	EST.LINDGRE N	HI-6105	137445	2013.09.03	2014.09.02
EMS Antenna	R&S	HL046E	100028	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	101	2013.03.10	2014.03.09



9.4. Test Result and Data

Basic Standard : IEC 61000-4-3
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 17°C
Relative Humidity : 50%
Atmospheric Pressure : 100 kPa
Test Date : Jan 23, 2014

For EN 55024: 2010

Test Voltage: 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V /m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Voltage: 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: 253V/50Hz


Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test engineer: Seben




9.5. Test Photographs

ADS-24RD-12 1224G

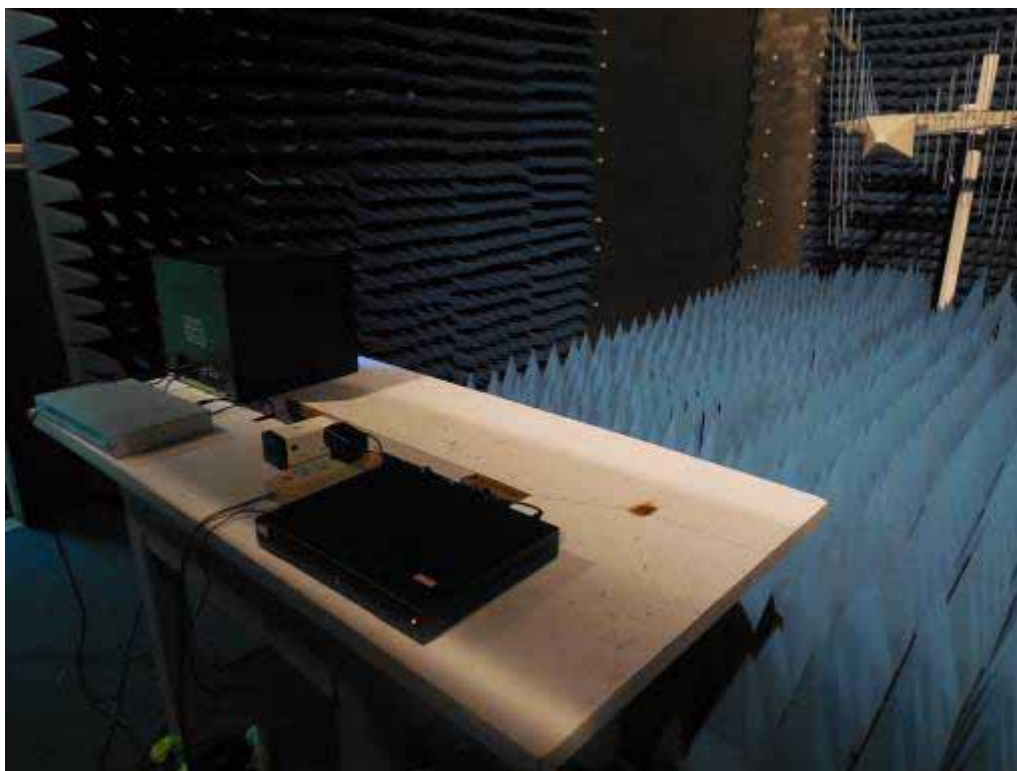



HKA-A24150-230

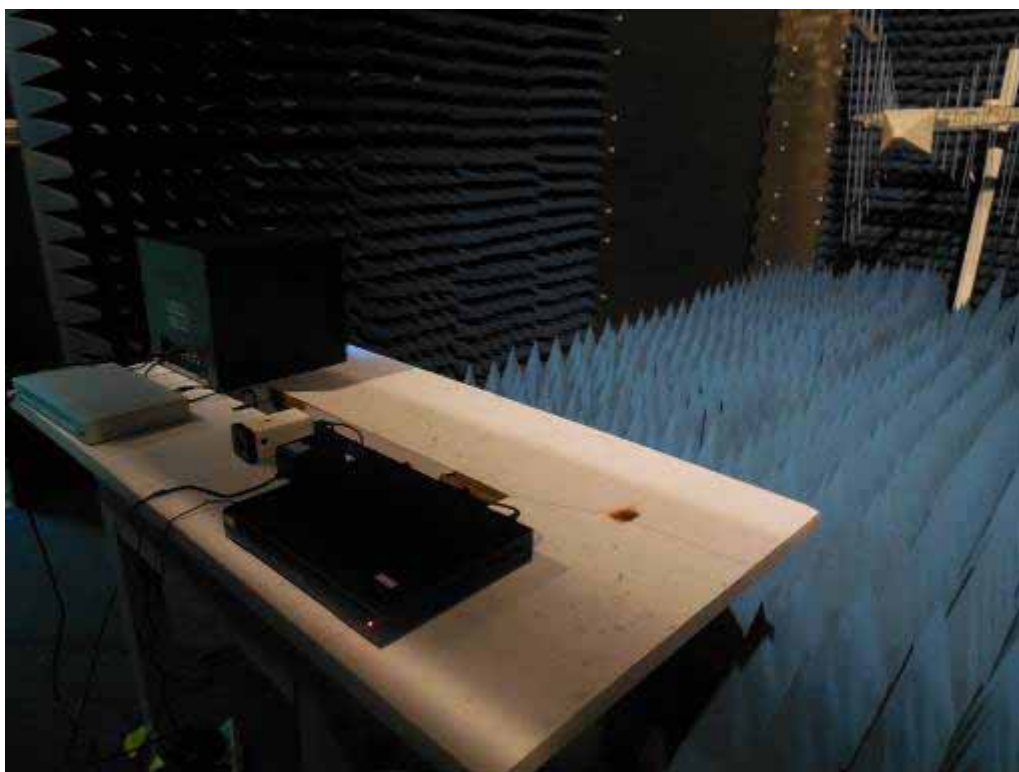



10. Electrical Fast Transient/ Burst Immunity Test

10.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ✧ ambient temperature: 15 to 35 ;
 - ✧ relative humidity : 45% to 75%;
 - ✧ Atmospheric pressure: 86 Kpa (860 hPa) to 106 Kpa (1060 hPa).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - ✧ The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT is not exceeding 1 m.
 - ✧ The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - ✧ The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - ✧ The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - ✧ Normal performance within the specification limits.
 - ✧ Temporary degradation or loss of function or performance which is self-recoverable.
 - ✧ Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - ✧ Degradation or loss of function which is not recoverable due to damage of equipment (components).



10.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 KV	0.25 KV
2	1.0 KV	0.50 KV
3	2.0 KV	1.00 KV
4	4.0 KV	2.00 KV
X	Specified	Specified

Remark : “ X ” is an open level. The level is subject to negotiation between the user and the manufacturer or is specified by the manufacturer.

10.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN2000-06-32	121	2013.03.10	2014.03.09
Coupling clamp	EMCPARTNER	CN-EFT1000	547	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



10.4. Test Result and Data

Basic Standard : IEC 61000-4-4
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 49 %
Atmospheric Pressure : 100 kPa
Test Date : Jan 23, 2014

For EN 55024: 2010

Test Voltage:230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5 kHz</u> above 2.0 kV			
Burst : 15m/300ms		5 <u>kHz</u> below and equal 2.0 kV			
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	-	+	-
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---



For EN 50130-4: 2011

Test Voltage:230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz above 2.0 kV			
Burst : 15m/300ms		5/100 kHz below and equal 2.0 kV			
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	-	+	-
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage:195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz above 2.0 kV			
Burst : 15m/300ms		5/100 kHz below and equal 2.0 kV			
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	-	+	-
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage:253V/50Hz

Pulse : 5/50 ns	Repetition Rate: 5/100 kHz above 2.0 kV	
Burst : 15m/300ms	5/100 kHz below and equal 2.0 kV	
Test time : 1 min/each condition		
Voltage/ Mode/ Polarity/ Result/ Phase	<u>1 kV</u>	<u>2.0 kV</u>



		+	-	+	-
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test engineer: Seben



10.5. Test Photographs

Main(ADS-24RD-12 1224G)






Main(HKA-A24150-230)





BNC(ADS-24RD-12 1224G)

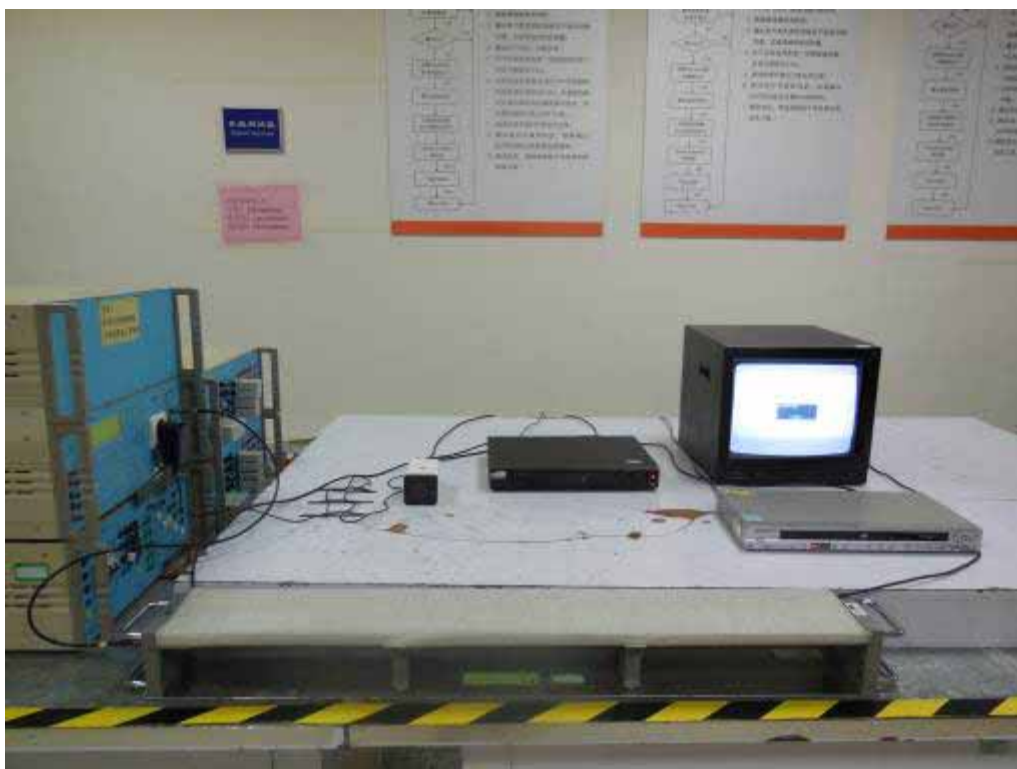



BNC(HKA-A24150-230)





11. Surge Immunity Test

11.1. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ✧ ambient temperature : 15 to 35
- ✧ relative humidity : 10 % to 75 %
- ✧ atmospheric pressure : 86 kPa to 106 kPa (860 hPa to 1060 hPa)

b. Electromagnetic conditions

the electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- ✧ generator and other equipment utilized;
- ✧ test level (voltage/current);
- ✧ generator source impedance;
- ✧ internal or external generator trigger;
- ✧ number of tests : at least five positive and five negative at the selected points;
- ✧ repetition rate : maximum 1/min.
- ✧ inputs and outputs to be tested;
- ✧ representative operating conditions of the EUT;
- ✧ sequence of application of the surge to the circuit;
- ✧ phase angle in the case of AC. power supply;
- ✧ actual installation conditions, for example :

AC : neutral earthed,

DC : (+) or (-) earthed to simulated the actual earthing conditions.

- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.



11.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$, KV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified
NOTE: "X" is an open class. This level can be specified in the product specification.	

11.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN-UTP8	021	2013.03.10	2014.03.09
CDN	EMCPARTNER	CDN2000-06-32	121	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



11.4. Test Result and Data

Basic Standard : IEC 61000-4-5
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 49 %
Atmospheric Pressure : 100 kPa
Test Date : Jan 25, 2014

For EN 55024: 2010

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		-	A	A	A	A

Waveform :10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A



For EN 50130-4: 2011

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		-	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A

Power Port

Test Voltage:195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		-	A	A	A	A



Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A

Power Port

Test Voltage:253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		-	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A



Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	-	+	-
BNC	A	A	A	A

Test engineer: _____



11.5. Test Photographs

ADS-24RD-12 1224G





HKA-A24150-230





12. Conduction Disturbances induced by Radio-Frequency Fields

12.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 100 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.



12.2. Test Severity Levels

Level	Voltage Level (emf.)
1	1 V
2	3 V
3	10 V
x	Specified
NOTE - x is an open class. This level can be specified in the product specification.	

12.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Conducted immunity test system	FRANKONIA	CIT-10/75	102D1294	2013.03.10	2014.03.09
EM Injection clamp	FCC	F-203I-23MM	536	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T2	A3010029	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T4	A3015017	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-T8	A3022010	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-M2	A3002037	2013.03.10	2014.03.09
CDN	FRANKONIA	CDN-M2+M3	A3011102	2013.03.10	2014.03.09
CDN	FCC	CDN-M5/32	A3013024	2013.03.10	2014.03.09
6 dB Attenuator	FRANKONIA	N/A	N/A	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09

**12.4. Test Result and Data**

Basic Standard : IEC 61000-4-6
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 49%
Atmospheric Pressure : 100 kPa
Test Date : Jan 24, 2014

For EN 55024: 2010

Test Voltage:230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 2.9s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	BNC	3	A

For EN 50130-4: 2011

Test Voltage:230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 2.9s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A



Test Voltage:195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 2.9s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage:253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 2.9s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test engineer:



12.5. Test Photographs

BNC(ADS-24RD-12 1224G)






BNC(HKA-A24150-230)





13. Power Frequency Magnetic Field Immunity Tests

13.1. Test Setup

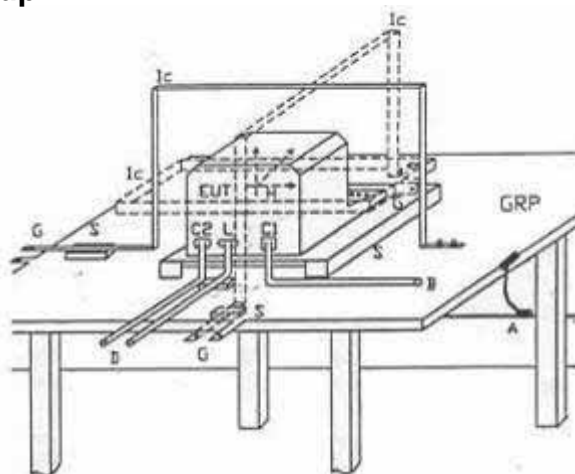

GPR	:	Ground plane	C1	:	Power supply circuit
A	:	Safety earth	C2	:	Signal circuit
S	:	Insulating support	L	:	Communication line
EUT	:	Equipment under test	B	:	To power supply source
Lc	:	Induction coil	D	:	To signal source, simulator
E	:	Earth terminal	G	:	To the test generator

13.2. Test Severity Levels

Level	Magnetic field strength A/m
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special
NOTE 1 "X" is an open level. This level can be given in the product specification.	

13.1. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
H-Filed-Loop	EMCPARTNER	MF1000-1	144	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



13.1. Test Result and Data

Basic Standard : IEC 61000-4-8
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 49%
Atmospheric Pressure : 100 kPa
Test Date : Jan 23, 2014

For EN 55024: 2010

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test engineer: _____



13.2. Test Photographs

ADS-24RD-12 1224G





HKA-A24150-230





14. Voltage Dips and Voltage Interruptions Immunity Test Setup

14.1. Test Conditions

1. Source voltage and frequency : 230V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input DC Power Ports				
Voltage Dips		% Reduction period	20 250	
		% Reduction period	30 25	
		% Reduction period	60 10	
Voltage Interruptions		% Reduction period	100 250	

14.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2013.03.10	2014.03.09



14.3. Test Result and Data

Basic Standard : IEC 61000-4-11
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : HAC-HF3101P
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 49%
Atmospheric Pressure : 100 kPa
Test Date : Jan 25, 2014

For EN 55024: 2010

Voltage(UT): AC 100V/50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	B	B	B	B	B	B	B	B
	>95%	0.5	B	B	B	B	B	B	B	B

Voltage(UT): AC 230V-240 V/50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A



For EN 50130-4: 2011

Test Voltage: 230V/50Hz										
Voltage(UT): AC 230 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: 195.5V/50Hz										
Voltage(UT): AC 230 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Voltage: 253V/50Hz										
Voltage(UT): AC 230 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test engineer: Seben



14.4. Test Photographs

ADS-24RD-12 1224G





HKA-A24150-230





15. EUT Photographs

1) EUT Photo



2) EUT Photo





3) EUT Photo



4) EUT Photo





5) EUT Photo(ADS-24RD-12 1224G)



6) EUT Photo(ADS-24RD-12 1224G)





7) EUT Photo(ADS-24RD-12 1224G)



8) EUT Photo(ADS-24RD-12 1224G)





9) EUT Photo(HKA-A24150-230)



10) EUT Photo(HKA-A24150-230)





11) EUT Photo(HKA-A24150-230)

