



EMC TEST REPORT

Authorized under **Declaration of Conformity**

According to

EN 55022: 2010/AC:2011(Class B)	EN 55024 : 2010
EN 61000-6-3: 2007/A1:2011	EN 50130-4: 2011
EN 61000-3-2: 2006+A2: 2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
	IEC 61000-4-4 : 2012
	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant : Zhejiang Dahua Vision Technology Co., Ltd.

Address : The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.

Equipment : IP CAMERA

Model No. : IPC-HDBW5100-Mercury,IPC-HDB5100-Mercury,
IPC-HDBW5200-Mercury,IPC-HDBW5202-Mercury,
IPC-HDB5200-Mercury,IPC-HDB5202-Mercury,
IPC-HDBW5300-Mercury,IPC-HDBW5302-Mercury,
IPC-HDB5300-Mercury,IPC-HDB5302-Mercury
DH-IPC-HDBW5100-Mercury,DH-IPC-HDB5100-Mercury,
DH-IPC-HDBW5200-Mercury,DH-IPC-HDBW5202-Mercury,
DH-IPC-HDB5200-Mercury,DH-IPC-HDB5202-Mercury,
DH-IPC-HDBW5300-Mercury,H-IPC-HDBW5302-Mercury,
DH-IPC-HDB5300-Mercury,DH-IPC-HDB5302-Mercury

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology (Suzhou) Corp.** the test report shall not be reproduced except in full.
- This test report is only applicable to European Community.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

CERTIFICATE OF COMPLIANCE	5
1. Summary of Test Procedure and Test Results	6
2. Immunity Testing Performance Criteria Definition	7
3. Test Configuration of Equipment under Test	8
3.1. Manufacturer	8
3.2. Feature of Equipment under Test.....	8
3.3. Test Software and Test Mode	10
3.4. Description of Support Unit	11
3.5. General Information of Test.....	12
3.6. Measurement Uncertainty	13
4. Test of Conducted Emission.....	15
4.1. Test Limit	15
4.2. Test Procedures	16
4.3. Typical Test Setup	16
4.4. Measurement equipment	17
4.5. Test Data and Result.....	18
4.6. Test Photographs	42
5. Test of Radiated Emission	46
5.1. Test Limit	46
5.2. Test Procedures	47
5.3. Typical test Setup.....	48
5.4. Measurement equipment	49
5.5. Test Result and Data (30MHz ~ 1000MHz)	50
5.6. Test Result and Data (1000MHz ~ 6000MHz)	62
5.7. Test Photographs (30MHz ~ 1000MHz).....	74
5.8. Test Photographs (1000MHz ~ 6000MHz).....	76
6. Harmonics Test	78
6.1. Limits of Harmonics Current Measurement	78
6.2. Measurement equipment	79
6.3. Test Result and Data.....	80
6.1. Test Photographs	92
7. Voltage Fluctuations Test	94
7.1. Test Procedure	94
7.2. Measurement equipment	94
7.3. Test Result and Data	95
7.4. Test Photographs	107
8. Electrostatic Discharge Immunity Test	109
8.1. Test Procedure	109
8.2. Test Setup for Tests Performed in Laboratory.....	110
8.3. Test Severity Levels	111
8.4. Measurement equipment	111



8.5. Test Result and Data	112
8.6. Test Photographs	125
9. Radio Frequency electromagnetic field immunity test.....	135
9.1. Test Procedure	135
9.2. Test Severity Levels	136
9.3. Measurement equipment	136
9.4. Test Result and Data	137
9.5. Test Photographs	146
10. Electrical Fast Transient/ Burst Immunity Test	148
10.1. Test Procedure	148
10.2. Test Severity Levels	149
10.3. Measurement equipment	149
10.4. Test Result and Data	150
10.5. Test Photographs	159
11. Surge Immunity Test	163
11.1. Test Procedure	163
11.2. Test Severity Level	164
11.3. Measurement equipment	164
11.4. Test Result and Data	165
11.5. Test Photographs	179
12. Conduction Disturbances induced by Radio-Frequency Fields.....	181
12.1. Test Procedure	181
12.2. Test Severity Levels	182
12.3. Measurement equipment	182
12.4. Test Result and Data	183
12.5. Test Photographs	192
13. Power Frequency Magnetic Field Immunity Tests	194
13.1. Test Setup	194
13.1. Test Severity Levels	194
13.1. Measurement equipment	194
13.1. Test Result and Data	195
13.2. Test Photographs	197
14. Voltage Dips and Voltage Interruptions Immunity Test Setup	199
14.1. Test Conditions	199
14.2. Measurement equipment	199
14.3. Test Result and Data	200
14.4. Test Photographs	209
15. EUT Photographs	211



History of this test report

☒ ORIGINAL.

☐ Additional attachment as following record:

Attachment No.	Date	Description



CERTIFICATE OF COMPLIANCE

According to

EN 55022: 2010/AC:2011(Class B)	EN 55024 : 2010
EN 61000-6-3: 2007/A1:2011	EN 50130-4: 2011
EN 61000-3-2: 2006+A2: 2009	IEC 61000-4-2 : 2008
EN 61000-3-3 : 2008	IEC 61000-4-3 : 2006+A1:2007+A2:2010
	IEC 61000-4-4 : 2012
	IEC 61000-4-5 : 2005
	IEC 61000-4-6 : 2008
	IEC 61000-4-8 : 2009
	IEC 61000-4-11 : 2004

Applicant : Zhejiang Dahua Vision Technology Co., Ltd.

Address : The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.

Equipment : IP CAMERA

Model No. : IPC-HDBW5100-Mercury, IPC-HDB5100-Mercury,
IPC-HDBW5200-Mercury, IPC-HDBW5202-Mercury,
IPC-HDB5200-Mercury, IPC-HDB5202-Mercury,
IPC-HDBW5300-Mercury, IPC-HDBW5302-Mercury,
IPC-HDB5300-Mercury, IPC-HDB5302-Mercury,
DH-IPC-HDBW5100-Mercury, DH-IPC-HDB5100-Mercury,
DH-IPC-HDBW5200-Mercury, DH-IPC-HDBW5202-Mercury,
DH-IPC-HDB5200-Mercury, DH-IPC-HDB5202-Mercury,
DH-IPC-HDBW5300-Mercury, H-IPC-HDBW5302-Mercury,
DH-IPC-HDB5300-Mercury, DH-IPC-HDB5302-Mercury

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **EUROPEAN COUNCIL DIRECTIVE 2004/108/EC**.

The test was carried out on Jul 14, 2014 at **Cerpass Technology(Suzhou) Corp.**

Signature

Miro Chueh/ Technical director



1. Summary of Test Procedure and Test Results

EMISSION(EN 55022: 2010/AC:2011 / EN 61000-6-3: 2007/A1:2011)		
Test Item	Normative References	Test Result
Conducted Emission	EN 55022 : 2010/AC:2011 EN 61000-6-3: 2007/A1:2011	PASS
Radiated Emission	EN 55022 : 2010/AC:2011 EN 61000-6-3: 2007/A1:2011	PASS
Harmonics	EN 61000-3-2: 2006+A2: 2009	PASS
Voltage Fluctuations	EN 61000-3-3: 2008	PASS

IMMUNITY (EN 55024 : 2010)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	± 4 kV (contact discharge, HCP/VCP) ± 8 kV (Air discharge)	PASS
Radio Frequency electromagnetic field immunity test (RS)	80-1000 MHz, 3V/m, 80%AM(1KHz)	PASS
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: ± 1 kV, Signal Port: ± 0.5 kV	PASS
Surge Immunity Test	AC Power Ports: Line to Line: ± 1 kV Line to earth: ± 2 kV Signal and telecommunication port: ± 1 kV	PASS
Conduction Disturbances induced by Radio-Frequency Fields	0.15-80MHz, 3V, 80%AM(1KHz)	PASS
Power Frequency Magnetic Field Immunity Test	50Hz, 1A/m	PASS
Voltage Dips and Voltage Interruptions Immunity Test	Voltage dips: >95% Reduction, 0.5 Durations (Cycle)	PASS
	30% Reduction, 25 Durations (Cycle)	PASS
	Voltage interruptions: >95% Reduction, 250 Durations (Cycle)	PASS



IMMUNITY (EN 50130-4: 2011)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	± 6 kV (contact discharge ,HCP/VCP) ± 8 kV (Air discharge)	PASS
Radio Frequency electromagnetic field immunity test (RS)	80-2700 MHz, 10V/m, 80%AM(1KHz)	PASS
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: ± 2.0 kV, Signal Port: ± 1.0 kV	PASS
Surge Immunity Test	AC Power Ports: line to line: ± 0.5 , ± 1 kV line to earth: ± 0.5 , ± 1 , ± 2 kV Signal Port: ± 0.5 , ± 1 kV	PASS
Conduction Disturbances induced by Radio-Frequency Fields	0.15-100MHz, 10V, 80%AM(1KHz)	PASS
Voltage Dips and Voltage Interruptions Immunity Test	Voltage Interruptions: 100% Reduction, 250 Cycle	PASS
	Voltage Dips: 60% Reduction, 10 Cycle 30% Reduction, 25 Cycle 20% Reduction, 250 Cycle	PASS

2. Immunity Testing Performance Criteria Definition

- A. Normal performance within limits specified by the manufacture, requestor or purchaser;
- B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- C. Temporary loss of function or degradation of performance, the correction of which requires operation intervention;
- D. Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.




3. Test Configuration of Equipment under Test

3.1. Manufacturer

Zhejiang Dahua Vision Technology Co., Ltd.

The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.

3.2. Feature of Equipment under Test

IP CAMERA	Model No.:	IPC-HDBW5100-Mercury,IPC-HDB5100-Mercury, IPC-HDBW5200-Mercury,IPC-HDBW5202-Mercury, IPC-HDB5200-Mercury,IPC-HDB5202-Mercury, IPC-HDBW5300-Mercury,IPC-HDBW5302-Mercury, IPC-HDB5300-Mercury,IPC-HDB5302-Mercury DH-IPC-HDBW5100-Mercury,DH-IPC-HDB5100-Mercury, DH-IPC-HDBW5200-Mercury,DH-IPC-HDBW5202-Mercury, DH-IPC-HDB5200-Mercury,DH-IPC-HDB5202-Mercury, DH-IPC-HDBW5300-Mercury,H-IPC-HDBW5302-Mercury, DH-IPC-HDB5300-Mercury,DH-IPC-HDB5302-Mercury
Remark	IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury, IPC-HDBW5100-Mercury was selected as the test model and its data have been recorded in this report.	
Adapter 1	Model No.:	ADS-12B-12 12012Gz
	Input :	100-240V~ 50/60Hz Max.0.3A
	Output :	12V  1.0A
Adapter 2	Model No.:	HKA-A24150-230
	Input :	230V~ 50Hz
	Output :	24V~1500mA 36VA



Models' Differences:

Model No	Differences
IPC-HDBW5100-Mercury	Differences between the models, unlike the main measuring model sensor plate and a lens, the light board, the motherboard also has small differences, no power zoom function
IPC-HDB5100-Mercury	Compared to HDBW5100, no infrared light board
IPC-HDBW5200-Mercury	Compared to HDBW5202, infrared light board, no motorized zoom function
IPC-HDBW5202-Mercury	Differences between the models, unlike the main measuring model sensor plate and a lens
IPC-HDB5200-Mercury	Compared to HDBW5202, no infrared light board, no motorized zoom function
IPC-HDB5202-Mercury	Compared to HDBW5202, no infrared light board
IPC-HDBW5300-Mercury	No motorized zoom
IPC-HDBW5302-Mercury	Test model
IPC-HDB5300-Mercury	Infrared light board lack of hardware, no motorized zoom
IPC-HDB5302-Mercury	Infrared light board lack of hardware
DH-IPC-HDBW5100-Mercury	with "DH" have dahua logo.
DH-IPC-HDB5100-Mercury	
DH-IPC-HDBW5200-Mercury	
DH-IPC-HDBW5202-Mercury	
DH-IPC-HDB5200-Mercury	
DH-IPC-HDB5202-Mercury	
DH-IPC-HDBW5300-Mercury	
DH-IPC-HDBW5302-Mercury	
DH-IPC-HDB5300-Mercury	
DH-IPC-HDB5302-Mercury	



3.3. Test Software and Test Mode

Test Manner

- a During testing, the interface cables and equipment positions were varied according to Europe Standard.
- b Turn on the power of all equipment.
- c The complete test system included Notebook PC and EUT for EMC test.

The pre-test modes

Test Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz

Test Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz

Test Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz

Test Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230

Test Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230

Test Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz

Test Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz

Test Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz

Test Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230

Test Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230

Test Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230

**3.4. Description of Support Unit**

No.	Device	Manufacturer	Model No.	Description
1	Notebook PC	SONY	PCG-71811P	Non-Shielded,1.5m (R33021)

No.	Cable	Quantity	Description
A	LAN Cable	1	Non-Shielded,>3.0m



3.5. General Information of Test

Test Site:	Cerpass Technology (Suzhou) Co.,Ltd
Test Site Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 6GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

LABORATORY ACCREDITATION





3.6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	0.09MHz-30MHz	+/- 1.2462 dB

Measurement	Polarity	Frequency	Uncertainty
Radiated emissions (below 1GHz)	H	30MHz ~ 200MHz	+/- 4.0246dB
		200MHz ~1000MHz	+/- 3.8673dB
	V	30MHz ~ 200MHz	+/- 4.0242dB
		200MHz ~1000MHz	+/- 3.8688dB
Radiated emissions (above 1GHz)	H	1000MHz ~18000MHz	+/- 3.8856dB
		18000MHz ~40000MHz	+/- 3.8674dB
	V	1000MHz ~18000MHz	+/- 3.8852dB
		18000MHz ~40000MHz	+/- 3.8670dB

Measurement	Uncertainty
ESD—Rise time tr	9%
ESD—Peak current Ip	2.5%
ESD—Current at 30 ns	1%
ESD—Current at 60 ns	4%
RS above 3GHz	±3.62dB
RS under 3GHz	±3.70dB
EFT—Rise time tr	4%
EFT—Peak current Ip	4%
EFT—Current	4%
Surge—Rise time tr	4%
Surge—Peak current Ip	4%
Surge—Current	4%



CS-CND	$\pm 0.80\text{dB}$
CS-Clamp	$\pm 1.06\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22: 2008, clause 11, Measurement Uncertainty) determining compliance with the limits shall be based on the results of the compliance measurement. Consequently the measured emissions being less than the maximum allowed emission result in this being a compliant test or passing test.



4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 61000-6-3. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

Table 1 Class B Line Conducted Emission Limits:

Frequency range (MHz)	Limits (dB μ V)	
	Quasi Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5. to 30.	60	50
Note 1: The lower limits shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to .50MHz.		


Table 2 - Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment.

Frequency range (MHz)	Voltage limits dB(μ V)		Current limits dB(μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 to 30	74	64	30	20
Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 to 0.5 MHz.				
Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication under test (conversion factor is 20 log10 150/1 = 44dB).				

4.2. Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

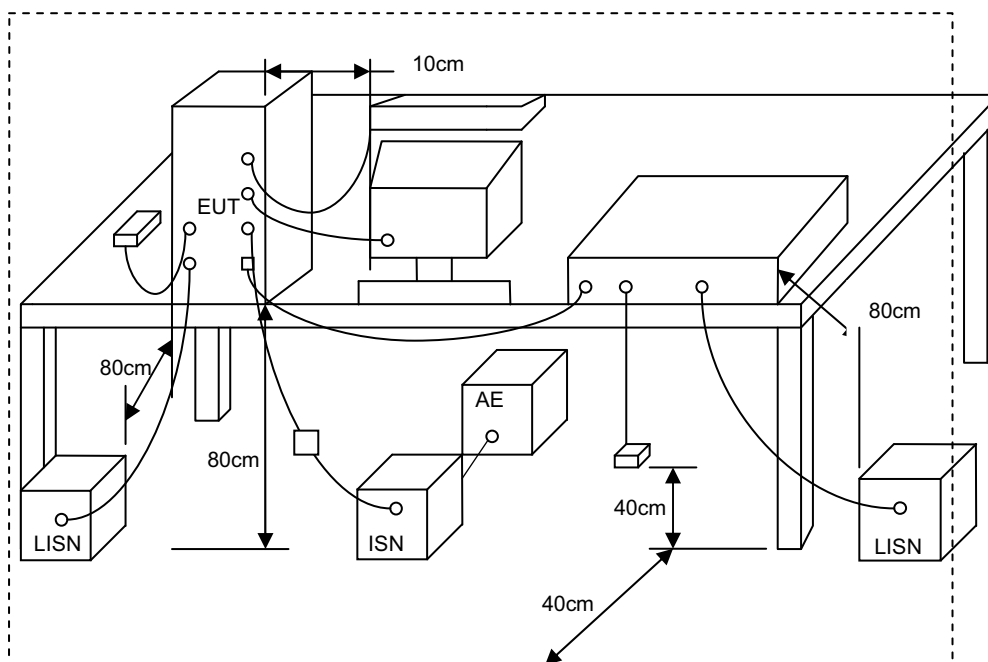


**4.4. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2014.03.24	2015.03.23
AMN	R&S	ESH2-Z5	100182	2013.09.11	2014.09.10
Two-Line V-Network	R&S	ENV216	100325	2013.12.04	2014.12.03
ISN	FCC	FCC-TLISN-T2-02	20379	2014.03.24	2015.03.23
ISN	FCC	FCC-TLISN-T4-02	20380	2014.03.24	2015.03.23
ISN	FCC	FCC-TLISN-T8-02	20381	2014.03.24	2015.03.23
ISN	TESEQ	ISN ST08	30175	2014.03.24	2015.03.23
Current Probe	R&S	EZ-17	100303	2014.04.04	2015.04.03
Passive Voltage Probe	R&S	ESH2-Z3	100026	2014.03.24	2015.03.23
Pulse Limiter	R&S	ESH3-Z2	100529	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2014.03.31	2015.03.30



4.5. Test Data and Result

Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

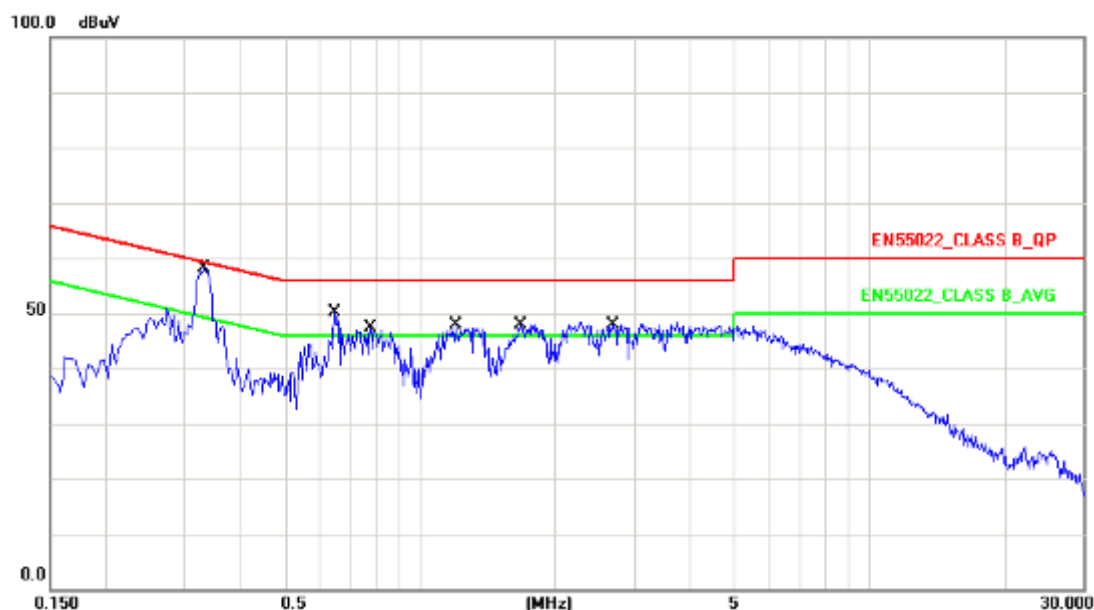


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	10.14	44.69	54.83	59.45	-4.62	QP
2	0.3300	10.14	34.30	44.44	49.45	-5.01	AVG
3	0.6460	10.15	35.39	45.54	56.00	-10.46	QP
4	0.6460	10.15	23.41	33.56	46.00	-12.44	AVG
5	0.7780	10.15	33.70	43.85	56.00	-12.15	QP
6	0.7780	10.15	23.54	33.69	46.00	-12.31	AVG
7	1.1980	10.16	34.49	44.65	56.00	-11.35	QP
8	1.1980	10.16	25.20	35.36	46.00	-10.64	AVG
9	1.6780	10.17	33.77	43.94	56.00	-12.06	QP
10	1.6780	10.17	24.67	34.84	46.00	-11.16	AVG
11	2.6900	10.18	32.94	43.12	56.00	-12.88	QP
12	2.6900	10.18	23.97	34.15	46.00	-11.85	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

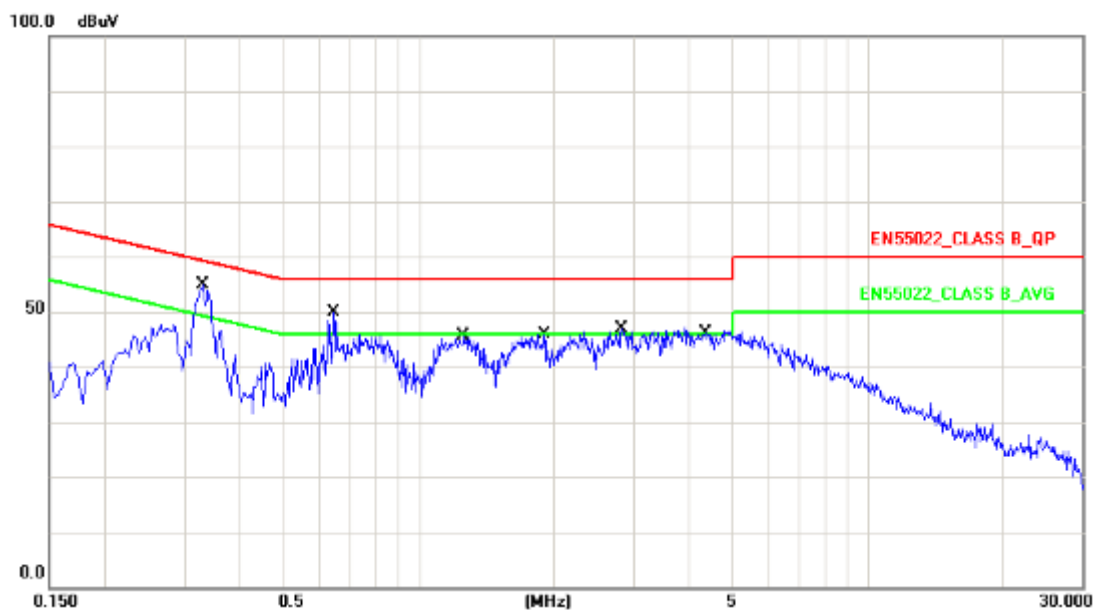


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	10.14	42.15	52.29	59.45	-7.16	QP
2	0.3300	10.14	32.72	42.86	49.45	-6.59	AVG
3	0.6460	10.16	32.19	42.35	56.00	-13.65	QP
4	0.6460	10.16	22.95	33.11	46.00	-12.89	AVG
5	1.2579	10.18	30.91	41.09	56.00	-14.91	QP
6	1.2579	10.18	23.02	33.20	46.00	-12.80	AVG
7	1.9060	10.18	28.68	38.86	56.00	-17.14	QP
8	1.9060	10.18	17.63	27.81	46.00	-18.19	AVG
9	2.8340	10.20	30.20	40.40	56.00	-15.60	QP
10	2.8340	10.20	20.95	31.15	46.00	-14.85	AVG
11	4.3500	10.24	30.02	40.26	56.00	-15.74	QP
12	4.3500	10.24	21.11	31.35	46.00	-14.65	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

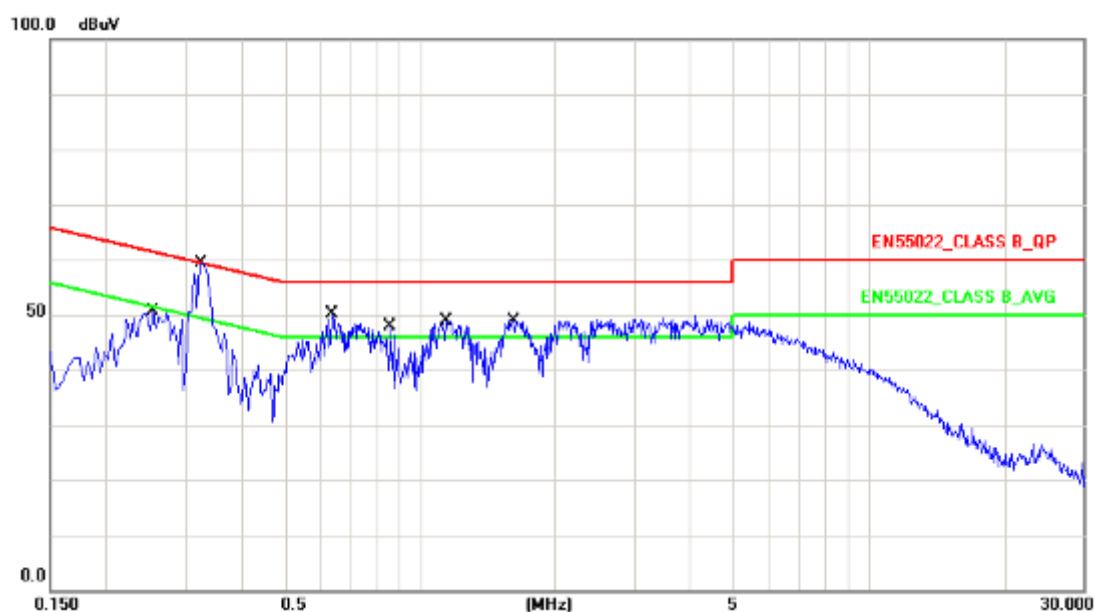


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2540	10.13	38.08	48.21	61.62	-13.41	QP
2	0.2540	10.13	28.21	38.34	51.62	-13.28	AVG
3	0.3260	10.14	46.72	56.86	59.55	-2.69	QP
4	0.3260	10.14	36.33	46.47	49.55	-3.08	AVG
5	0.6340	10.15	36.97	47.12	56.00	-8.88	QP
6	0.6340	10.15	25.14	35.29	46.00	-10.71	AVG
7	0.8580	10.15	30.71	40.86	56.00	-15.14	QP
8	0.8580	10.15	19.85	30.00	46.00	-16.00	AVG
9	1.1420	10.16	35.43	45.59	56.00	-10.41	QP
10	1.1420	10.16	25.42	35.58	46.00	-10.42	AVG
11	1.6140	10.17	34.97	45.14	56.00	-10.86	QP
12	1.6140	10.17	25.53	35.70	46.00	-10.30	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

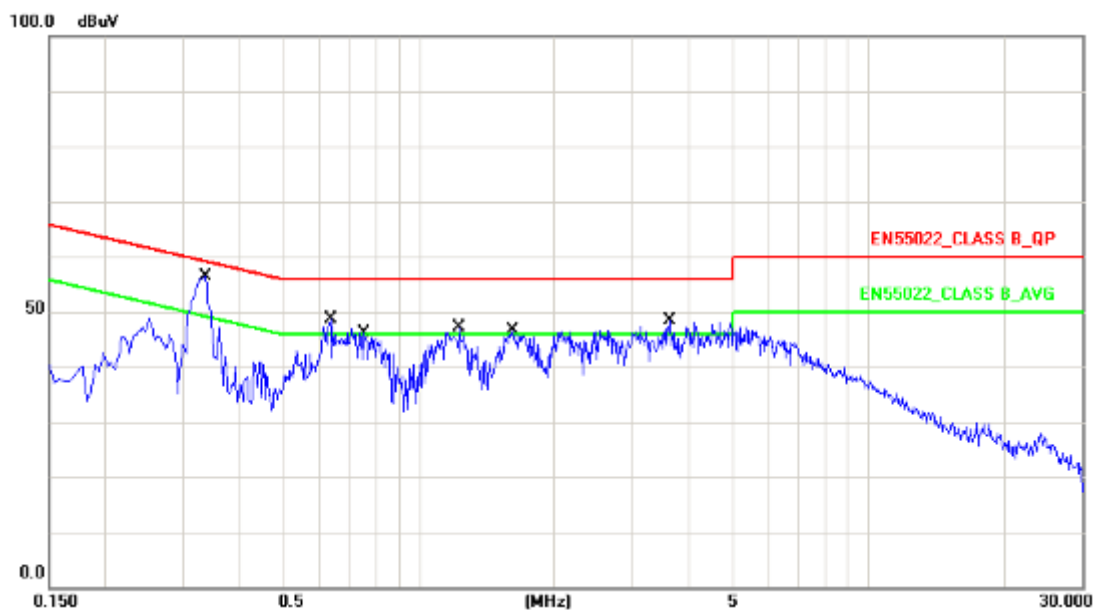


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3339	10.14	42.30	52.44	59.35	-6.91	QP
2	0.3339	10.14	34.40	44.54	49.35	-4.81	AVG
3	0.6340	10.16	33.66	43.82	56.00	-12.18	QP
4	0.6340	10.16	24.43	34.59	46.00	-11.41	AVG
5	0.7580	10.16	32.02	42.18	56.00	-13.82	QP
6	0.7580	10.16	23.57	33.73	46.00	-12.27	AVG
7	1.2340	10.18	32.00	42.18	56.00	-13.82	QP
8	1.2340	10.18	24.06	34.24	46.00	-11.76	AVG
9	1.6220	10.18	31.95	42.13	56.00	-13.87	QP
10	1.6220	10.18	24.16	34.34	46.00	-11.66	AVG
11	3.6260	10.21	30.03	40.24	56.00	-15.76	QP
12	3.6260	10.21	21.51	31.72	46.00	-14.28	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

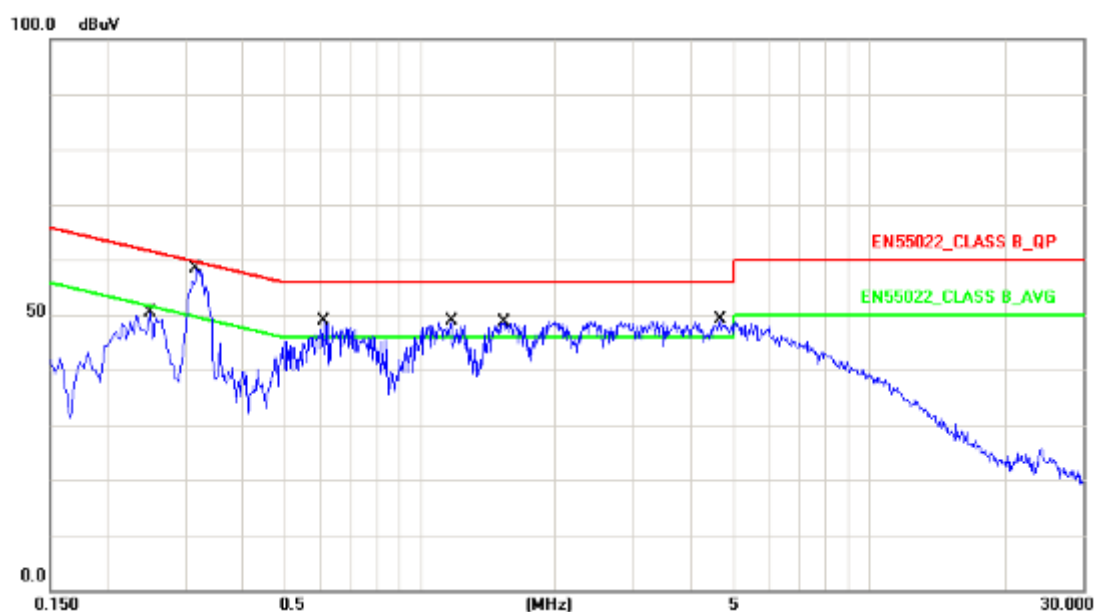


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2500	10.13	36.13	46.26	61.75	-15.49	QP
2	0.2500	10.13	26.43	36.56	51.75	-15.19	AVG
3	0.3180	10.14	46.78	56.92	59.76	-2.84	QP
4	0.3180	10.14	36.97	47.11	49.76	-2.65	AVG
5	0.6100	10.15	35.39	45.54	56.00	-10.46	QP
6	0.6100	10.15	25.27	35.42	46.00	-10.58	AVG
7	1.1780	10.16	33.72	43.88	56.00	-12.12	QP
8	1.1780	10.16	24.49	34.65	46.00	-11.35	AVG
9	1.5420	10.17	34.73	44.90	56.00	-11.10	QP
10	1.5420	10.17	26.38	36.55	46.00	-9.45	AVG
11	4.6540	10.22	32.91	43.13	56.00	-12.87	QP
12	4.6540	10.22	23.76	33.98	46.00	-12.02	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

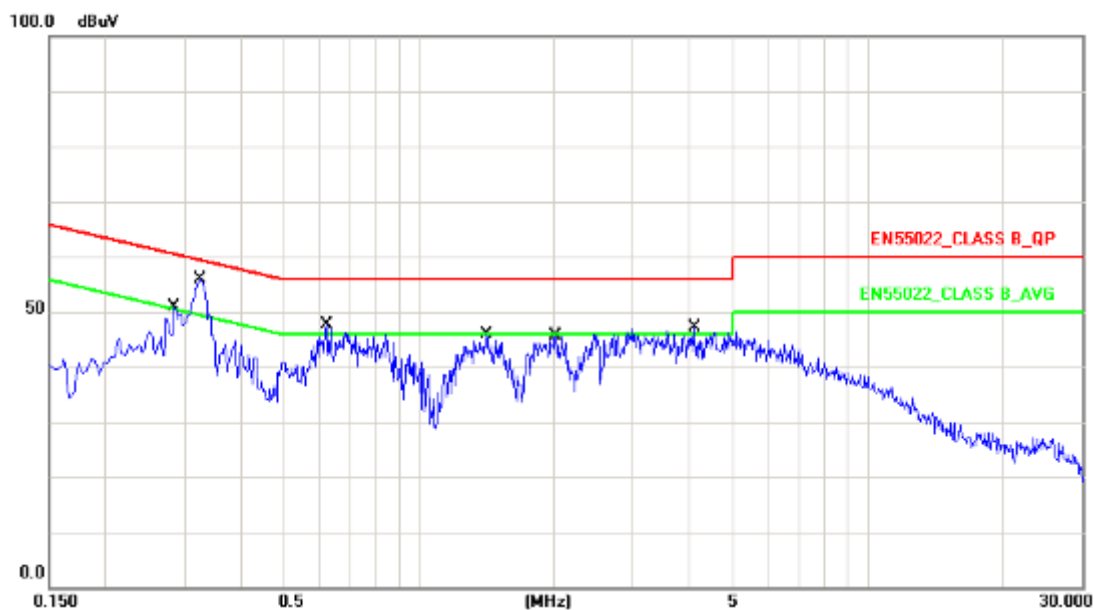


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2860	10.14	24.88	35.02	60.64	-25.62	QP
2	0.2860	10.14	13.17	23.31	50.64	-27.33	AVG
3	0.3260	10.14	43.17	53.31	59.55	-6.24	QP
4	0.3260	10.14	33.74	43.88	49.55	-5.67	AVG
5	0.6260	10.16	33.12	43.28	56.00	-12.72	QP
6	0.6260	10.16	24.22	34.38	46.00	-11.62	AVG
7	1.4140	10.18	28.50	38.68	56.00	-17.32	QP
8	1.4140	10.18	19.59	29.77	46.00	-16.23	AVG
9	2.0180	10.18	31.28	41.46	56.00	-14.54	QP
10	2.0180	10.18	24.00	34.18	46.00	-11.82	AVG
11	4.1100	10.22	29.78	40.00	56.00	-16.00	QP
12	4.1100	10.22	21.93	32.15	46.00	-13.85	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

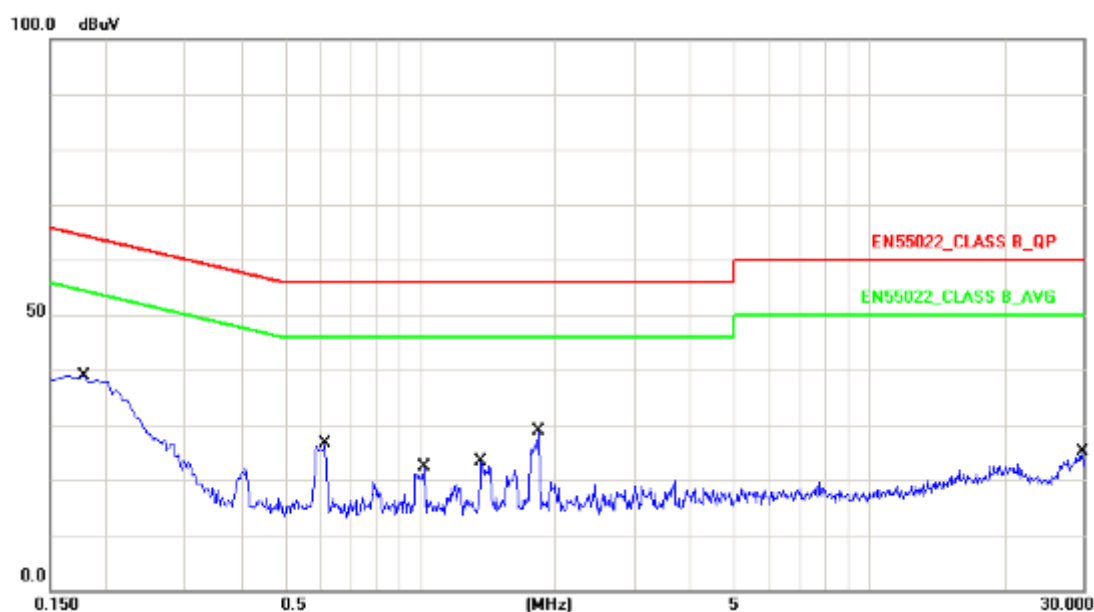


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	10.12	21.20	31.32	64.57	-33.25	QP
2	0.1780	10.12	-0.54	9.58	54.57	-44.99	AVG
3	0.6140	10.15	12.79	22.94	56.00	-33.06	QP
4	0.6140	10.15	4.35	14.50	46.00	-31.50	AVG
5	1.0220	10.16	7.57	17.73	56.00	-38.27	QP
6	1.0220	10.16	0.73	10.89	46.00	-35.11	AVG
7	1.3700	10.16	6.97	17.13	56.00	-38.87	QP
8	1.3700	10.16	0.15	10.31	46.00	-35.69	AVG
9	1.8380	10.17	15.04	25.21	56.00	-30.79	QP
10	1.8380	10.17	5.70	15.87	46.00	-30.13	AVG
11	29.8780	10.44	9.27	19.71	60.00	-40.29	QP
12	29.8780	10.44	4.82	15.26	50.00	-34.74	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

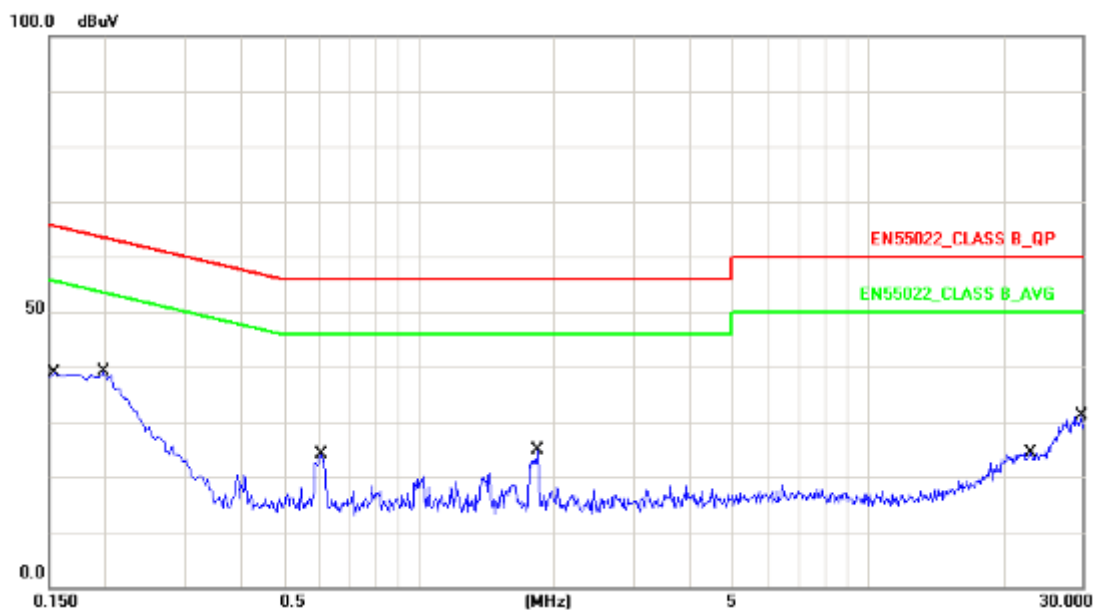


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	10.13	21.38	31.51	65.78	-34.27	QP
2	0.1539	10.13	-0.11	10.02	55.78	-45.76	AVG
3	0.1980	10.13	21.79	31.92	63.69	-31.77	QP
4	0.1980	10.13	13.68	23.81	53.69	-29.88	AVG
5	0.6060	10.16	7.47	17.63	56.00	-38.37	QP
6	0.6060	10.16	2.76	12.92	46.00	-33.08	AVG
7	1.8420	10.18	10.64	20.82	56.00	-35.18	QP
8	1.8420	10.18	2.19	12.37	46.00	-33.63	AVG
9	23.1340	10.38	8.45	18.83	60.00	-41.17	QP
10	23.1340	10.38	4.26	14.64	50.00	-35.36	AVG
11	29.9060	10.27	11.70	21.97	50.00	-28.03	AVG
12	29.9060	10.27	11.69	21.96	50.00	-28.04	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

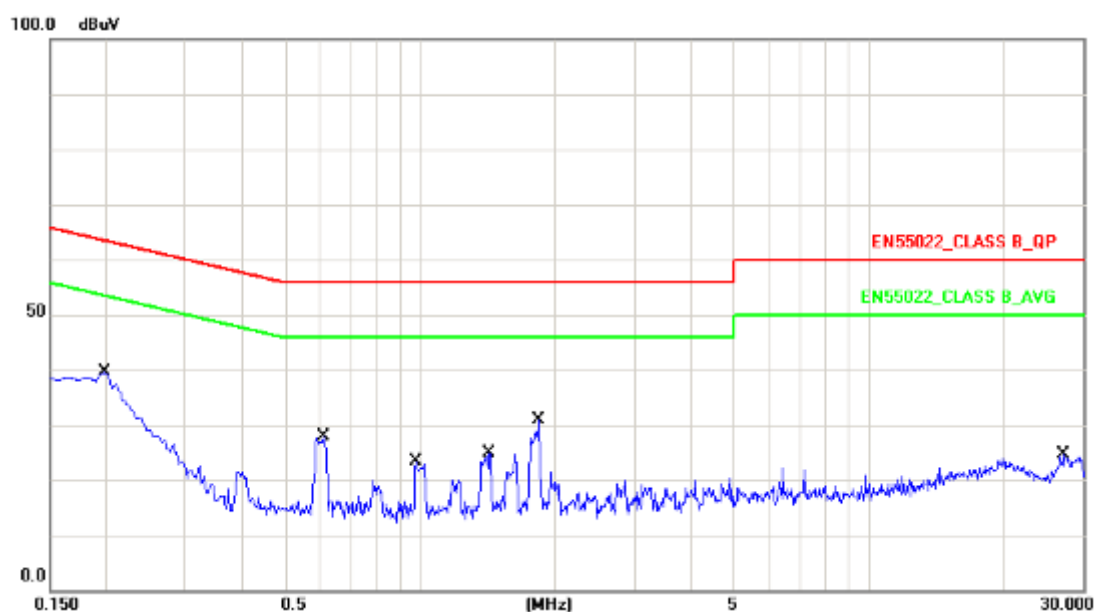


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1980	10.12	22.81	32.93	63.69	-30.76	QP
2	0.1980	10.12	17.78	27.90	53.69	-25.79	AVG
3	0.6100	10.15	15.11	25.26	56.00	-30.74	QP
4	0.6100	10.15	8.26	18.41	46.00	-27.59	AVG
5	0.9820	10.16	9.93	20.09	56.00	-35.91	QP
6	0.9820	10.16	2.54	12.70	46.00	-33.30	AVG
7	1.4260	10.16	9.36	19.52	56.00	-36.48	QP
8	1.4260	10.16	2.92	13.08	46.00	-32.92	AVG
9	1.8420	10.17	16.83	27.00	56.00	-29.00	QP
10	1.8420	10.17	6.63	16.80	46.00	-29.20	AVG
11	27.1860	10.43	9.56	19.99	60.00	-40.01	QP
12	27.1860	10.43	5.05	15.48	50.00	-34.52	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

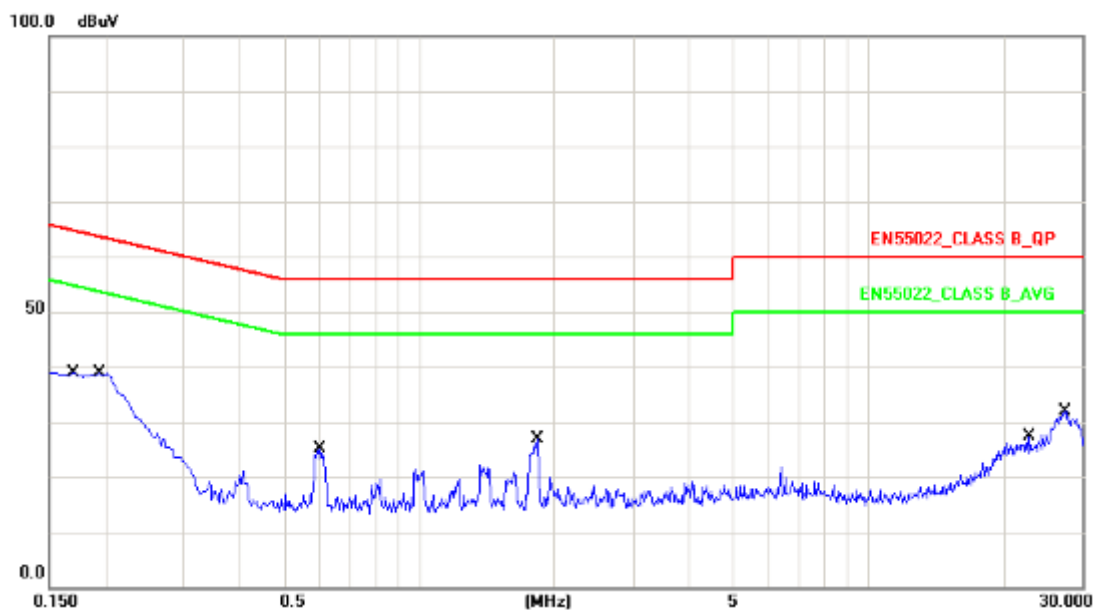


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	10.13	21.17	31.30	64.96	-33.66	QP
2	0.1700	10.13	-0.48	9.65	54.96	-45.31	AVG
3	0.1940	10.13	20.85	30.98	63.86	-32.88	QP
4	0.1940	10.13	8.87	19.00	53.86	-34.86	AVG
5	0.6020	10.16	9.27	19.43	56.00	-36.57	QP
6	0.6020	10.16	4.63	14.79	46.00	-31.21	AVG
7	1.8380	10.18	13.77	23.95	56.00	-32.05	QP
8	1.8380	10.18	4.73	14.91	46.00	-31.09	AVG
9	22.8980	10.39	10.99	21.38	60.00	-38.62	QP
10	22.8980	10.39	6.88	17.27	50.00	-32.73	AVG
11	27.4180	10.31	18.84	29.15	60.00	-30.85	QP
12	27.4180	10.31	14.72	25.03	50.00	-24.97	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

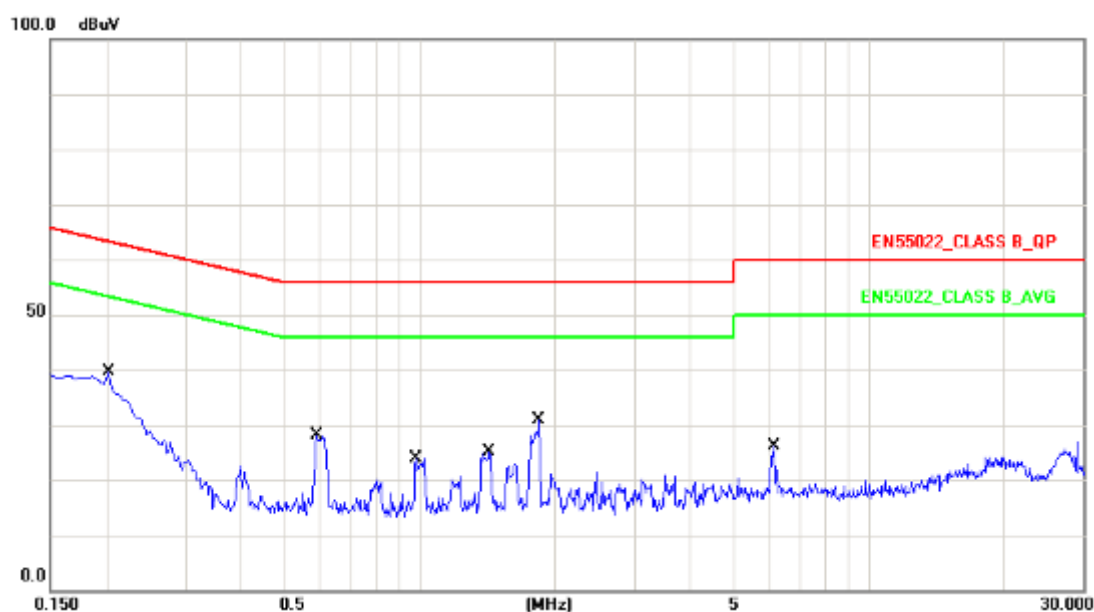


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	10.12	22.77	32.89	63.52	-30.63	QP
2	0.2020	10.12	18.40	28.52	53.52	-25.00	AVG
3	0.5899	10.16	16.14	26.30	56.00	-29.70	QP
4	0.5899	10.16	8.14	18.30	46.00	-27.70	AVG
5	0.9820	10.16	10.05	20.21	56.00	-35.79	QP
6	0.9820	10.16	2.58	12.74	46.00	-33.26	AVG
7	1.4299	10.16	11.63	21.79	56.00	-34.21	QP
8	1.4299	10.16	3.41	13.57	46.00	-32.43	AVG
9	1.8420	10.17	16.61	26.78	56.00	-29.22	QP
10	1.8420	10.17	6.52	16.69	46.00	-29.31	AVG
11	6.1660	10.25	1.13	11.38	60.00	-48.62	QP
12	6.1660	10.25	-3.56	6.69	50.00	-43.31	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

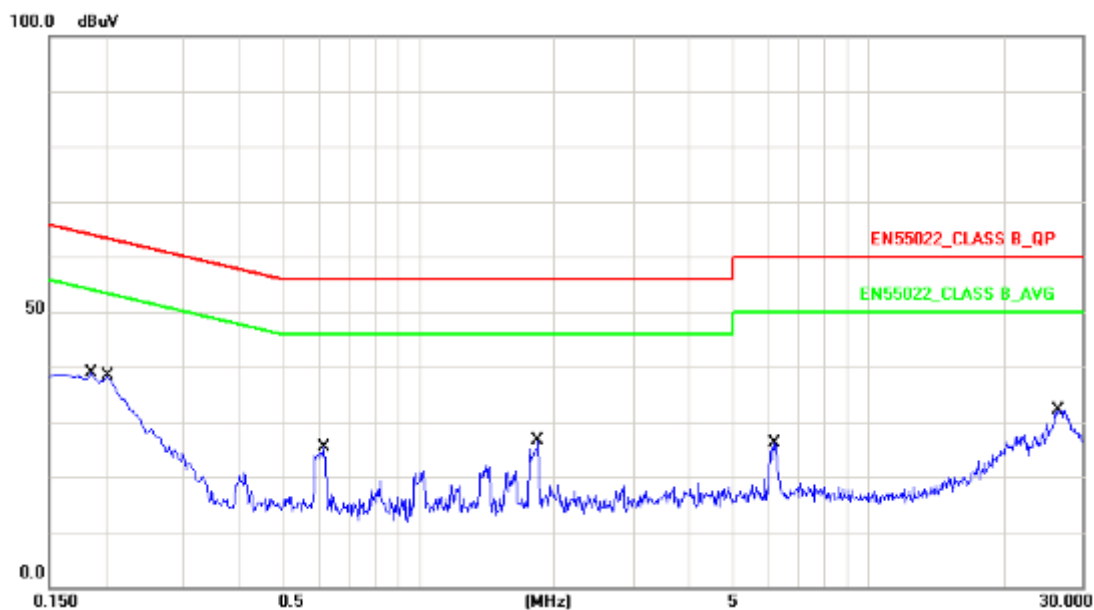


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	10.13	20.86	30.99	64.21	-33.22	QP
2	0.1860	10.13	-0.56	9.57	54.21	-44.64	AVG
3	0.2020	10.13	21.00	31.13	63.52	-32.39	QP
4	0.2020	10.13	14.27	24.40	53.52	-29.12	AVG
5	0.6140	10.16	10.93	21.09	56.00	-34.91	QP
6	0.6140	10.16	2.94	13.10	46.00	-32.90	AVG
7	1.8420	10.18	12.93	23.11	56.00	-32.89	QP
8	1.8420	10.18	3.77	13.95	46.00	-32.05	AVG
9	6.1979	10.27	7.85	18.12	60.00	-41.88	QP
10	6.1979	10.27	-2.52	7.75	50.00	-42.25	AVG
11	26.4860	10.33	18.31	28.64	60.00	-31.36	QP
12	26.4860	10.33	14.18	24.51	50.00	-25.49	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

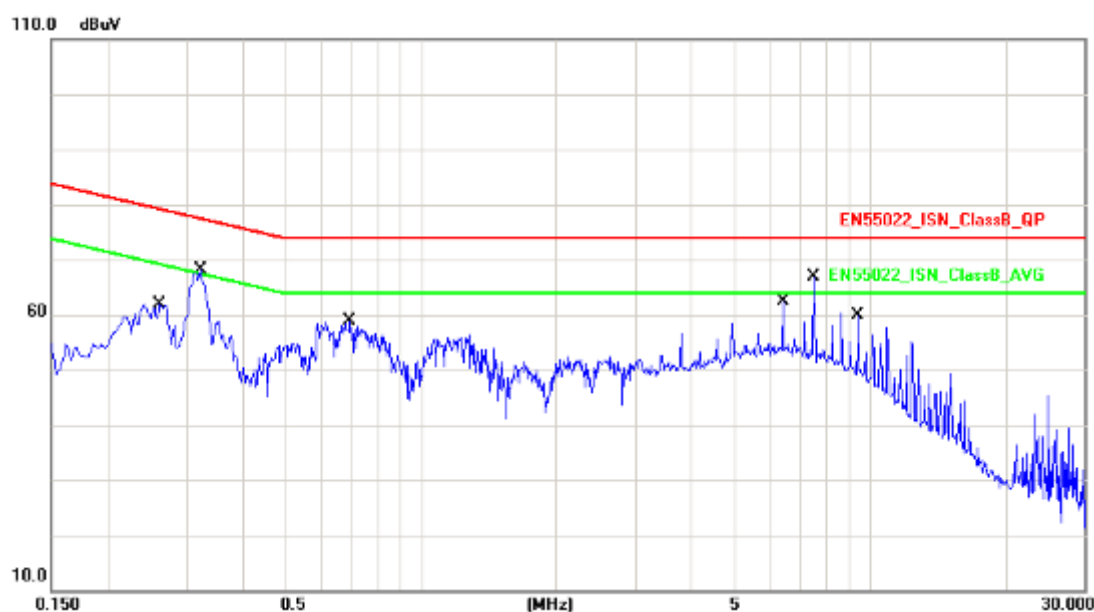


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2620	9.87	49.36	59.23	80.80	-21.57	QP
2	0.2620	9.87	38.37	48.24	70.80	-22.56	AVG
3	0.3220	9.85	56.46	66.31	79.08	-12.77	QP
4	0.3220	9.85	45.62	55.47	69.08	-13.61	AVG
5	0.6940	9.77	45.21	54.98	74.00	-19.02	QP
6	0.6940	9.77	34.76	44.53	64.00	-19.47	AVG
7	6.4140	9.79	44.40	54.19	74.00	-19.81	QP
8	6.4140	9.79	37.35	47.14	64.00	-16.86	AVG
9	7.5020	9.80	53.90	63.70	74.00	-10.30	QP
10	7.5020	9.80	46.78	56.58	64.00	-7.42	AVG
11	9.4060	9.87	42.04	51.91	74.00	-22.09	QP
12	9.4060	9.87	34.89	44.76	64.00	-19.24	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30

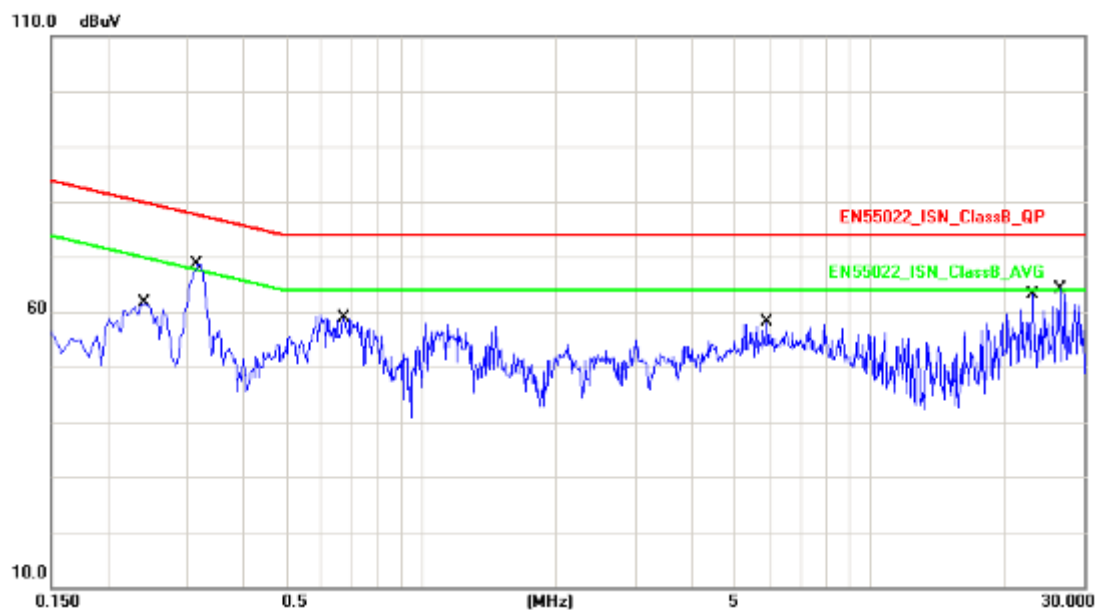

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2420	9.88	49.59	59.47	81.37	-21.90	QP
2	0.2420	9.88	38.20	48.08	71.37	-23.29	AVG
3	0.3180	9.85	56.89	66.74	79.20	-12.46	QP
4	0.3180	9.85	47.33	57.18	69.20	-12.02	AVG
5	0.6740	9.77	46.02	55.79	74.00	-18.21	QP
6	0.6740	9.77	35.20	44.97	64.00	-19.03	AVG
7	5.9100	9.79	44.39	54.18	74.00	-19.82	QP
8	5.9100	9.79	40.16	49.95	64.00	-14.05	AVG
9	23.1299	9.84	51.82	61.66	74.00	-12.34	QP
10	23.1299	9.84	49.89	59.73	64.00	-4.27	AVG
11	26.6100	9.86	53.45	63.31	74.00	-10.69	QP
12	26.6100	9.86	50.14	60.00	64.00	-4.00	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3140	9.86	54.45	64.31	79.31	-15.00	QP
2	0.3140	9.86	43.49	53.35	69.31	-15.96	AVG
3	0.6900	9.77	43.20	52.97	74.00	-21.03	QP
4	0.6900	9.77	32.75	42.52	64.00	-21.48	AVG
5	1.2980	9.76	44.68	54.44	74.00	-19.56	QP
6	1.2980	9.76	34.48	44.24	64.00	-19.76	AVG
7	3.7500	9.78	44.78	54.56	74.00	-19.44	QP
8	3.7500	9.78	37.39	47.17	64.00	-16.83	AVG
9	8.5860	9.84	44.30	54.14	74.00	-19.86	QP
10	8.5860	9.84	37.81	47.65	64.00	-16.35	AVG
11	11.2500	9.87	48.73	58.60	74.00	-15.40	QP
12	11.2500	9.87	41.63	51.50	64.00	-12.50	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	9.85	56.83	66.68	79.20	-12.52	QP
2	0.3180	9.85	46.10	55.95	69.20	-13.25	AVG
3	0.6020	9.77	46.60	56.37	74.00	-17.63	QP
4	0.6020	9.77	35.49	45.26	64.00	-18.74	AVG
5	7.9220	9.81	45.23	55.04	74.00	-18.96	QP
6	7.9220	9.81	41.64	51.45	64.00	-12.55	AVG
7	16.2300	9.82	44.50	54.32	74.00	-19.68	QP
8	16.2300	9.82	41.53	51.35	64.00	-12.65	AVG
9	23.1299	9.84	51.80	61.64	74.00	-12.36	QP
10	23.1299	9.84	49.73	59.57	64.00	-4.43	AVG
11	26.6100	9.86	52.42	62.28	74.00	-11.72	QP
12	26.6100	9.86	49.36	59.22	64.00	-4.78	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3140	9.86	56.82	66.68	79.31	-12.63	QP
2	0.3140	9.86	46.74	56.60	69.31	-12.71	AVG
3	0.6419	9.77	46.30	56.07	74.00	-17.93	QP
4	0.6419	9.77	34.80	44.57	64.00	-19.43	AVG
5	1.1060	9.76	43.56	53.32	74.00	-20.68	QP
6	1.1060	9.76	32.98	42.74	64.00	-21.26	AVG
7	1.4220	9.76	45.16	54.92	74.00	-19.08	QP
8	1.4220	9.76	32.90	42.66	64.00	-21.34	AVG
9	6.2500	9.79	48.59	58.38	74.00	-15.62	QP
10	6.2500	9.79	43.20	52.99	64.00	-11.01	AVG
11	9.9940	9.89	40.29	50.18	74.00	-23.82	QP
12	9.9940	9.89	29.82	39.71	64.00	-24.29	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/06/30




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3140	9.86	57.28	67.14	79.31	-12.17	QP
2	0.3140	9.86	47.19	57.05	69.31	-12.26	AVG
3	0.5740	9.77	48.70	58.47	74.00	-15.53	QP
4	0.5740	9.77	37.08	46.85	64.00	-17.15	AVG
5	1.4060	9.76	46.37	56.13	74.00	-17.87	QP
6	1.4060	9.76	34.59	44.35	64.00	-19.65	AVG
7	7.9260	9.81	45.46	55.27	74.00	-18.73	QP
8	7.9260	9.81	41.74	51.55	64.00	-12.45	AVG
9	16.2300	9.82	49.41	59.23	74.00	-14.77	QP
10	16.2300	9.82	46.53	56.35	64.00	-7.65	AVG
11	23.1299	9.84	51.69	61.53	74.00	-12.47	QP
12	23.1299	9.84	50.22	60.06	64.00	-3.94	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

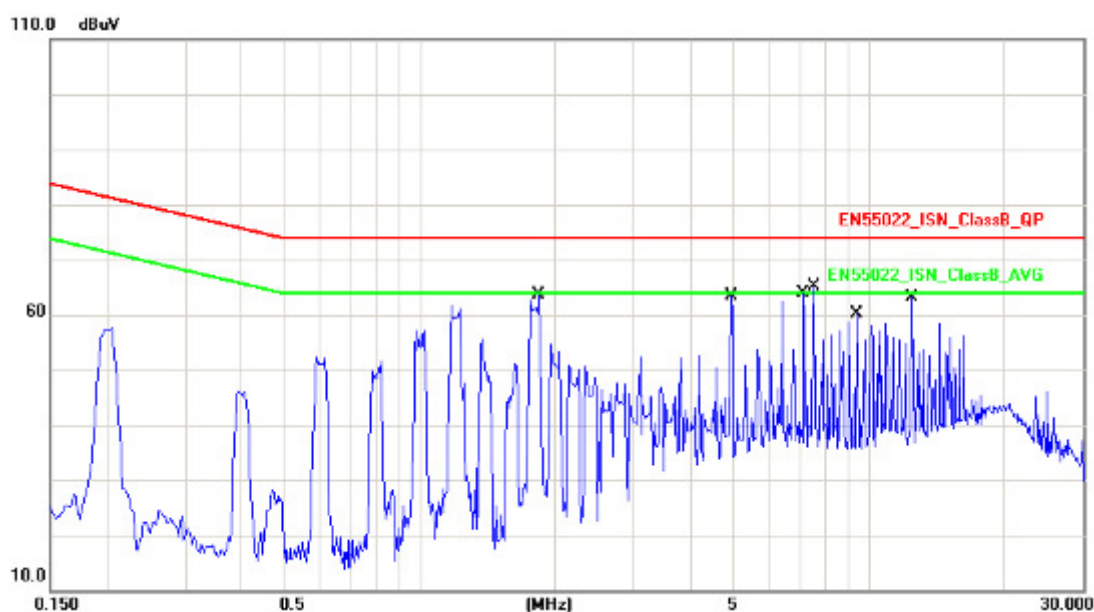


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.8420	9.77	50.57	60.34	74.00	-13.66	QP
2	1.8420	9.77	38.30	48.07	64.00	-15.93	AVG
3	4.9460	9.80	45.38	55.18	74.00	-18.82	QP
4	4.9460	9.80	37.68	47.48	64.00	-16.52	AVG
5	7.1740	9.79	46.07	55.86	74.00	-18.14	QP
6	7.1740	9.79	38.86	48.65	64.00	-15.35	AVG
7	7.5500	9.80	45.60	55.40	74.00	-18.60	QP
8	7.5500	9.80	38.59	48.39	64.00	-15.61	AVG
9	9.4020	9.87	48.21	58.08	74.00	-15.92	QP
10	9.4020	9.87	40.93	50.80	64.00	-13.20	AVG
11	12.4980	9.85	55.77	65.62	74.00	-8.38	QP
12	12.4980	9.85	48.60	58.45	64.00	-5.55	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

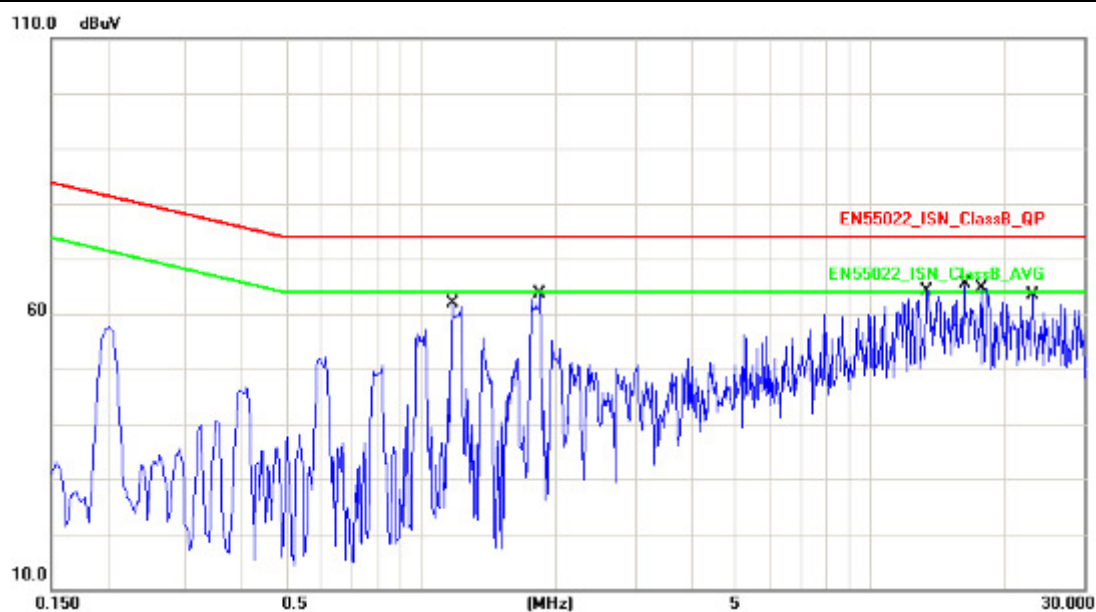


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.1780	9.76	49.30	59.06	74.00	-14.94	QP
2	1.1780	9.76	34.09	43.85	64.00	-20.15	AVG
3	1.8420	9.77	50.40	60.17	74.00	-13.83	QP
4	1.8420	9.77	37.97	47.74	64.00	-16.26	AVG
5	13.3580	9.84	53.38	63.22	74.00	-10.78	QP
6	13.3580	9.84	50.09	59.93	64.00	-4.07	AVG
7	16.2300	9.82	54.32	64.14	74.00	-9.86	QP
8	16.2300	9.82	51.03	60.85	64.00	-3.15	AVG
9	17.6940	9.84	54.06	63.90	74.00	-10.10	QP
10	17.6940	9.84	50.78	60.62	64.00	-3.38	AVG
11	23.1299	9.84	52.34	62.18	74.00	-11.82	QP
12	23.1299	9.84	51.09	60.93	64.00	-3.07	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

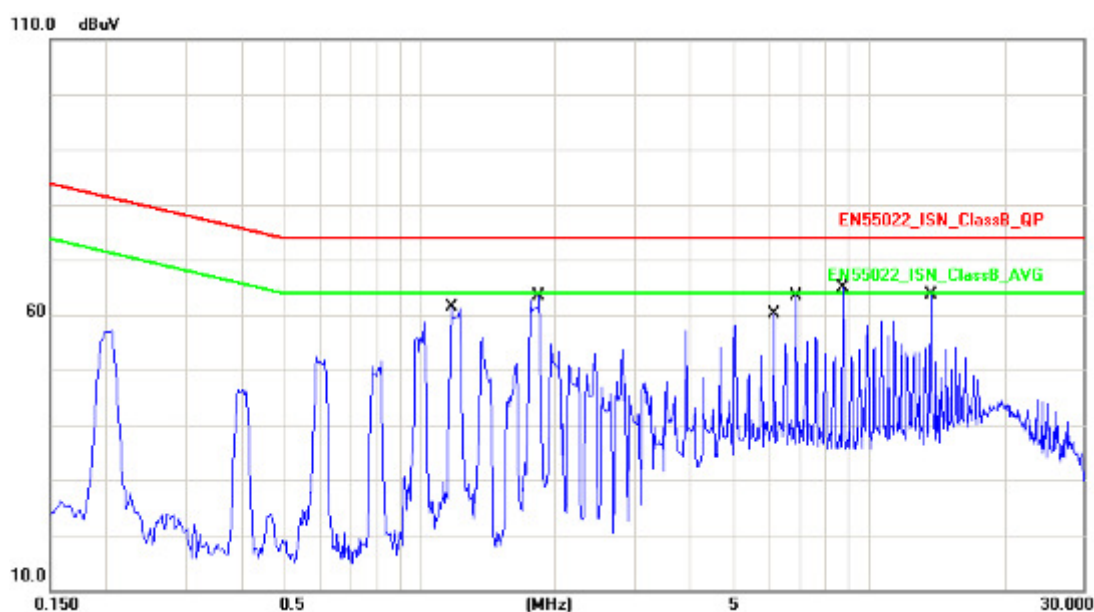


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.1780	9.76	49.38	59.14	74.00	-14.86	QP
2	1.1780	9.76	32.30	42.06	64.00	-21.94	AVG
3	1.8420	9.77	50.43	60.20	74.00	-13.80	QP
4	1.8420	9.77	38.13	47.90	64.00	-16.10	AVG
5	6.1420	9.79	42.41	52.20	74.00	-21.80	QP
6	6.1420	9.79	35.43	45.22	64.00	-18.78	AVG
7	6.9020	9.78	45.54	55.32	74.00	-18.68	QP
8	6.9020	9.78	38.22	48.00	64.00	-16.00	AVG
9	8.7500	9.85	53.45	63.30	74.00	-10.70	QP
10	8.7500	9.85	46.37	56.22	64.00	-7.78	AVG
11	13.7500	9.84	50.59	60.43	74.00	-13.57	QP
12	13.7500	9.84	43.43	53.27	64.00	-10.73	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

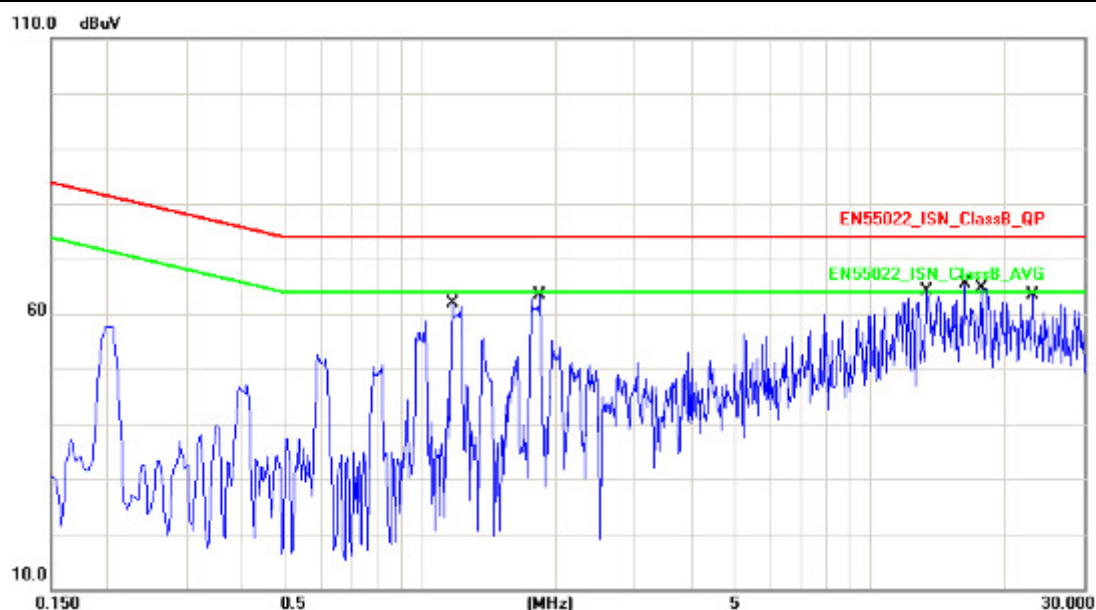


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.1780	9.76	49.30	59.06	74.00	-14.94	QP
2	1.1780	9.76	34.18	43.94	64.00	-20.06	AVG
3	1.8420	9.77	50.21	59.98	74.00	-14.02	QP
4	1.8420	9.77	37.75	47.52	64.00	-16.48	AVG
5	13.3580	9.84	53.38	63.22	74.00	-10.78	QP
6	13.3580	9.84	50.08	59.92	64.00	-4.08	AVG
7	16.2300	9.82	54.32	64.14	74.00	-9.86	QP
8	16.2300	9.82	50.98	60.80	64.00	-3.20	AVG
9	17.6940	9.84	54.01	63.85	74.00	-10.15	QP
10	17.6940	9.84	50.68	60.52	64.00	-3.48	AVG
11	23.1299	9.84	52.37	62.21	74.00	-11.79	QP
12	23.1299	9.84	51.08	60.92	64.00	-3.08	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

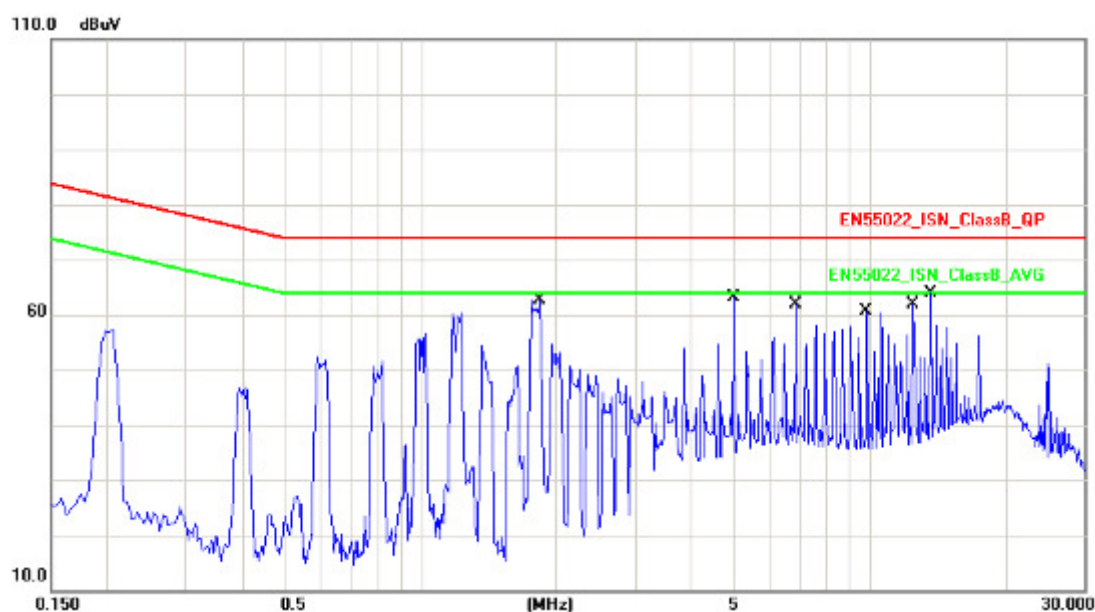


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.8420	9.77	50.42	60.19	74.00	-13.81	QP
2	1.8420	9.77	38.12	47.89	64.00	-16.11	AVG
3	4.9980	9.80	44.22	54.02	74.00	-19.98	QP
4	4.9980	9.80	36.58	46.38	64.00	-17.62	AVG
5	6.8500	9.78	44.03	53.81	74.00	-20.19	QP
6	6.8500	9.78	36.79	46.57	64.00	-17.43	AVG
7	9.8540	9.89	37.35	47.24	74.00	-26.76	QP
8	9.8540	9.89	21.11	31.00	64.00	-33.00	AVG
9	12.5060	9.85	47.11	56.96	74.00	-17.04	QP
10	12.5060	9.85	40.40	50.25	64.00	-13.75	AVG
11	13.6940	9.84	46.47	56.31	74.00	-17.69	QP
12	13.6940	9.84	39.65	49.49	64.00	-14.51	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/12

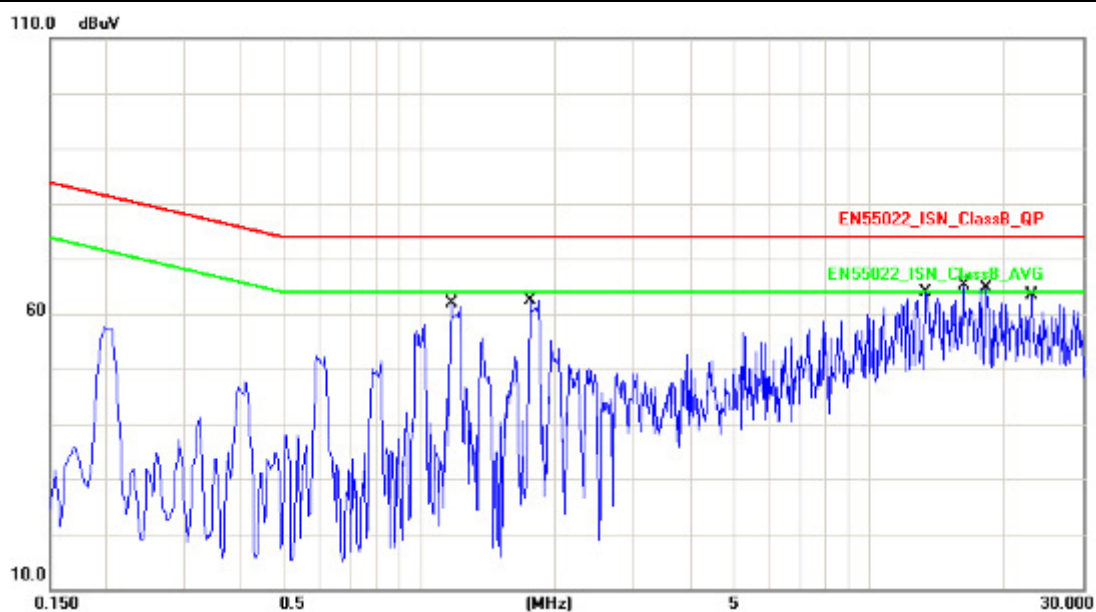

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.1780	9.76	49.35	59.11	74.00	-14.89	QP
2	1.1780	9.76	34.12	43.88	64.00	-20.12	AVG
3	1.7620	9.77	49.17	58.94	74.00	-15.06	QP
4	1.7620	9.77	36.68	46.45	64.00	-17.55	AVG
5	13.3580	9.84	53.32	63.16	74.00	-10.84	QP
6	13.3580	9.84	50.03	59.87	64.00	-4.13	AVG
7	16.2300	9.82	54.28	64.10	74.00	-9.90	QP
8	16.2300	9.82	50.96	60.78	64.00	-3.22	AVG
9	18.2420	9.84	53.92	63.76	74.00	-10.24	QP
10	18.2420	9.84	50.56	60.40	64.00	-3.60	AVG
11	23.1299	9.84	52.41	62.25	74.00	-11.75	QP
12	23.1299	9.84	51.16	61.00	64.00	-3.00	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben



4.6. Test Photographs

Main(ADS-12B-12 12012Gz)

Front View



Rear View





Main(HKA-A24150-230)

Front View



Rear View





Signal (ADS-12B-12 12012Gz)

Front View



Rear View





Signal(HKA-A24150-230)

Front View



Rear View





5. Test of Radiated Emission

5.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 61000-6-3. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 10 m

Frequency range MHz	Quasi-peak limits dB(μV/m)
30 to 230	30
230 to 1000	37
NOTE 1 The lower limit shall apply at the transition frequency.	
NOTE 2 Additional provisions may be required for cases where interference occurs.	

The EUT shall meet the limits of below Table when measured in accordance with the method described in European Standard EN 61000-6-3 and the conditional testing procedure described below.

Table – Limits for radiated disturbance of class B ITE at a measuring distance of 3 m

Frequency range GHz	Average limit dB(μV/m)	Peak limits dB(μV/m)
1 to 3	50	70
3 to 6	54	74
NOTE The lower limit applies at the transition frequency.		

• Conditional testing procedure:

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.




5.2. Test Procedures

- a. The EUT was placed on a relatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.




5.3. Typical test Setup

Below 1GHz Test Setup

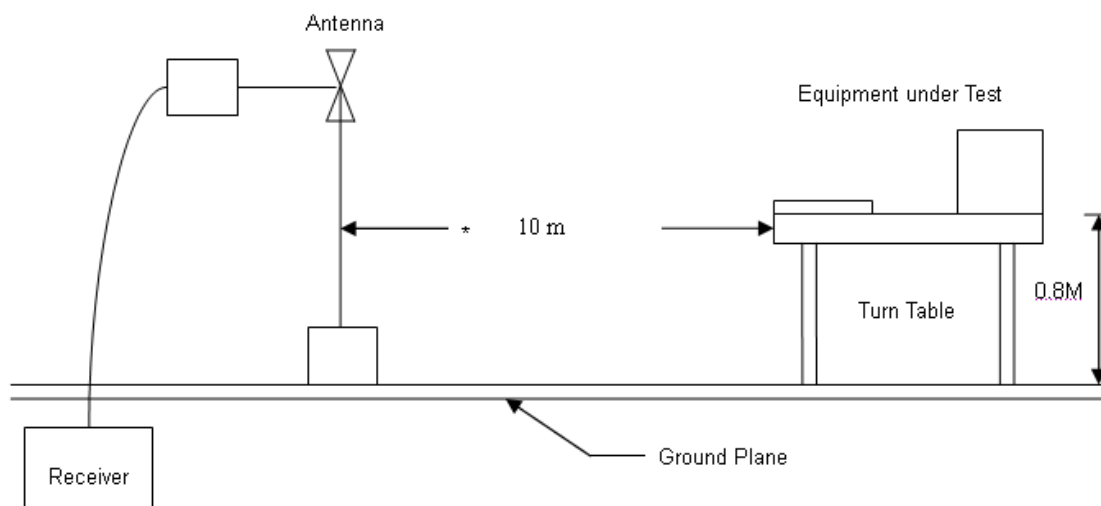

Above 1GHz Test Setup

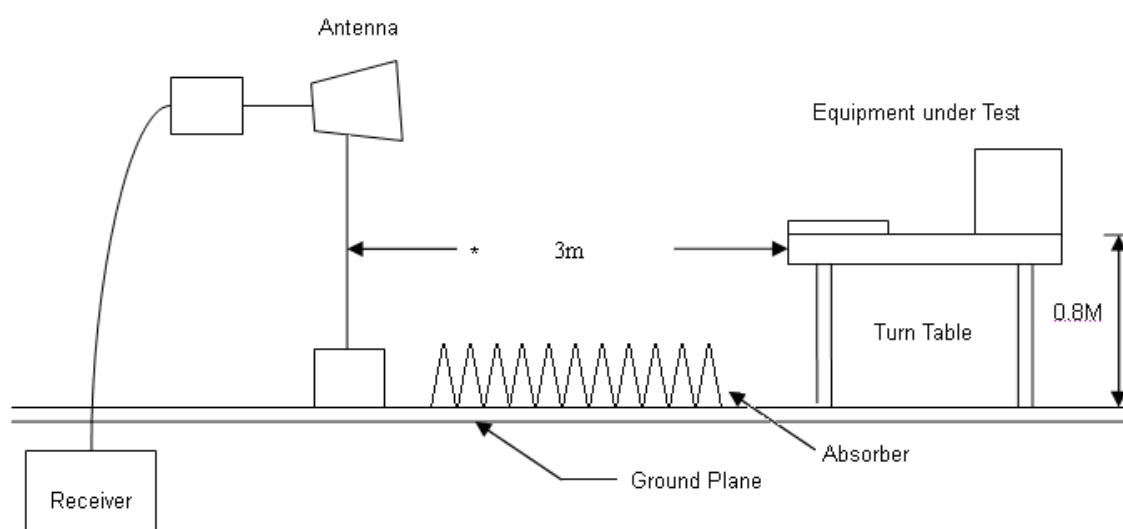


**5.4. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2014.03.24	2015.03.23
Preamplifier	Agilent	87405B	My39500554	2014.03.24	2015.03.23
Preamplifier	Agilent	8449B	3008A02342	2014.03.24	2015.03.23
Bilog Antenna	Schaffner	CBL6141A	4257	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2014.05.24	2015.05.23
Spectrum Analyzer	R&S	FSP40	100324	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2014.03.31	2015.03.30



5.5. Test Result and Data (30MHz ~ 1000MHz)

Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

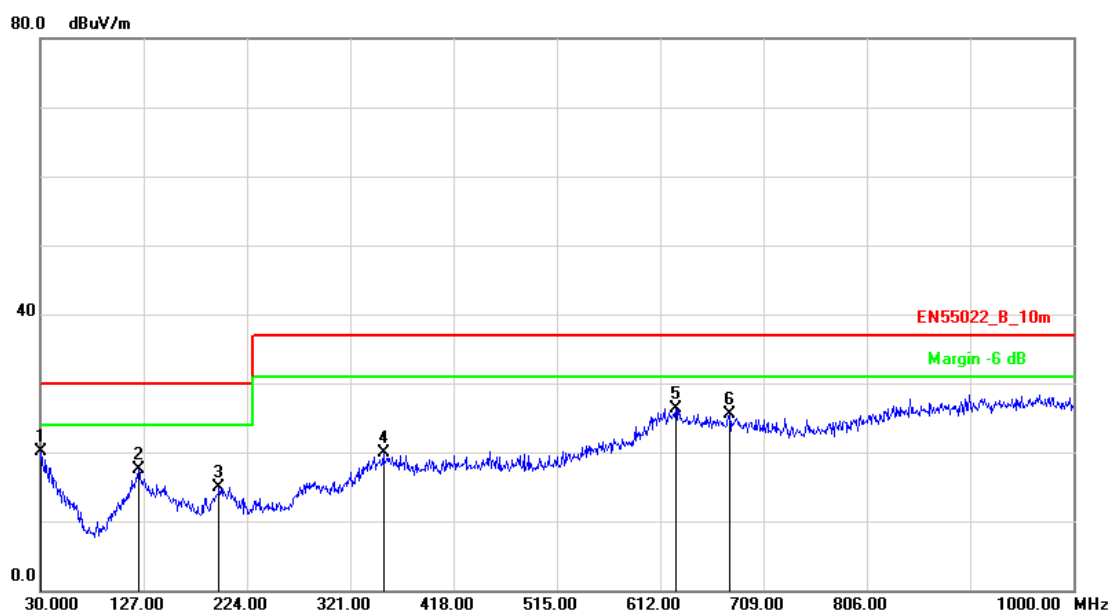


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-5.75	25.81	20.06	30.00	-9.94	QP	100	360
2	122.1500	-9.82	27.26	17.44	30.00	-12.56	QP	200	262
3	197.8100	-10.26	25.13	14.87	30.00	-15.13	QP	100	244
4	352.0400	-5.14	25.04	19.90	37.00	-17.10	QP	400	25
5	626.5499	1.26	25.03	26.29	37.00	-10.71	QP	400	139
6	676.9900	0.13	25.28	25.41	37.00	-11.59	QP	100	295

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

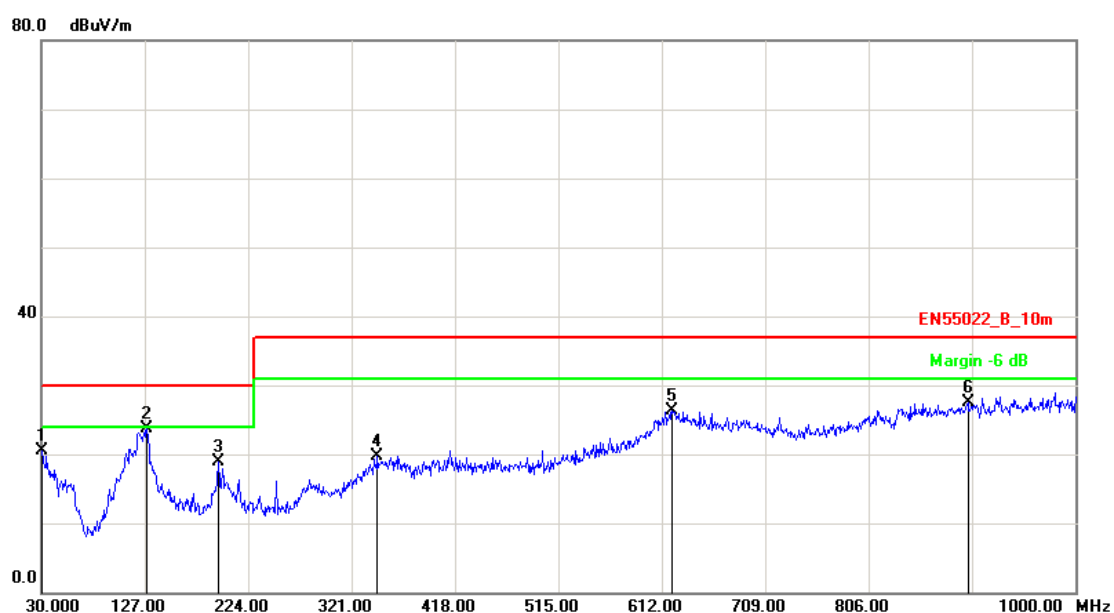


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-5.75	26.16	20.41	30.00	-9.59	QP	200	114
2	128.9400	-9.82	33.52	23.70	30.00	-6.30	QP	100	201
3	195.8700	-10.53	29.39	18.86	30.00	-11.14	QP	100	52
4	345.2500	-5.39	25.13	19.74	37.00	-17.26	QP	100	0
5	621.7000	1.39	24.84	26.23	37.00	-10.77	QP	100	253
6	899.1200	2.23	25.19	27.42	37.00	-9.58	QP	400	147

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

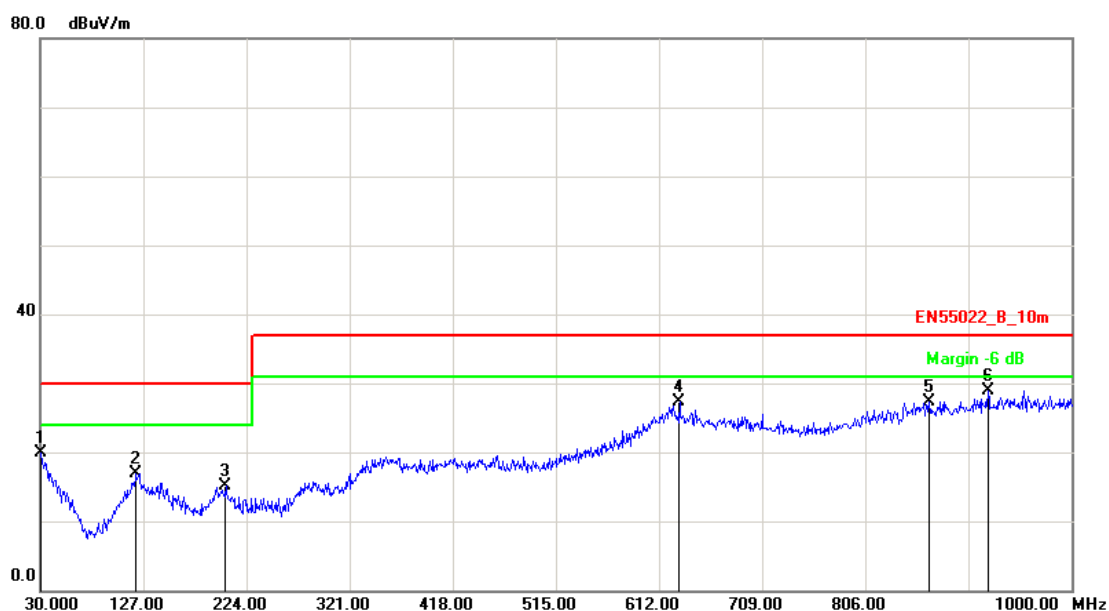


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-5.48	25.39	19.91	30.00	-10.09	QP	100	222
2	120.2099	-9.82	26.73	16.91	30.00	-13.09	QP	100	35
3	204.5999	-10.48	25.53	15.05	30.00	-14.95	QP	100	226
4	631.3999	1.12	26.09	27.21	37.00	-9.79	QP	400	16
5	866.1399	1.98	25.27	27.25	37.00	-9.75	QP	400	145
6	921.4298	2.39	26.60	28.99	37.00	-8.01	QP	100	25

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

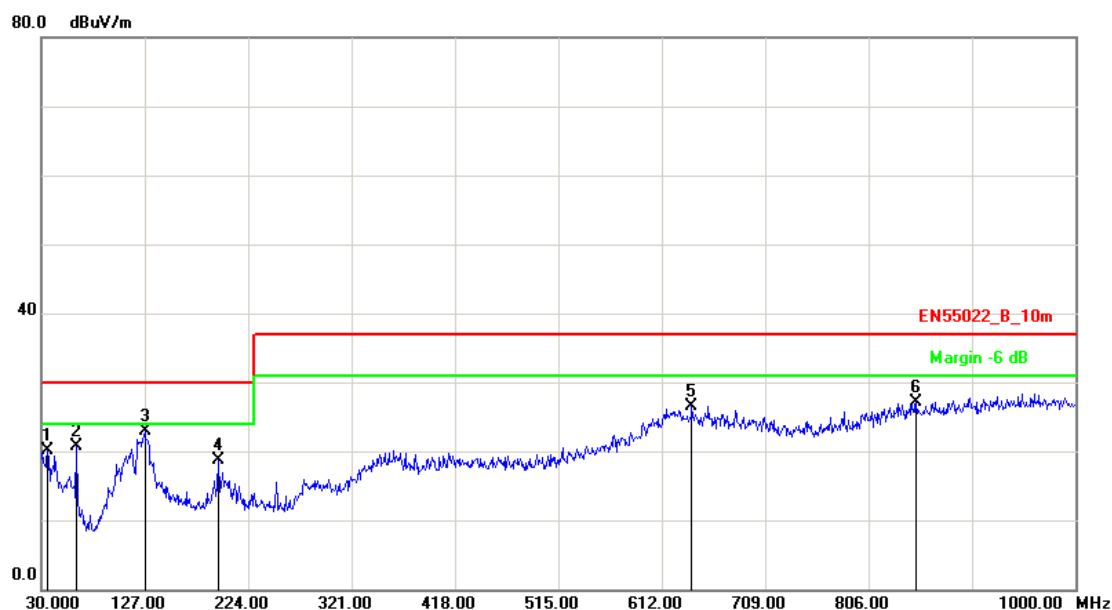

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	35.8200	-7.09	27.25	20.16	30.00	-9.84	QP	100	52
2	62.9800	-13.55	34.19	20.64	30.00	-9.36	QP	100	287
3	127.0000	-9.82	32.73	22.91	30.00	-7.09	QP	100	46
4	195.8700	-10.53	29.27	18.74	30.00	-11.26	QP	100	234
5	640.1300	0.88	25.61	26.49	37.00	-10.51	QP	100	191
6	850.6200	1.70	25.41	27.11	37.00	-9.89	QP	400	124

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10




No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-5.75	25.89	20.14	30.00	-9.86	QP	200	185
2	117.2999	-10.22	31.86	21.64	30.00	-8.36	QP	200	284
3	359.8000	-4.86	25.33	20.47	37.00	-16.53	QP	200	269
4	622.6699	1.37	24.86	26.23	37.00	-10.77	QP	100	255
5	651.7698	0.55	26.04	26.59	37.00	-10.41	QP	200	328
6	727.4299	-0.75	26.55	25.80	37.00	-11.20	QP	100	359

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

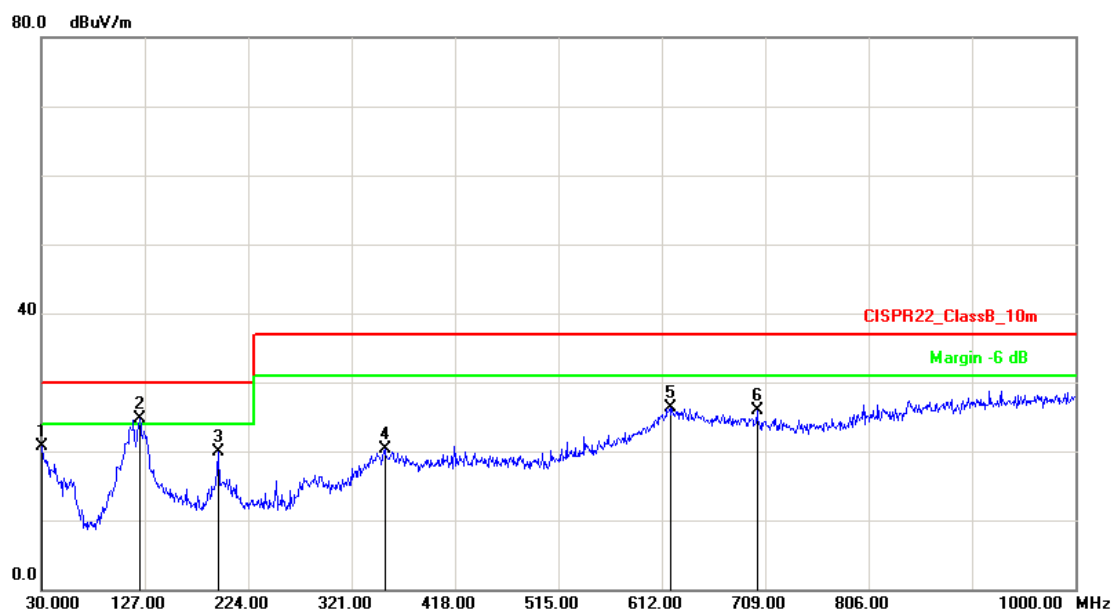


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9700	-5.75	26.53	20.78	30.00	-9.22	QP	100	188
2	122.1500	-9.82	34.52	24.70	30.00	-5.30	QP	100	272
3	195.8700	-10.53	30.36	19.83	30.00	-10.17	QP	200	184
4	352.0400	-5.14	25.35	20.21	37.00	-16.79	QP	100	288
5	619.7600	1.42	24.87	26.29	37.00	-10.71	QP	100	192
6	701.2400	-0.16	26.00	25.84	37.00	-11.16	QP	100	205

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

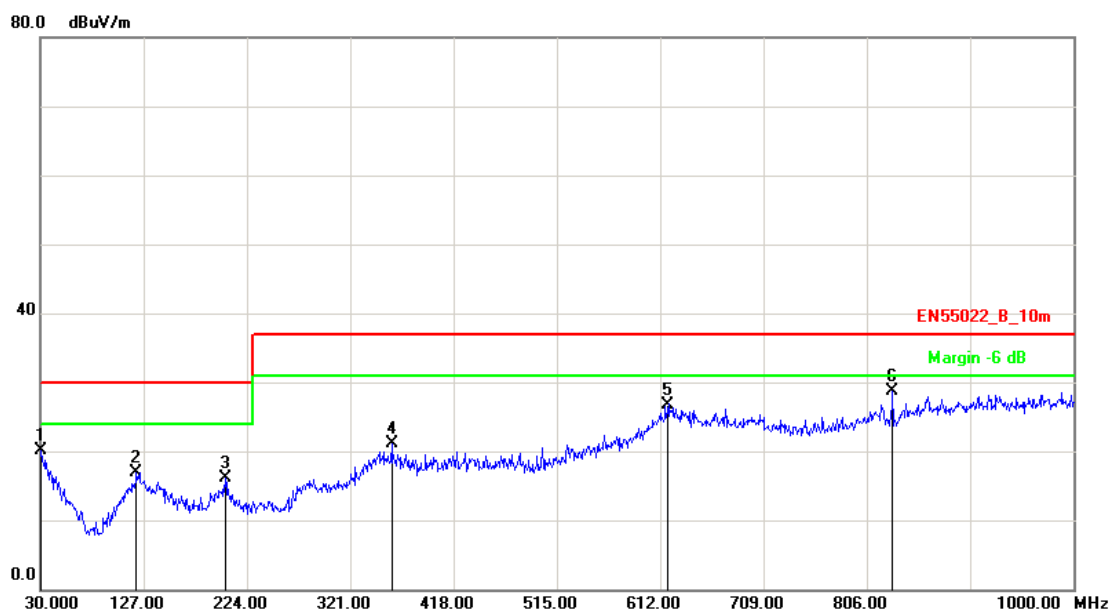


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-5.75	25.76	20.01	30.00	-9.99	QP	100	360
2	120.2099	-9.82	26.80	16.98	30.00	-13.02	QP	100	95
3	203.6299	-10.37	26.50	16.13	30.00	-13.87	QP	100	20
4	359.8000	-4.86	25.98	21.12	37.00	-15.88	QP	100	348
5	619.7599	1.42	25.38	26.80	37.00	-10.20	QP	100	309
6	830.2500	1.22	27.40	28.62	37.00	-8.38	QP	400	263

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

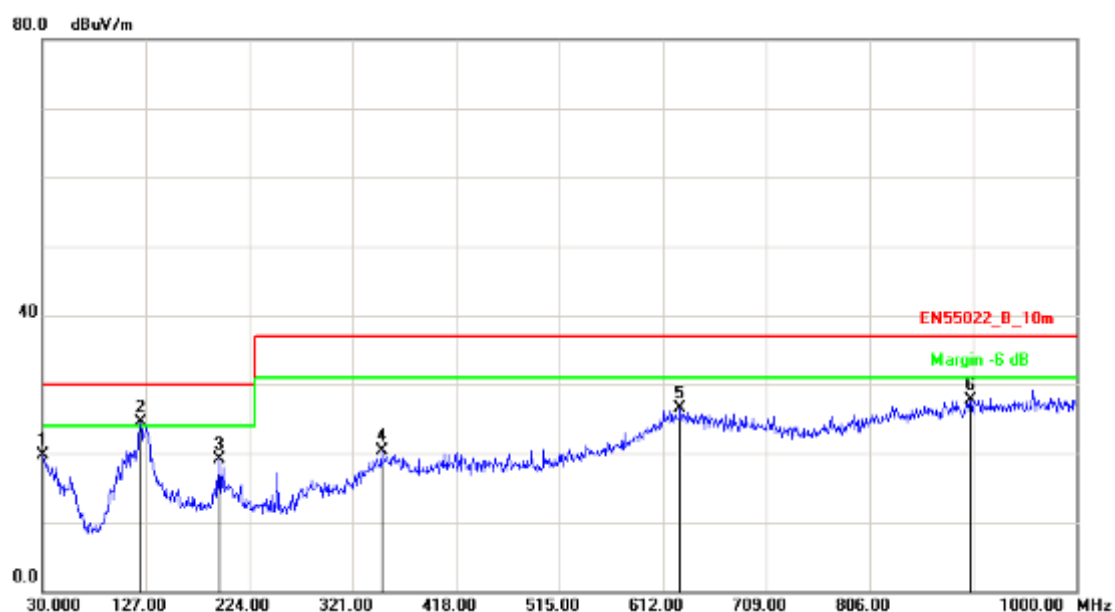


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9700	-5.75	25.36	19.61	30.00	-10.39	QP	100	353
2	122.1500	-9.82	34.25	24.43	30.00	-5.57	QP	100	0
3	195.8700	-10.53	29.60	19.07	30.00	-10.93	QP	100	21
4	348.1600	-5.28	25.57	20.29	37.00	-16.71	QP	100	7
5	628.4900	1.20	25.22	26.42	37.00	-10.58	QP	100	0
6	901.0599	2.25	25.55	27.80	37.00	-9.20	QP	400	14

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

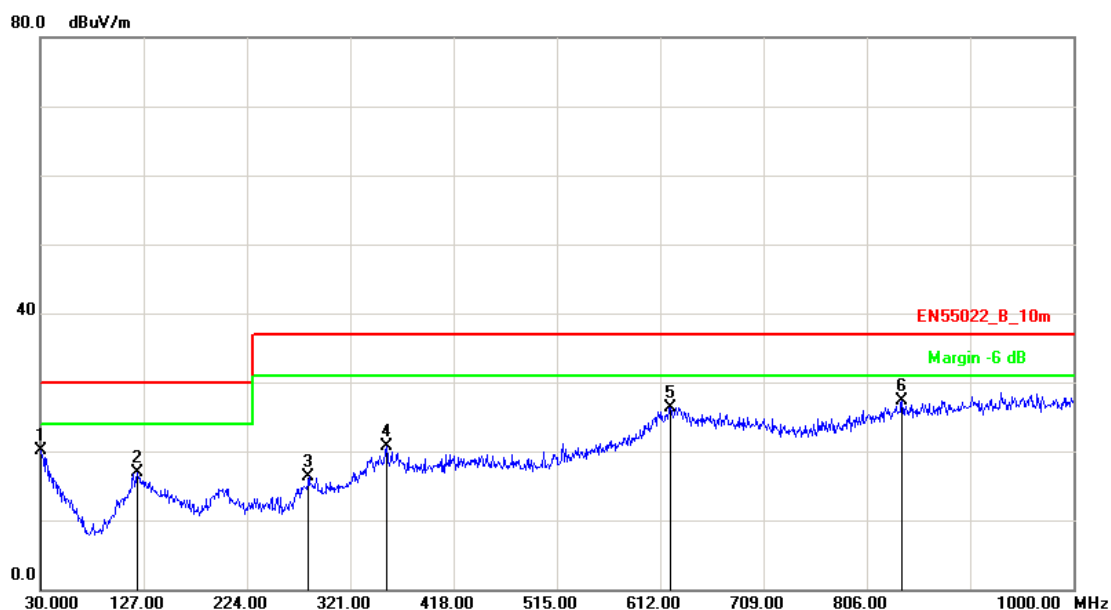


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-5.48	25.55	20.07	30.00	-9.93	QP	100	162
2	121.1800	-9.82	26.68	16.86	30.00	-13.14	QP	100	254
3	282.1999	-8.99	25.36	16.37	37.00	-20.63	QP	100	298
4	354.9499	-5.03	25.64	20.61	37.00	-16.39	QP	400	5
5	621.7000	1.39	24.96	26.35	37.00	-10.65	QP	400	215
6	838.9800	1.43	25.95	27.38	37.00	-9.62	QP	400	33

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

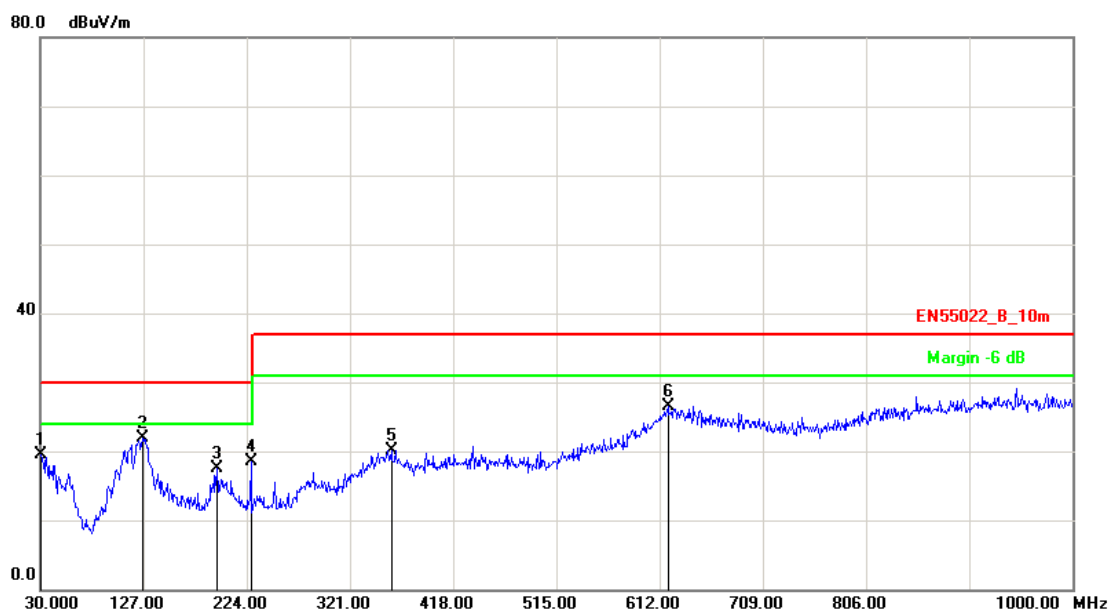


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9700	-5.75	25.28	19.53	30.00	-10.47	QP	100	160
2	126.0300	-9.82	31.67	21.85	30.00	-8.15	QP	100	81
3	195.8700	-10.53	28.07	17.54	30.00	-12.46	QP	100	11
4	227.8800	-12.08	30.67	18.59	30.00	-11.41	QP	100	67
5	359.8000	-4.86	25.02	20.16	37.00	-16.84	QP	100	89
6	619.7600	1.42	25.18	26.60	37.00	-10.40	QP	100	152

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

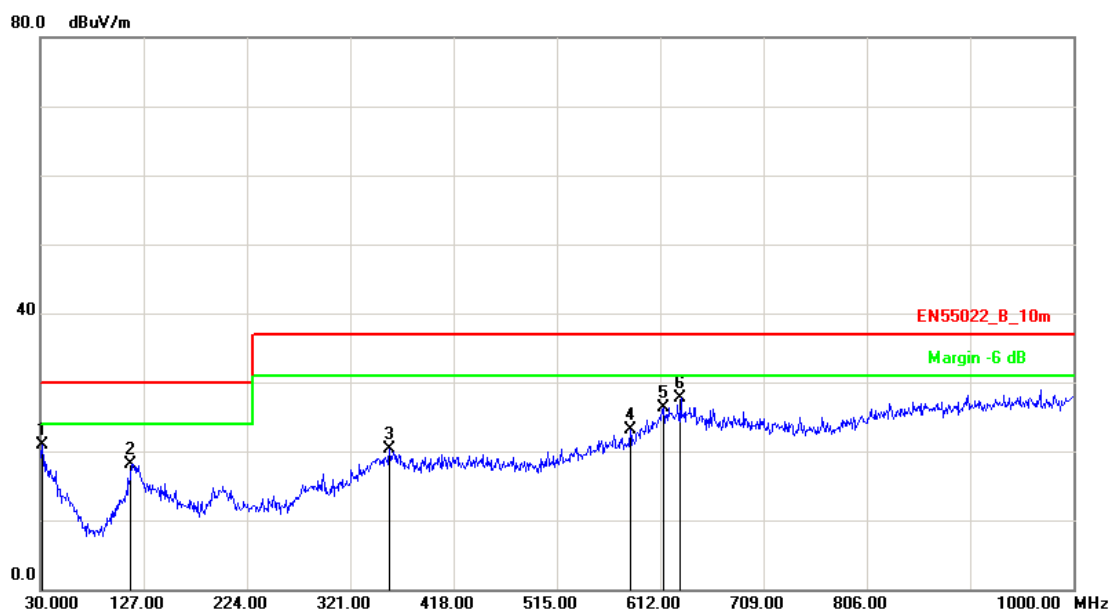


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	31.9400	-6.02	26.85	20.83	30.00	-9.17	QP	100	41
2	115.3599	-10.51	28.71	18.20	30.00	-11.80	QP	100	286
3	357.8599	-4.93	25.19	20.26	37.00	-16.74	QP	100	302
4	583.8700	-2.20	25.39	23.19	37.00	-13.81	QP	100	138
5	614.9099	0.93	25.36	26.29	37.00	-10.71	QP	100	181
6	631.3999	1.12	26.56	27.68	37.00	-9.32	QP	100	25

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/10

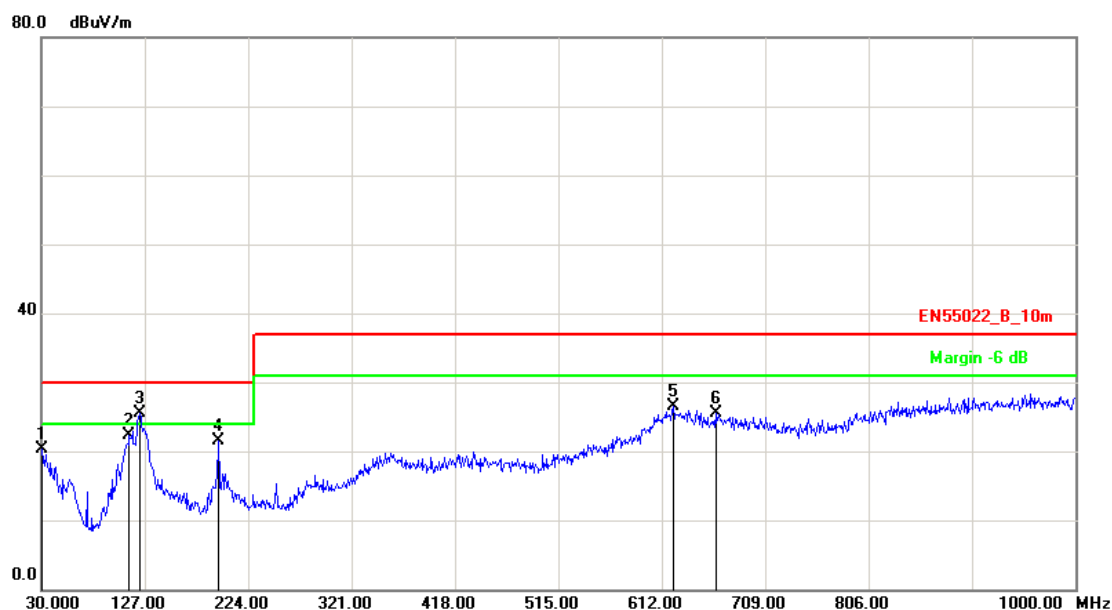


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9700	-5.75	26.04	20.29	30.00	-9.71	QP	100	124
2	112.4500	-10.94	33.34	22.40	30.00	-7.60	QP	100	0
3	122.1500	-9.82	35.31	25.49	30.00	-4.51	QP	100	294
4	195.8700	-10.53	31.95	21.42	30.00	-8.58	QP	100	216
5	622.6700	1.37	25.21	26.58	37.00	-10.42	QP	100	36
6	662.4400	0.29	25.16	25.45	37.00	-11.55	QP	100	250

Note: Measurement Level = Reading Level + Correct Factor

**5.6. Test Result and Data (1000MHz ~ 6000MHz)**

Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

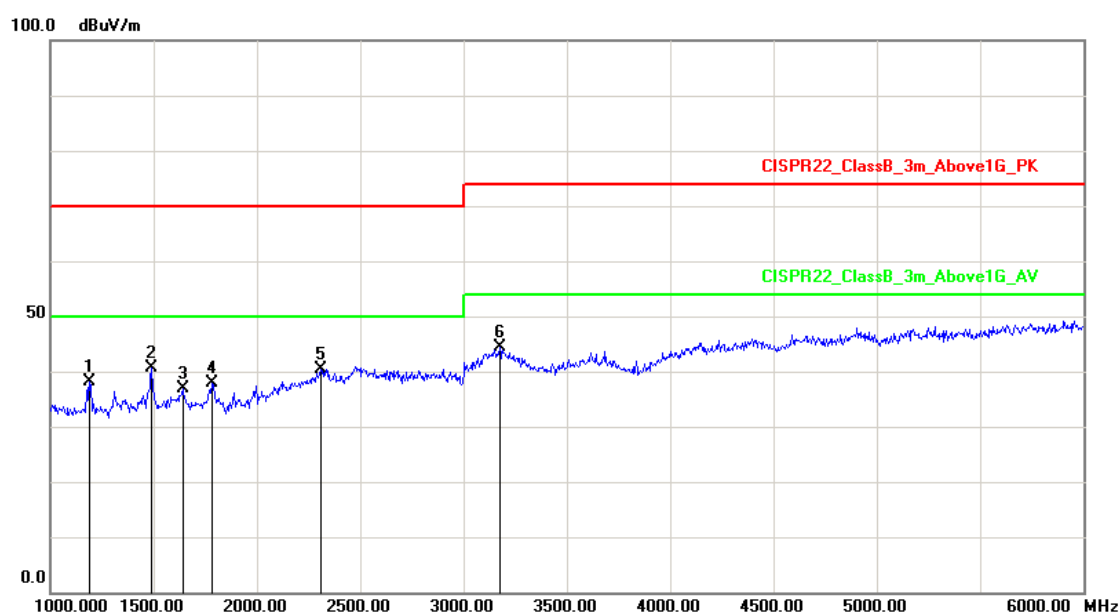


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1190.000	-14.58	52.69	38.11	70.00	-31.89	peak	100	255
2	1490.000	-12.40	53.09	40.69	70.00	-29.31	peak	100	135
3	1640.000	-11.80	48.69	36.89	70.00	-33.11	peak	100	318
4	1780.000	-10.77	48.61	37.84	70.00	-32.16	peak	100	76
5	2310.000	-2.96	43.39	40.43	70.00	-29.57	peak	100	88
6	3175.000	-2.42	46.73	44.31	74.00	-29.69	peak	100	66

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Normal Operation for IPC-HDBW5100-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

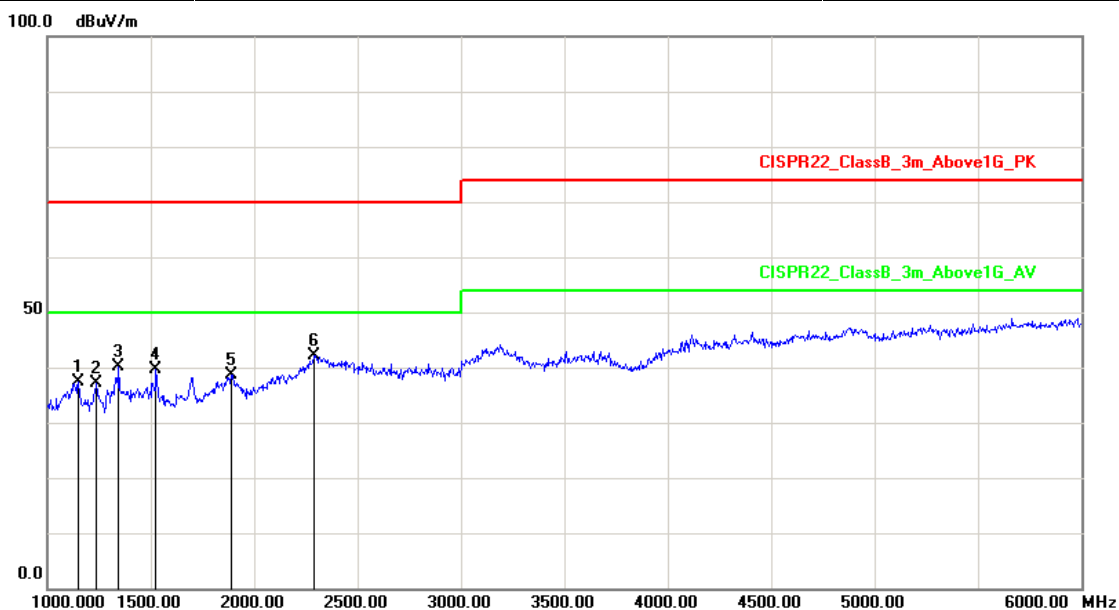


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1150.000	-14.80	52.30	37.50	70.00	-32.50	peak	100	243
2	1235.000	-14.11	51.23	37.12	70.00	-32.88	peak	100	302
3	1345.000	-13.04	53.29	40.25	70.00	-29.75	peak	100	305
4	1525.000	-12.28	51.96	39.68	70.00	-30.32	peak	100	359
5	1890.000	-9.91	48.51	38.60	70.00	-31.40	peak	100	257
6	2290.000	-3.20	45.30	42.10	70.00	-27.90	peak	100	19

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

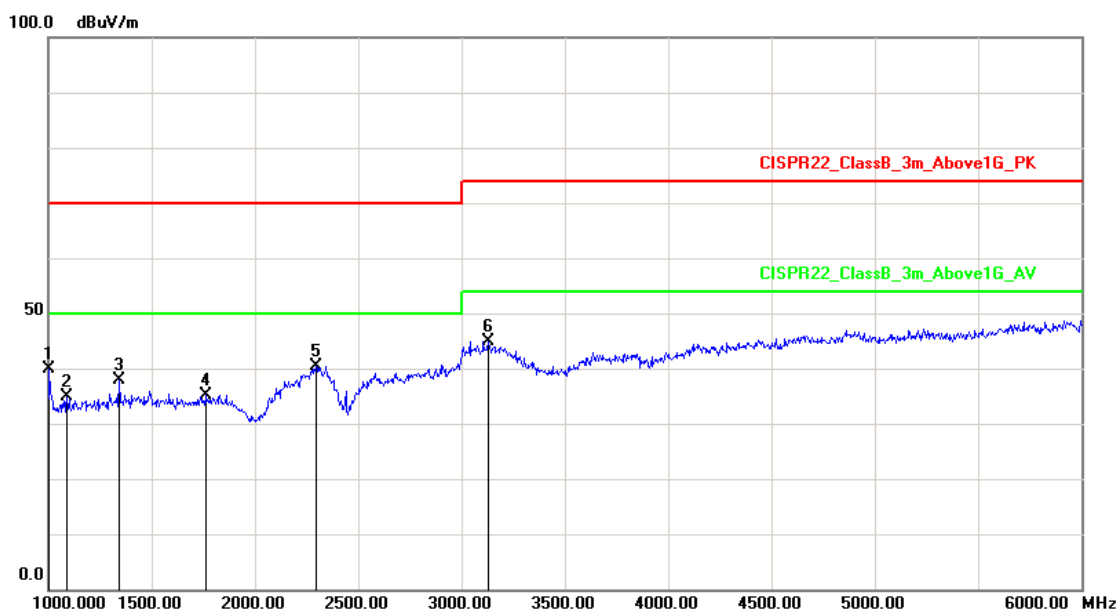


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1005.000	-15.49	55.47	39.98	70.00	-30.02	peak	100	226
2	1090.000	-15.12	50.02	34.90	70.00	-35.10	peak	100	134
3	1345.000	-13.04	50.96	37.92	70.00	-32.08	peak	100	156
4	1760.000	-10.96	46.16	35.20	70.00	-34.80	peak	100	181
5	2295.000	-3.07	43.40	40.33	70.00	-29.67	peak	100	0
6	3130.000	-2.39	47.39	45.00	74.00	-29.00	peak	100	262

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Operation for IPC-HDBW5202-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

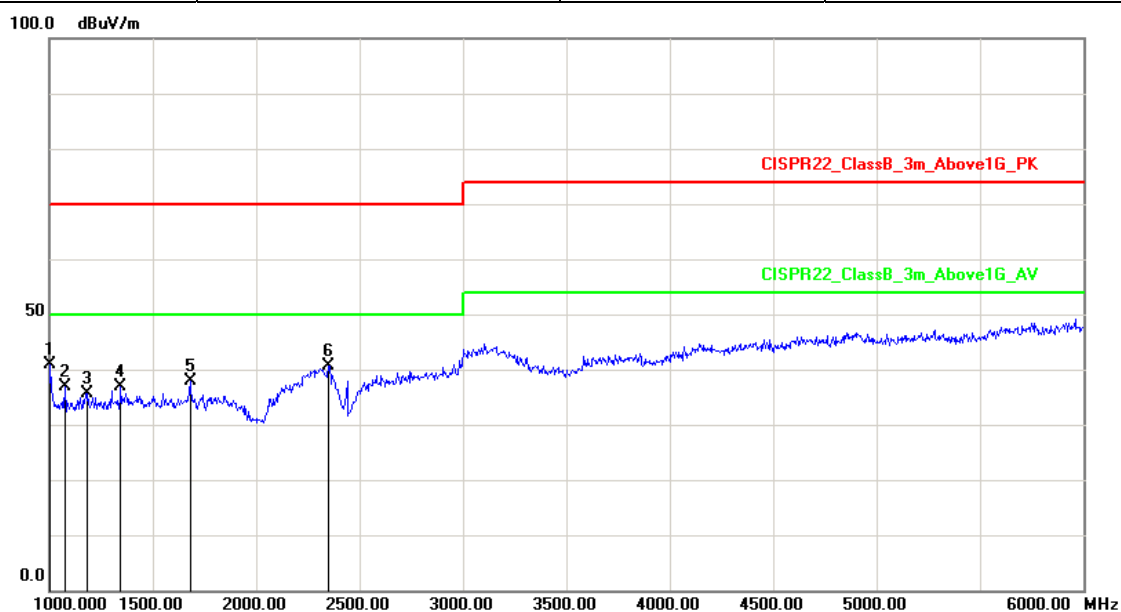


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1005.000	-15.49	56.40	40.91	70.00	-29.09	peak	100	133
2	1075.000	-15.19	51.99	36.80	70.00	-33.20	peak	100	154
3	1185.000	-14.60	50.19	35.59	70.00	-34.41	peak	100	166
4	1345.000	-13.04	49.86	36.82	70.00	-33.18	peak	100	151
5	1680.000	-11.61	49.51	37.90	70.00	-32.10	peak	100	65
6	2350.000	-3.09	43.74	40.65	70.00	-29.35	peak	100	7

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

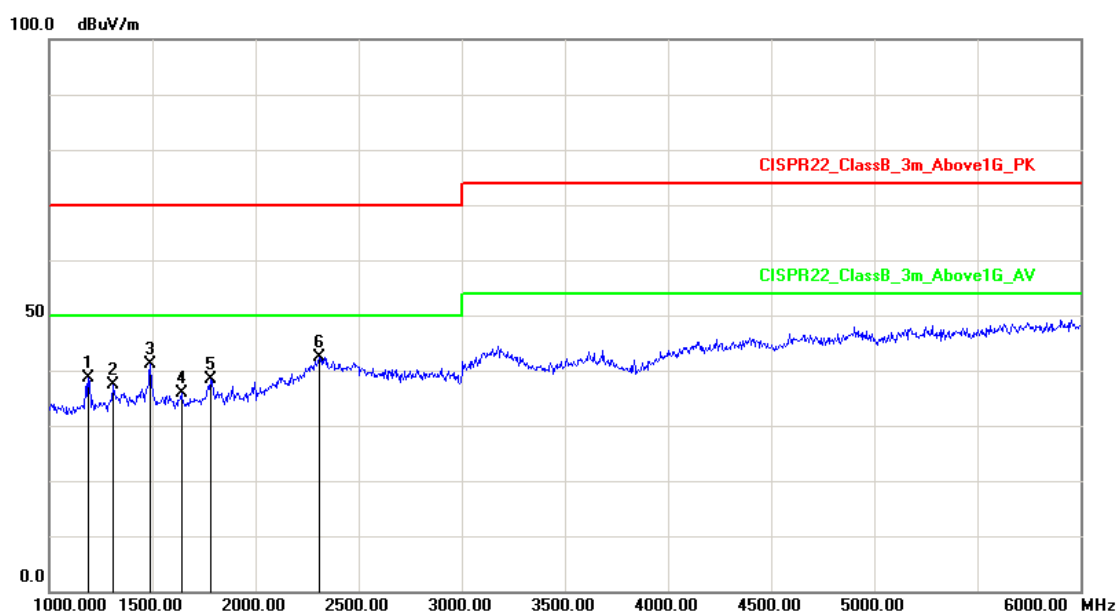


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1190.000	-14.58	53.19	38.61	70.00	-31.39	peak	100	255
2	1310.000	-13.28	50.55	37.27	70.00	-32.73	peak	100	241
3	1490.000	-12.40	53.59	41.19	70.00	-28.81	peak	100	135
4	1640.000	-11.80	47.69	35.89	70.00	-34.11	peak	100	318
5	1780.000	-10.77	49.11	38.34	70.00	-31.66	peak	100	76
6	2310.000	-2.96	45.39	42.43	70.00	-27.57	peak	100	88

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Normal Operation for IPC-HDBW5302-Mercury with ADS-12B-12 12012Gz		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

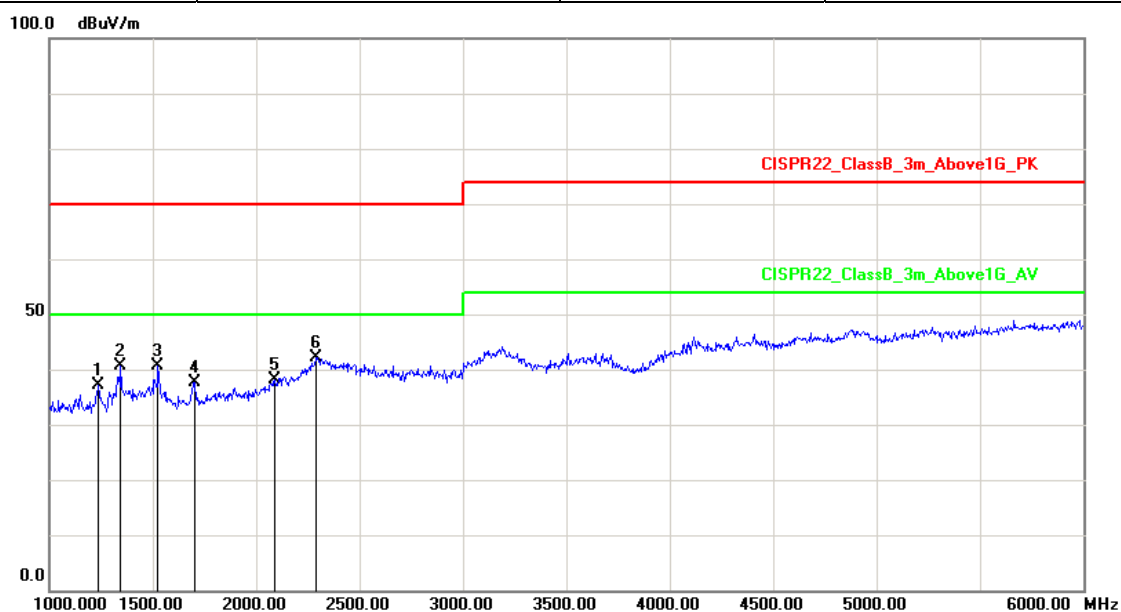


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1235.000	-14.11	51.23	37.12	70.00	-32.88	peak	100	302
2	1345.000	-13.04	53.79	40.75	70.00	-29.25	peak	100	305
3	1525.000	-12.28	52.96	40.68	70.00	-29.32	peak	100	359
4	1705.000	-11.46	49.00	37.54	70.00	-32.46	peak	100	228
5	2090.000	-7.07	45.21	38.14	70.00	-31.86	peak	100	276
6	2290.000	-3.20	45.30	42.10	70.00	-27.90	peak	100	19

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

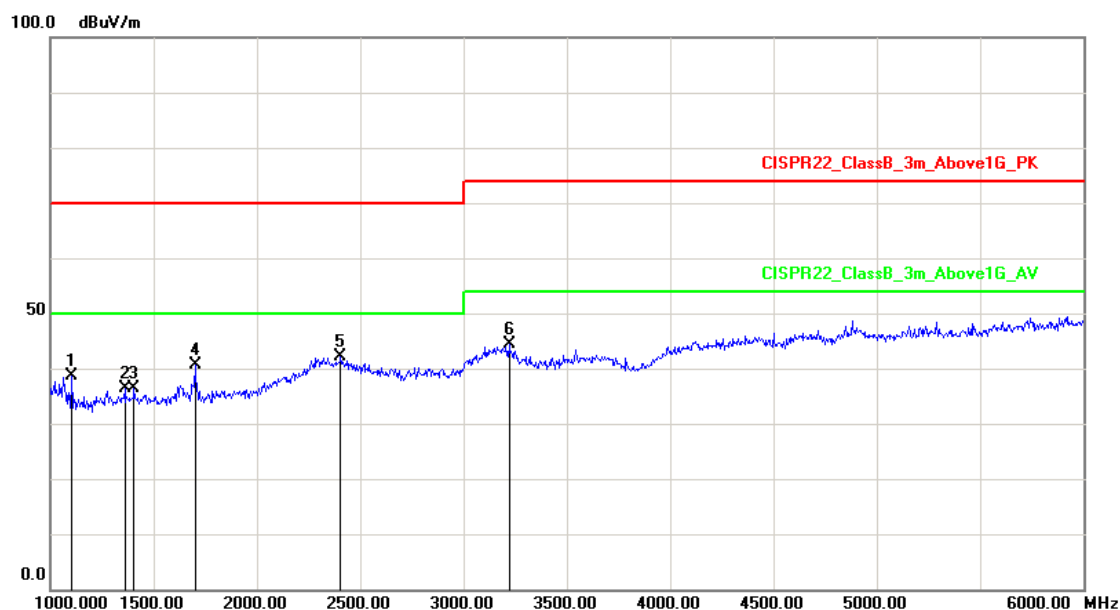


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1105.000	-15.05	53.57	38.52	70.00	-31.48	peak	100	1
2	1360.000	-12.94	49.20	36.26	70.00	-33.74	peak	100	50
3	1405.000	-12.65	48.93	36.28	70.00	-33.72	peak	100	347
4	1700.000	-11.51	52.20	40.69	70.00	-29.31	peak	100	6
5	2405.000	-3.29	45.36	42.07	70.00	-27.93	peak	100	29
6	3220.000	-2.81	47.22	44.41	74.00	-29.59	peak	100	279

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 4: Normal Operation for IPC-HDBW5100-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5100-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

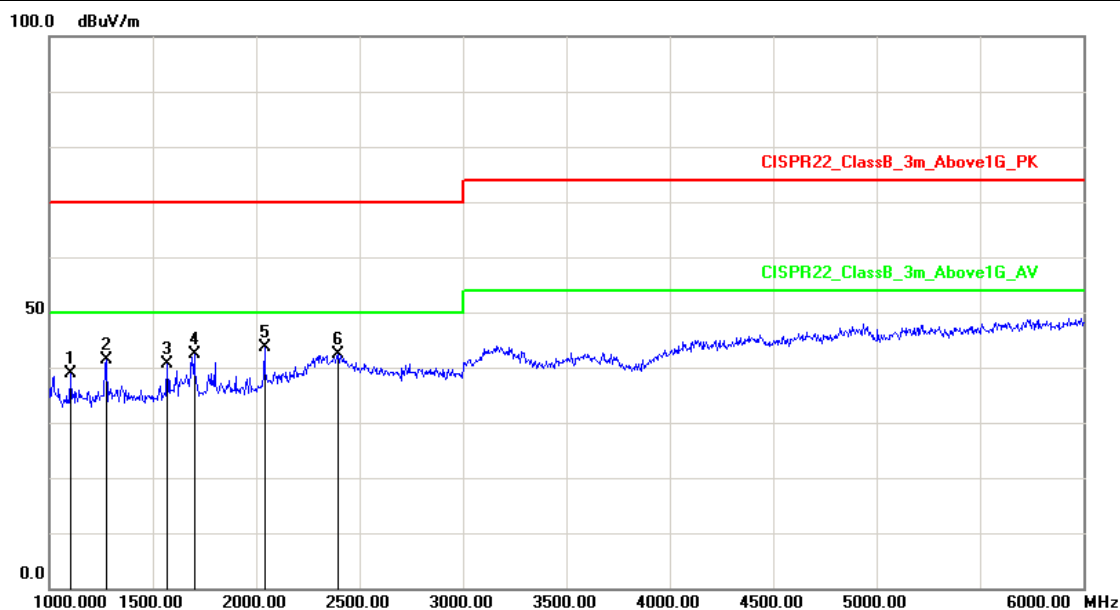


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1100.000	-15.08	53.99	38.91	70.00	-31.09	peak	100	88
2	1275.000	-13.64	55.05	41.41	70.00	-28.59	peak	100	166
3	1570.000	-12.11	52.86	40.75	70.00	-29.25	peak	100	158
4	1700.000	-11.51	53.87	42.36	70.00	-27.64	peak	100	110
5	2040.000	-8.15	51.75	43.60	70.00	-26.40	peak	100	40
6	2395.000	-3.24	45.68	42.44	70.00	-27.56	peak	100	249

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

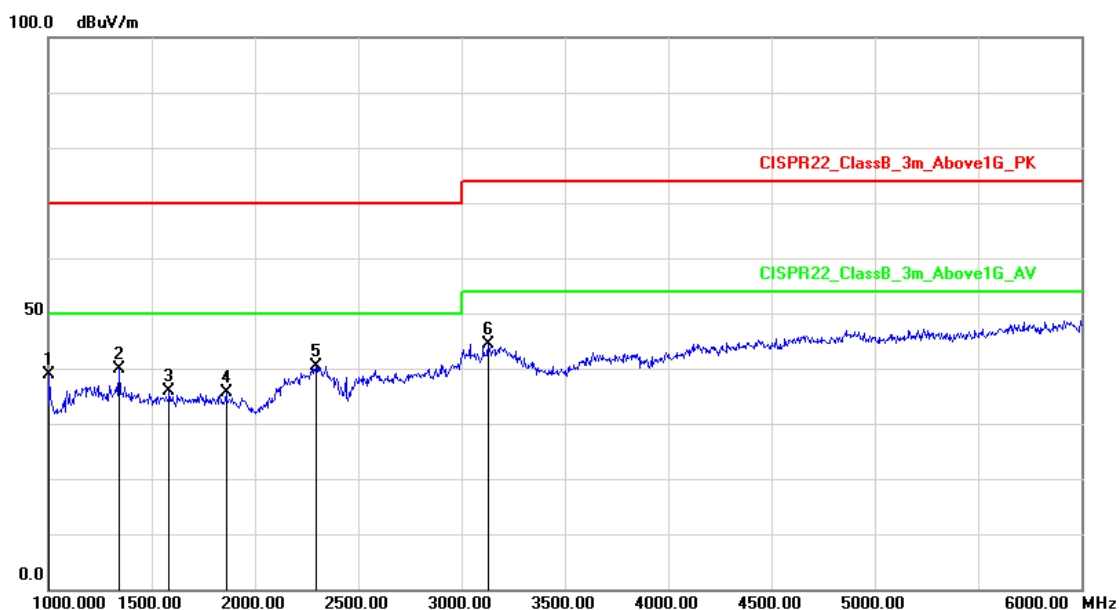


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1005.000	-15.49	54.47	38.98	70.00	-31.02	peak	100	23
2	1345.000	-13.04	52.96	39.92	70.00	-30.08	peak	100	114
3	1585.000	-12.06	47.84	35.78	70.00	-34.22	peak	100	62
4	1860.000	-10.13	45.64	35.51	70.00	-34.49	peak	100	360
5	2295.000	-3.07	43.40	40.33	70.00	-29.67	peak	100	85
6	3130.000	-2.39	46.89	44.50	74.00	-29.50	peak	100	157

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 5: Normal Operation for IPC-HDBW5202-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5202-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

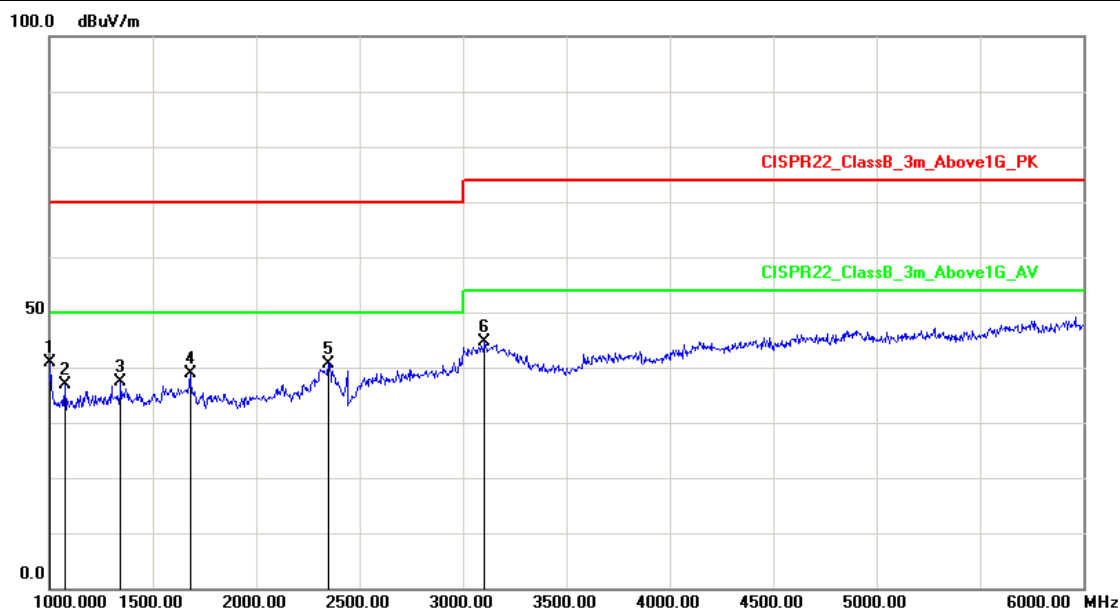


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1005.000	-15.49	56.40	40.91	70.00	-29.09	peak	100	258
2	1075.000	-15.19	51.99	36.80	70.00	-33.20	peak	100	263
3	1345.000	-13.04	50.36	37.32	70.00	-32.68	peak	100	114
4	1680.000	-11.61	50.51	38.90	70.00	-31.10	peak	100	62
5	2350.000	-3.09	43.74	40.65	70.00	-29.35	peak	100	85
6	3105.000	-2.37	46.97	44.60	74.00	-29.40	peak	100	157

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

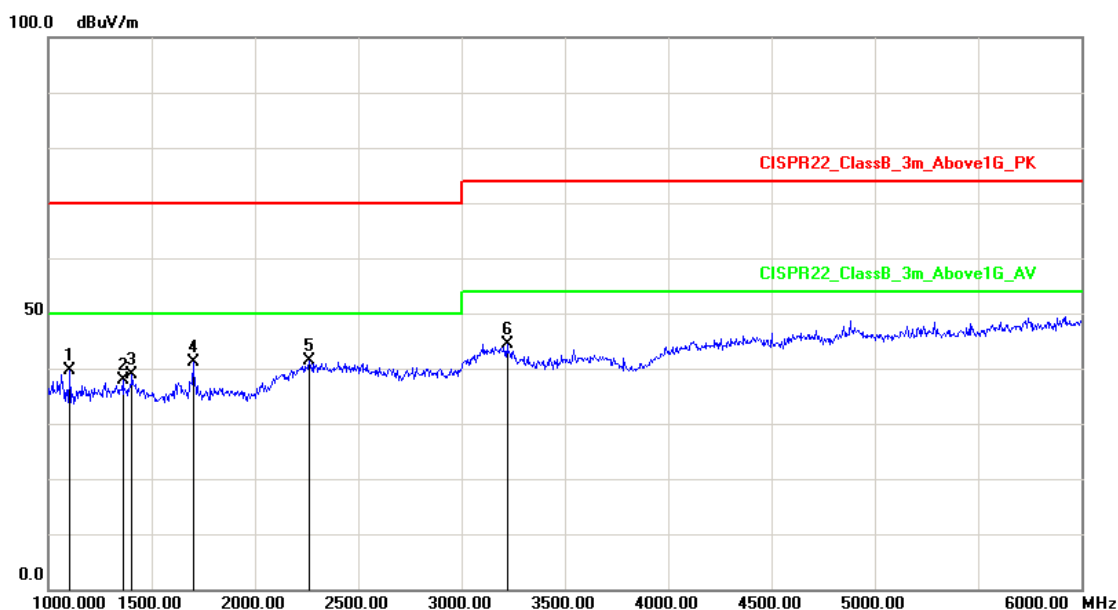


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1105.000	-15.05	54.57	39.52	70.00	-30.48	peak	100	1
2	1360.000	-12.94	50.70	37.76	70.00	-32.24	peak	100	50
3	1405.000	-12.65	51.43	38.78	70.00	-31.22	peak	100	347
4	1700.000	-11.51	52.70	41.19	70.00	-28.81	peak	100	6
5	2260.000	-4.02	45.52	41.50	70.00	-28.50	peak	100	183
6	3220.000	-2.81	47.22	44.41	74.00	-29.59	peak	100	279

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 6: Normal Operation for IPC-HDBW5302-Mercury with HKA-A24150-230		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW5302-Mercury
Temp :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/07/13

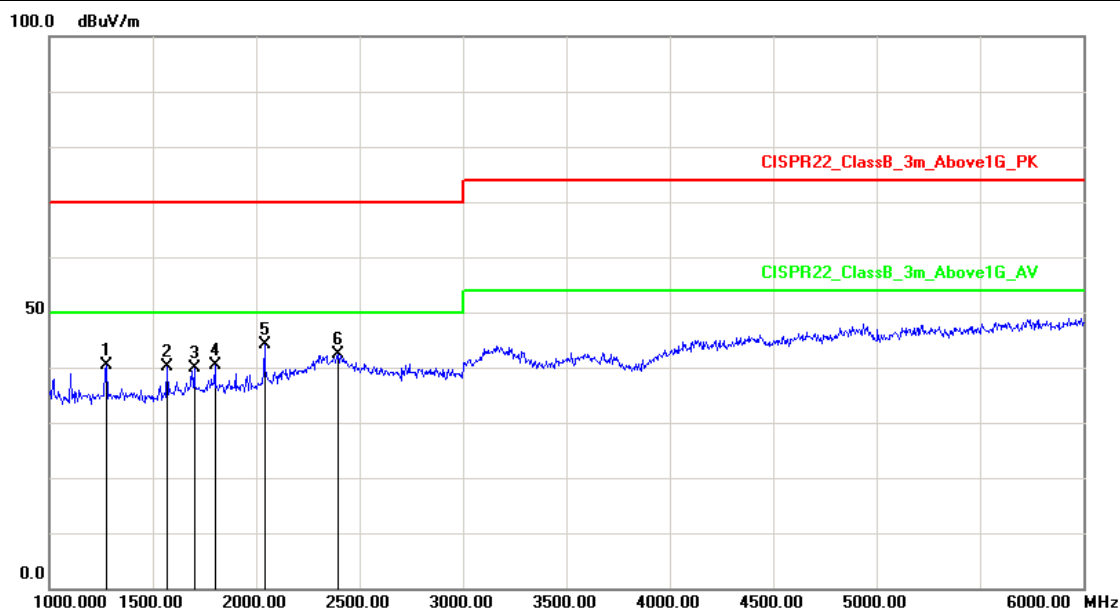

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1275.000	-13.64	54.05	40.41	70.00	-29.59	peak	100	166
2	1570.000	-12.11	52.36	40.25	70.00	-29.75	peak	100	158
3	1700.000	-11.51	51.37	39.86	70.00	-30.14	peak	100	110
4	1800.000	-10.59	50.89	40.30	70.00	-29.70	peak	100	250
5	2040.000	-8.15	52.25	44.10	70.00	-25.90	peak	100	40
6	2395.000	-3.24	45.68	42.44	70.00	-27.56	peak	100	249

Note: Measurement Level = Reading Level + Correct Factor

Test engineer:



5.7. Test Photographs (30MHz ~ 1000MHz)

ADS-12B-12 12012Gz

Front View



Rear View





HKA-A24150-230

Front View



Rear View





5.8. Test Photographs (1000MHz ~ 6000MHz)

ADS-12B-12 12012Gz

Front View




Rear View





HKA-A24150-230

Front View

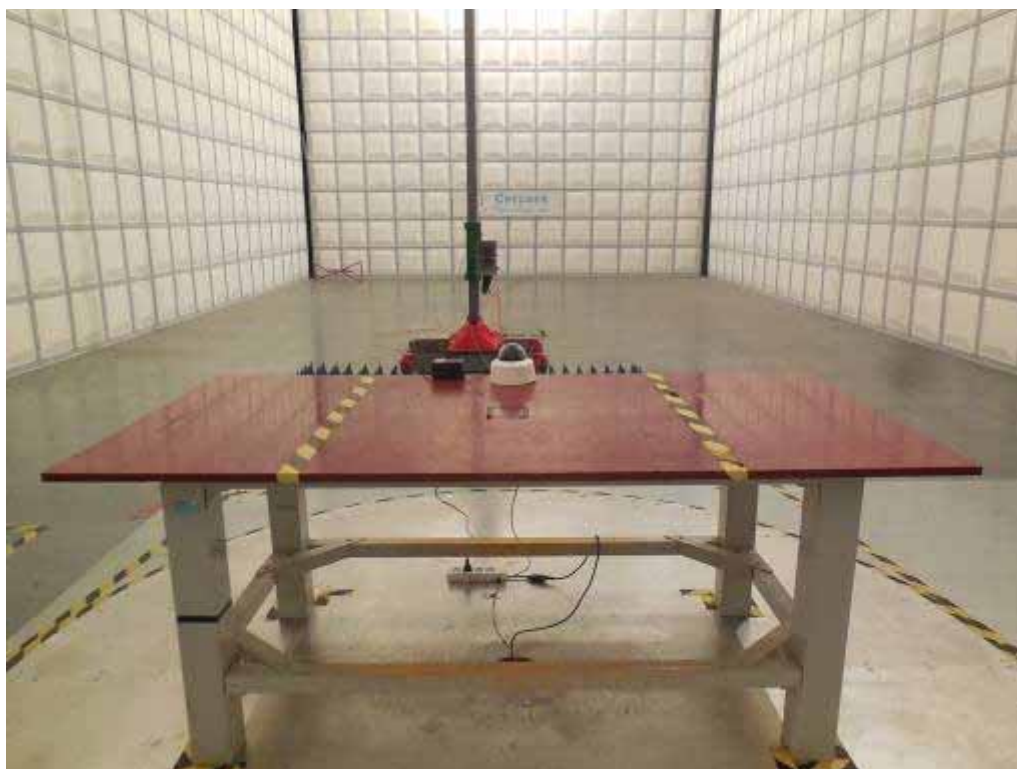

Rear View





6. Harmonics Test

6.1. Limits of Harmonics Current Measurement

(a) Limits for Class A equipment

Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8 ≤ n ≤ 40	0.23 × 8/n
11	0.33		
13	0.21		
15 ≤ n ≤ 39	0.15 × 15/n		

(b) Limits for Class B equipment

For Class B equipment, the harmonics of the input current shall not exceed the values given in Table that is the limit of Class A multiplied by a factor of 1.5.

(c) Limits for Class C equipment

Harmonics Order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
11 < n < 39 (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits for Class D equipment

Harmonics Order n	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
11 < n < 39 (odd harmonics only)	3.85/n	See limit of Class A

NOTE: According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.


**6.2. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2014.03.31	2015.03.30



6.3. Test Result and Data

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5100-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

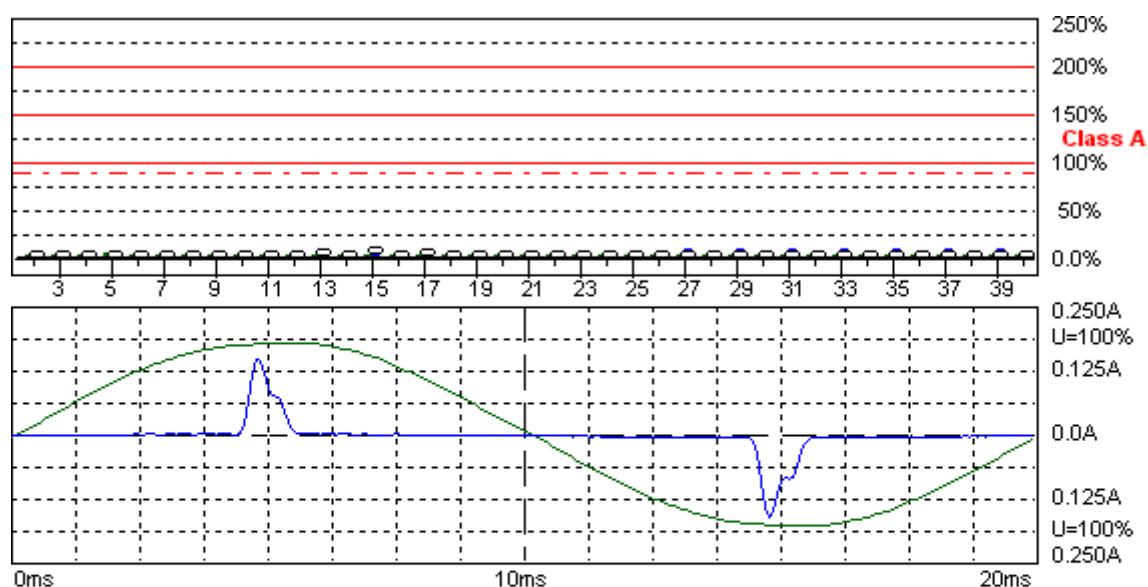**Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)**

2014-6-26 14:40:23 harmonic.hsu

Urms = 223.0 V P = 2.951 W THC = 0.027 A
Irms = 0.030 A pf = 0.448

Range: 0.25 A
V-nom: 230 V
TestTime: 15 min (100%)

IPC-HDBW5100-Mercury
mode1

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 223.0V Freq = 50.000 Range: 0.25 A

Irms = 0.030A Ipk = 0.166A cf = 5.616

P = 2.951W S = 6.589VA pf = 0.448

THDi = 89.6 % THDu = 1.40 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0135		0.0136		
2	100	0.0002	0.0212	0.0005	0.0466	1.0800
3	150	0.0111	0.4830	0.0111	0.4830	2.3000
4	200	0.0002	0.0532	0.0006	0.1455	0.4300
5	250	0.0107	0.9410	0.0108	0.9450	1.1400
6	300	0.0002	0.0712	0.0008	0.2543	0.3000
7	350	0.0102	1.3237	0.0103	1.3396	0.7700
8	400	0.0002	0.0929	0.0008	0.3649	0.2300
9	450	0.0094	2.3613	0.0097	2.4223	0.4000
10	500	0.0002	0.1161	0.0009	0.4893	0.1840
11	550	0.0086	2.5940	0.0089	2.7096	0.3300
12	600	0.0002	0.1294	0.0009	0.5971	0.1533
13	650	0.0076	3.6040	0.0081	3.8656	0.2100
14	700	0.0002	0.1625	0.0009	0.6734	0.1314
15	750	0.0066	4.3844	0.0073	4.8930	0.1500
16	800	0.0002	0.1990	0.0008	0.7298	0.1150
17	850	0.0055	4.1734	0.0066	4.9574	0.1324
18	900	0.0002	0.2388	0.0008	0.7613	0.1022
19	950	0.0045	3.8398	0.0059	4.9737	0.1184
20	1000	0.0003	0.2820	0.0008	0.8459	0.0920
21	1050	0.0037	3.4322	0.0054	5.0130	0.1071
22	1100	0.0003	0.3284	0.0008	0.9122	0.0836
23	1150	0.0030	3.0572	0.0051	5.1941	0.0978
24	1200	0.0003	0.3981	0.0007	0.9752	0.0767
25	1250	0.0026	2.8653	0.0051	5.6118	0.0900
26	1300	0.0003	0.4312	0.0008	1.0781	0.0708
27	1350	0.0025	2.9480	0.0051	6.1157	0.0833
28	1400	0.0003	0.4876	0.0008	1.1610	0.0657
29	1450	0.0025	3.2844	0.0051	6.6081	0.0776
30	1500	0.0003	0.5224	0.0007	1.1942	0.0613
31	1550	0.0028	3.8052	0.0051	7.0428	0.0726
32	1600	0.0003	0.5307	0.0007	1.1942	0.0575
33	1650	0.0030	4.3416	0.0050	7.3405	0.0682
34	1700	0.0003	0.5639	0.0006	1.1278	0.0541
35	1750	0.0031	4.8184	0.0048	7.5243	0.0643
36	1800	0.0003	0.5374	0.0005	1.0150	0.0511
37	1850	0.0031	5.1690	0.0045	7.4775	0.0608
38	1900	0.0003	0.5357	0.0004	0.9139	0.0484
39	1950	0.0031	5.3955	0.0042	7.2469	0.0577
40	2000	0.0002	0.4976	0.0004	0.8625	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5202-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

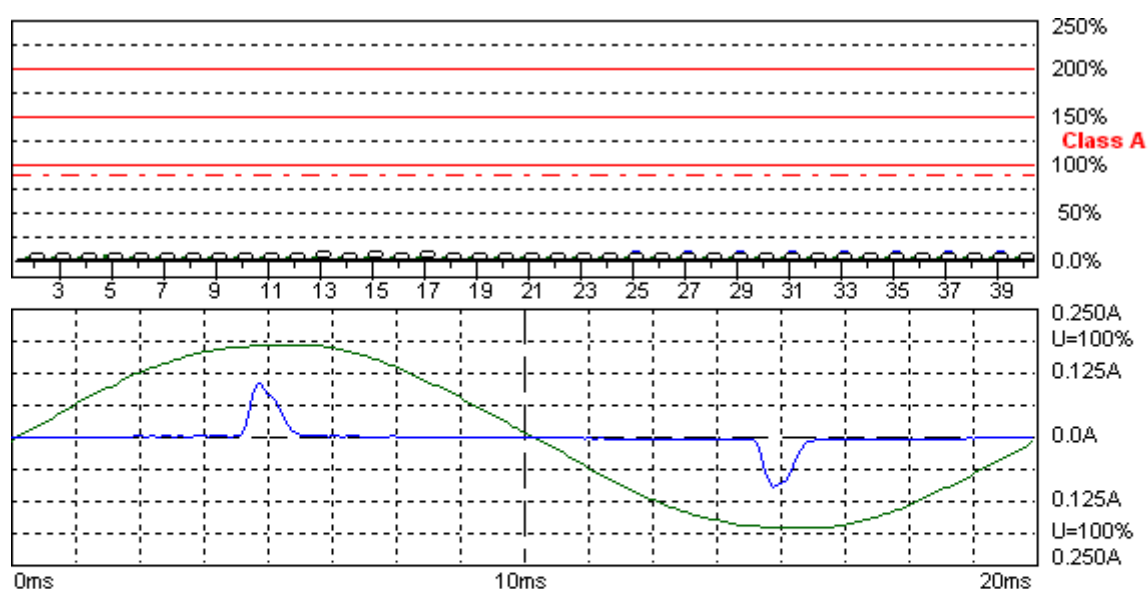**Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)**

2014-6-26 15:08:56 harmonic.hsu

Urms = 223.6 V P = 2.356 W THC = 0.021 A
 Irms = 0.022 A pf = 0.472

Range: 0.25 A
 V-nom: 230 V
 TestTime: 15 min (100%)

IPC-HDBW5100-Mercury
 mode2

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 223.6V Freq = 49.974 Range: 0.25 A

Irms = 0.022A Ipk = 0.114A cf = 5.082

P = 2.356W S = 4.996VA pf = 0.472

THDi = 88.6 % THDu = 1.50 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0108		0.0195		
2	100	0.0002	0.0155	0.0007	0.0650	1.0800
3	150	0.0085	0.3675	0.0167	0.7278	2.3000
4	200	0.0002	0.0390	0.0007	0.1703	0.4300
5	250	0.0082	0.7188	0.0157	1.3760	1.1400
6	300	0.0002	0.0661	0.0008	0.2594	0.3000
7	350	0.0078	1.0186	0.0143	1.8509	0.7700
8	400	0.0002	0.0929	0.0008	0.3450	0.2300
9	450	0.0073	1.8311	0.0125	3.1319	0.4000
10	500	0.0002	0.1161	0.0008	0.4478	0.1840
11	550	0.0067	2.0345	0.0107	3.2367	0.3300
12	600	0.0002	0.1493	0.0008	0.5473	0.1533
13	650	0.0060	2.8556	0.0089	4.2361	0.2100
14	700	0.0003	0.1974	0.0009	0.6502	0.1314
15	750	0.0053	3.5299	0.0077	5.1371	0.1500
16	800	0.0003	0.2256	0.0009	0.7430	0.1150
17	850	0.0045	3.4241	0.0068	5.1073	0.1324
18	900	0.0003	0.2836	0.0008	0.8210	0.1022
19	950	0.0038	3.2084	0.0061	5.1541	0.1184
20	1000	0.0003	0.3151	0.0008	0.8956	0.0920
21	1050	0.0031	2.8625	0.0059	5.4972	0.1071
22	1100	0.0003	0.3649	0.0008	0.9669	0.0836
23	1150	0.0024	2.4645	0.0057	5.8336	0.0978
24	1200	0.0003	0.3981	0.0008	1.0150	0.0767
25	1250	0.0018	2.0345	0.0054	6.0357	0.0900
26	1300	0.0003	0.4312	0.0007	1.0565	0.0708
27	1350	0.0013	1.6113	0.0051	6.0791	0.0833
28	1400	0.0003	0.4644	0.0007	1.0913	0.0657
29	1450	0.0010	1.3373	0.0047	6.0574	0.0776
30	1500	0.0003	0.4727	0.0007	1.0947	0.0613
31	1550	0.0009	1.2824	0.0047	6.4752	0.0726
32	1600	0.0003	0.4777	0.0006	1.0880	0.0575
33	1650	0.0010	1.4547	0.0047	6.8258	0.0682
34	1700	0.0002	0.4511	0.0006	1.0714	0.0541
35	1750	0.0011	1.7327	0.0045	7.0258	0.0643
36	1800	0.0002	0.4478	0.0005	1.0449	0.0511
37	1850	0.0012	2.0074	0.0043	7.0760	0.0608
38	1900	0.0002	0.4412	0.0005	0.9769	0.0484
39	1950	0.0013	2.2481	0.0040	6.9295	0.0577
40	2000	0.0002	0.3981	0.0004	0.9288	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 3
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5302-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

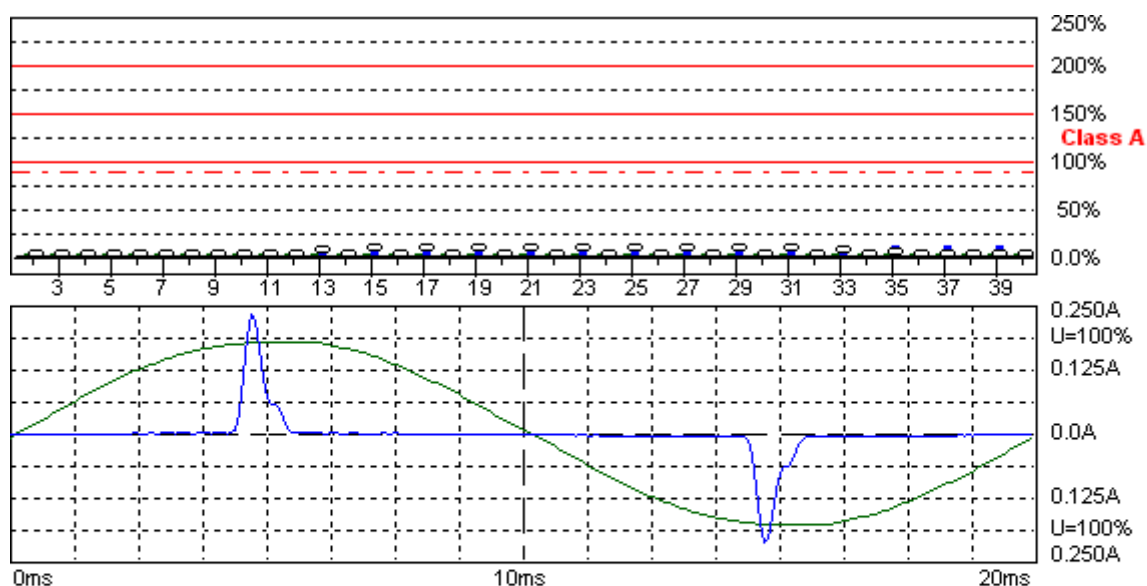**Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)**

2014-6-26 16:17:10 harmonic.hsu

Urms = 223.4 V P = 3.657 W THC = 0.038 A
 Irms = 0.040 A pf = 0.413

Range: 0.25 A
 V-nom: 230 V
 TestTime: 15 min (100%)

IPC-HDBW5100-Mercury
 mode3

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 223.4V Freq = 50.039 Range: 0.25 A

Irms = 0.040A Ipk = 0.243A cf = 6.123

P = 3.657W S = 8.864VA pf = 0.413

THDi = 91.8 % THDu = 1.30 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0166		0.0187		
2	100	0.0004	0.0410	0.0005	0.0509	1.0800
3	150	0.0142	0.6157	0.0162	0.7032	2.3000
4	200	0.0005	0.1065	0.0006	0.1348	0.4300
5	250	0.0137	1.2060	0.0155	1.3599	1.1400
6	300	0.0005	0.1577	0.0006	0.2035	0.3000
7	350	0.0131	1.7062	0.0146	1.8925	0.7700
8	400	0.0005	0.2123	0.0007	0.2853	0.2300
9	450	0.0123	3.0785	0.0134	3.3455	0.4000
10	500	0.0005	0.2737	0.0007	0.3732	0.1840
11	550	0.0114	3.4448	0.0120	3.6482	0.3300
12	600	0.0005	0.3383	0.0007	0.4578	0.1533
13	650	0.0103	4.9119	0.0107	5.0935	0.2100
14	700	0.0005	0.4063	0.0007	0.5457	0.1314
15	750	0.0093	6.1849	0.0097	6.4392	0.1500
16	800	0.0005	0.4644	0.0007	0.6369	0.1150
17	850	0.0083	6.2602	0.0088	6.6406	0.1324
18	900	0.0005	0.5374	0.0007	0.7165	0.1022
19	950	0.0074	6.2493	0.0081	6.8292	0.1184
20	1000	0.0005	0.5805	0.0007	0.7629	0.0920
21	1050	0.0067	6.2378	0.0075	7.0211	0.1071
22	1100	0.0005	0.6385	0.0007	0.8210	0.0836
23	1150	0.0062	6.3171	0.0071	7.2530	0.0978
24	1200	0.0005	0.6767	0.0007	0.8757	0.0767
25	1250	0.0058	6.4935	0.0069	7.6803	0.0900
26	1300	0.0005	0.7331	0.0007	0.9271	0.0708
27	1350	0.0057	6.7932	0.0069	8.2214	0.0833
28	1400	0.0005	0.7430	0.0006	0.9520	0.0657
29	1450	0.0056	7.1587	0.0068	8.7321	0.0776
30	1500	0.0005	0.7712	0.0006	0.9454	0.0613
31	1550	0.0055	7.5263	0.0066	9.1241	0.0726
32	1600	0.0004	0.7696	0.0005	0.9553	0.0575
33	1650	0.0053	7.8328	0.0064	9.3323	0.0682
34	1700	0.0004	0.7613	0.0005	0.9305	0.0541
35	1750	0.0051	7.9990	0.0060	9.3045	0.0643
36	1800	0.0004	0.7464	0.0005	0.9255	0.0511
37	1850	0.0049	7.9793	0.0055	9.0332	0.0608
38	1900	0.0004	0.7248	0.0004	0.9139	0.0484
39	1950	0.0045	7.7759	0.0049	8.5429	0.0577
40	2000	0.0003	0.6966	0.0004	0.8625	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 4
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5100-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

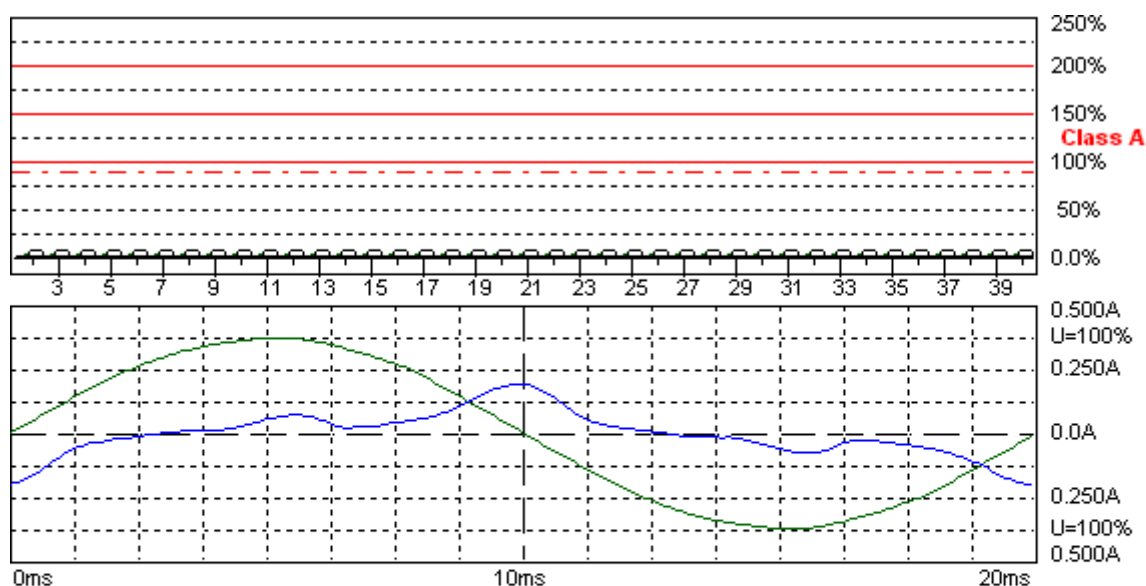**Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)**

2014-7-14 12:02:48 harmonic.hsu

Urms = 230.1 V P = 6.590 W THC = 0.043 A
 Irms = 0.086 A pf = 0.333

Range: 0.5 A
 V-nom: 230 V
 TestTime: 15 min (100%)

IPC-HDBW5100-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.1V Freq = 50.000 Range: 0.5 A

Irms = 0.086A Ipk = 0.201A cf = 2.338

P = 6.590W S = 19.77VA pf = 0.333

THDi = 50.4 % THDu = 1.20 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.0745		0.0757		
2	100	0.0006	0.0537	0.0008	0.0706	1.0800
3	150	0.0344	1.4967	0.0351	1.5246	2.3000
4	200	0.0002	0.0426	0.0003	0.0639	0.4300
5	250	0.0244	2.1443	0.0259	2.2701	1.1400
6	300	0.0002	0.0712	0.0003	0.1017	0.3000
7	350	0.0048	0.6222	0.0053	0.6936	0.7700
8	400	0.0001	0.0531	0.0002	0.0663	0.2300
9	450	0.0087	2.1820	0.0089	2.2125	0.4000
10	500	0.0001	0.0663	0.0002	0.0995	0.1840
11	550	0.0005	0.1572	0.0006	0.1850	0.3300
12	600	0.0001	0.0398	0.0001	0.0597	0.1533
13	650	0.0014	0.6685	0.0016	0.7702	0.2100
14	700	0.0001	0.0697	0.0001	0.0697	0.1314
15	750	0.0005	0.3255	0.0008	0.5493	0.1500
16	800	0.0001	0.0796	0.0001	0.0796	0.1150
17	850	0.0010	0.7609	0.0010	0.7840	0.1324
18	900	0.0001	0.0597	0.0001	0.0896	0.1022
19	950	0.0003	0.2835	0.0003	0.2835	0.1184
20	1000	0.0001	0.0663	0.0001	0.0663	0.0920
21	1050	0.0004	0.3703	0.0004	0.3988	0.1071
22	1100	0.0001	0.0730	0.0001	0.1095	0.0836
23	1150	0.0003	0.2808	0.0004	0.3743	0.0978
24	1200	0.0001	0.0796	0.0001	0.1194	0.0767
25	1250	0.0003	0.3391	0.0003	0.3730	0.0900
26	1300	0.0001	0.0862	0.0001	0.1294	0.0708
27	1350	0.0002	0.2197	0.0002	0.2563	0.0833
28	1400	0.0001	0.0929	0.0001	0.1393	0.0657
29	1450	0.0002	0.2753	0.0003	0.3540	0.0776
30	1500	0.0001	0.0995	0.0001	0.1493	0.0613
31	1550	0.0002	0.2523	0.0002	0.2943	0.0726
32	1600	0.0001	0.1061	0.0001	0.1592	0.0575
33	1650	0.0002	0.2238	0.0002	0.2686	0.0682
34	1700	0.0001	0.1692	0.0001	0.1692	0.0541
35	1750	0.0002	0.2848	0.0002	0.3323	0.0643
36	1800	0.0001	0.1194	0.0001	0.1791	0.0511
37	1850	0.0002	0.2509	0.0002	0.3011	0.0608
38	1900	0.0001	0.1261	0.0001	0.1891	0.0484
39	1950	0.0001	0.2116	0.0002	0.2645	0.0577
40	2000	0.0001	0.1990	0.0001	0.2654	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg)
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (Imax)
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 5
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5202-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

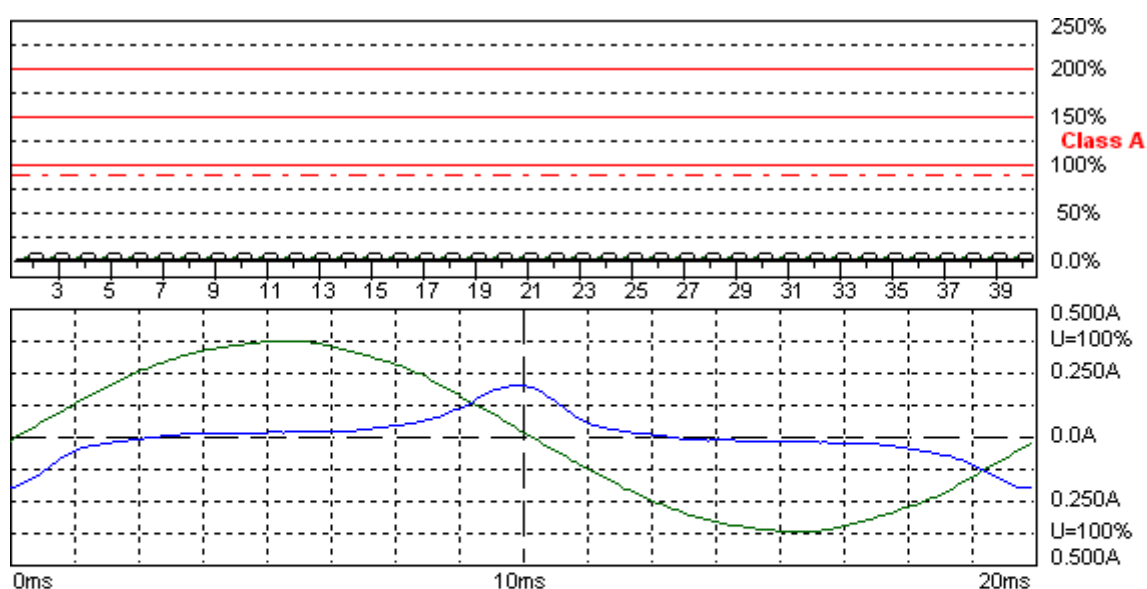**Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)**

2014-7-14 11:35:46 harmonic.hsu

Urms = 230.1 V P = 4.184 W THC = 0.045 A
 Irms = 0.084 A pf = 0.215

Range: 0.5 A
 V-nom: 230 V
 TestTime: 15 min (100%)

IPC-HDBW5202-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.1V Freq = 50.013 Range: 0.5 A
 Irms = 0.084A Ipk = 0.205A cf = 2.422
 P = 4.184W S = 19.44VA pf = 0.215
 THDi = 53.1 % THDu = 1.20 % Class A
 Test - Time : 15min (100 %)
 Test completed, Result: PASSED




Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0718		0.0718		
2	100	0.0002	0.0141	0.0002	0.0170	1.0800
3	150	0.0394	1.7143	0.0394	1.7143	2.3000
4	200	0.0001	0.0213	0.0001	0.0284	0.4300
5	250	0.0186	1.6303	0.0186	1.6330	1.1400
6	300	0.0001	0.0305	0.0001	0.0305	0.3000
7	350	0.0096	1.2484	0.0096	1.2524	0.7700
8	400	0.0001	0.0398	0.0001	0.0398	0.2300
9	450	0.0052	1.3046	0.0052	1.3123	0.4000
10	500	0.0001	0.0498	0.0001	0.0498	0.1840
11	550	0.0016	0.4716	0.0016	0.4716	0.3300
12	600	0.0001	0.0398	0.0001	0.0398	0.1533
13	650	0.0004	0.2035	0.0004	0.2035	0.2100
14	700	0.0000	0.0232	0.0001	0.0464	0.1314
15	750	0.0004	0.2441	0.0004	0.2645	0.1500
16	800	0.0001	0.0531	0.0001	0.0531	0.1150
17	850	0.0003	0.2075	0.0003	0.2075	0.1324
18	900	0.0001	0.0597	0.0001	0.0597	0.1022
19	950	0.0002	0.2062	0.0002	0.2062	0.1184
20	1000	0.0001	0.0663	0.0001	0.0663	0.0920
21	1050	0.0001	0.0570	0.0001	0.0570	0.1071
22	1100	0.0001	0.0730	0.0001	0.0730	0.0836
23	1150	0.0001	0.0624	0.0001	0.0936	0.0978
24	1200	0.0001	0.0796	0.0001	0.0796	0.0767
25	1250	0.0001	0.0678	0.0001	0.1017	0.0900
26	1300	0.0001	0.0862	0.0001	0.0862	0.0708
27	1350	0.0001	0.1099	0.0001	0.1099	0.0833
28	1400	0.0001	0.0929	0.0001	0.1393	0.0657
29	1450	0.0001	0.1180	0.0001	0.1180	0.0776
30	1500	0.0001	0.0995	0.0001	0.1493	0.0613
31	1550	0.0001	0.1261	0.0001	0.1261	0.0726
32	1600	0.0001	0.1061	0.0001	0.1592	0.0575
33	1650	0.0001	0.1343	0.0001	0.1343	0.0682
34	1700	0.0001	0.1692	0.0001	0.1692	0.0541
35	1750	0.0001	0.1424	0.0001	0.1899	0.0643
36	1800	0.0001	0.1791	0.0001	0.1791	0.0511
37	1850	0.0001	0.1506	0.0001	0.2007	0.0608
38	1900	0.0001	0.1891	0.0001	0.2521	0.0484
39	1950	0.0001	0.1587	0.0001	0.2116	0.0577
40	2000	0.0001	0.2654	0.0001	0.2654	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.



Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 6
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5302-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

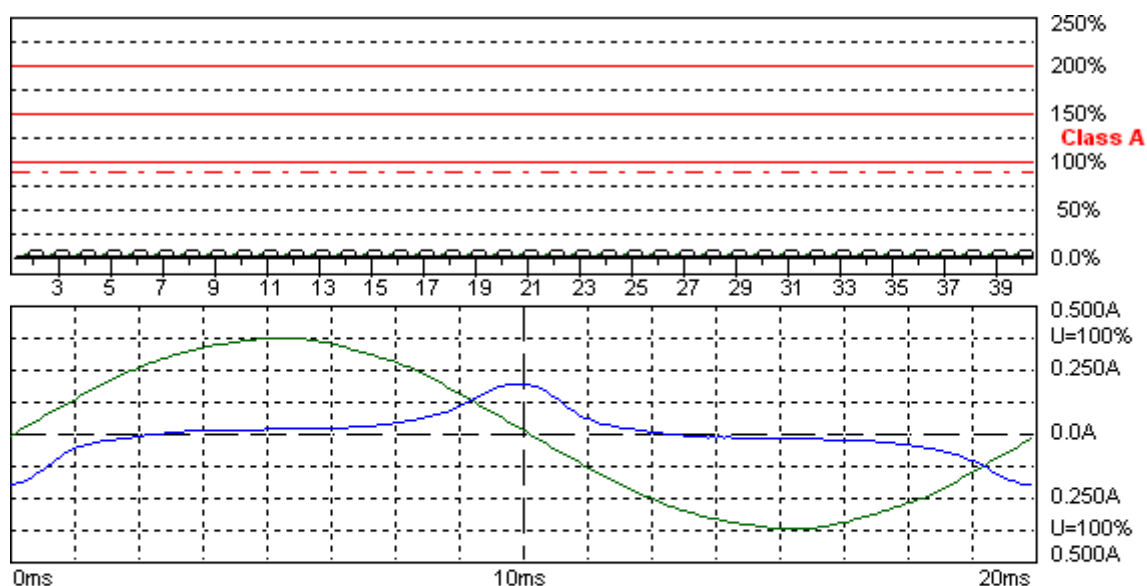**Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)**

2014-7-14 10:51:45 harmonic.hsu

Urms = 230.1 V P = 4.221 W THC = 0.044 A
 Irms = 0.083 A pf = 0.220

Range: 0.5 A
 V-nom: 230 V
 TestTime: 15 min (100%)

IPC-HDBW5300-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.1V Freq = 50.000 Range: 0.5 A

Irms = 0.083A Ipk = 0.202A cf = 2.421

P = 4.221W S = 19.21VA pf = 0.220

THDi = 52.8 % THDu = 1.20 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED



Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0711		0.0711		
2	100	0.0001	0.0085	0.0002	0.0170	1.0800
3	150	0.0387	1.6838	0.0387	1.6838	2.3000
4	200	0.0001	0.0142	0.0001	0.0284	0.4300
5	250	0.0182	1.5955	0.0182	1.5955	1.1400
6	300	0.0001	0.0203	0.0001	0.0305	0.3000
7	350	0.0094	1.2247	0.0094	1.2247	0.7700
8	400	0.0001	0.0265	0.0001	0.0398	0.2300
9	450	0.0052	1.2970	0.0052	1.3046	0.4000
10	500	0.0001	0.0332	0.0001	0.0498	0.1840
11	550	0.0016	0.4809	0.0016	0.4901	0.3300
12	600	0.0001	0.0398	0.0001	0.0398	0.1533
13	650	0.0004	0.2035	0.0005	0.2180	0.2100
14	700	0.0001	0.0464	0.0001	0.0464	0.1314
15	750	0.0004	0.2441	0.0004	0.2645	0.1500
16	800	0.0001	0.0531	0.0001	0.0796	0.1150
17	850	0.0003	0.2075	0.0003	0.2075	0.1324
18	900	0.0001	0.0597	0.0001	0.0597	0.1022
19	950	0.0002	0.2062	0.0003	0.2319	0.1184
20	1000	0.0001	0.0663	0.0001	0.0995	0.0920
21	1050	0.0001	0.0570	0.0001	0.0854	0.1071
22	1100	0.0001	0.0730	0.0001	0.1095	0.0836
23	1150	0.0001	0.0624	0.0001	0.0936	0.0978
24	1200	0.0001	0.0796	0.0001	0.1194	0.0767
25	1250	0.0001	0.1017	0.0001	0.1017	0.0900
26	1300	0.0001	0.0862	0.0001	0.1294	0.0708
27	1350	0.0001	0.1099	0.0001	0.1099	0.0833
28	1400	0.0001	0.1393	0.0001	0.1393	0.0657
29	1450	0.0001	0.1180	0.0001	0.1573	0.0776
30	1500	0.0001	0.1493	0.0001	0.1493	0.0613
31	1550	0.0001	0.1261	0.0001	0.1261	0.0726
32	1600	0.0001	0.1592	0.0001	0.1592	0.0575
33	1650	0.0001	0.1343	0.0001	0.1343	0.0682
34	1700	0.0001	0.1692	0.0001	0.1692	0.0541
35	1750	0.0001	0.1424	0.0001	0.1899	0.0643
36	1800	0.0001	0.1791	0.0001	0.1791	0.0511
37	1850	0.0001	0.1506	0.0001	0.2007	0.0608
38	1900	0.0001	0.1891	0.0001	0.2521	0.0484
39	1950	0.0001	0.1587	0.0001	0.2116	0.0577
40	2000	0.0001	0.1990	0.0001	0.2654	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg})
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.

Test engineer: Seben



6.1. Test Photographs

ADS-12B-12 12012Gz





HKA-A24150-230





7. Voltage Fluctuations Test

7.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

7.2. Measurement equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2014.03.31	2015.03.30



7.3. Test Result and Data

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5100-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

Flickermeter 1000-4-15 for 230V/50Hz

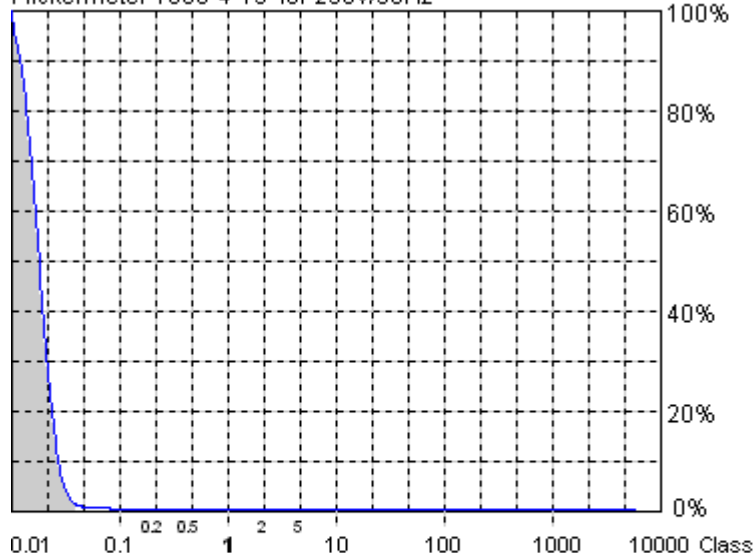

Actual Flicker (Fli):	0.02
Short-term Flicker (Pst):	0.13
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.13
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.59%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-6-26 14:51:42 harmonic.hsu

Urms = 223.4 V P = 2.963 W
Irms = 0.030 A pf = 0.447

Range: 0.25 A
V-nom: 230 V
TestTime: 10 min (100%)

IPC-HDBW5100-Mercury
mode1

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 223.4V Freq = 49.987 Range: 0.25 A
Irms = 0.030A Ipk = 0.171A cf = 5.757
P = 2.963W S = 6.628VA pf = 0.447

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5202-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

Flickermeter 1000-4-15 for 230V/50Hz

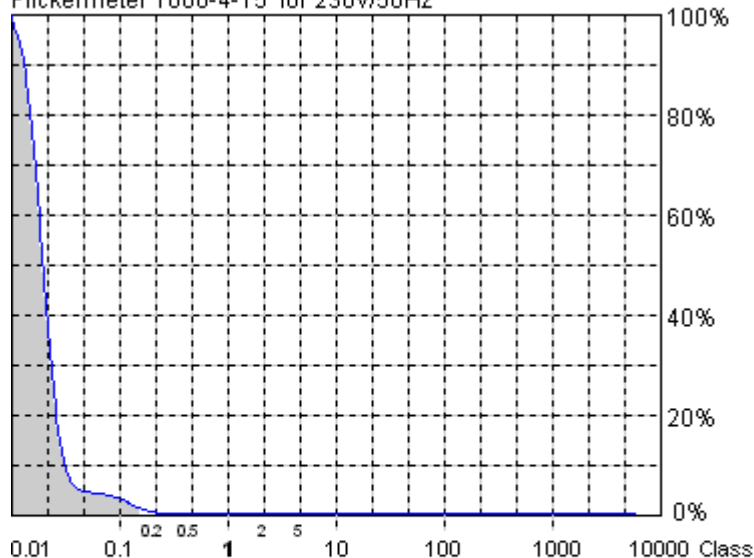**Actual Flicker (Fli): 0.03****Short-term Flicker (Pst): 0.18**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.18

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.01%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.49%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-6-26 15:37:11 harmonic.hsu

Urms = 223.6 V P = 3.246 W

Range: 0.25 A

Irms = 0.033 A pf = 0.445

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW5100-Mercury
mode2**Test completed, Result: PASSED**

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 223.6V Freq = 50.013 Range: 0.25 A
Irms = 0.033A Ipk = 0.177A cf = 5.423
P = 3.246W S = 7.289VA pf = 0.445

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 3
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5302-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jun 26, 2014

Flickermeter 1000-4-15 for 230V/50Hz

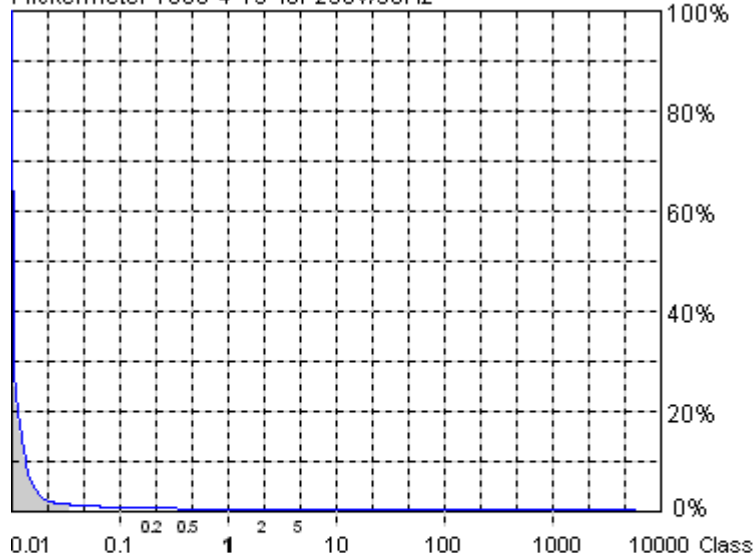

Actual Flicker (Fli):	0.01
Short-term Flicker (Pst):	0.17
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.17
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.57%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-6-26 16:36:58 harmonic.hsu

Urms = 223.2 V P = 3.657 W
 Irms = 0.040 A pf = 0.412

Range: 0.5 A
 V-nom: 230 V
 TestTime: 10 min (100%)

IPC-HDBW5100-Mercury
 mode3

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 223.2V Freq = 49.974 Range: 0.5 A
Irms = 0.040A Ipk = 0.248A cf = 6.221
P = 3.657W S = 8.884VA pf = 0.412

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 4
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5100-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

Flickermeter 1000-4-15 for 230V/50Hz

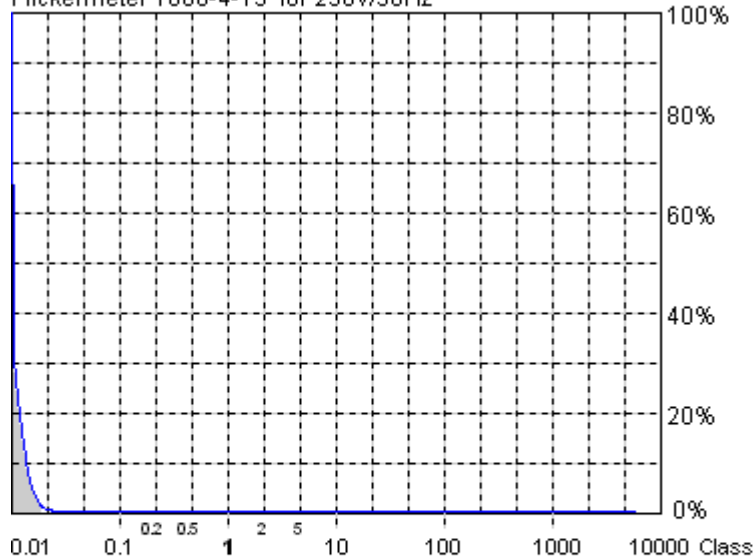**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.09**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.09

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.11%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-7-14 12:19:12 harmonic.hsu

Urms = 230.1 V P = 6.590 W

Irms = 0.086 A pf = 0.332

Range: 0.5 A

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW5100-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.1V Freq = 50.000 Range: 0.5 A
Irms = 0.086A Ipk = 0.201A cf = 2.329
P = 6.590W S = 19.83VA pf = 0.332

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 5
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5202-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

Flickermeter 1000-4-15 for 230V/50Hz

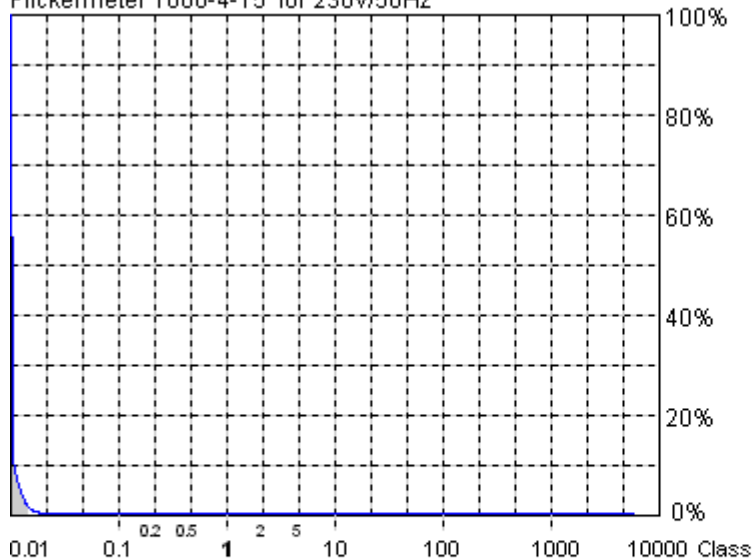**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.08**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.08

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.13%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-7-14 11:46:19 harmonic.hsu

Urms = 230.1 V P = 4.184 W

Irms = 0.085 A pf = 0.215

Range: 0.5 A

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW5202-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.1V Freq = 50.000 Range: 0.5 A
Irms = 0.085A Ipk = 0.205A cf = 2.418
P = 4.184W S = 19.49VA pf = 0.215

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN


Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 6
Equipment	:	IP CAMERA
Model No.	:	IPC-HDBW5302-Mercury
Temperature	:	20°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jul 14, 2014

Flickermeter 1000-4-15 for 230V/50Hz

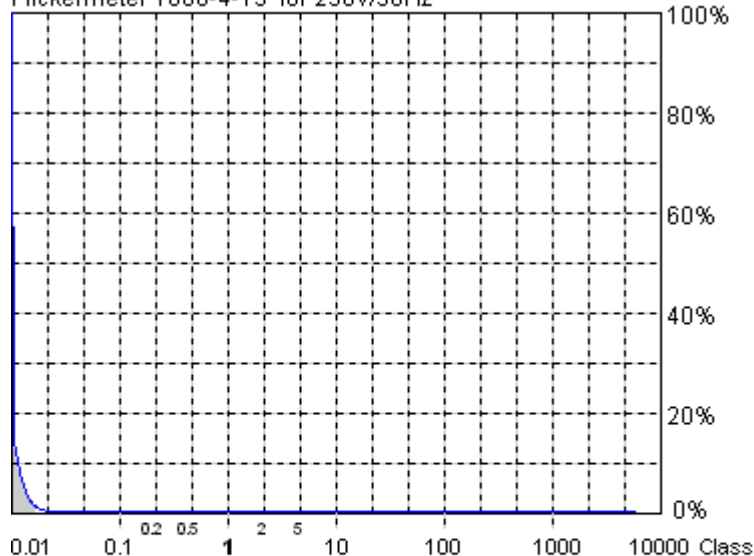**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.08**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.08

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.12%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2014-7-14 11:18:05 harmonic.hsu

Urms = 230.1 V P = 4.197 W

Irms = 0.084 A pf = 0.217

Range: 0.5 A

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW5300-Mercury

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 230.1V Freq = 50.000 Range: 0.5 A
Irms = 0.084A Ipk = 0.204A cf = 2.423
P = 4.197W S = 19.38VA pf = 0.217

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Test engineer: Seben



7.4. Test Photographs

ADS-12B-12 12012Gz





HKA-A24150-230






8. Electrostatic Discharge Immunity Test

8.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 hPa) to 106 KPa (1060 hPa).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - ✧ If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - ✧ Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - ✧ The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.



8.2. Test Setup for Tests Performed in Laboratory

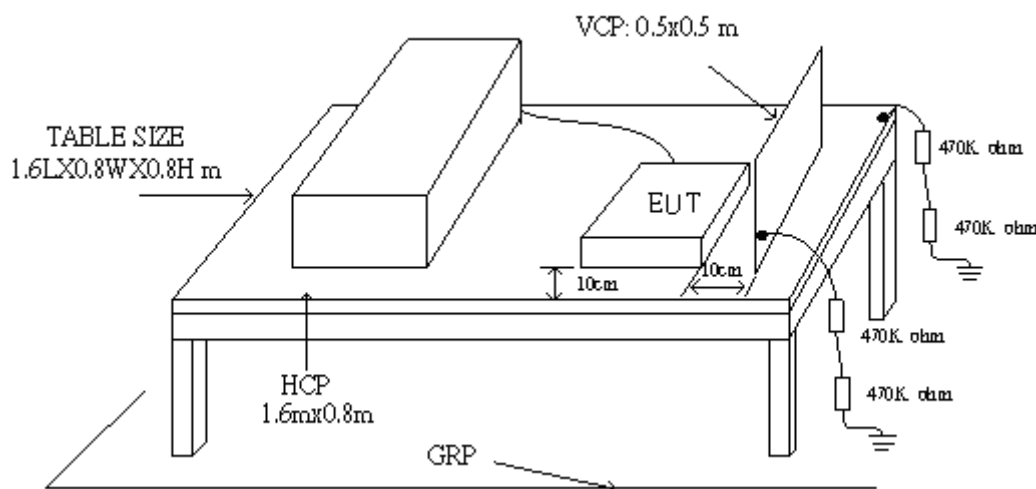

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner :

- Contact Discharge to the conductive surfaces and to coupling plane;
- Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the Exclusive Certification Corp., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.



8.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (KV) of Contact discharge	Level	Test Voltage (KV) of Air Discharge
1	± 2	1	± 2
2	± 4	2	± 4
3	± 6	3	± 8
4	± 8	4	± 15
X	Specified	X	Specified
Remark: "X" is an open level.			

8.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESD Simulator	EM Test	dito	V0714102399	2014.04.04	2015.04.03
Tonometer	shanghaifengyun	DYM3	3251	2014.03.31	2015.03.30
Dehumidifier	ZEDO	ZD-220LB	CEP-TH-01	N/A	N/A
Humidifier	YADU	YZ-DS251C	CEP-TH-02	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	102	2014.03.31	2015.03.30

**8.5. Test Result and Data**

Basic Standard : IEC 61000-4-2
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : IP CAMERA
 Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
 IPC-HDBW5100-Mercury
 Final Test Result : PASS
 Temperature : 22°C
 Relative Humidity : 50 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jun 29, 2014

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 2

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
33	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
34,35	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 5

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
34	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
35,36	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 6

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-7	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
8-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12-30	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32,33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test engineer:



8.6. Test Photographs

ADS-12B-12 12012Gz








HKA-A24150-230






IPC-HDBW5100-Mercury

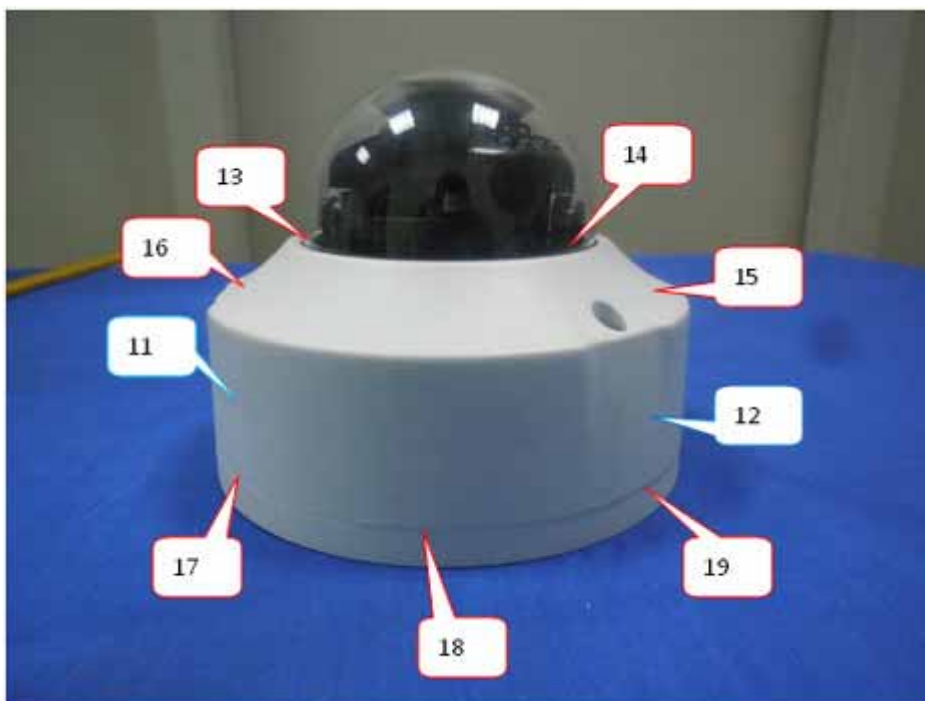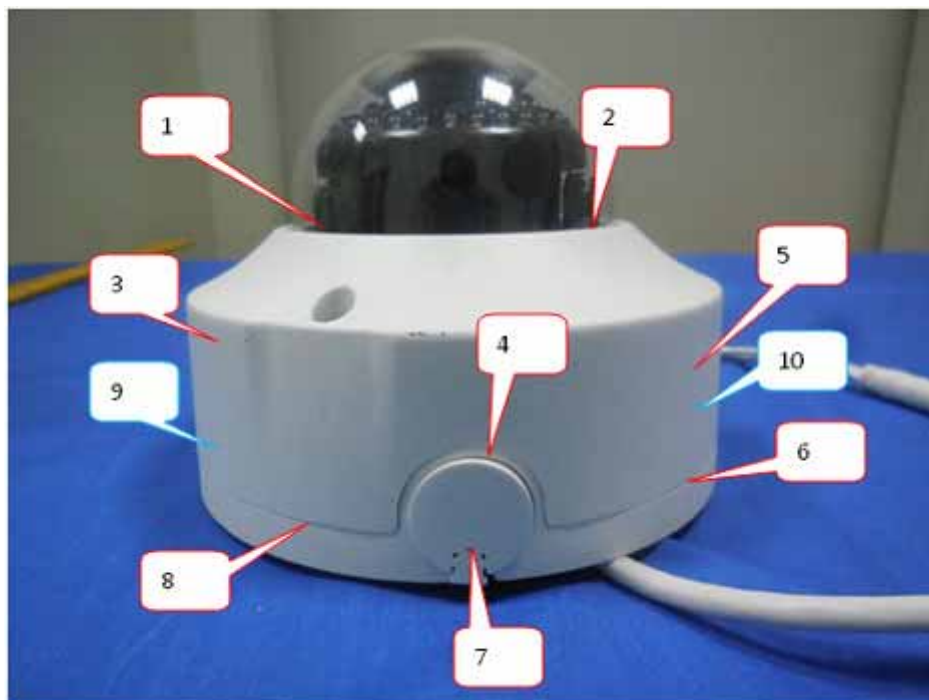

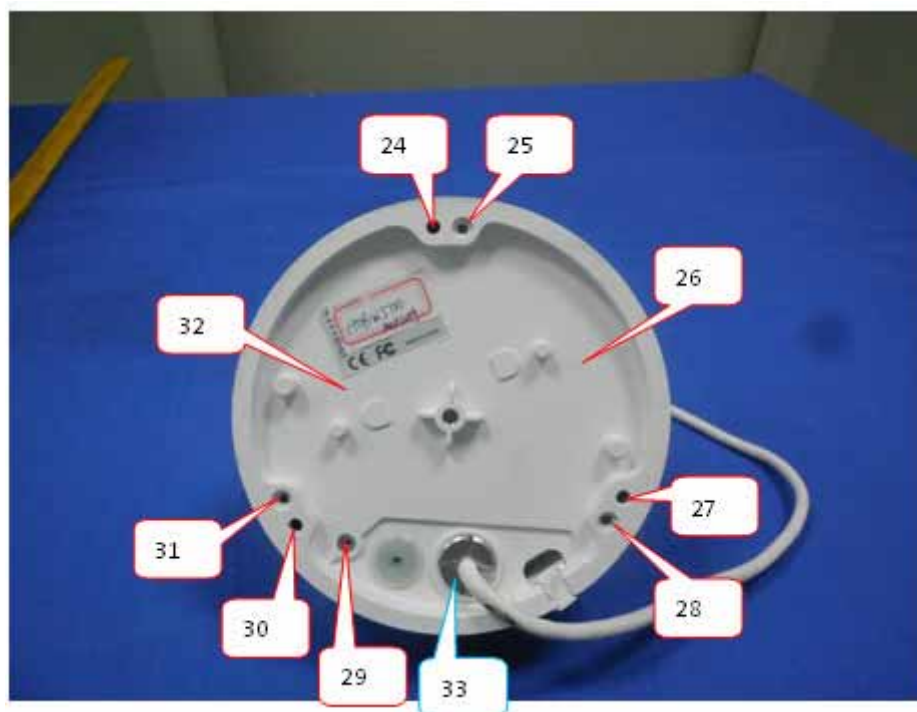




IPC-HDBW5202-Mercury

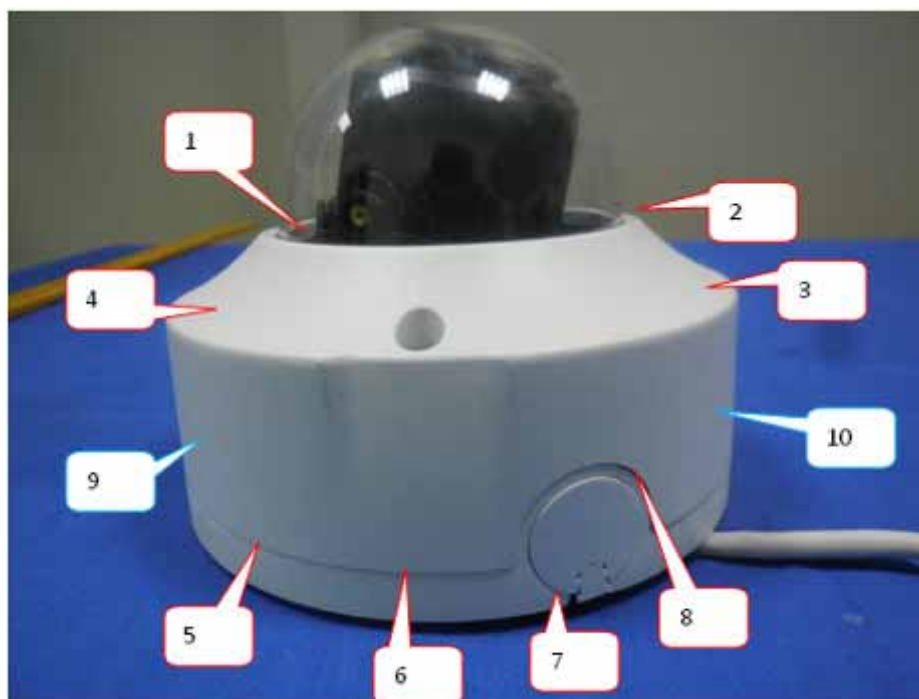





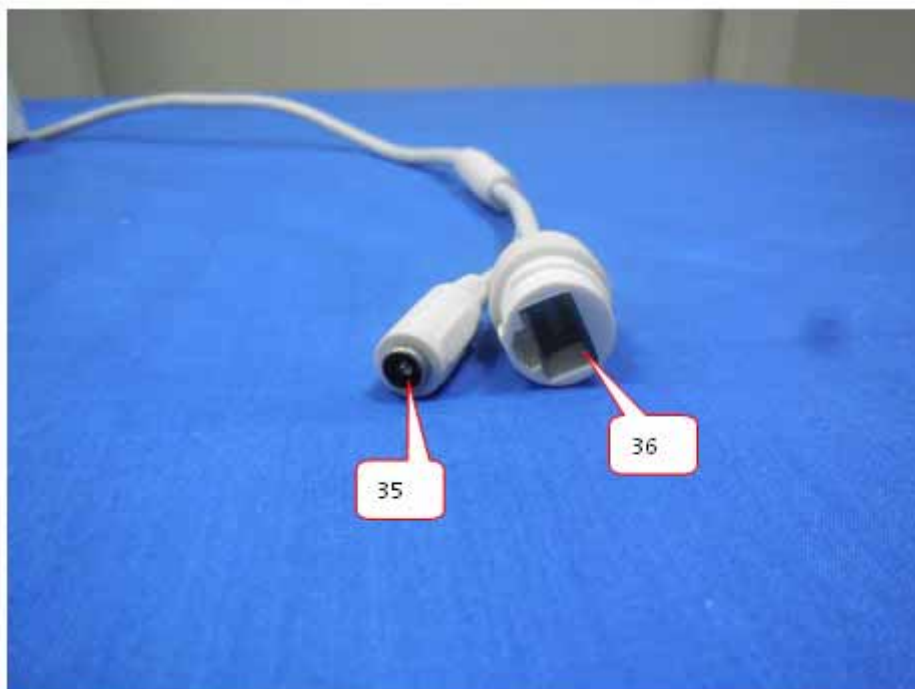



IPC-HDBW5302-Mercury

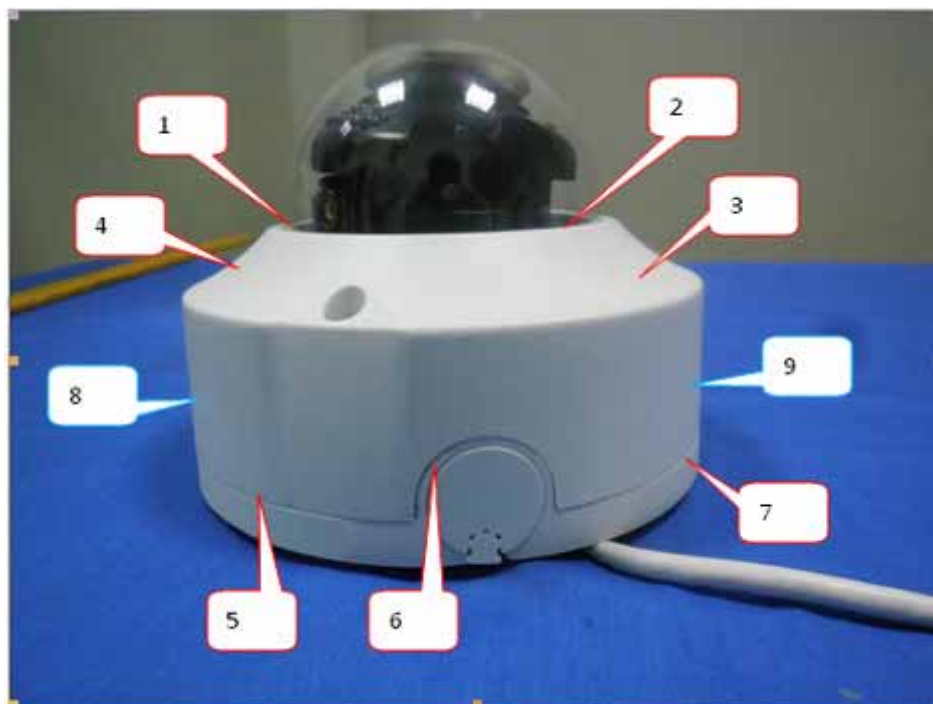

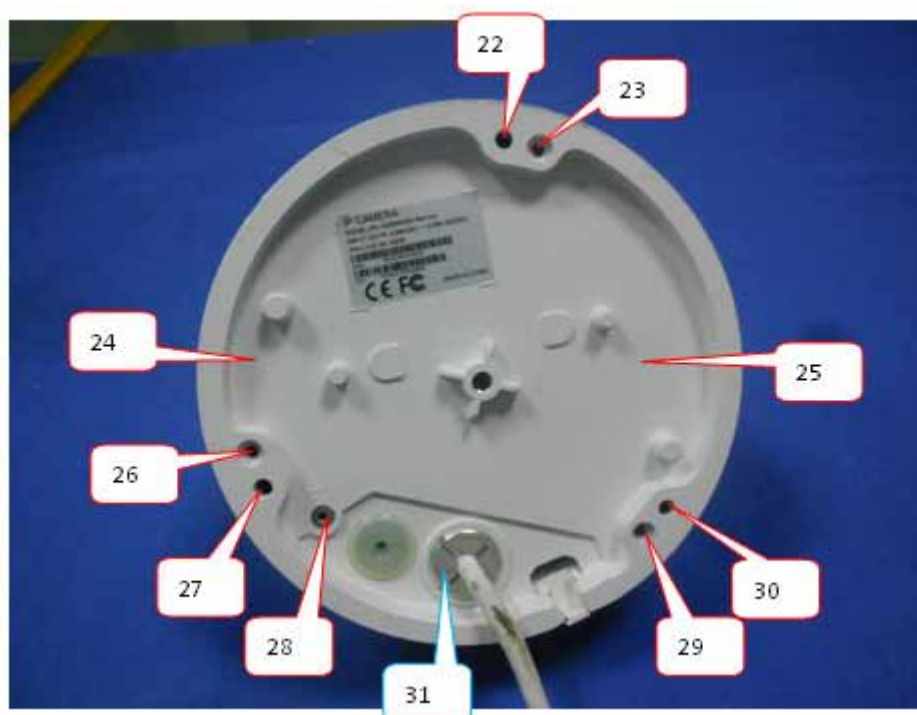





9. Radio Frequency electromagnetic field immunity test

9.1. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-2700 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.



9.2. Test Severity Levels

	Condition of Test	Remarks
1.	Field Strength	10 V/m
2.	Radiated Signal	AM 80% Modulated with 1kHz Pulse modulation 1Hz (0.5s ON; 0.5s OFF)
3.	Scanning Frequency	80MHz - 2700MHz
4.	Dwell Time	3 Seconds
5.	Frequency step size Δf	1%
6.	The rate of Swept of Frequency	1.5 x 10 ⁻³ decades/s

9.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Signal Generator	R&S	SML03	103287	2014.03.24	2015.03.23
Power Sensor	R&S	NR P-Z91	100383	2014.03.24	2015.03.23
Power Sensor	R&S	NRP-Z91	100384	2014.03.24	2015.03.23
Power Meter	R&S	NRP	101206	2014.03.24	2015.03.23
Power Amplifier	BONN	BLWA0830-16 0/100/40D	076659	2014.03.24	2015.03.23
Istropic Electric Field Probe	EST.LINDGRE N	HI-6105	137445	2013.09.03	2014.09.02
EMS Antenna	R&S	HL046E	100028	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	101	2014.03.31	2015.03.30



9.4. Test Result and Data

Basic Standard : IEC 61000-4-3
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : IP CAMERA
Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
IPC-HDBW5100-Mercury
Final Test Result : PASS
Temperature : 22 °C
Relative Humidity : 49%
Atmospheric Pressure : 100 kPa
Test Date : Jun 29, 2014

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal & Vertical	Front	3 V/m	A
80~1000	Horizontal & Vertical	Rear	3 V/m	A
80~1000	Horizontal & Vertical	Left	3 V/m	A
80~1000	Horizontal & Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A



Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Mode 2

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Mode 5

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Mode 6

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value



Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test engineer:




9.5. Test Photographs

ADS-12B-12 12012Gz

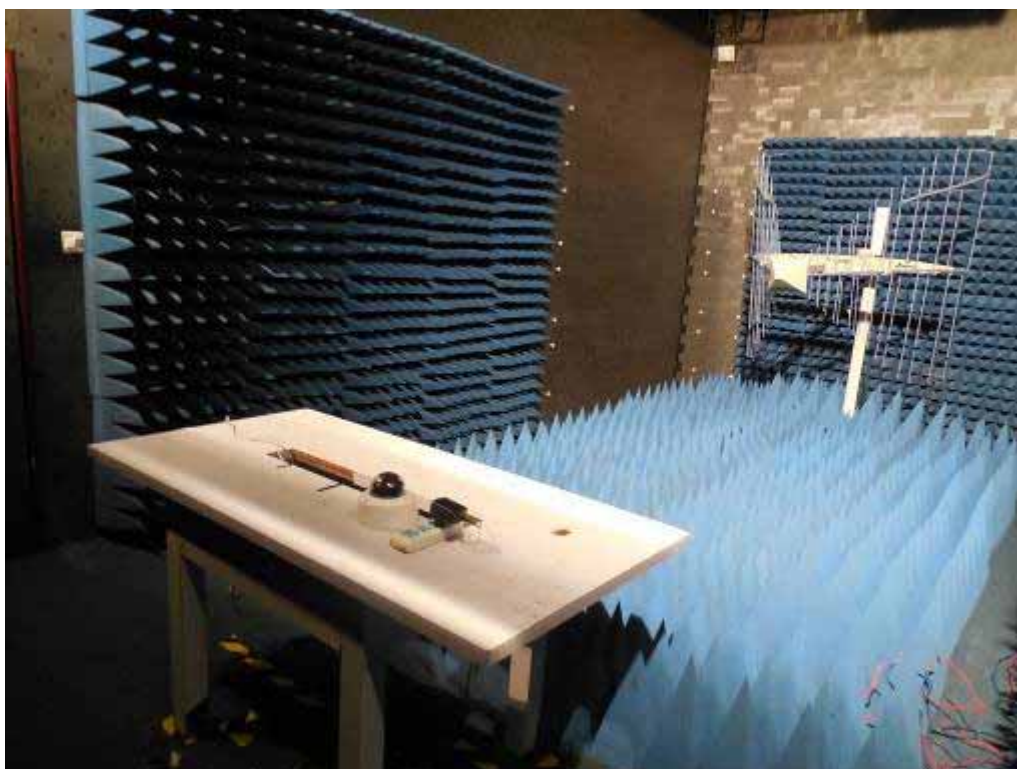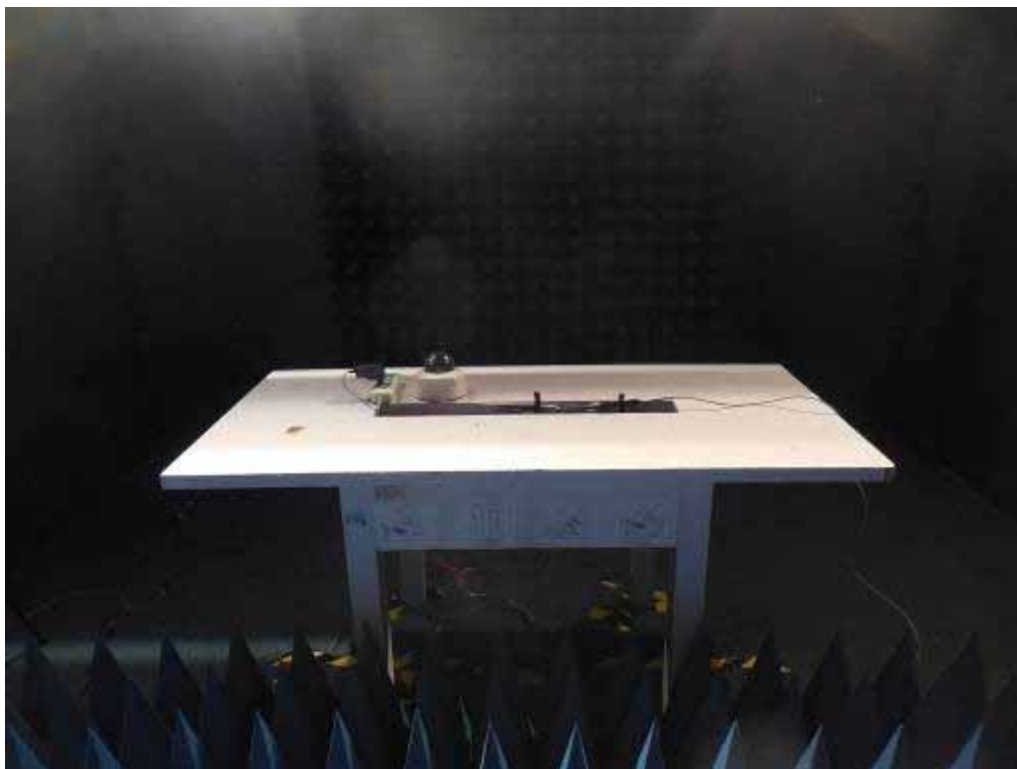



HKA-A24150-230

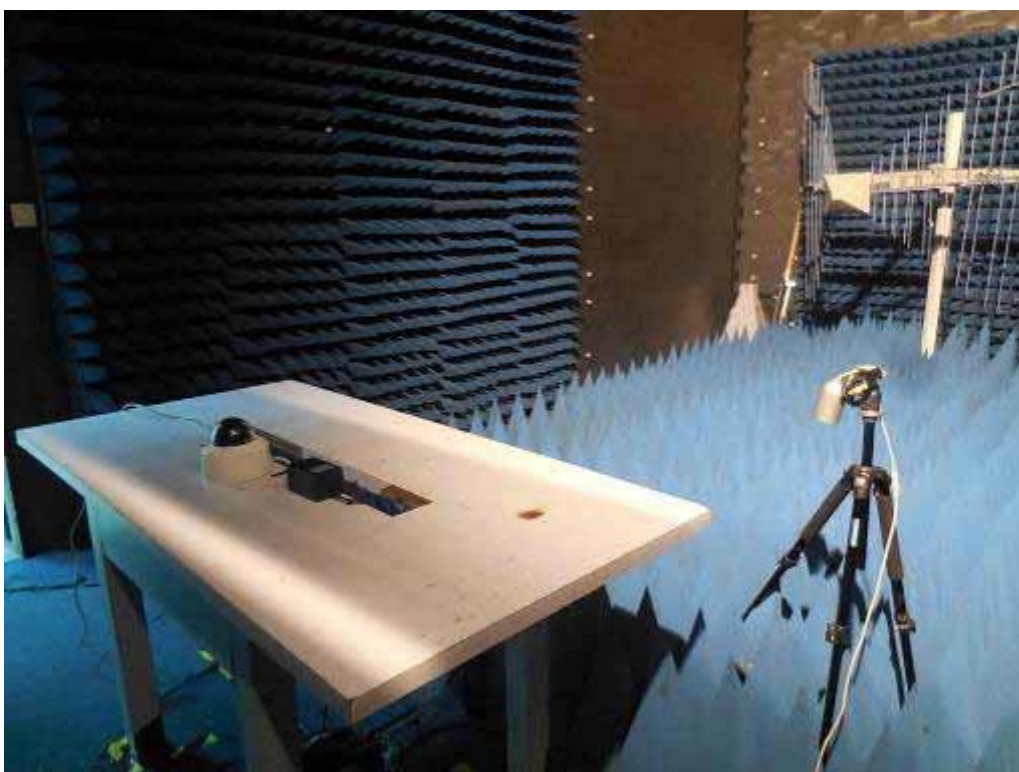



10. Electrical Fast Transient/ Burst Immunity Test

10.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ✧ ambient temperature: 15°C to 35°C;
 - ✧ relative humidity : 45% to 75%;
 - ✧ Atmospheric pressure: 86 Kpa (860 hPa) to 106 Kpa (1060 hPa).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - ✧ The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT is not exceeding 1 m.
 - ✧ The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - ✧ The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - ✧ The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - ✧ Normal performance within the specification limits.
 - ✧ Temporary degradation or loss of function or performance which is self-recoverable.
 - ✧ Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - ✧ Degradation or loss of function which is not recoverable due to damage of equipment (components).



10.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 KV	0.25 KV
2	1.0 KV	0.50 KV
3	2.0 KV	1.00 KV
4	4.0 KV	2.00 KV
X	Specified	Specified

Remark : “ X ” is an open level. The level is subject to negotiation between the user and the manufacturer or is specified by the manufacturer.

10.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2014.03.24	2015.03.23
CDN	EMCPARTNER	CDN2000-06-32	121	2014.03.24	2015.03.23
Coupling clamp	EMCPARTNER	CN-EFT1000	547	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2014.03.31	2015.03.30



10.4. Test Result and Data

Basic Standard : IEC 61000-4-4
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : IP CAMERA
Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
IPC-HDBW5100-Mercury

Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 52 %
Atmospheric Pressure : 100 kPa
Test Date : Jul 30, 2014

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Mode 2

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Mode 5

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Mode 6

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---



Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1</u> kV		<u>2.0</u> kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test engineer: Seben



10.5. Test Photographs

Main(ADS-12B-12 12012Gz)





Main(ADS-12B-12 12012Gz)





Signal(ADS-12B-12 12012Gz)





Signal(HKA-A24150-230)





11. Surge Immunity Test

11.1. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ✧ ambient temperature : 15 °C to 35 °C
- ✧ relative humidity : 10 % to 75 %
- ✧ atmospheric pressure : 86 kPa to 106 kPa (860 hPa to 1060 hPa)

b. Electromagnetic conditions

the electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- ✧ generator and other equipment utilized;
- ✧ test level (voltage/current);
- ✧ generator source impedance;
- ✧ internal or external generator trigger;
- ✧ number of tests : at least five positive and five negative at the selected points;
- ✧ repetition rate : maximum 1/min.
- ✧ inputs and outputs to be tested;
- ✧ representative operating conditions of the EUT;
- ✧ sequence of application of the surge to the circuit;
- ✧ phase angle in the case of AC. power supply;
- ✧ actual installation conditions, for example :

AC : neutral earthed,

DC : (+) or (-) earthed to simulated the actual earthing conditions.

- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.



11.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$, KV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified
NOTE: "X" is an open class. This level can be specified in the product specification.	

11.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2014.03.24	2015.03.23
CDN	EMCPARTNER	CDN-UTP8	021	2014.03.24	2015.03.23
CDN	EMCPARTNER	CDN2000-06-32	121	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2014.03.31	2015.03.30

**11.4. Test Result and Data**

Basic Standard : IEC 61000-4-5
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : IP CAMERA
 Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
 IPC-HDBW5100-Mercury

 Final Test Result : PASS
 Temperature : 18°C
 Relative Humidity : 52 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jul 01, 2014

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A



Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Mode 2

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A



Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage		<u>0.5 kV</u>		<u>1 kV</u>
Mode / Polarity / Result		+	—	+
RJ45		A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage		<u>0.5 kV</u>		<u>1 kV</u>
Mode / Polarity / Result		+	—	+
RJ45		A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage		<u>0.5 kV</u>		<u>1 kV</u>
Mode / Polarity / Result		+	—	+
RJ45		A	A	A



Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A



Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Mode 5

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A



Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Mode 6

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50μs(8/20μs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700μs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Test engineer: _____



11.5. Test Photographs

ADS-12B-12 12012Gz





HKA-A24150-230





12. Conduction Disturbances induced by Radio-Frequency Fields

12.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 100 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.



12.2. Test Severity Levels

Level	Voltage Level (emf.)
1	1 V
2	3 V
3	10 V
x	Specified
NOTE - x is an open class. This level can be specified in the product specification.	

12.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Conducted immunity test system	FRANKONIA	CIT-10/75	102D1294	2014.03.24	2015.03.23
EM Injection clamp	FCC	F-203I-23MM	536	2014.03.24	2015.03.23
CDN	FRANKONIA	CDN-T2	A3010029	2014.03.24	2015.03.23
CDN	FRANKONIA	CDN-T4	A3015017	2014.03.24	2015.03.23
CDN	FRANKONIA	CDN-T8	A3022010	2014.03.24	2015.03.23
CDN	FRANKONIA	CDN-M2	A3002037	2014.03.24	2015.03.23
CDN	FRANKONIA	CDN-M2+M3	A3011102	2014.03.24	2015.03.23
CDN	FCC	CDN-M5/32	A3013024	2014.03.24	2015.03.23
6 dB Attenuator	FRANKONIA	N/A	N/A	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2014.03.31	2015.03.30

**12.4. Test Result and Data**

Basic Standard : IEC 61000-4-6
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : IP CAMERA
Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
IPC-HDBW5100-Mercury
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 52%
Atmospheric Pressure : 100 kPa
Test Date : Jul 02, 2014

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Mode 2

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Mode 5

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Mode 6

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A



Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test engineer:_____



12.5. Test Photographs

ADS-12B-12 12012Gz






HKA-A24150-230





13. Power Frequency Magnetic Field Immunity Tests

13.1. Test Setup

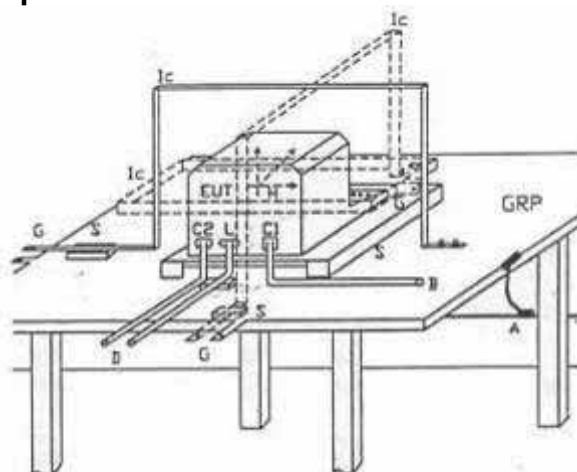

GPR	:	Ground plane	C1	:	Power supply circuit
A	:	Safety earth	C2	:	Signal circuit
S	:	Insulating support	L	:	Communication line
EUT	:	Equipment under test	B	:	To power supply source
Lc	:	Induction coil	D	:	To signal source, simulator
E	:	Earth terminal	G	:	To the test generator

13.1. Test Severity Levels

Level	Magnetic field strength A/m
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special
NOTE 1 "X" is an open level. This level can be given in the product specification.	

13.1. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2014.03.24	2015.03.23
H-Filed-Loop	EMCPARTNER	MF1000-1	144	2014.03.09	2015.03.08
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2014.03.31	2015.03.30



13.1. Test Result and Data

Basic Standard : IEC 61000-4-8
Product Standard : EN 55024 : 2010
Equipment : IP CAMERA
Model No. : IPC-HDBW5302-Mercury,
IPC-HDBW5202-Mercury, IPC-HDBW5100-Mercury

Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 52%
Atmospheric Pressure : 100 kPa
Test Date : Jul 03,2014

Test Mode 1

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test Mode 2

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A



Test Mode 3

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test Mode 4

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test Mode 5

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test Mode 6

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test engineer: _____



13.2. Test Photographs

ADS-12B-12 12012Gz





HKA-A24150-230





14. Voltage Dips and Voltage Interruptions Immunity Test Setup

14.1. Test Conditions

1. Source voltage and frequency : 230V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input AC Power Ports				
Voltage Dips		% Reduction period	20 250	
		% Reduction period	30 25	
		% Reduction period	60 10	
Voltage Interruptions		% Reduction period	100 250	

14.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2014.03.24	2015.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2014.03.31	2015.03.30

**14.3. Test Result and Data**

Basic Standard : IEC 61000-4-11
Product Standard : EN 50130-4: 2011
Product Standard : EN 55024 : 2010
Equipment : IP CAMERA
Model No. : IPC-HDBW5302-Mercury, IPC-HDBW5202-Mercury,
IPC-HDBW5100-Mercury
Final Test Result : PASS
Temperature : 18°C
Relative Humidity : 52%
Atmospheric Pressure : 100 kPa
Test Date : Jul 04, 2014

Test Mode 1

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Mode 2

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Mode 3

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Mode 4

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Mode 5

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Mode 6

For EN 55024: 2010

Voltage(UT): AC 230V50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.



Test Voltage: AC 195.5V/50Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test Voltage: AC 253 V 50 Hz Interval(s) : 10s Times : 3										
Test mod	Test level UT %	Durations (period / ms)	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	A	A	A	A	A	A	A	A
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

100% and 20% is permitted to UPS to meet the requirements of Result A.

Test engineer: Seben



14.4. Test Photographs

ADS-12B-12 12012GZ





HKA-A24150-230





15. EUT Photographs

1) EUT Photo(IPC-HDBW5302-Mercury)



2) EUT Photo(IPC-HDBW5302-Mercury)





3) EUT Photo (IPC-HDBW5302-Mercury)



4) EUT Photo (IPC-HDBW5302-Mercury)





5) EUT Photo (IPC-HDBW5302-Mercury)



6) EUT Photo (IPC-HDBW5202-Mercury)





7) EUT Photo (IPC-HDBW5202-Mercury)



8) EUT Photo (IPC-HDBW5202-Mercury)





9) EUT Photo (IPC-HDBW5202-Mercury)



10) EUT Photo (IPC-HDBW5202-Mercury)





11) EUT Photo (IPC-HDBW5100-Mercury)



12) EUT Photo (IPC-HDBW5100-Mercury)





13) EUT Photo (IPC-HDBW5100-Mercury)




14) EUT Photo (IPC-HDBW5100-Mercury)





15) EUT Photo(Adapter/ADS-12B-12 12012Gz)

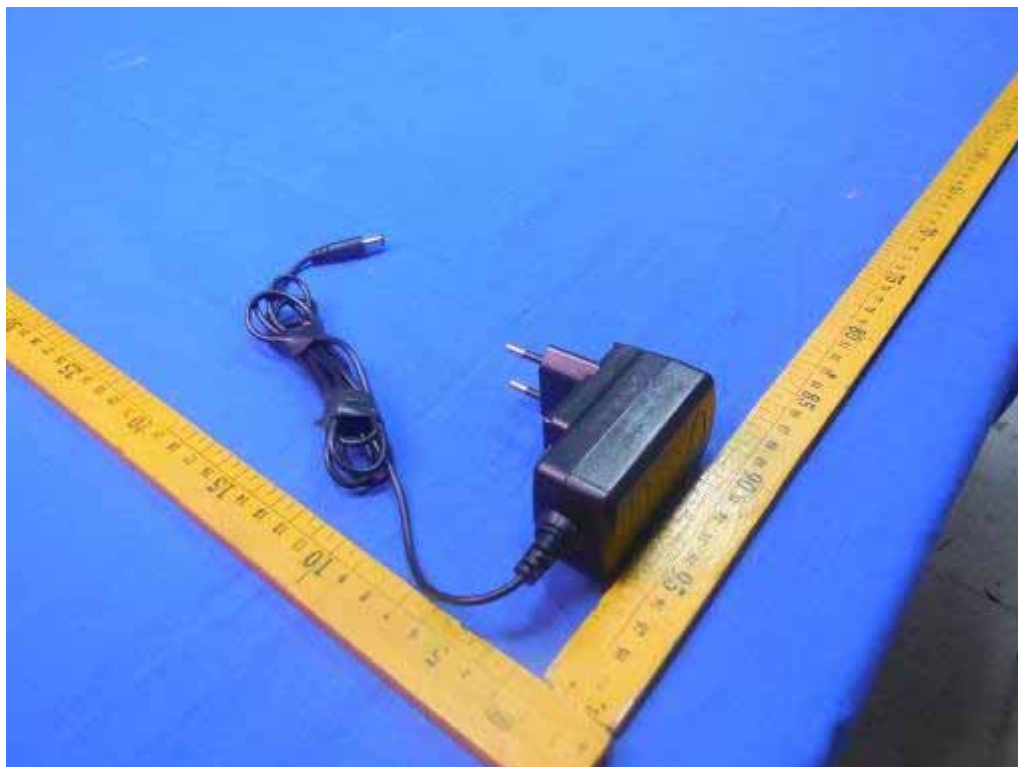

16) EUT Photo(Adapter/ ADS-12B-12 12012Gz)





17) EUT Photo(Adapter/ ADS-12B-12 12012Gz)



18) EUT Photo(Adapter/ ADS-12B-12 12012Gz)





19) EUT Photo(Adapter/HKA-A24150-230)



20) EUT Photo(Adapter/HKA-A24150-230)





21) EUT Photo(Adapter/HKA-A24150-230)

