



EMC TEST REPORT

For

CONSUMER CAMERA

Model No:

DH-IPC-HFW1435SN-W-0280B-S2; DH-IPC-HFW1435SN-W-0360B-S2;
DH-IPC-HFW1435SP-W-0280B-S2; DH-IPC-HFW1435SP-W-0360B-S2;
DH-IPC-HFW1435SN-W-S2; DH-IPC-HFW1435SP-W-S2; IPC-G42MP-0280B;
IPC-G42MP-0360B; IPC-G42MN-0280B; IPC-G42MN-0360B; IPC-G42MP;
IPC-G42MN; IPC-HFW1435S-W-0280B-S2; IPC-HFW1435S-W-0360B-S2;
DH-IPC-HFW1435S-W-S2; IPC-HFW1435S-W-S2; IPC-G42M-0280B;
IPC-G42M-0360B; IPC-G42M;

REPORT NUMBER: 4789507044-5

ISSUE DATE: July 1, 2020

Prepared for

Zhejiang Dahua Vision Technology Co Ltd

Prepared by

UL-CCIC Company Limited

No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China

T: + 86-512-6808 6400

F: + 86-512-6808 4099

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History			
<u>Version</u>	Issue Date	Revisions	Revised By
Rev1.0	7/1/2020	Initial Issue	



Test Summary

According to the specifications of the manufacture, the EUT must complies with the following standards' requirements:

EN 55032:2015

EN IEC 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

EN 50130-4:2011/A1:2014

EN 55024:2010/A1:2015

EN 55035:2017

Electromagnetic Interference (EMI)

Test Items	Test Method	Reference Clause	Result
Radiated Emission	EN 55032:2015	CISPR 16-2-1:2014	PASS
Conducted Emission	EN 55032:2015	CISPR 16-2-3: 2010+A1:2010+A2:2 014	PASS
Harmonic Emission on AC, 50Hz to 2kHz	EN 61000-3-2:2014	EN 61000-3-2:2019	N/A
Flicker Emission on AC	EN 61000-3-3:2013	EN 61000-3- 3:2013+A1:2019	PASS

Electromagnetic Susceptibility(EMS)

ESD	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4-2:2009	PASS
Radiated Immunity	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4- 3:2006/A2:2010	PASS
Electrical Fast Transients (EFT)	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4-4:2012	PASS
Surge Immunity	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4-5:2014	PASS
Conducted Immunity	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4-6:2014	PASS
Power Frequency Magnetic Field	EN 55024:2010/A1:2015 EN 55035:2017	EN 61000-4-8:2010	N/A
Voltage Dips and Interruptions	EN 55024:2010/A1:2015 EN 55035:2017 EN 50130-4:2011/A1:2014	EN 61000-4-11:2004	PASS



Remark :

- 1) N/A is an abbreviation for Not Applicable.
- 2) Pre-test with all operating ranges of voltage and frequency then choose the worst case as final result.
- 3) The measurement result for the sample received is Pass according to EN 55032:2015;EN 61000-3-2:2019; EN 61000-3-3:2013+A1:2019; EN 50130-4:2011/A1:2014;EN55024:2010/A1:2015,EN 55035:2017 when Accuracy Method decision rule is applied.



CONTENTS

1	ATTESTATION OF TEST RESULTS	6
2	TEST METHODOLOGY	8
3	FACILITIES AND ACCREDITATION	8
4	CALIBRATION AND UNCERTAINTY	9
4.1	MEASURING INSTRUMENT CALIBRATION	9
4.2	MEASUREMENT UNCERTAINTY	9
5	EQUIPMENT UNDER TEST	10
5.1	DESCRIPTION FOR THE EUT	10
5.2	TEST MODE	10
5.3	DESCRIPTION OF TEST SETUP	10
5.4	MEASURING INSTRUMENT AND SOFTWARE USED	11
6	ELECTROMAGNETIC COMPATIBILITY (EMC)	13
6.1	ELECTROMAGNETIC INTERFERENCE (EMI)	13
6.1.1	CONDUCTED EMISSION	13
6.1.2	RADIATED EMISSION	119
6.1.3	FLICKER TEST	24
6.2	ELECTROMAGNETIC SUSCEPTIBILITY (IMMUNITY)	26
6.2.1	ELECTROSTATIC DISCHARGE (ESD)	27
6.2.2	RADIATED IMMUNITY	30
6.2.3	ELECTRICAL FAST TRANSIENTS (EFT)	34
6.2.4	SURGE IMMUNITY	36
6.2.5	CONDUCTED IMMUNITY	38
6.2.6	VOLTAGE DIPS AND INTERRUPTIONS	40
7	PHOTOGRAPHS OF EMC TEST CONFIGURATION	42
7.1	CONDUCTED EMISSION TEST SETUP	42
7.2	RADIATED EMISSION TEST SETUP	43
7.3	HARMONIC CURRENT & VOLTAGE FLUCTUATION AND FLICK MEASUREMENT	44
7.4	ESD	44
7.5	RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY	45
7.6	ELECTRICAL FAST TRANSIENT/BURST	46
7.7	SURGE IMMUNITY	错误!未定义书签。
7.8	VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY	错误!未定义书签。
7.9	CONDUCTED IMMUNITY	47
8	Photographs of the EUT	49



1 ATTESTATION OF TEST RESULTS

Applicant Information	
Company Name:	ZHEJIANG DAHUA VISION TECHNOLOGY CO.,LTD.
Address:	No.1199 Bin'an Road, Binjiang District, Hangzhou, P.R.China
EUT Description	
Product Name	CONSUMER CAMERA
Model Name	DH-IPC-HFW1435SN-W-0280B-S2;DH-IPC-HFW1435SN-W-0360B-S2; DH-IPC-HFW1435SP-W-0280B-S2;DH-IPC-HFW1435SP-W-0360B-S2; DH-IPC-HFW1435SN-W-S2;DH-IPC-HFW1435SP-W-S2;IPC-G42MP-0280B; IPC-G42MP-0360B;IPC-G42MN-0280B;IPC-G42MN-0360B;IPC-G42MP; IPC-G42MN;IPC-HFW1435S-W-0280B-S2;IPC-HFW1435S-W-0360B-S2; DH-IPC-HFW1435S-W-S2;IPC-HFW1435S-W-S2;IPC-G42M-0280B; IPC-G42M-0360B;IPC-G42M;
Model Difference	Series models are the same except for the name and software
Date Tested	June14, 2020- June 23, 2020



APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
EN 55032:2015	PASS
EN 61000-3-3:2013	PASS
EN 55035:2017	PASS
EN 55024:2010/A1:2015	PASS
EN 50130-4:2011/A1:2014	PASS

Prepared By:

Sky Chen
Engineer Project Associate

Reviewed By:

Linda Ni
Senior Project Engineer

Authorized By:

Chris Zhong
Laboratory Leader



2 TEST METHODOLOGY

All tests were performed in accordance with the procedures documented EN 55032:2015, EN 61000-3-3:2013, EN 55035:2017, EN55024:2010/A1:2015, EN 50130-4:2011/A1:2014.

3 FACILITIES AND ACCREDITATION

Test Location	UL-CCIC Company Limited
Address	No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China
Accreditation Certificate	<p>CNAS (Certificate No.: L2065) The Laboratory has been assessed and proved to be in compliance with CNAS, The Certificate Registration Number is L2065.</p> <p>A2LA (Certificate No.: 4829.01) UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1247) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>IC (IC Designation No.: 25056) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p>



4 CALIBRATION AND UNCERTAINTY

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus

Test Item	Frequency Range	Measurement Uncertainty	U _{cispr}
Conducted Emission at mains port using AMN	9kHz-150kHz	3.5 dB	3.8 dB
Conducted Emission at mains port using AMN	150kHz-30MHz	3.0 dB	3.4 dB
Conducted Emission at mains port using VP	9kHz-30MHz	2.3 dB	2.9 dB
Conducted Emission at telecommunication port using AAN	150kHz-30MHz	3.4 dB	5.0 dB
Radiated Emission	30MHz-1000MHz	3.3 dB	6.3 dB
Radiated Emission	1GHz-18GHz	3.8 dB	5.2 dB (1GHz-6GHz)
			5.5 dB (6GHz-18GHz)
Remark: AMN – Artificial Mains Network VP – Voltage Probe ANN – Asymmetric Artificial Network			

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5 EQUIPMENT UNDER TEST

5.1 DESCRIPTION FOR THE EUT

Product Name:	CONSUMER CAMERA
Model No.:	DH-IPC-HFW1435SP-W-S2
Power Supply:	AC 230V/50Hz AC 110V/60Hz
Test voltage:	AC 230V/50Hz AC 110V/60Hz
Cable Type:	N/A
Software:	N/A
Rated Power:	100-240V~50/60Hz,Max0.3A

5.2 TEST MODE

Mode 1	Normal operating for DH-IPC-HFW1435SP-W-S2
--------	--

5.3 DESCRIPTION OF TEST SETUP

The EUT has been tested independently.

Description	Manufacturer	Model No.
Notebook	LENOVO	T480s



5.4 MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI Test Receiver	R&S	ESR3	126700	2019-12-07	2020-12-06
2	LISN	R&S	ENV216	126701	2019-12-07	2020-12-06
3	ISN	R&S	ENY81	126711	2019-10-14	2020-10-13

Radiated Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	R&S	ESR26	126703	2019-12-07	2020-12-06
2	Hybrid Antenna	SunAR RF Motion	JB1	177821	2019-01-28	2022-01-27
4	Horn Antenna	R&S	HF907	126705	2019-01-27	2022-01-26
5	Amplifier	R&S	SCU-18D	134667	2019-12-07	2020-12-06

Harmonic & Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Single phase Harmonic & Flicker test system	TESEQ	Proflin2105-400-N	126719	2019-12-07	2020-12-06

Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Electrostatic Discharge Simulator	TESEQ	NSG 437	137873	2019-09-04	2020-09-03

Radiated Immunity

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	Signal Generator	KEYSIGHT	N5171B	155387	2020-05-10	2021-05-09
2	Power Amplifier	BONN	BLWA0810-200/100	137597	2020-05-10	2021-05-09
	Power Amplifier	AMETEK	AS102-001	155390	2020-05-10	2021-05-09
	Power Amplifier	AMETEK	AS1860-100	155391	2020-05-10	2021-05-09
3	Power Meter	DARE	RPR2006C	138150	2020-05-10	2021-05-09
4	Isotropic Electric Field Probe	DARE	RSS1006A	137874	2020-05-23	2021-05-22
5	EMS Antenna	SCHWARZBEC K	STLP9128D	137599	2020-06-15	2023-06-14

**Electrical Fast Transients**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test generator	TESEQ	NSG3060	137601	2020-05-10	2021-05-09
2	EMS test coupling network	TESEQ	CDN3061	137605	2020-05-10	2021-05-09
3	EUT supply power	TESEQ	VAR3005	137606	2020-05-10	2021-05-09
4	EFT coupling clamp	TESEQ	CDN 3425	137607	2020-05-10	2021-05-09

Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test generator	TESEQ	NSG3060	137601	2020-05-10	2021-05-09
2	EMS test coupling network	TESEQ	CDN3061	137605	2020-05-10	2021-05-09
3	EUT supply power	TESEQ	VAR3005	137606	2020-05-10	2021-05-09

Conducted Immunity

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	CI test machine	TESEQ	NSG4070	137614	2020-05-10	2021-05-09
2	Coupling and Decoupling Network	TESEQ	CDN M016	137613	2020-05-10	2021-05-09
3	Attenuator	TESEQ	ATN 6050	137615	2020-05-10	2021-05-09
4	CI coupling clamp	TESEQ	KEMZ 801A	137612	2020-05-10	2021-05-09


Voltage Dips and Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMS test generator	TESEQ	NSG3060	137601	2020-05-10	2021-05-09
2	EMS test coupling network	TESEQ	CDN3061	137605	2020-05-10	2021-05-09
3	EUT supply power	TESEQ	VAR3005	137606	2020-05-10	2021-05-09

6 ELECTROMAGNETIC COMPATIBILITY (EMC)

6.1 ELECTROMAGNETIC INTERFERENCE (EMI)

6.1.1 CONDUCTED EMISSION

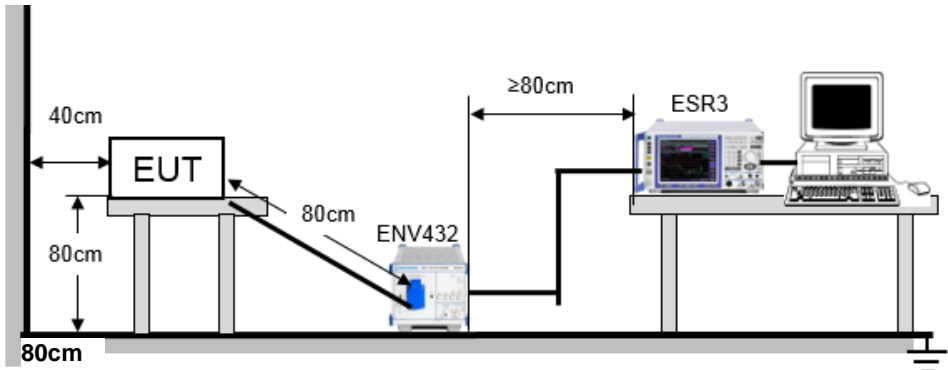Test Method:	EN 55032:2015																									
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)																									
	Quasi-Peak if maximized peak within 6dB of Quasi-Peak limit																									
EUT Operation:																										
Test Status:	Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected. Please see the attached Quasi-peak and Average test results.																									
Limit:	<div>Limits for conducted disturbance at the mains ports of class B</div> <table><tr><th rowspan="2">Frequency Range (MHz)</th><th colspan="2">Class B Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15 to 0.50</td><td>66 to 56</td><td>56 to 46</td></tr><tr><td>0.50 to 5</td><td>56</td><td>46</td></tr><tr><td>5 to 30</td><td>60</td><td>50</td></tr></table> <div>NOTE 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</div> <div>NOTE 2: The lower limit is applicable at the transition frequency.</div> <div>Limits for conducted disturbance at the telecommunication ports of class B (ISN)</div> <table><tr><th rowspan="2">Frequency Range (MHz)</th><th colspan="2">Class B Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15 to 0.50</td><td>84 to 74</td><td>74 to 64</td></tr><tr><td>0.50 to 30</td><td>74</td><td>64</td></tr></table>	Frequency Range (MHz)	Class B Limit (dBuV)		Quasi-peak	Average	0.15 to 0.50	66 to 56	56 to 46	0.50 to 5	56	46	5 to 30	60	50	Frequency Range (MHz)	Class B Limit (dBuV)		Quasi-peak	Average	0.15 to 0.50	84 to 74	74 to 64	0.50 to 30	74	64
Frequency Range (MHz)	Class B Limit (dBuV)																									
	Quasi-peak	Average																								
0.15 to 0.50	66 to 56	56 to 46																								
0.50 to 5	56	46																								
5 to 30	60	50																								
Frequency Range (MHz)	Class B Limit (dBuV)																									
	Quasi-peak	Average																								
0.15 to 0.50	84 to 74	74 to 64																								
0.50 to 30	74	64																								
Test Setup:																										
Test Procedure:	<div>1) The mains terminal disturbance voltage test was conducted in a shielded room.</div> <div>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same</div>																									




	<p>way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p>
--	---



Measurement Data


Power :	AC 230V	Port:	N, L1
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temperature :	25°C	Humidity :	60%
Pressure(mbar) :	1015	Date :	2020/6/15

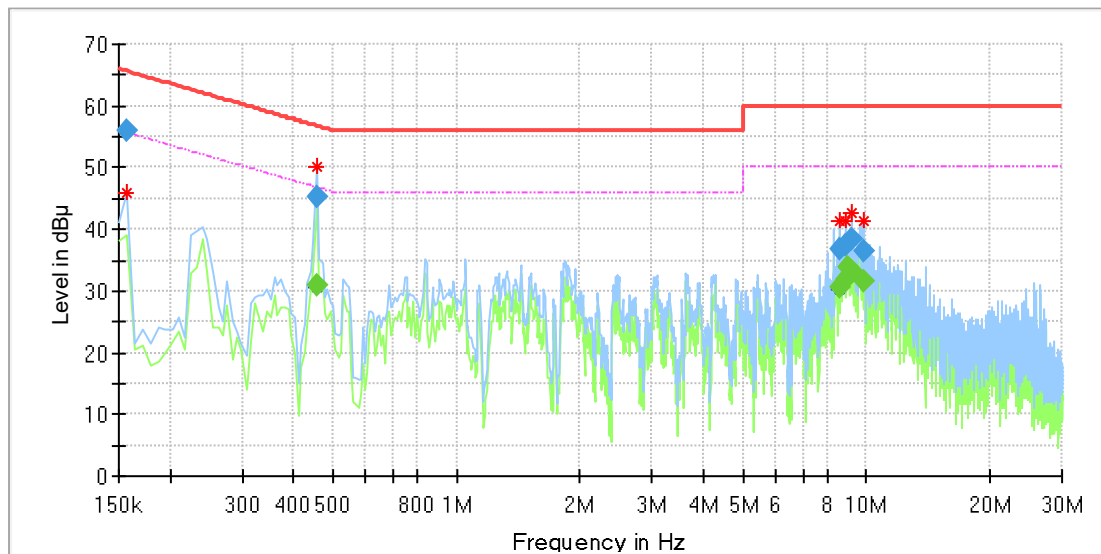

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.157463	56.05	---	65.60	9.55	1000.0	9.000	L1	OFF	9.5
0.455963	---	30.87	46.77	15.90	1000.0	9.000	L1	OFF	9.7
0.455963	45.18	---	56.77	11.59	1000.0	9.000	N	OFF	9.6
8.605013	---	30.56	50.00	19.44	1000.0	9.000	N	OFF	9.8
8.605013	36.63	---	60.00	23.37	1000.0	9.000	N	OFF	9.8
8.896050	---	31.99	50.00	18.01	1000.0	9.000	N	OFF	9.8
8.896050	37.56	---	60.00	22.44	1000.0	9.000	N	OFF	9.8
9.045300	---	33.97	50.00	16.03	1000.0	9.000	N	OFF	9.8
9.194550	38.45	---	60.00	21.55	1000.0	9.000	N	OFF	9.8
9.202013	---	33.09	50.00	16.91	1000.0	9.000	N	OFF	9.8
9.799013	---	31.62	50.00	18.38	1000.0	9.000	N	OFF	9.8
9.799013	36.44	---	60.00	23.56	1000.0	9.000	N	OFF	9.8

**Measurement Data**


Power :	AC 110V	Port:	N, L1
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temperature :	25°C	Humidity :	60%
Pressure(mbar) :	1015	Date :	2020/6/15

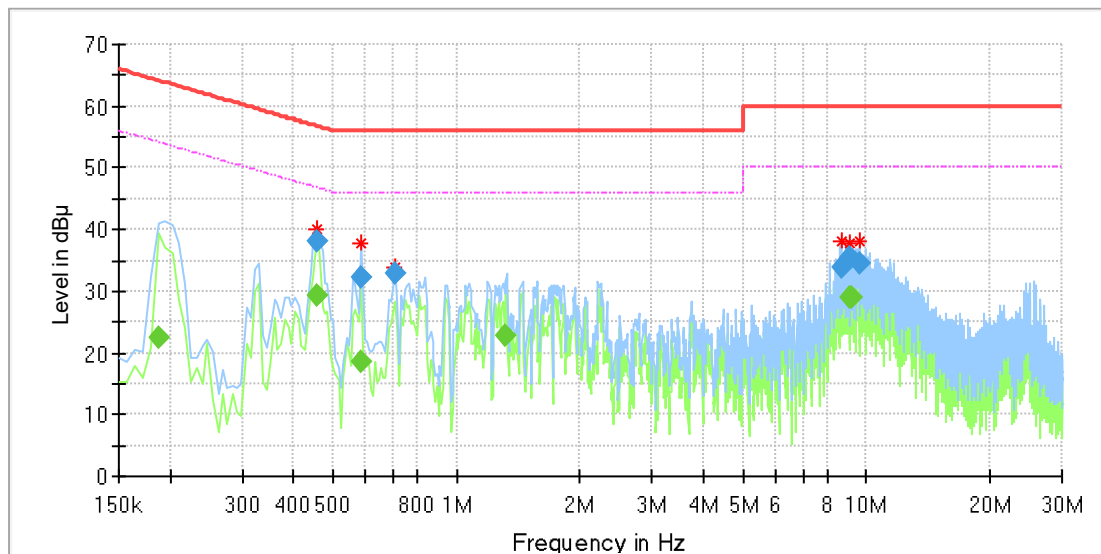

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.187313	---	22.54	54.16	31.62	1000.0	9.000	L1	OFF	9.6
0.455963	---	29.28	46.77	17.48	1000.0	9.000	L1	OFF	9.7
0.455963	37.99	---	56.77	18.78	1000.0	9.000	N	OFF	9.6
0.582825	---	18.57	46.00	27.43	1000.0	9.000	L1	OFF	9.7
0.582825	32.23	---	56.00	23.77	1000.0	9.000	N	OFF	9.6
0.709688	32.83	---	56.00	23.17	1000.0	9.000	N	OFF	9.5
1.321613	---	22.81	46.00	23.19	1000.0	9.000	L1	OFF	9.5
8.657250	33.86	---	60.00	26.14	1000.0	9.000	N	OFF	9.8
9.142313	35.47	---	60.00	24.53	1000.0	9.000	N	OFF	9.8
9.142313	---	28.93	50.00	21.07	1000.0	9.000	N	OFF	9.8
9.164700	---	28.90	50.00	21.10	1000.0	9.000	N	OFF	9.8
9.657225	34.50	---	60.00	25.50	1000.0	9.000	N	OFF	9.8




Power :	AC 230V	Port:	LAN
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temperature :	25°C	Humidity :	60%
Pressure(mbar) :	1015	Date :	2020/6/15

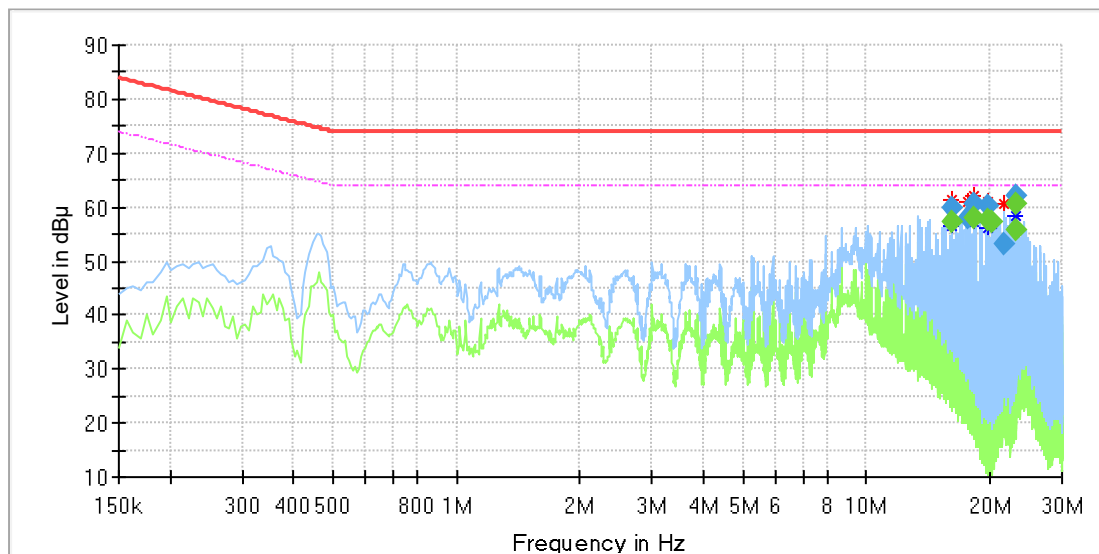

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
16.230065	---	57.11	64.00	6.89	50.0	9.000	Single Line	9.8
16.230065	59.77	---	74.00	14.23	50.0	9.000	Single Line	9.8
17.696609	58.13	---	74.00	15.87	50.0	9.000	Single Line	9.8
18.241696	---	58.00	64.00	6.00	50.0	9.000	Single Line	9.8
18.241696	60.64	---	74.00	13.36	50.0	9.000	Single Line	9.8
19.708239	---	57.75	64.00	6.25	50.0	9.000	Single Line	9.9
19.708239	60.19	---	74.00	13.81	50.0	9.000	Single Line	9.9
20.259815	---	57.26	64.00	6.74	50.0	9.000	Single Line	9.9
21.667957	52.99	---	74.00	21.01	50.0	9.000	Single Line	9.9
23.069609	---	55.67	64.00	8.33	50.0	9.000	Single Line	9.9
23.128011	---	60.75	64.00	3.25	50.0	9.000	Single Line	9.9
23.128011	61.92	---	74.00	12.08	50.0	9.000	Single Line	9.9



Power :	AC 110V	Port:	LAN
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temperature :	25°C	Humidity :	60%
Pressure(mbar) :	1015	Date :	2020/6/15

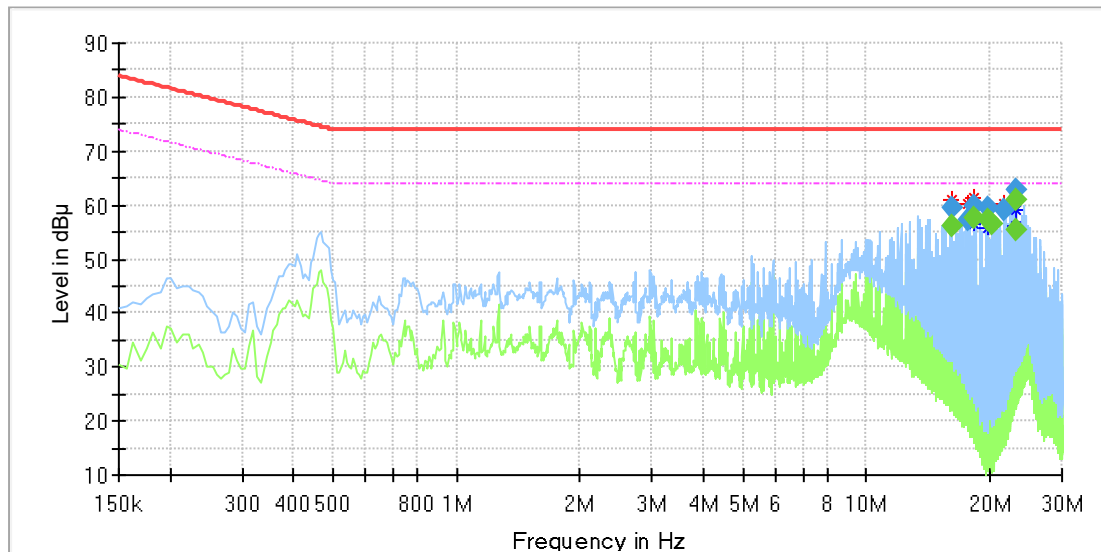

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
16.230065	---	56.31	64.00	7.69	50.0	9.000	Single Line	9.8
16.230065	59.30	---	74.00	14.70	50.0	9.000	Single Line	9.8
17.696609	57.38	---	74.00	16.62	50.0	9.000	Single Line	9.8
18.241696	---	57.54	64.00	6.46	50.0	9.000	Single Line	9.8
18.241696	60.03	---	74.00	13.97	50.0	9.000	Single Line	9.8
19.708239	---	57.24	64.00	6.76	50.0	9.000	Single Line	9.9
19.708239	59.39	---	74.00	14.61	50.0	9.000	Single Line	9.9
20.259815	---	56.55	64.00	7.45	50.0	9.000	Single Line	9.9
21.661467	59.08	---	74.00	14.92	50.0	9.000	Single Line	9.9
23.069609	---	55.54	64.00	8.46	50.0	9.000	Single Line	9.9
23.128011	---	61.09	64.00	2.91	50.0	9.000	Single Line	9.9
23.128011	62.84	---	74.00	11.16	50.0	9.000	Single Line	9.9

6.1.2 RADIATED EMISSION

Test Method:	EN 55032:2015			
EUT Operation:				
Test Status:	Pre-scan was performed with peak detected on all ports, Quasi-peak measurements was performed at the frequencies at which maximum peak emission level were detected..			
Receive Setup:	Frequency range (MHz)	Detector	RBW	VBW
	30-1000	Quasi-peak	120kHz	300kHz
	Above 1000	Peak	1MHz	3MHz
Limit:	Frequency		Limit(@3m)	Remark
	30MHz-230MHz		40dBuV/m	QP value
	230MHz-1GHz		47dBuV/m	QP value
	1GHz-3GHz		50dBuV/m	Average value
			70dBuV/m	PK value
	3GHz-6GHz		54dBuV/m	Average value
			74dBuV/m	PK value
Test Setup:				

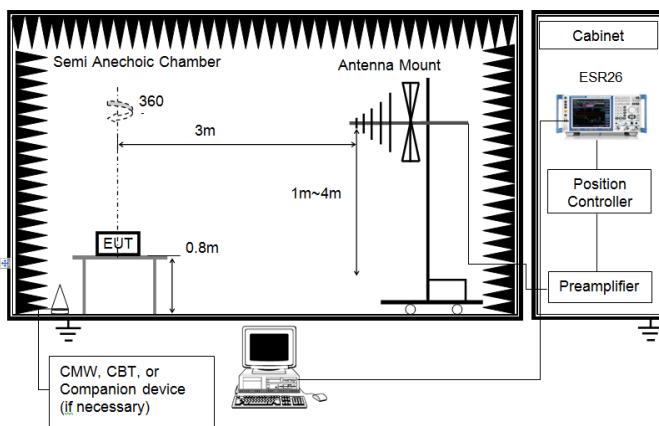


Figure 1. 30MHz to 1GHz

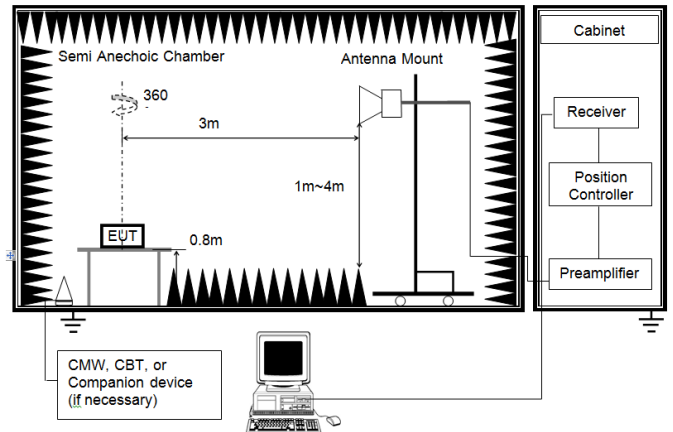



Figure 2. Above 1 GHz

Test Procedure:

- From 30 MHz to 1GHz test procedure as below:
 - The radiated emissions were tested in a semi-anechoic chamber.
 - The EUT is placed on a turntable, which is 0.8m above ground plane.
 - The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
 - EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
 - Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
 - And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
 - Repeat above procedures until the measurements for all frequencies are complete.
- Above 1GHz test procedure as below:
 - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber.

**Measurement Data:****30MHz ~ 1000MHz**

Power :	AC 230V	Ant. Polarization:	Horizontal/Vertical
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temp :	22℃	Humidity :	59%
Pressure(mbar) :	1017	Date :	2020/6/22

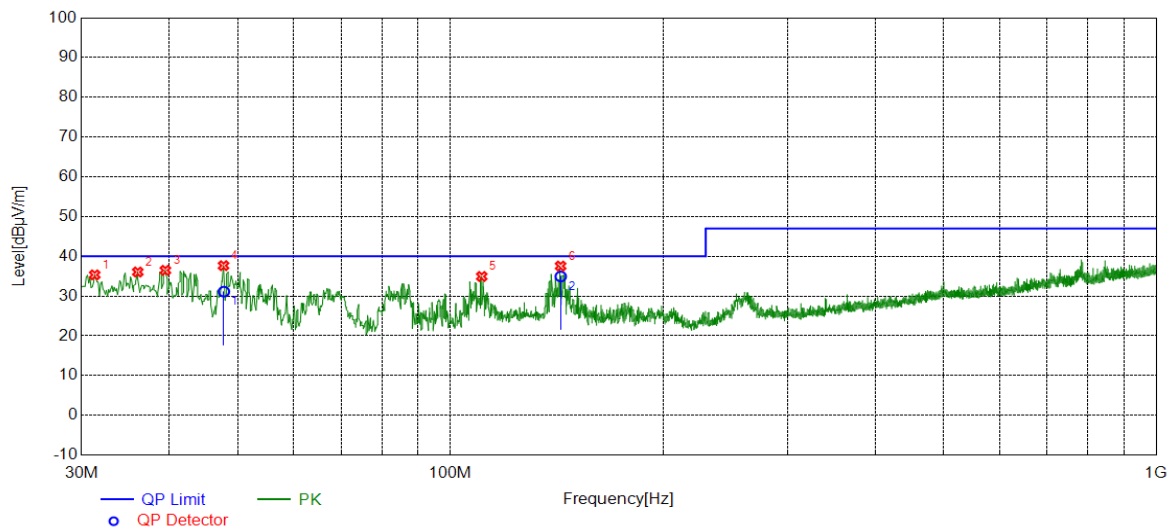**PK Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.3339	8.98	26.35	35.33	40.00	4.67	100	349	Vertical
2	36.0633	12.75	23.30	36.05	40.00	3.95	100	315	Vertical
3	39.4587	15.35	21.12	36.47	40.00	3.53	100	315	Vertical
4	47.7047	21.57	16.08	37.65	40.00	2.35	100	0	Vertical
5	110.7626	15.97	18.96	34.93	40.00	5.07	200	210	Horizontal
6	143.2617	17.53	20.02	37.55	40.00	2.45	200	228	Horizontal


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	47.7536	15.07	16.05	31.12	40.00	8.88	104	261	Vertical
2	143.2854	14.91	20.02	34.93	40.00	5.07	183	2	Horizontal

Note: Measurement Level = Reading Level + Correct Factor



Power :	AC 110V	Ant. Polarization:	Horizontal/Vertical
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temp :	22°C	Humidity :	59%
Pressure(mbar) :	1017	Date :	2020/6/22

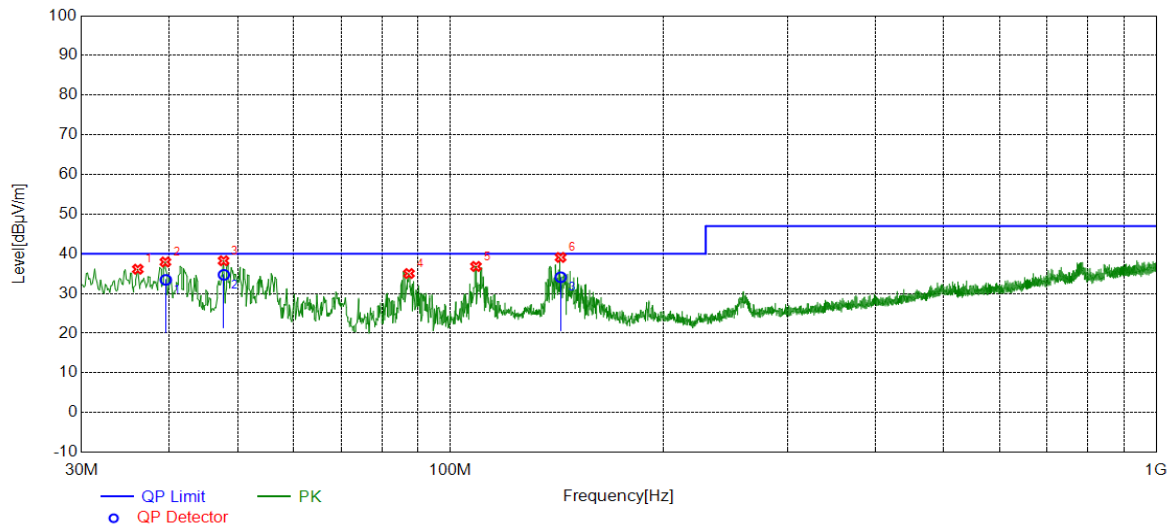


PK Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.0633	12.82	23.30	36.12	40.00	3.88	100	43	Vertical
2	39.4587	16.82	21.12	37.94	40.00	2.06	100	219	Vertical
3	47.7047	22.17	16.08	38.25	40.00	1.75	100	219	Vertical
4	87.3584	20.46	14.58	35.04	40.00	4.96	100	70	Vertical
5	108.701	18.23	18.59	36.82	40.00	3.18	100	193	Vertical
6	143.261	19.08	20.02	39.10	40.00	0.90	200	2	Horizontal
Final Data List									
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.5062	12.35	21.09	33.44	40.00	6.56	108	260	Vertical
2	47.7530	18.66	16.05	34.71	40.00	5.29	113	241	Vertical
3	143.2885	14.08	20.02	34.10	40.00	5.90	159	18	Horizontal

Note: Measurement Level = Reading Level + Correct Factor



Above 1000MHz

Power :	AC 230V	Ant. Polarization:	Horizontal/Vertical
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temp :	22°C	Humidity :	59%
Pressure(mbar) :	1017	Date :	2020/6/22

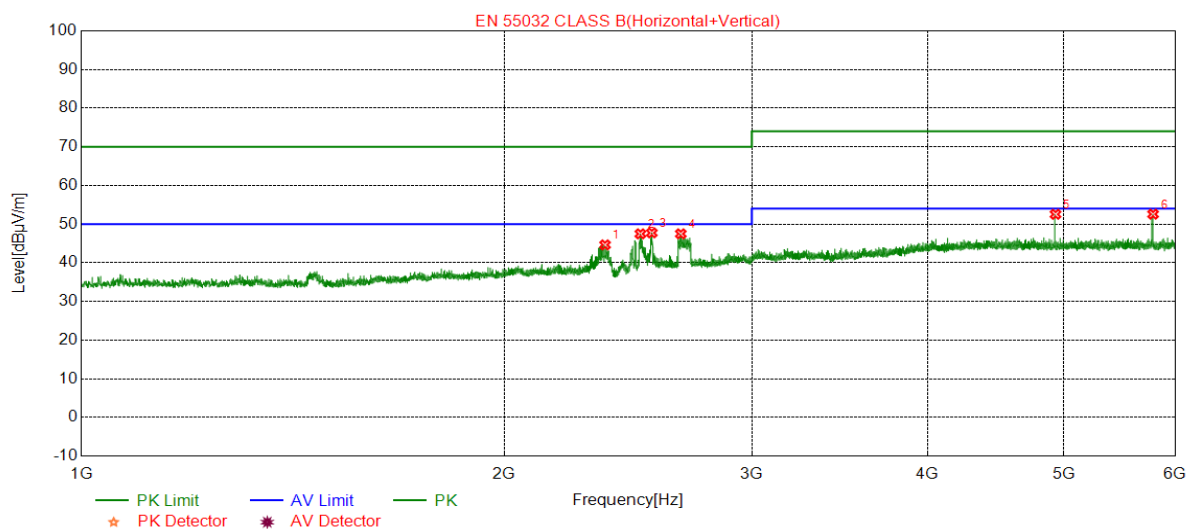


PK Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2358.55	46.29	-1.66	44.63	70.00	25.37	100	180	Vertical
2	2499.24	48.10	-0.62	47.48	70.00	22.52	100	11	Vertical
3	2546.59	48.80	-1.07	47.73	70.00	22.27	100	180	Vertical
4	2670.27	48.24	-0.75	47.49	70.00	22.51	100	156	Horizontal
5	4934.11	47.51	5.03	52.54	74.00	21.46	200	15	Vertical
6	5789.22	47.18	5.39	52.57	74.00	21.43	100	111	Horizontal

Note: Measurement Level = Reading Level + Correct Factor




Power :	AC 110V	Ant. Polarization:	Horizontal/Vertical
Equipment :	CONSUMER CAMERA	Model No :	DH-IPC-HFW1435SP-W-S2
Temp :	22°C	Humidity :	59%
Pressure(mbar) :	1017	Date :	2020/6/22

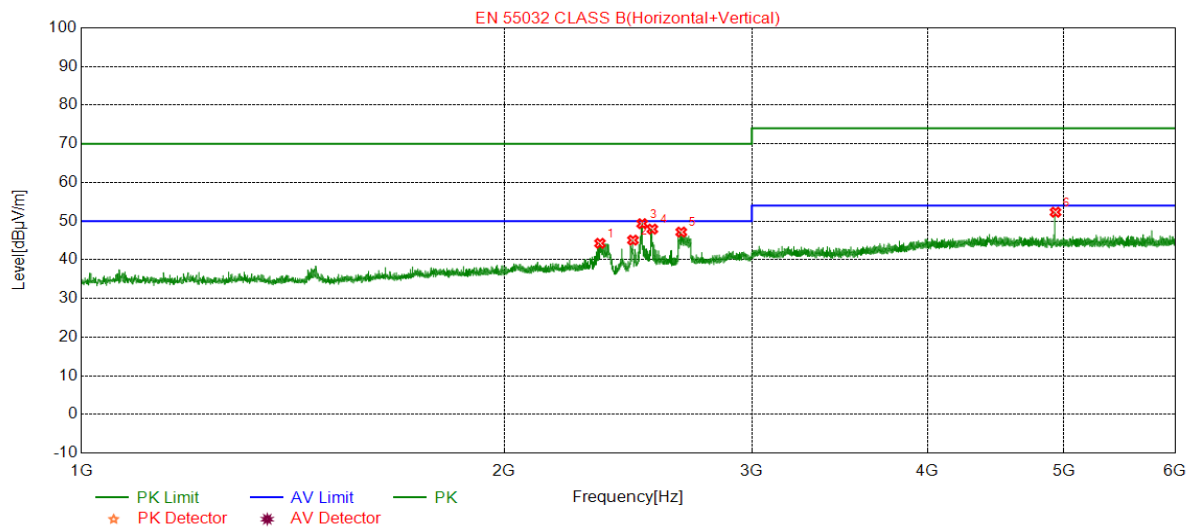

PK Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2339.22	46.07	-1.82	44.25	70.00	25.75	100	192	Vertical
2	2468.91	45.91	-0.84	45.07	70.00	24.93	200	20	Vertical
3	2506.58	49.89	-0.55	49.34	70.00	20.66	200	180	Vertical
4	2548.59	48.98	-1.06	47.92	70.00	22.08	100	192	Vertical
5	2672.27	47.91	-0.74	47.17	70.00	22.83	100	156	Horizontal
6	4934.11	47.27	5.03	52.30	74.00	21.70	200	204	Vertical

Note: Measurement Level = Reading Level + Correct Factor

6.1.3 FLICKER TEST

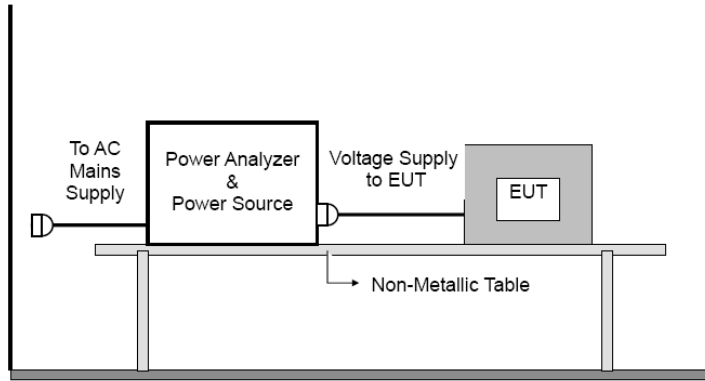Test Method:		EN 61000-3-3:2013+A1:2019			
EUT Operation:					
Ambient:	Temp.: 20	°C	Humid.: 61.5	%	Press.:1012 mbar
Limits:	Test items	Limits(EN61000-3-3)		Descriptions	
	P _{st}	≤1.0, T _p =10min		short-term flicker indicator	
	P _{lt}	≤0.65, T _p =2h		long-term flicker indicator	
	T _{max}	≤3.3%		relative voltage change characteristic	
	d _c	≤3.3%		relative steady-state voltage change	
	d _{max}	≤4%(or 6% ^{Note(1)} , 7% ^{Note(2)})		maximum relative voltage change:	
	d _(t)	≤3.3%, more than 500ms		relative voltage change characteristic	
Test Setup:					
<div></div> <div><div>1.</div><div>The test supply voltage (open-circuit voltage) was the rated voltage of the EUT. The Test voltage: was maintained within ±2 % of the nominal value. The frequency was 50 Hz ±0.5 %.</div></div> <div><div>2.</div><div>The voltage fluctuations and flicker were measured at the supply terminals of the EUT.</div></div> <div><div>3.</div><div>The observation period, T_p, for the assessment of flicker values by flicker measurement, flicker simulation, or analytical method was:<div>— for P_{st}, T_p = 10 min;</div><div>— for P_{lt}, T_p = 2 h.</div>The observation period included that part of the whole operation cycle in which the EUT produces the most unfavorable sequence of voltage changes.</div></div>					



Measurement Data:

Test Result: Pass


Status: Test Completed

Psti and limit line

European Limits



Plt and limit line

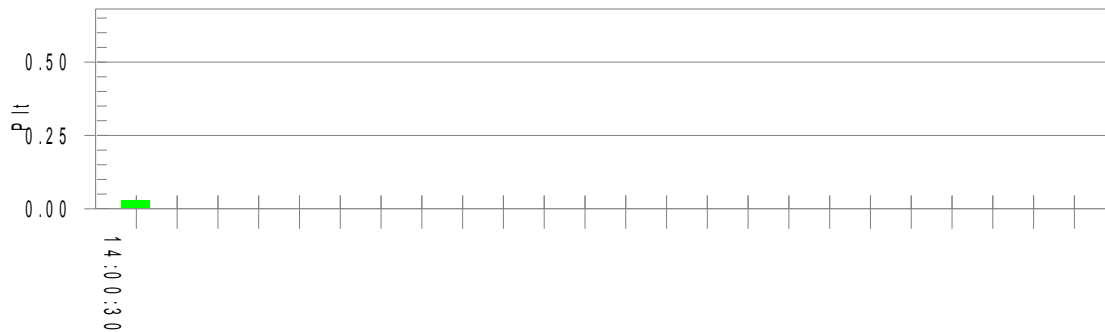

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.19

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.064

Highest Plt (2 hr. period): 0.028

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass




6.2 ELECTROMAGNETIC SUSCEPTIBILITY (IMMUNITY)

Performance Criteria Description

Criterion A:
The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criterion B:
The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criterion C:
Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

6.2.1 ELECTROSTATIC DISCHARGE (ESD)

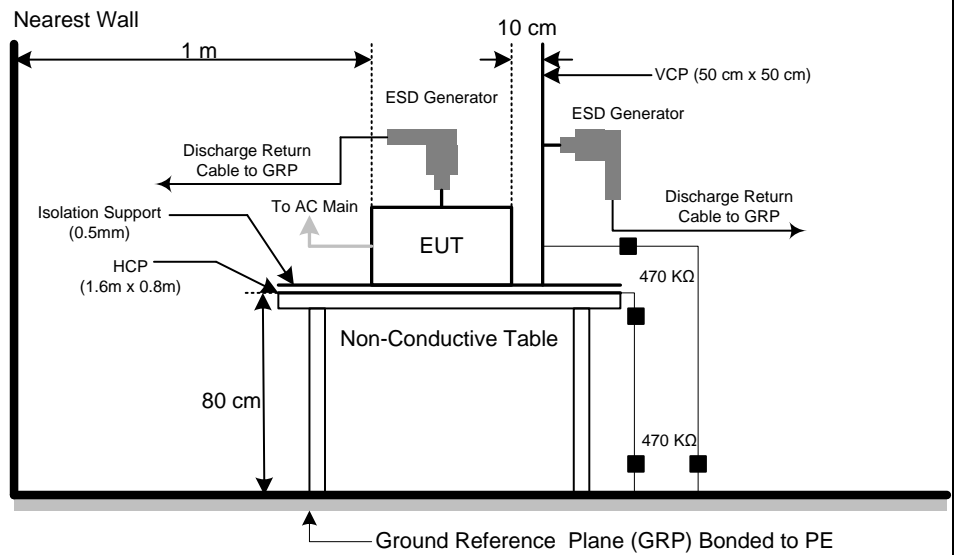Test Method:	EN61000-4-2 :2009
EUT Operation:	
Ambient:	Temp.: 22.5 °C Humid.:59.6 % Press.: 1008 mbar
Criterion Required:	(EN 50130-4:2011/A1:2014); (For EN 55024:2010/A1:2015;EN 55035:2017)
Discharge Impedance:	330 Ω / 150 pF
Polarity:	Positive & Negative
Number of Discharge:	200 times
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Equipment Used:	Refer to section 5 for details.
Test Setup:	 <p style="text-align: center;">Test set-up for tabletop equipment</p>
Test Procedure:	<ol style="list-style-type: none"> 1) Contact discharges to the conductive surfaces and to coupling planes: Air discharge at slots and apertures, and insulating surfaces: On those parts of the EUT where it was not possible to perform contact discharge testing, the equipment was investigated to identify user accessible points where breakdown may occur. This investigation was restricted to those areas normally handled by the user. The application of electrostatic discharges to the contacts of open connectors was not required by this standard. 2) The EUT was put on a 0.8m high wooden table for table-top equipment or 0.1m high for floor standing equipment standing on the ground reference plane (GRP). 3) A horizontal coupling plane(HCP) 1.6m by 0.8m in size was placed on the table, and the EUT with its cables were isolated from the HCP by an insulating support thick than 0.5mm. The VCP 0.5m by 0.5m in size & HCP were constructed from the same material type & think mess as that of the GRP, and connected to the GRP via a 470kΩ resistor at each end. The distance between EUT and any of the other metallic surfaces excepted the



	<p>GRP, HCP and VCP was greater than 1m.</p> <p>4) During the contact discharges, the tip of the discharge electrode was touch the EUT before the discharge switch is operated. During the air discharges, the round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.</p> <p>5) After each discharge, the ESD generator was removed from the EUT, the generator was then retriggered for a new single discharge. For ungrounded product, a discharge cable with two resistances was used after each discharge to remove remnant electrostatic voltage. 10 times of each polarity single discharge were applied to HCP and VCP.</p>
Test Results:	
Observations:	<p>Test Point:</p> <ol style="list-style-type: none">1. All insulated part of indicator lights and seams.2. All accessible metal parts of the enclosure.3. All sides.



Test Results:

Direct Application Test Results

For EN 50130-4:2011/A1:2014				
Direct Application			Test Results	
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge
2,4,8	+/-	1	N/A	A
6	+/-	2	A	N/A
EN 55024:2010/A1:2015& EN 55035:2017				
Direct Application			Test Results	
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge
8	+/-	1	N/A	A
4	+/-	2	A	N/A

Indirect Application Test Results

For EN 50130-4:2011/A1:2014				
Indirect Application			Test Results	
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling	Vertical Coupling
6	+/-	3	A	A
EN 55024:2010/A1:2015& EN 55035:2017				
Indirect Application			Test Results	
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling	Vertical Coupling
4	+/-	3	A	A

Results: Pass

Test phenomenon description for the EUT:

1. The EUT working is normal, before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

N/A: Not Applicable (not required by Standard).

6.2.2 RADIATED IMMUNITY

Test Method:	EN 61000-4-3 :2006/A2 :2010			
EUT Operation:				
Ambient:	Temp.: 22.5	°C	Humid.: 63	%
Criterion Required:	A			
Test Setup:				

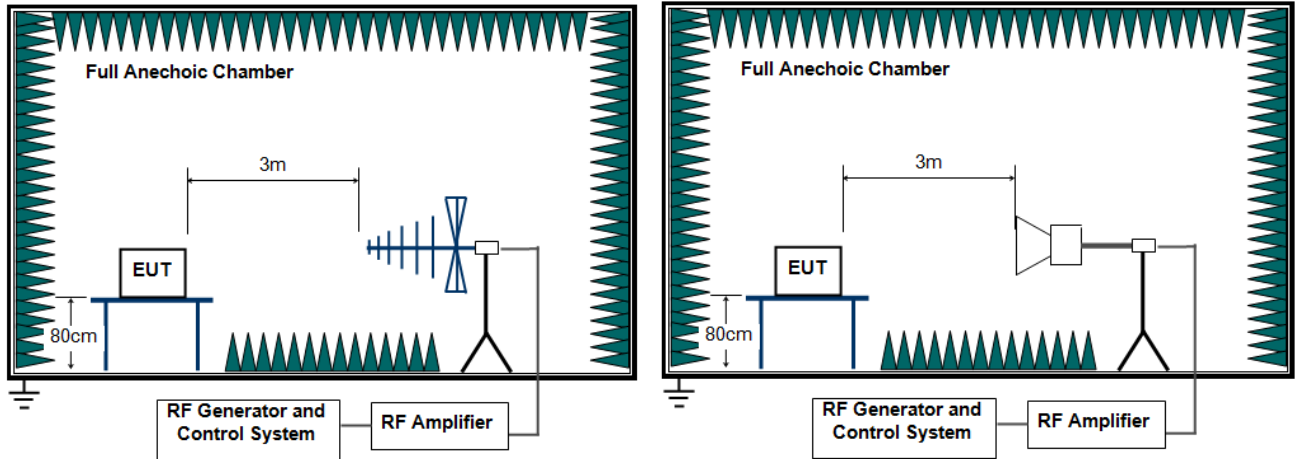


Figure 1. 80MHz to 1GHz ,

1GHz to 6GHz

Test Procedure:

- 1) For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items.
- 2) If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.
- 3) The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area).
- 4) The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1% of the preceding frequency value.
- 5) The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5s.
- 6) The test normally was performed with the generating antenna facing each side of the EUT.



	<p>7) The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.</p> <p>8) The EUT was performed in a configuration to actual installation conditions, a video camera, test data and/or an audio monitor were used to monitor the performance of the EUT.</p>
--	---

**Test Results:**

For EN 50130-4:2011/A1:2014						
Frequency	Level	Modulation	Dwell Time	Antenna Polarization	EUT Face	Result / Observations
80MHz-2.7GHz	10 V/m	1 kHz, 80% AM. 1Hz(0.5sOn, 0.5sOff)PM 1 % increment	1s	V	Front	A
				H		A
				V	Rear	A
				H		A
				V	Left	A
				H		A
				V	Right	A
				H		A
				V	Top	A
				H		A
				V	Bottom	A
				H		A
EN 55024:2010/A1:2015& EN 55035:2017						
Frequency	Level	Modulation	Dwell Time	Antenna Polarization	EUT Face	Result / Observations
80MHz-1GHz,	3 V/m	1 kHz, 80% Amp. 1 % increment	3s	V	Front	A
				H		A
				V	Rear	A
				H		A
				V	Left	A
				H		A
(±1%) 1 800 MHz, 2 600 MHz, 3 500 MHz, 5 000 MHz				V	Right	A
				H		A
				V	Top	A
				H		A
				V	Bottom	A
				H		A




Results: Pass

Note:

Test phenomenon description for the EUT:

1. The EUT working is normal, before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

6.2.3 ELECTRICAL FAST TRANSIENTS (EFT)

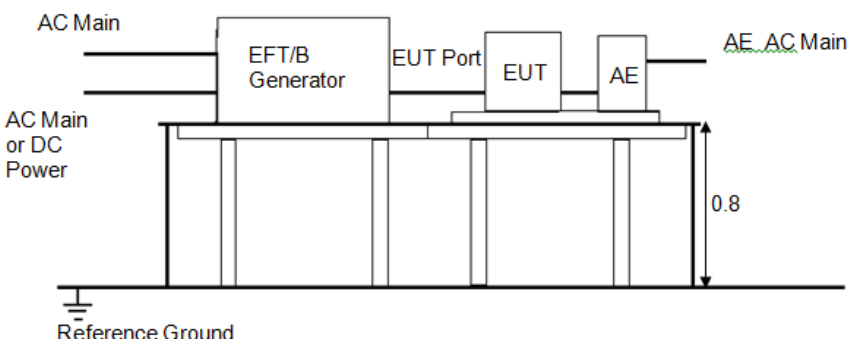Test Method:	EN 61000-4-4:2012
Test Level:	$\pm 2.0\text{kV}$ on AC port (for EN 50130-4:2011/A1:2014) $\pm 1.0\text{kV}$ on AC port (EN 55035 :2017; 55024:2010/A1:2015) $\pm 1.0\text{kV}$ on Signal port (for EN 50130-4:2011/A1:2014) $\pm 0.5\text{kV}$ on Signal port (EN 55035 :2017; 55024:2010/A1:2015)
Polarity:	Positive & Negative
Repetition Frequency:	100kHz (for EN50130-4:2011/A1:2014) 5kHz (for EN 55024:2010/A1:2015 ; EN 55035 :2017)
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
EUT Operation:	
Ambient:	Temp.: 21.5 °C Humid.:62 % Press.: 1008 mbar
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The GRP shall project beyond the EUT and the clamp by at least 0.1m on all sides. The distance between the EUT and any other of the metallic surface except the GRP was greater than 0.5m. All cables to the EUT was placed on the insulation support 0.1m above GRP. A cable not subject to EFT was routed as far as possible from cable under test to minimize the coupling between the cables. 3) The length of signal and power cable between the EUT and EFT generator was 0.5m. If the cable is a non-detachable supply cable more than 0.5m, the excess length of this cable shall be folded to avoid a flat coil and situated at a distance of 0.1m above the GRP. 4) The EUT was conducted the below specified test voltages for line and neutral or line, neutral and earth simultaneously (for telecommunication, single, control and DC port line with capacitive coupling clamp), 120 seconds duration. If the equipment contains identical ports, only one was tested; multicomputer cables, such as a 50-pair telecommunication cable, were tested as a single cable. Cables did not be split or divided into groups of conductors for this test; interface ports, which were intended by the manufacturer to be connected to data cables not longer than 3 m, did not be tested.

**Test Results:**

FOR EN50130-4:2011/A1:2014			
Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Observations (Performance Criterion)
AC port	2.0	Direct	A
Lan line	1.0	Clamp	A
FOR EN 55035 :2017 ;EN 55024:2010/A1:2015			
Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Observations (Performance Criterion)
AC port	1.0	Direct	A
Lan line	0.5	Clamp	A

Results: Pass

Note:


A: No loss of function.

B: EUT can be recovered after being disturbed.

Test phenomenon description for the EUT:

1. The EUT working is normal, before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

6.2.4 SURGE IMMUNITY

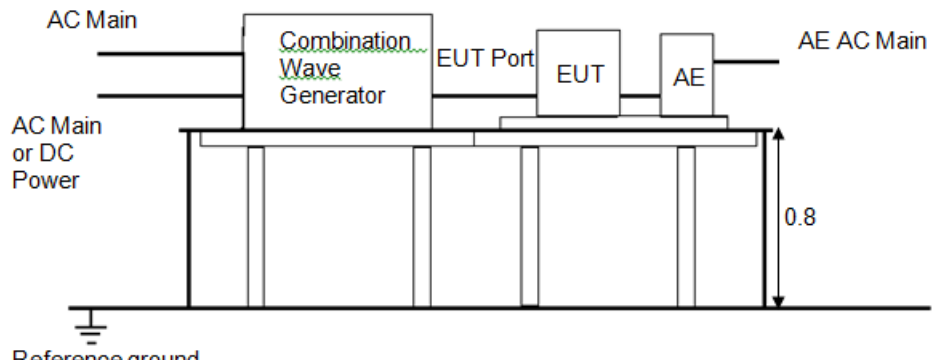Test Method:	EN 61000-4-5 :2014
Test Level:	FOR EN50130-4:2011/A1:2014 ± 0.5/1.0 kV Line to Line, ± 0.5/1.0/2.0 kV Line to ground, ± 0.5/1.0 kV Signal port FOR (EN 55024:2010/A1:2015;EN 55035:2017) ±1 kV Line-to-Line , ±2 kV Line-to-ground ± 0.5/1.0 kV Signal port
Criterion Required:	A(for EN 50130-4:2011/A1:2014); B(for EN 55024:2010/A1:2015;EN 55035:2017)
Polarity:	Positive & Negative
Interval:	60s between each surge
No. of Surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
EUT Operation:	
Ambient:	Temp.: 21.5 °C Humid.: 69 % Press.: 1008 mbar
Test Setup:	 <p>For AC port</p>
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane(GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The 1.2/50 μs surge was to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks were required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave so that the specified wave may be applied on the lines under test. 3) The power cord between the EUT and the coupling/decoupling network was not exceed 2 m in length. The interconnection line between the EUT and the coupling/ decoupling network shall not exceed 2 m in length. 4) The EUT was conducted 0.5 kV and 1 kV test voltage for line to line and line to neutral and conducted 0.5 kV, 1 kV and 2 kV test voltage for line to earth and neutral to earth, five positive pulses and five negative pulses each at 0°, 90°, 180° and 270° for a.c. power ports and five positive pulses and five



negative surge pulses for d.c. power ports (for telecommunication port, It was 0.5 kV for indoor cable longer than 10m line to ground and 0.5kV,1kV test voltage for outdoor cable line to ground, five positive pulses and five negative surge pulses), The test levels were applied on the EUT with a 2 Ω generator source impedance for power supply terminals and 40 Ω output impedance for interconnection lines. The tests were done at repetition rate one per minute.

Test Results:

For mains port:

Pulse No	Line-Line	Level (kV)	Surge Interval	Phase (deg)	Observation (Performance Criterion)
1–10	L-N	$\pm 0.5, 1.0$	60 s	0°	A
11–20	L-N	$\pm 0.5, 1.0$	60 s	90°	A
21–30	L-N	$\pm 0.5, 1.0$	60 s	180°	A
31–40	L-N	$\pm 0.5, 1.0$	60 s	270°	A
41–50	L-PE	$\pm 0.5, 1.0, 2.0$	60 s	0°	A
51–60	L-PE	$\pm 0.5, 1.0, 2.0$	60 s	90°	A
61–70	L-PE	$\pm 0.5, 1.0, 2.0$	60 s	180°	A
71–80	L-PE	$\pm 0.5, 1.0, 2.0$	60 s	270°	A
81–90	N-PE	$\pm 0.5, 1.0, 2.0$	60 s	0°	A
91–100	N-PE	$\pm 0.5, 1.0, 2.0$	60 s	90°	A
101–110	N-PE	$\pm 0.5, 1.0, 2.0$	60 s	180°	A
111–120	N-PE	$\pm 0.5, 1.0, 2.0$	60 s	270°	A

For telecommunication port:

Pulse No	Line-Line	Level(kV)	Surge Interval	Observation (Performance Criterion)
1–10	LAN port;	$\pm 0.5, 1.0$	60 s	A

Results: Pass


Note:

A: No loss of function.

Test phenomenon description for the EUT:

1. The EUT working is normal, Before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

6.2.5 CONDUCTED IMMUNITY

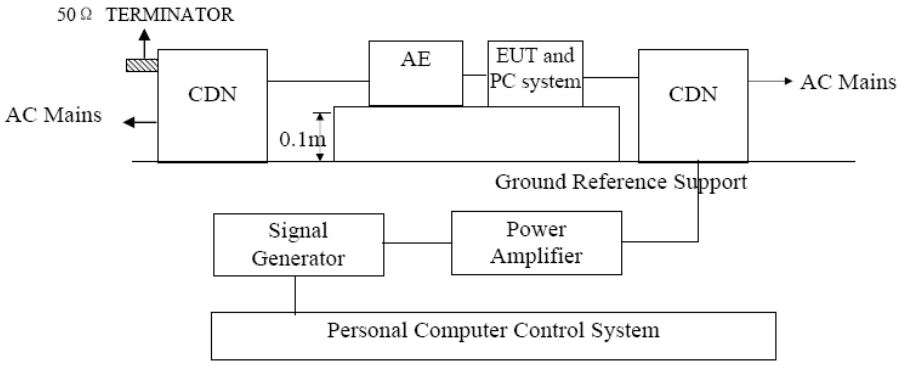Test Method:	EN 61000-4-6:2014			
Criterion Required:	A			
EUT Operation:				
Ambient:	Temp.:21.6	°C	Humid.: 69	% Press.: 1008 mbar
Test Setup:	 <p style="text-align: center;">For AC port</p>			
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on an insulating support of 0.1m height above a ground reference Plane, arranged and connected to satisfy its functional requirement. All cables exiting the EUT was supported at a height of at least 30 mm above the ground reference plane. 2) The coupling and decoupling devices were required; they were located between 0.1m and 0.3m from the EUT. This distance was to be measured horizontally from the projection of the EUT on to the ground reference plane to the coupling and decoupling device. 3) Each AE, used with clamp injection, shall be placed on an insulating support 0.1m above the ground reference plane. A decoupling network shall be installed on each cable between the EUT and AE except the cable under test. All cables connected to each AE, other than those being connected to the EUT, shall be provided with decoupling networks. The decoupling networks connected to each AE (except those on cables between the EUT and AE) shall be applied no further than 0.3m from the AE. The cable(s) between the AE and the decoupling network (s) or in between the AE and the injection clamp shall not be bundled nor wrapped and shall be kept between 30mm and 50mm above the ground reference plane. 4) The frequency range was swept from 150 kHz to 80MHz, using the signal levels established during the setting process, and with the disturbance signal 80 % amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or to change coupling devices as necessary. Where the frequency was swept incrementally, the step size does not exceed 1% of the preceding frequency value. The dwell time of the amplitude modulated carrier at each frequency was not less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5 s. 			

**Test Results:**

For EN 50130-4:2011/A1:2014						
Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Observation (Performance Criterion)
150 kHz to 100 MHz	Main port/Signal port	10V	80%, 1 kHz AM; 1 Hz PM	1%	1s	A/Pass
For EN 55024:2010/A1:2015						
Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Observation (Performance Criterion)
150 kHz to 80 MHz	Main port/Signal port	3V	80%, 1 kHz AM	1%	1s	A/Pass
For EN 55035 :2017						
Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Observation (Performance Criterion)
150 kHz to 10 MHz	Main port/Signal port	3V	80%, 1 kHz AM	1%	1s	A/Pass
10MHz to 30 MHz	Main port/Signal port	3-1V	80%, 1 kHz AM	1%	1s	A/Pass
30MHz to 80 MHz	Main port/Signal port	1V	80%, 1 kHz AM	1%	1s	A/Pass

Results: Pass


Note:

A: No loss of function.

Test phenomenon description for the EUT:

1. The EUT working is normal, Before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

6.2.6 VOLTAGE DIPS AND INTERRUPTIONS

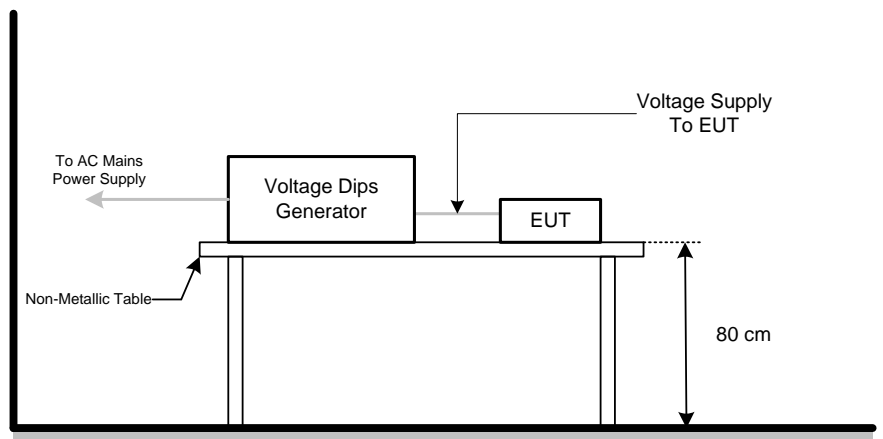Test Method:	EN 61000-4-11 :2004				
Test Level:	EN 50130-4:2011/A1:2014 80% for 250 Periods 70 % for 25 Periods 40 % for 10 Periods 0% for 250 Periods EN 55035 :2017; 55024:2010/A1:2015 >95 % for 0.5 Periods 30 % for 25 Periods >95 % for 250 Periods				
No. of Dips / Interruptions:	3 per Level				
EUT Operation:					
Ambient:	Temp.: 21.5	°C	Humid.: 69	%	Press.:1008 mbar
Test Setup:					
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The test was performed with the EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer. 3) The EUT was tested for each selected combination of test level and duration with a sequence of three dips /interruptions with intervals of 10 s minimum. Each representative mode of operation was tested. 4) For EUT with more than one power cord, each power cord was tested individually. 				

**Test Results:**

For EN 50130-4:2011/A1:2014					
Test Level % U_T	Phase	Duration of drop out in Periods	No. of drop out	Time between drop out	Observations (Performance Criterion)
80	0°,180°	250/300	3	10s	A
70	0°,180°	25/30	3	10s	A
40	0°,180°	10	3	10s	A
0	0°,180°	250/300	3	10s	C
For EN 55024:2010/A1:2015& EN 55035 :2017					
Test Level % U_T	Phase	Duration of drop out in Periods	No. of drop out	Time between drop out	Observations (Performance Criterion)
0	0°,180°	0.5	3	10s	A
70	0°,180°	25/30	3	10s	A
0	0°,180°	250/300	3	10s	C

Not: The EUT powered off and restarted.

Results: Pass

Note:

A: No loss of function.

During the level 100% and duration of 250Periods, the EUT will restart


Test phenomenon description for the EUT:

1. The EUT working is normal, Before the conditioning.
2. No any change in status of the EUT was observed, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.


7 PHOTOGRAPHS OF EMC TEST CONFIGURATION

7.1 CONDUCTED EMISSION TEST SETUP

Main port

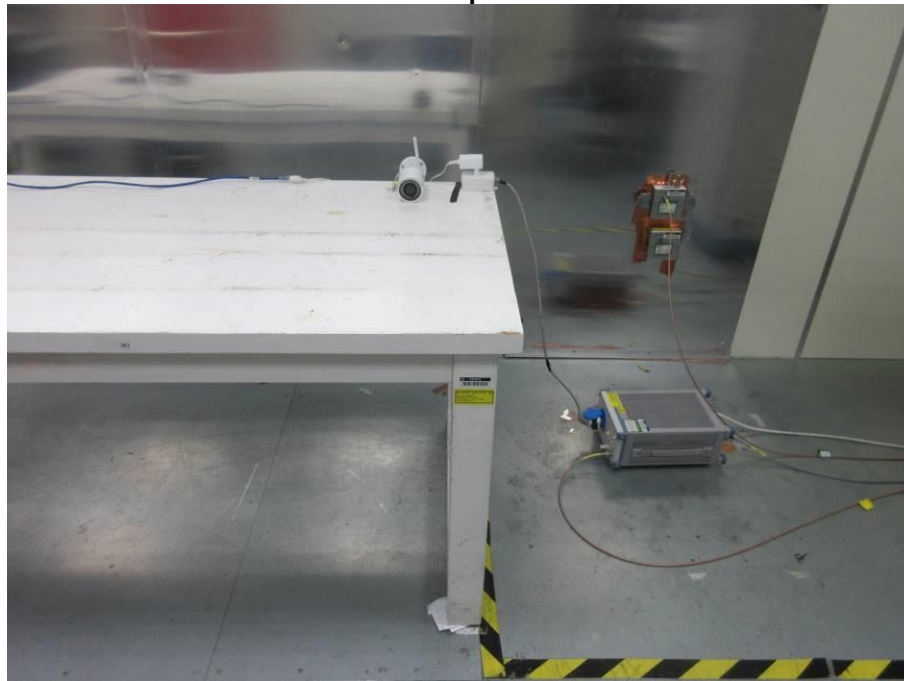

LAN Port

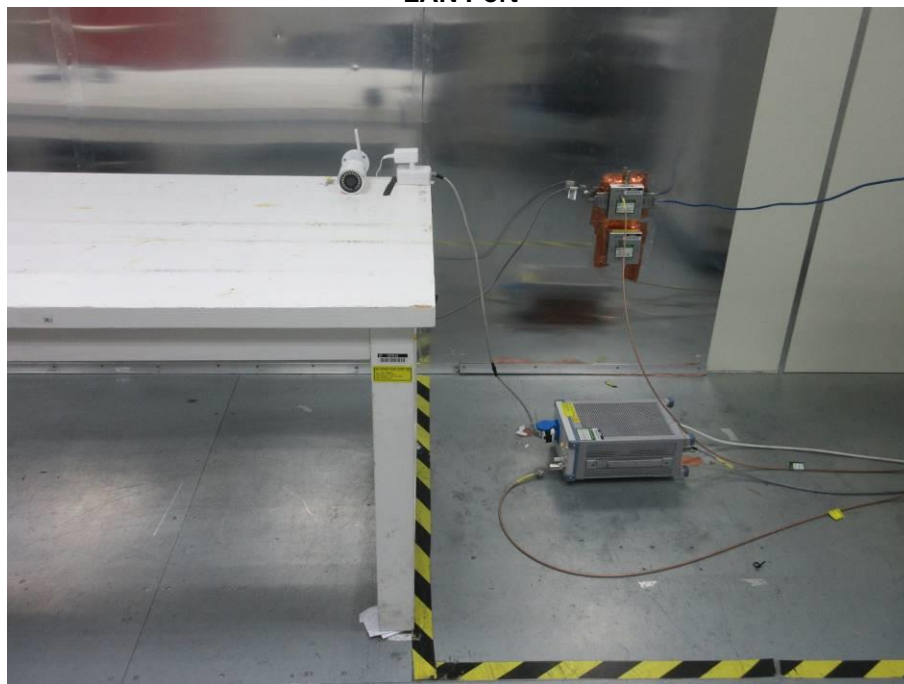


7.2 RADIATED EMISSION TEST SETUP

30MHz ~ 1000MHz



Above 1000MHz

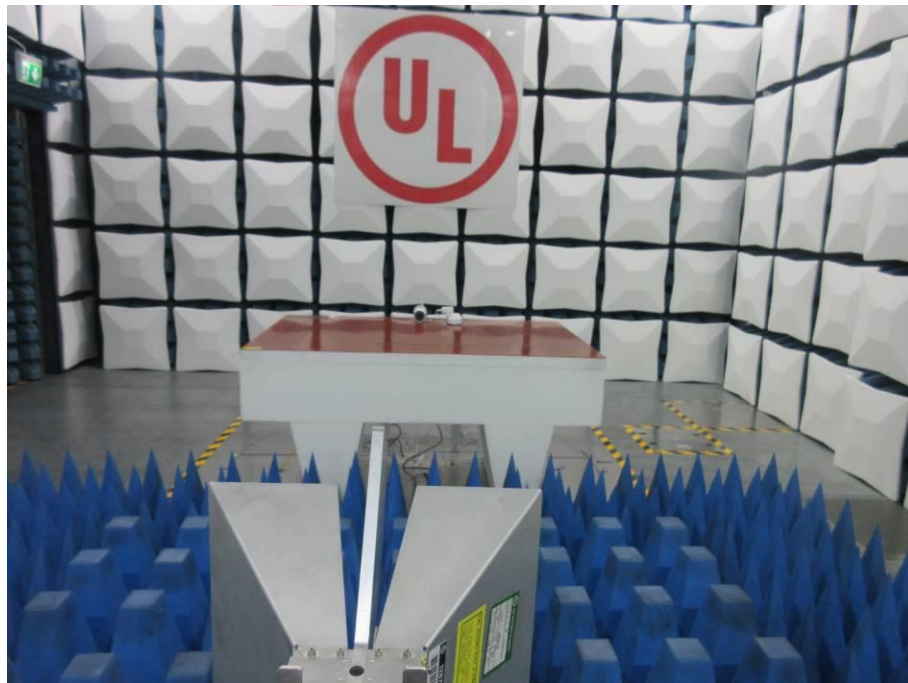

7.3 HARMONIC CURRENT & VOLTAGE FLUCTUATION AND FLICK MEASUREMENT

Flicker




7.4 ESD



7.5 RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY Below 1GHz



Above 1GHz

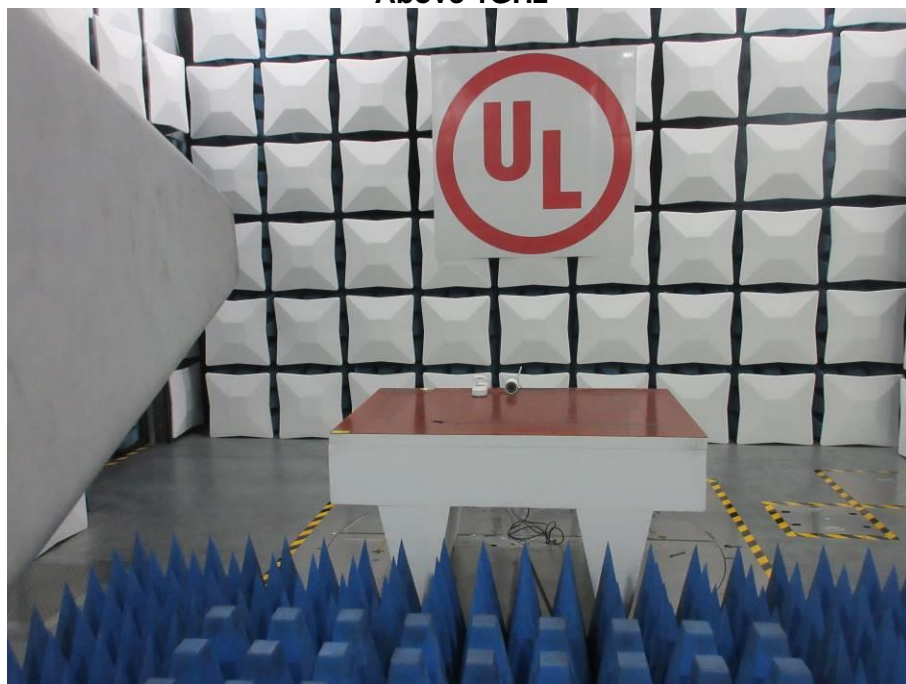


7.6 ELECTRICAL FAST TRANSIENT/BURST/SURGE/DIPS

AC Port



EFT-LAN Port

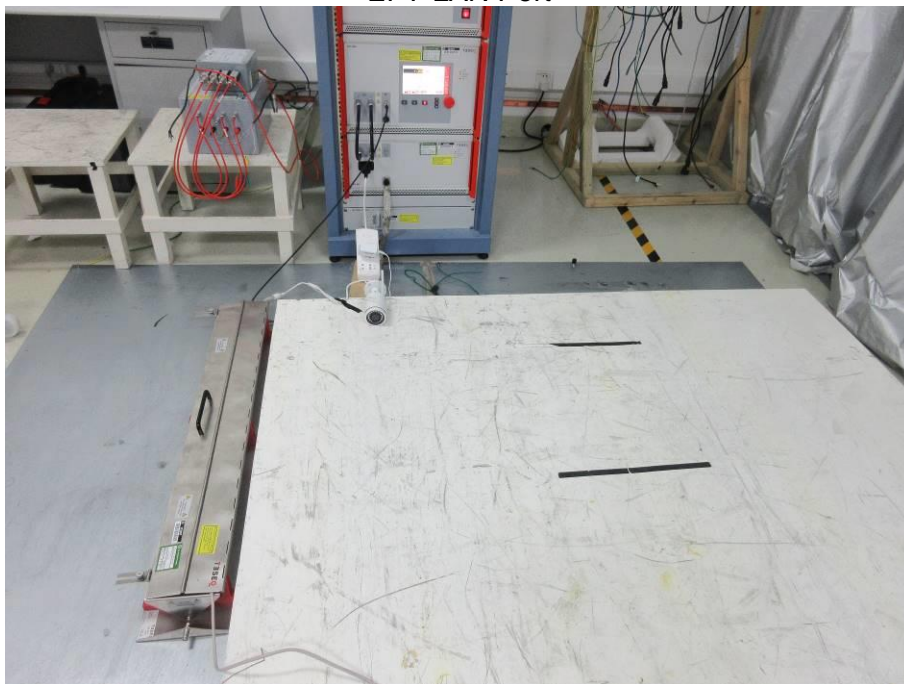

SURGE LAN Port



7.7 CONDUCTED IMMUNITY

Main Port




LAN Port




8 Photographs of the EUT

EUT(1)

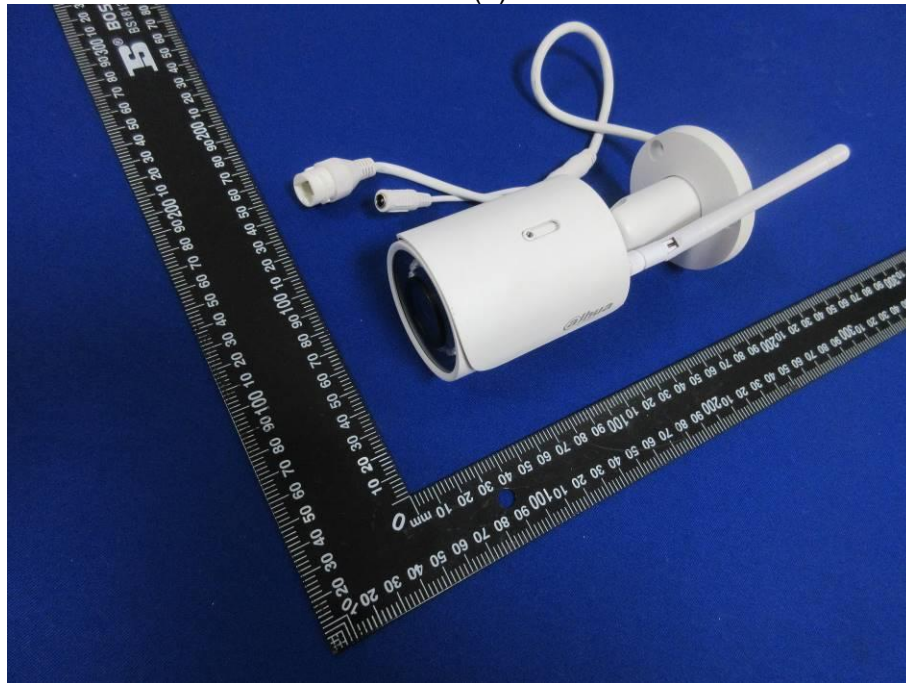

EUT(2)

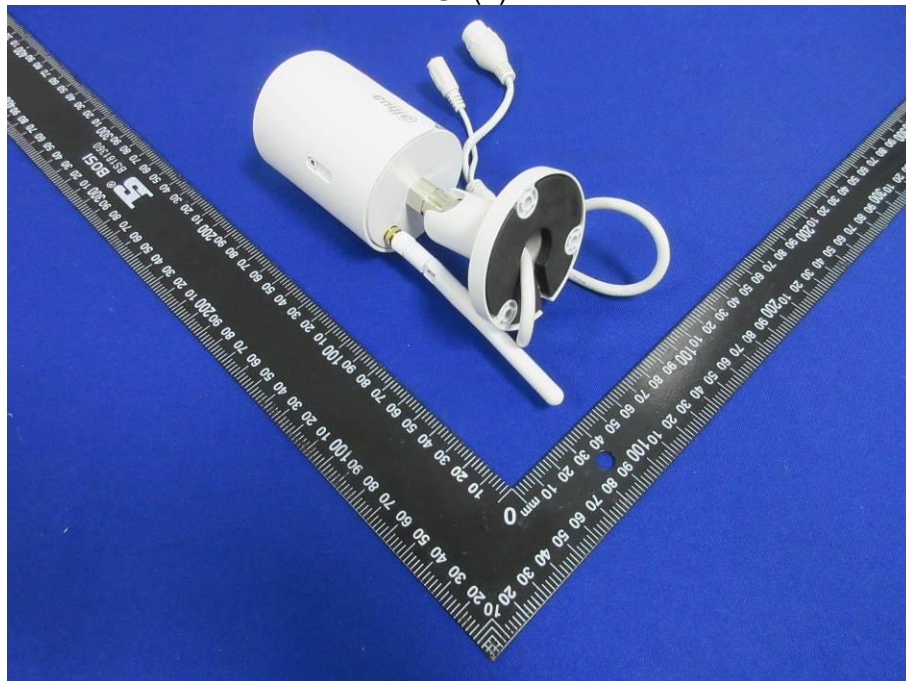


EUT(3)




EUT(4)




EUT(5)

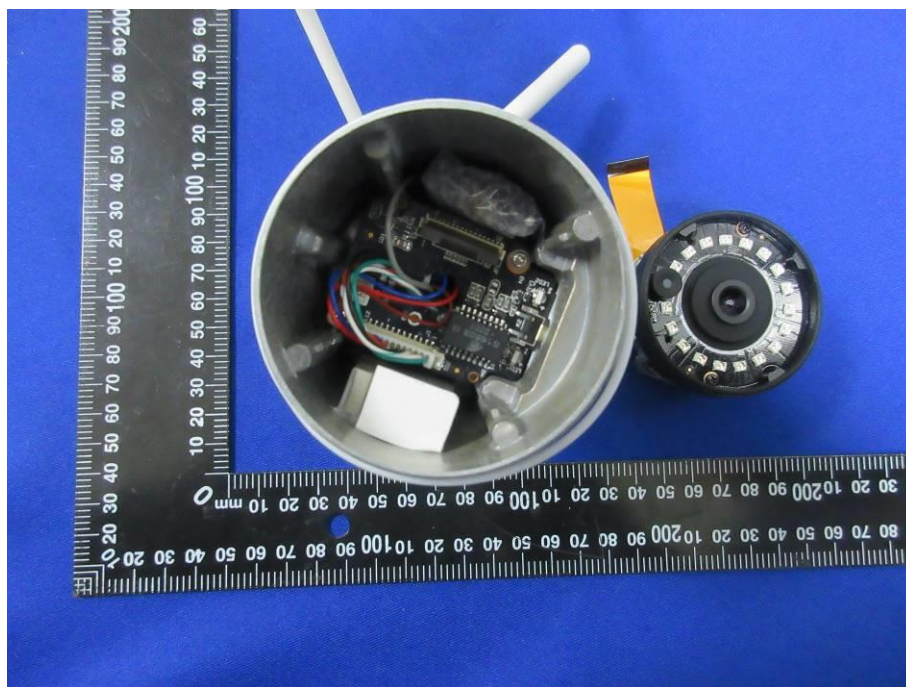


EUT(6)

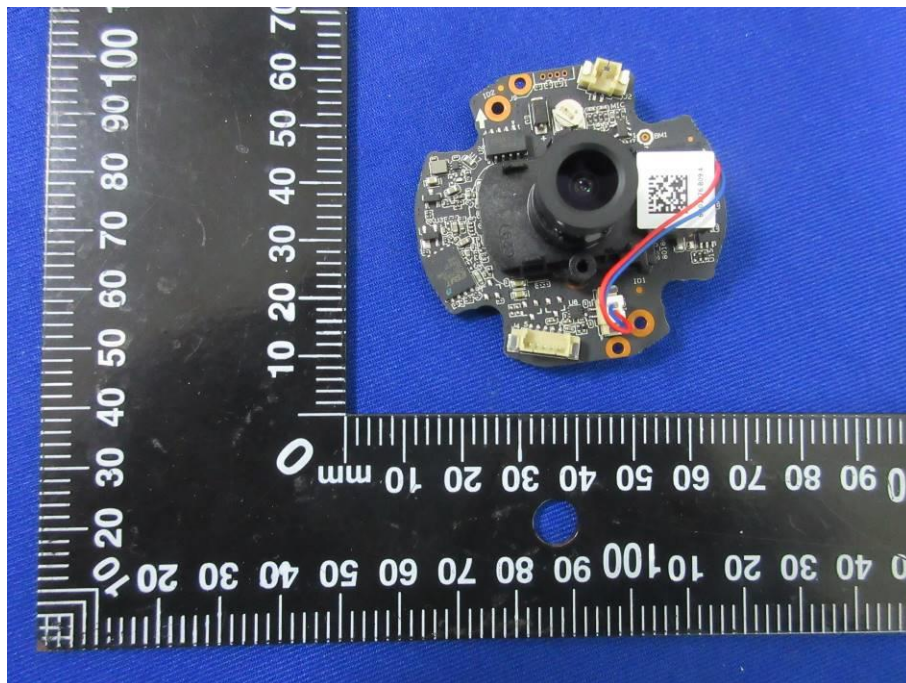


EUT(7)

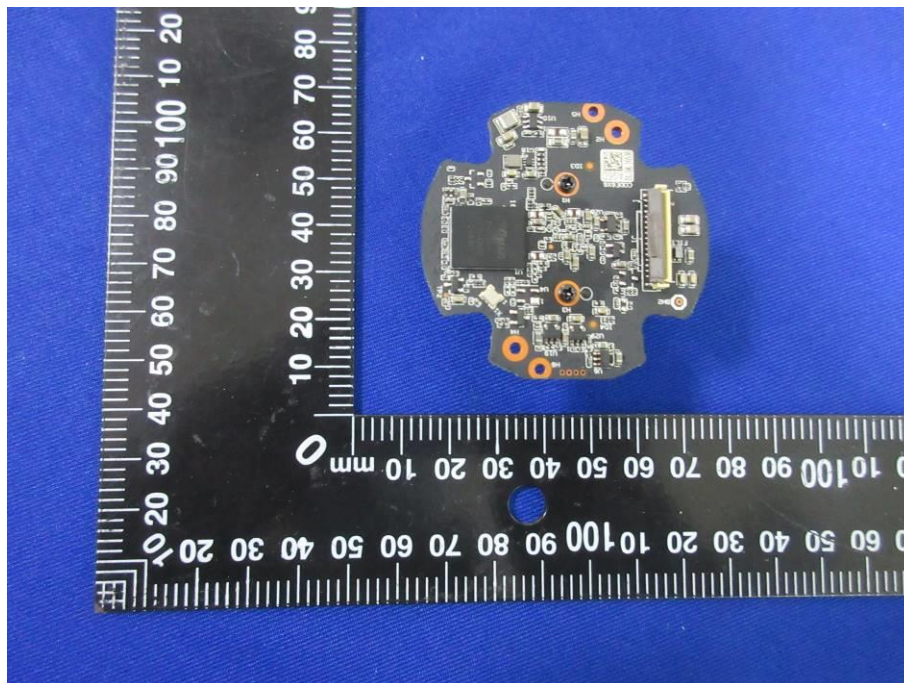


EUT(8)

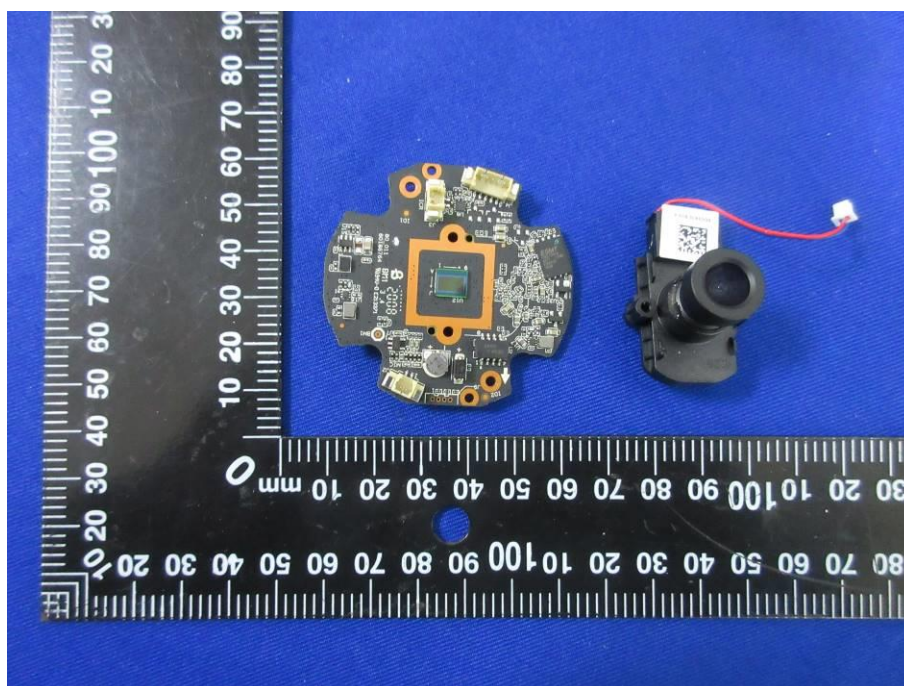


EUT(9)

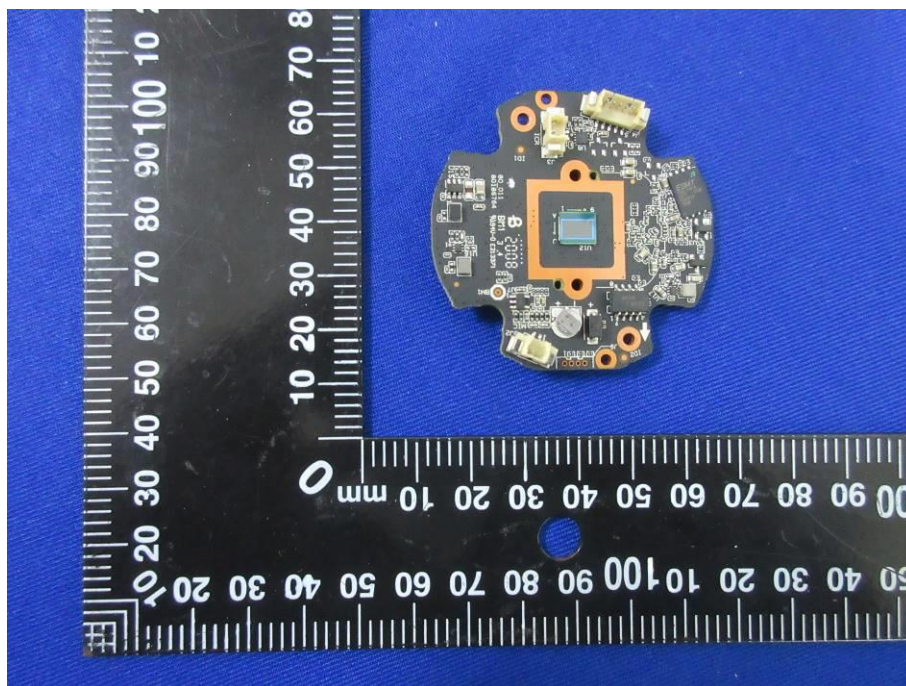


EUT(10)

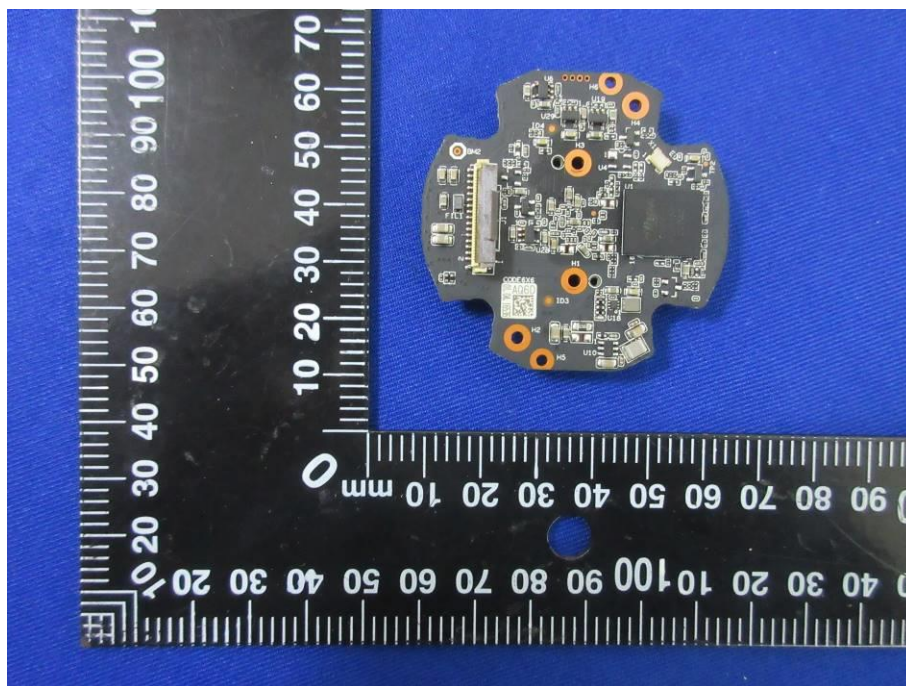


EUT(11)

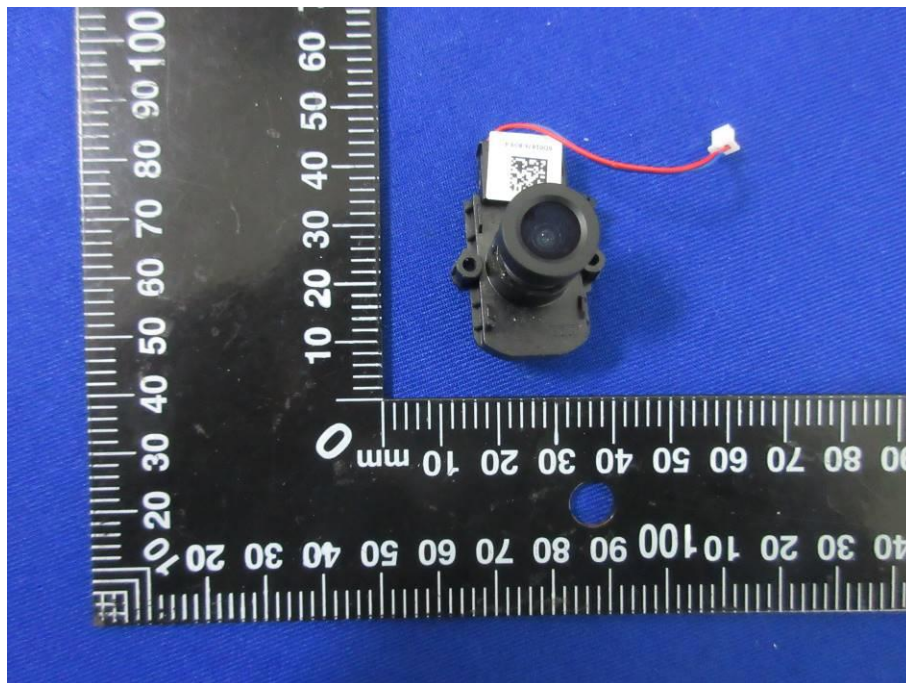


EUT(12)

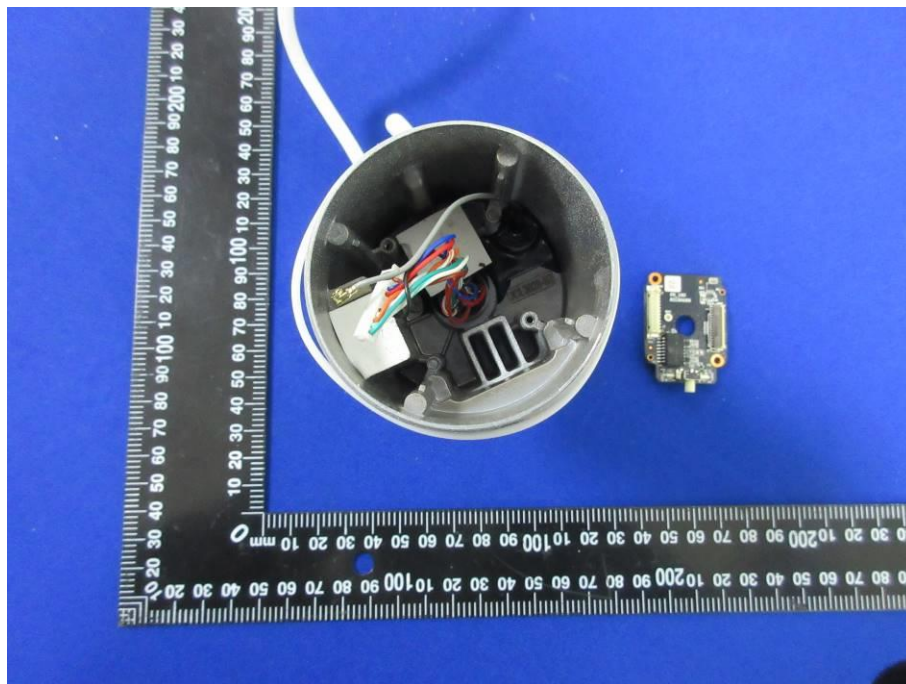

EUT(13)

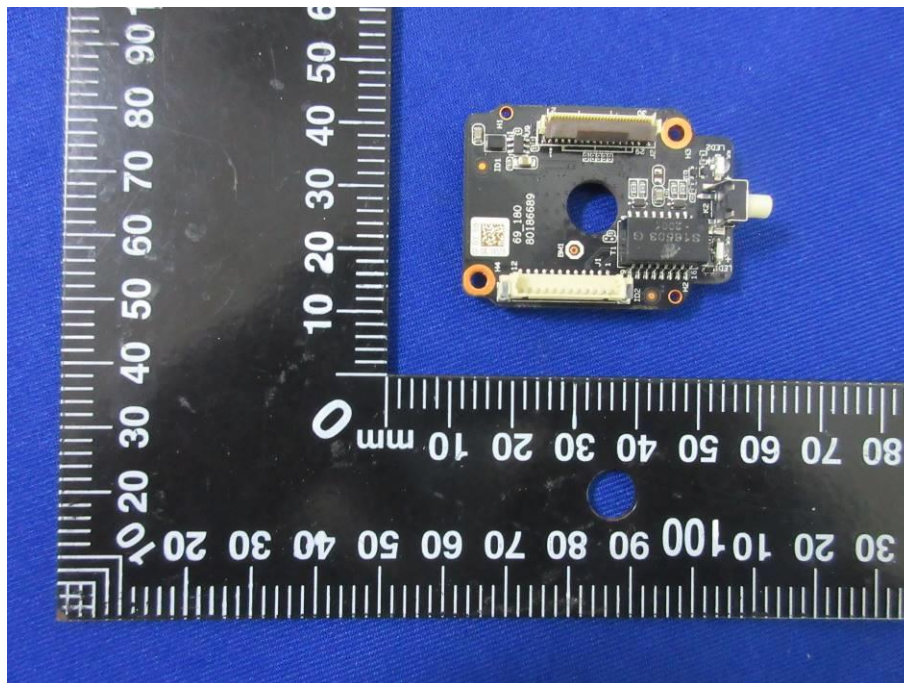

EUT(14)

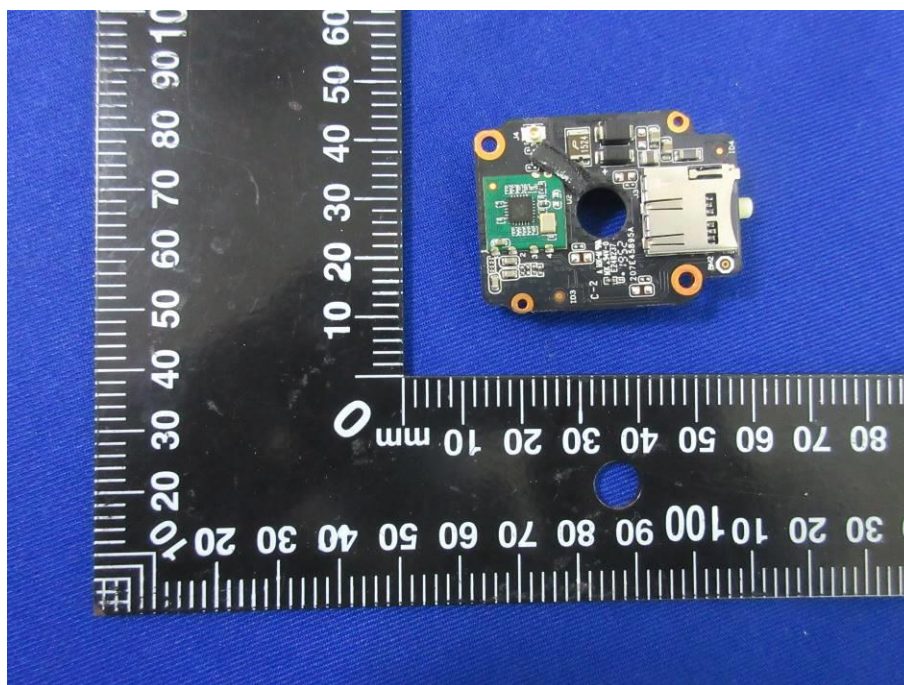


Adapter
EUT(15)



EUT(16)



EUT(17)

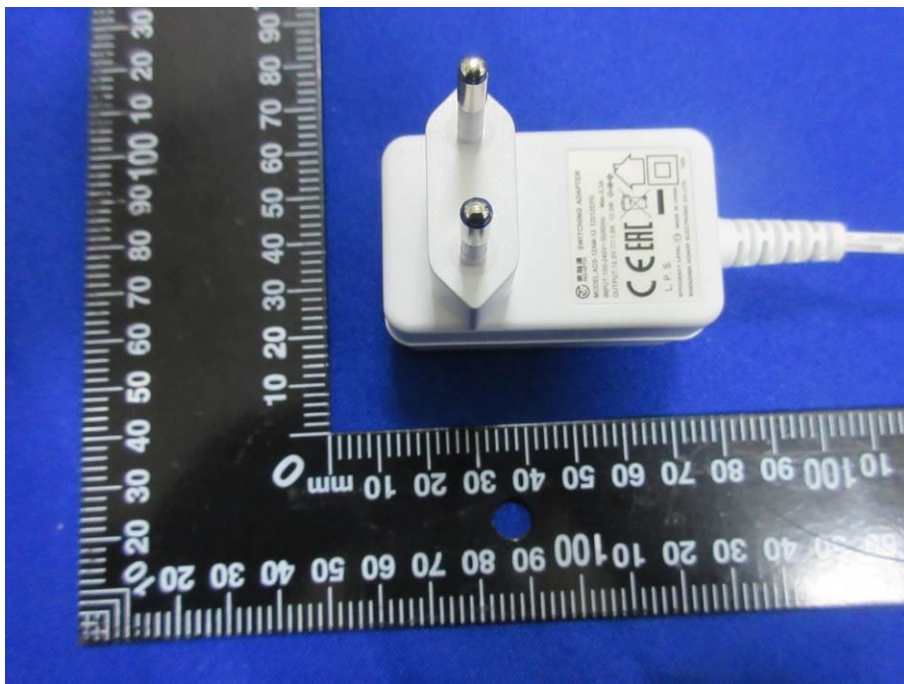

EUT(18)



END OF REPORT