
TELETEK

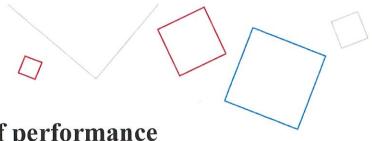

Declaration of performance

№ 026/2023

According to Construction Products Regulation EU № 305/2011

1. Unique identification code of the product-type:

SensoIRIS MOUT, SensoIRIS MOUT IP55, SensoIRIS MOUT IP65

2. Type Number:

SensoIRIS MOUT, SensoIRIS MOUT IP55, SensoIRIS MOUT IP65

Description:

Intelligent analogue addressable fire alarm monitored output module for conventional sounders with built-in isolator module

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer

Fire detection and fire alarm systems installed in and around buildings

4. Manufacturer

Teletek Electronics JSC 2, Iliyansko shose Str. NPZ Voenna Rampa 1220 Sofia, Bulgaria

5. Trading Company

Teletek Electronics JSC 2. Ilivansko shose Str. NPZ Voenna Rampa 1220 Sofia, Bulgaria

6. System of assessment

System 1

7. Notified Body

EVPU a.s. 19 Trencianska Str. 018 51 Nova Dubnica, Slovakia

Notified Body Number

1293

the prescribed tests and evaluation of factory production control Performed according to system 4 and issued the following certificate

EC Certificate Number

1293- CPR-0472 Rev.2

TELETEK

8. No European Technical Assessment has been issued for this product.

9. Declared performance


| Essential characteristics | Performance | Harmonized technical specification EN 54-18:2005 EN 54-18:2005/AC:2007 |
|--|-------------|--|
| Response delay (response time) | Pass | 5.2 |
| Operational reliability | Pass | 5.1.4 |
| Performance under fire conditions | Pass | 5.1.4 |
| Durability of operational reliability: | Pass | 5.3, 5.4 |
| temperature resistance | | |
| Durability of operational reliability; | Pass | 5.8 to 5.11 |
| vibration resistance | | |
| Durability of operational reliability; | Pass | 5.5, 5.6 |
| humidity resistance | | * |
| Durability of operational reliability; | Pass | 5.7 |
| corrosion resistance | | |
| Durability of operational reliability; | Pass | 5.2, 5.12 |
| electrical stability | | |

| Essential characteristics | Performance | Harmonized technical specification EN 54-17:2005 |
|---|-------------------|--|
| Performance under fire conditions | Pass | EN 54-17:2005/AC:2007 |
| | | 5.2 |
| Operational reliability | Pass | 4 |
| Durability of operational reliability | Pass | 5.4, 5.5 |
| andresponse delay: | | |
| temperature resistance | | |
| Durability of operational reliability: | Pass | 5.6, 5.7 |
| humidity resistance | | |
| Durability of operational reliability:shock | Pass | 5.9 to 5.12 |
| and vibration | 71.00.000.000.000 | |
| resistance | | |
| Durability of operational reliability: | Pass | 5.8 |
| corrosion resistance | | |
| Durability of operational reliability: | Pass | 5.3, 5.13 |
| electrical stability | | |

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

TELETEK

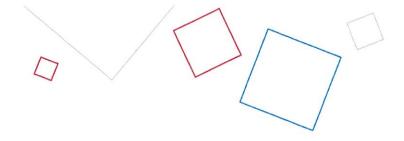

Signed for and on behalf of the manufacturer by:

2, Iliyansko shose str. NPZ Voenna Rampa 1220 Sofia, Bulgaria

14.11.2023

