

VTO3221E-P

Villa Outdoor Station



Technical Specification

Model	VTO3221E-P
-------	------------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Video

Video Compression	H.264
-------------------	-------

Image Sensor	1/2.9" 2MP CMOS
--------------	-----------------

Auto Gain Control	White Light
-------------------	-------------

Lens	2mm
------	-----

Angle of View	H:138°,V:78°,D:158°
---------------	---------------------

Day/Night	Color Image
-----------	-------------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	Omnidirectional Mic
-------------	---------------------

Audio Output	Built-in Speaker
--------------	------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

Screen	Not available
--------	---------------

Operation Mode

Keypad	Mechanical Button with Braille
--------	--------------------------------

Reader	Mifare Card (13.56MHz)
--------	------------------------

Features

- Keyboard villa door station
- Supplemental lighting with white light
- 2MP CMOS camera
- Mechanical button with Braille
- Aluminium alloy plate, IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Door release via password and Mifare card

Interface

Alarm In/Out	1/1
--------------	-----

Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
--------------	---

Wiegand In	1
------------	---

Network

Ethernet	10M/100Mbps
----------	-------------

Network Protocol	TCP/IP
------------------	--------

General

Ingress Protection	IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
--------------------	---

Tamper Switch	1
---------------	---

Installation	Surface & Flush
--------------	-----------------

Material	Aluminum
----------	----------

Power	DC 12V, 2A, PoE(802.3af)
-------	--------------------------

Power Consumption	Standby ≤2W, Work ≤7W
-------------------	-----------------------


Working Temperature	-40°C~+60°C
---------------------	-------------

Relative Humidity	20%~95%RH
-------------------	-----------


Dimensions	200mm×98mm×32mm
------------	-----------------

Weight	1.5Kg
--------	-------

Dimensions

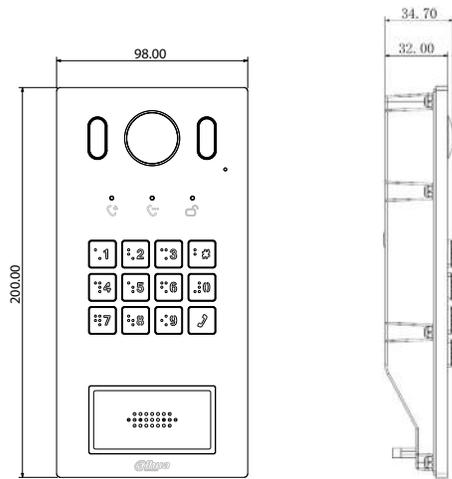

View Area

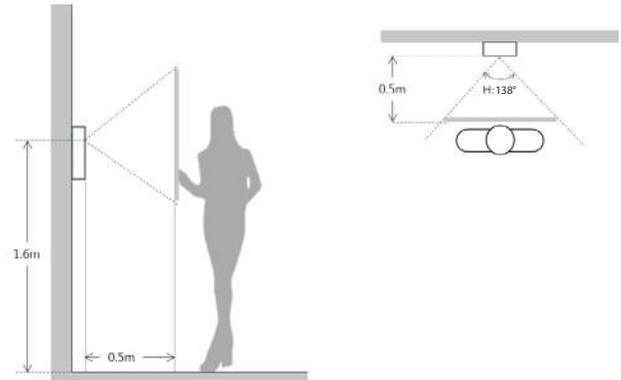

Application

