

DHI-VTS8340B-CG

Master Station



- Easy to operate, no need to install, bracket angle range 0°–45°.
- Supports 4 720P channels.
- 10-inch capacitive high resolution LCD provides good human machine interaction.
- Three audio input modes: Handsfree, handset, and gooseneck microphone.
- SD card expansion makes videos and snapshots can be restored locally.
- Supports HDMI output; resolution 1024×600.



Technical Specification

System

Main Processor	Embedded processor
Operating System	Embedded Linux operating system
Button Type	Mechanical
Network Protocol	IPv4; RTSP; RTP; TCP; UDP

Basic

Screen Type	Capacitive Screen
Display	10 inch TFT display
Resolution	1024(H)×600(V)
Camera	5MP CMOS
Angle of View	Horizontal: 57°; vertical: 45°; diagonal: 72°
Video Compression	H.264
Video Resolution	Main stream: 1024×600
Frame Rate	25fps
Video Bit Rate	2Mbps
Audio Compression	G.711a; G.711u; PCM
Audio Input	3
Audio Output	Built-in speaker; handset speaker
Audio Mode	Two-way voice call
Audio Enhancement	Echo suppression and cancellation/digital noise reduction
Audio Bit Rate	16KHz, 16Bit

Casing	PC+ABS
--------	--------

Function

Communication	Full digital
Displayed in Split Screen	4 channel 720P videos can be displayed on the 4-section screen
Storage	Micro SD card (max capacity is 64GB)
Web Configuration	Yes


Port

HDMI	1
Network	1 RJ-45 100Mbps/1000Mbps self-adaptive

General

Color	Titanium grey
Power Supply	DC 12V/2A
Power Adapter	Provided
Installation	Installed on the desk
Certifications	CE, FCC
Dimensions	344.97 mm × 224.6 mm × 64.42 mm (13.58"×8.84"×2.54")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	5%RH–90%RH (non-condensing)
Working Environment	Indoor
Operating Altitude	0 m–1300 m (0 ft–4265.09 ft)
Power Consumption	≤24W
Gross Weight	2.5 kg (5.51 lb)

Dimensions (mm[inch])

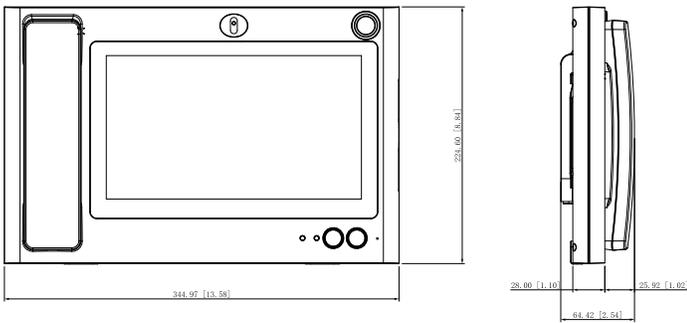

Application

