



# FAW355

**Piloto convencional estroboscópico a 24Vcc para pared. Rojo con lente roja. IP65. Base alta para tubo vista.**

## General

---

The FAW355 is a general purpose wall mount LED beacon for fire alarm applications. It features a special base deep containing all wiring connections and allow for easy removal/placement of the device. With an EN54-23 approved coverage pattern of W-2.4-7.5, each FAW355 may be mounted up to 2.4m high and cover a square room of 7.5 x 7.5m with a single device.

## Easy and Fast Installation

---


The FAW355 beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws, these beacons use TimeSaver™ bases from the 630 series detectors. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

## Efficient and versatile

---

The FAW355 beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area. The flash rate of the beacon may be adjusted during installation, with a selection of 0.5Hz or 1Hz.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the beacon from the base.

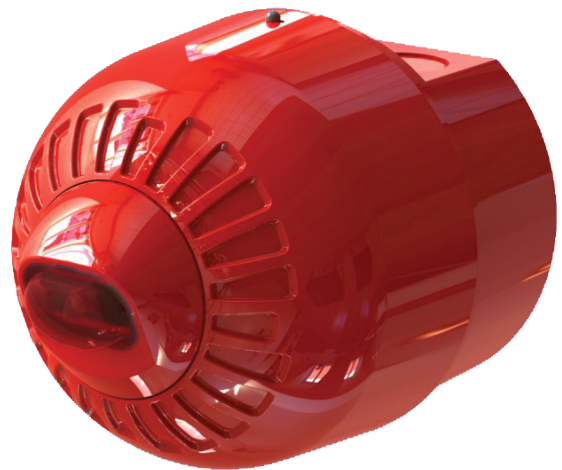

## Detalles

---

- Automatic synchronisation
- Anti-Tamper locking mechanism
- Deep mouting base
- Wiring directly to base
- Flash rate selectable
- IP65 Ingress protection

# FAW355

Piloto convencional estroboscópico a 24Vcc para pared. Rojo con lente rojo. IP65. Base alta para tubo vista.

## Especificaciones técnicas

### General

|                         |                 |
|-------------------------|-----------------|
| Monitorización de línea | Polarised input |
|-------------------------|-----------------|

### Eléctrico

|                           |                              |
|---------------------------|------------------------------|
| Voltaje de funcionamiento | 17 to 60 VDC                 |
| Consumo de corriente      | 20 mA @ 0.5 Hz, 40 mA @ 1 Hz |

### Sirena

|                 |                         |
|-----------------|-------------------------|
| Nivel de salida | Continuous operation    |
| Sincronización  | Automatic, Phased start |

### VAD

|                        |                   |
|------------------------|-------------------|
| Color                  | Red               |
| Cobertura de la planta | up to 7.5 x 7.5 m |
| Frecuencia de destello | 0.5 or 1 Hz       |

### Físico

|                     |                            |
|---------------------|----------------------------|
| Dimensiones físicas | 100 x 104 mm (Ø x D)       |
| Peso neto           | 250 g                      |
| Color               | Rojo                       |
| Posición de montaje | Pared                      |
| Altura de montaje   | up to 2.4 m                |
| Material            | Alto impacto policarbonato |

### Medioambiental

|                               |                        |
|-------------------------------|------------------------|
| Temperatura de funcionamiento | -25 to +70°C           |
| Humedad relativa              | 5 to 95% noncondensing |
| Entorno                       | Interior, Exterior     |
| Clasificación IP              | IP65                   |

### Regulador

|               |         |
|---------------|---------|
| Certificación | EN54-23 |
|---------------|---------|

### EN54-23 rating

|                |           |
|----------------|-----------|
| Light coverage | W-2.4-7.5 |
|----------------|-----------|

EN54-23 Coverage: W-2.4-7.5

