



EN 55032
EN 55024
EN 50130-4
EN 61000-3-2
EN 61000-3-3

EMC TEST REPORT

For

IP Camera

**MODEL NUMBER: DH-IPC-HDBW4x2yEz-vvB; IPC-HDBW4x2yEz-vvB;
DH-IPC-HDBW4x2yEz;IPC-HDBW4x2yEz;DH-IPC-HDBW1320EP;
DH-IPC-HDBW1320EN;IPC-HDBW1320EP;IPC-HDBW1320EN;
DH-IPC-HDBW4x2yEz-AS-vvB; IPC-HDBW4x2yEz-AS-vvB;DH-IPC-HDBW4x2yEz-AS;
IPC-HDBW4x2yEz-AS;DH-IPC-HDBW1120EP;DH-IPC-HDBW1120EN;
DH-IPC-HDBW1220EP;DH-IPC-HDBW1220EN;IPC-HDBW1120EP;IPC-HDBW1120EN;
IPC-HDBW1220EP;IPC-HDBW1220EN**

(“x” can be 1; 2; 4; denote different Pixels; y can be 0-9 denote different function; z=N; P or blank; vv=0280; 0360; 0600 which represents different lens)

**IPC-HDBW1120EP-W; IPC-HDBW1120EN-W;DH-IPC-HDBW1120EP-W;
DH-IPC-HDBW1120EN-W;IPC-HDBW11A0EP-W; IPC-HDBW11A0EN-W;
DH-IPC-HDBW11A0EP-W; DH-IPC-HDBW11A0EN-W;IPC-HDBW1320EN-W;
IPC-HDBW1320EP-W;DH-IPC-HDBW1320EP-W; DH-IPC-HDBW1320EN-W;
IPC-HDBW13A0EN-W; IPC-HDBW13A0EP-W;DH-IPC-HDBW13A0EP-W;
DH-IPC-HDBW13A0EN-W;DH-IPC-HDBW1420EP;DH-IPC-HDBW1420EN;
DH-IPC-HDBW1420E;IPC-HDBW1420EP;IPC-HDBW1420EN;
DH-IPC-HDBW1420EP;DH-IPC-HDBW1420EN;IPC-HDBW1420EP;
IPC-HDBW1420EN;DH-IPC-HDBW1020EP;DH-IPC-HDBW1020EN;
IPC-HDBW1020EP;IPC-HDBW1020EN;DH-IPC-HDBW44A1EN-I;
DH-IPC-HDBW44A1EN;DH-IPC-HDBW42A1EN-I;DH-IPC-HDBW42A1EN;
DH-IPC-HDBW42A0EN-I;DH-IPC-HDBW42A0EN;DH-IPC-HDBW41A0EN-I;
DH-IPC-HDBW41A0EN;DH-IPC-HDBW44A1EN-ASI;DH-IPC-HDBW44A1EN-AS;
DH-IPC-HDBW42A1EN-ASI;DH-IPC-HDBW42A1EN-AS; DH-IPC-HDBW42A0EN-ASI;DH-
IPC-HDBW42A0EN-AS;DH-IPC-HDBW41A0EN-ASI;DH-IPC-HDBW41A0EN-AS;
DH-IPC-HDBW13A0EN;DH-IPC-HDBW12A0EN;DH-IPC-HDBW11A0EN;
DH-IPC-HDBW1420EP-S;DH-IPC-HDBW1420EN-S;IPC-HDBW1420EP-S;
IPC-HDBW1420EN-S;DH-IPC-HDBW14A0EN-S;DH-IPC-HDBW1420EP-AS;
DH-IPC-HDBW1420EN-AS;IPC-HDBW1420EP-AS;**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



IPC-HDBW1420EN-AS;DH-IPC-HDBW14A0EN-AS;
DH-IPC-HDBW1320EP-S;DH-IPC-HDBW1320EN-S;IPC-HDBW1320EP-S;
IPC-HDBW1320EN-S;DH-IPC-HDBW13A0EN-S;DH-IPC-HDBW1320EP-AS;
DH-IPC-HDBW1320EN-AS;IPC-HDBW1320EP-AS;IPC-HDBW1320EN-AS;
DH-IPC-HDBW13A0EN-AS;DH-IPC-HDBW1220EP-S;DH-IPC-HDBW1220EN-S;
IPC-HDBW1220EP-S;IPC-HDBW1320EN-S;DH-IPC-HDBW12A0EN-S;
DH-IPC-HDBW1220EP-AS;DH-IPC-HDBW1220EN-AS;IPC-HDBW1220EP-AS;
IPC-HDBW1220EN-AS;DH-IPC-HDBW12A0EN-AS;DH-IPC-HDBW1120EP-S;
DH-IPC-HDBW1120EN-S;IPC-HDBW1120EP-S;IPC-HDBW1120EN-S;
DH-IPC-HDBW11A0EN-S;DH-IPC-HDBW1120EP-AS;DH-IPC-HDBW1120EN-AS;
IPC-HDBW1120EP-AS;IPC-HDBW1120EN-AS;DH-IPC-HDBW11A0EN-AS;
DH-IPC-HDBW1020EP-S;DH-IPC-HDBW1020EN-S;IPC-HDBW1020EP-S;
IPC-HDBW1020EN-S;DH-IPC-HDBW10A0EN-S;DH-IPC-HDBW1020EP-AS;
DH-IPC-HDBW1020EN-AS;IPC-HDBW1020EP-AS;IPC-HDBW1020EN-AS;
DH-IPC-HDBW10A0EN-AS;IPC-HDBW4120EP-S;IPC-HDBW4120EN-S;
IPC-HDBW4220EP-S;IPC-HDBW4220EN-S;IPC-HDBW4221EP-S;
IPC-HDBW4221EN-S;IPC-HDBW4421EP-S;IPC-HDBW4421EN-S;
DH-IPC-HDBW4120EP-S;DH-IPC-HDBW4120EN-S;DH-IPC-HDBW4220EP-S;
DH-IPC-HDBW4220EN-S;DH-IPC-HDBW4221EP-S;DH-IPC-HDBW4221EN-S;
DH-IPC-HDBW4421EP-S;DH-IPC-HDBW4421EN-S;
IPC-D1A30N;IPC-D1A30P;IPC-D1A20N;IPC-D1A20P;IPC-D1A00N;IPC-D1A00P;

REPORT NUMBER: 4788746763-53

ISSUE DATE: December 19, 2018

Prepared for

**Zhejiang Dahua Vision Technology Co., Ltd.
No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech
Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
--	12/19/2018	Initial Issue	



Test Summary

Electromagnetic Interference (EMI)

EN 55032: 2015

EN 61000-3-2:2014

EN 61000-3-3:2013

Test Items	Test Method	Reference Clause	Result
Radiated Emission	EN 55032: 2015	CISPR 16-2-1:2014	PASS
Conducted Emission	EN 55032: 2015	CISPR 16-2-3: 2010+A1:2010+A2:2 014	PASS
Harmonic Emission on AC	EN 61000-3-2:2014	EN 61000-3-2:2014	N/A
Flicker Emission on AC	EN 61000-3-3:2013	EN 61000-3-3:2013	PASS

Electromagnetic Susceptibility(EMS)

EN 50130-4:2011/A1:2014

EN 55024: 2010/A1:2015

ESD	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-2:2009	PASS
Radiated Immunity	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-3:2006 +A1:2008+A2:2010	PASS
Electrical Fast Transients (EFT) on AC	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-4:2012	PASS
Surge Immunity on AC	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-5:2014	PASS
Conducted Immunity on AC	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-6:2014	PASS
Power Frequency Magnetic Field	EN 55024: 2010/A1:2015	EN 61000-4-8:2010	N/A
Voltage Dips and Interruptions on AC	EN 50130-4:2011/A1:2014 EN 55024: 2010/A1:2015	EN 61000-4-11:2004	N/A

Note 1, N/A is an abbreviation for Not Applicable.

Note 2,

The edition for related standards were updated to:

EN 55032:2015, EN 50130-4:2011/A1:2014, EN 55024:2010/A1:2015 , since the new edition has no difference on the test items to the old edition, all test data are referred to the original test report.

The detail test status, please refer the test report (report no.: SECE1607092-A, which was issued by Cerpas Technology Corporation on Sep 27, 2017.



CONTENTS

1	ATTESTATION OF TEST RESULTS	6
2	TEST METHODOLOGY	9
3	ACCREDITATION	9
4	MEASURING EQUIPMENT AND SOFTWARE USED	9
5	ELECTROMAGNETIC COMPATIBILITY (EMC)	10
5.1	<i>ELECTROMAGNETIC INTERFERENCE (EMI)</i>	<i>10</i>
5.1.1	CONDUCTED EMISSION	10
5.1.2	RADIATED EMISSION	40
5.1.3	FLICKER TEST	73
5.2	<i>ELECTROMAGNETIC SUSCEPTIBILITY (IMMUNITY)</i>	<i>80</i>
5.2.1	ELECTROSTATIC DISCHARGE (ESD)	81
5.2.2	RADIATED IMMUNITY	94
5.2.3	ELECTRICAL FAST TRANSIENTS (EFT)	102
5.2.4	SURGE IMMUNITY	109
5.2.5	CONDUCTED IMMUNITY	119
5.2.6	Voltage Dips and Interruptions	126
6	PHOTOGRAPHS OF EMC TEST CONFIGURATION	128
6.1	<i>CONDUCTED EMISSION</i>	<i>128</i>
6.2	<i>RADIATED EMISSION TEST SETUP</i>	<i>130</i>
6.3	<i>VOLTAGE FLUCTUATION AND FLICK MEASUREMENT</i>	<i>132</i>
6.4	<i>ESD</i>	<i>133</i>
6.5	<i>RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY</i>	<i>134</i>
6.6	<i>ELECTRICAL FAST TRANSIENT/BURST / SURGE IMMUNITY</i>	<i>135</i>
6.7	<i>CONDUCTED IMMUNITY</i>	<i>137</i>
7	Photographs of the EUT	138

1 ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

Manufacturer Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

EUT Information

EUT Name: IP Camera
Model: DH-IPC-HDBW4x2yEz-vvB; IPC-HDBW4x2yEz-vvB; DH-IPC-HDBW4x2yEz;
IPC-HDBW4x2yEz;DH-IPC-HDBW1320EP;
DH-IPC-HDBW1320EN;IPC-HDBW1320EP;IPC-HDBW1320EN;
DH-IPC-HDBW4x2yEz-AS-vvB; IPC-HDBW4x2yEz-AS-vvB;
DH-IPC-HDBW4x2yEz-AS; IPC-HDBW4x2yEz-AS;
DH-IPC-HDBW1120EP;DH-IPC-HDBW1120EN;
DH-IPC-HDBW1220EP;DH-IPC-HDBW1220EN;
IPC-HDBW1120EP;IPC-HDBW1120EN;IPC-HDBW1220EP;
IPC-HDBW1220EN
("x" can be 1; 2; 4; denote different Pixels; y can be 0-9 denote different
function; z=N; P or blank; vv=0280; 0360; 0600 which represents different
lens)
IPC-HDBW1120EP-W; IPC-HDBW1120EN-W;
DH-IPC-HDBW1120EP-W; DH-IPC-HDBW1120EN-W;
IPC-HDBW11A0EP-W; IPC-HDBW11A0EN-W;
DH-IPC-HDBW11A0EP-W; DH-IPC-HDBW11A0EN-W;
IPC-HDBW1320EN-W; IPC-HDBW1320EP-W;
DH-IPC-HDBW1320EP-W; DH-IPC-HDBW1320EN-W;
IPC-HDBW13A0EN-W; IPC-HDBW13A0EP-W;
DH-IPC-HDBW13A0EP-W; DH-IPC-HDBW13A0EN-W;
DH-IPC-HDBW1420EP;DH-IPC-HDBW1420EN;
DH-IPC-HDBW1420E;IPC-HDBW1420EP;IPC-HDBW1420EN;
DH-IPC-HDBW1420EP;DH-IPC-HDBW1420EN;
IPC-HDBW1420EP;IPC-HDBW1420EN;
DH-IPC-HDBW1020EP;DH-IPC-HDBW1020EN;
IPC-HDBW1020EP;IPC-HDBW1020EN;DH-IPC-HDBW44A1EN-I;
DH-IPC-HDBW44A1EN;DH-IPC-HDBW42A1EN-I;
DH-IPC-HDBW42A1EN;DH-IPC-HDBW42A0EN-I;
DH-IPC-HDBW42A0EN;DH-IPC-HDBW41A0EN-I;
DH-IPC-HDBW41A0EN;DH-IPC-HDBW44A1EN-ASI;
DH-IPC-HDBW44A1EN-AS; DH-IPC-HDBW42A1EN-ASI;
DH-IPC-HDBW42A1EN-AS; DH-IPC-HDBW42A0EN-ASI;
DH-IPC-HDBW42A0EN-AS;DH-IPC-HDBW41A0EN-ASI;
DH-IPC-HDBW41A0EN-AS;DH-IPC-HDBW13A0EN;



DH-IPC-HDBW12A0EN;DH-IPC-HDBW11A0EN;
DH-IPC-HDBW1420EP-S;DH-IPC-HDBW1420EN-S;
IPC-HDBW1420EP-S;IPC-HDBW1420EN-S;
DH-IPC-HDBW14A0EN-S;DH-IPC-HDBW1420EP-AS;
DH-IPC-HDBW1420EN-AS;IPC-HDBW1420EP-AS;
IPC-HDBW1420EN-AS;DH-IPC-HDBW14A0EN-AS;
DH-IPC-HDBW1320EP-S;DH-IPC-HDBW1320EN-S;
IPC-HDBW1320EP-S;IPC-HDBW1320EN-S;
DH-IPC-HDBW13A0EN-S;DH-IPC-HDBW1320EP-AS;
DH-IPC-HDBW1320EN-AS;IPC-HDBW1320EP-AS;
IPC-HDBW1320EN-AS;DH-IPC-HDBW13A0EN-AS;
DH-IPC-HDBW1220EP-S;DH-IPC-HDBW1220EN-S;
IPC-HDBW1220EP-S;IPC-HDBW1320EN-S;
DH-IPC-HDBW12A0EN-S;DH-IPC-HDBW1220EP-AS;
DH-IPC-HDBW1220EN-AS;IPC-HDBW1220EP-AS;
IPC-HDBW1220EN-AS;DH-IPC-HDBW12A0EN-AS;
DH-IPC-HDBW1120EP-S;DH-IPC-HDBW1120EN-S;
IPC-HDBW1120EP-S;IPC-HDBW1120EN-S;
DH-IPC-HDBW11A0EN-S;DH-IPC-HDBW1120EP-AS;
DH-IPC-HDBW1120EN-AS;IPC-HDBW1120EP-AS;
IPC-HDBW1120EN-AS;DH-IPC-HDBW11A0EN-AS;
DH-IPC-HDBW1020EP-S;DH-IPC-HDBW1020EN-S;
IPC-HDBW1020EP-S;IPC-HDBW1020EN-S;
DH-IPC-HDBW10A0EN-S;DH-IPC-HDBW1020EP-AS;
DH-IPC-HDBW1020EN-AS;IPC-HDBW1020EP-AS;
IPC-HDBW1020EN-AS;DH-IPC-HDBW10A0EN-AS;
IPC-HDBW4120EP-S;IPC-HDBW4120EN-S;
IPC-HDBW4220EP-S;IPC-HDBW4220EN-S;IPC-HDBW4221EP-S;
IPC-HDBW4221EN-S;IPC-HDBW4421EP-S;IPC-HDBW4421EN-S;
DH-IPC-HDBW4120EP-S;DH-IPC-HDBW4120EN-S;
DH-IPC-HDBW4220EP-S;DH-IPC-HDBW4220EN-S;
DH-IPC-HDBW4221EP-S;DH-IPC-HDBW4221EN-S;
DH-IPC-HDBW4421EP-S;DH-IPC-HDBW4421EN-S;
IPC-D1A30N;IPC-D1A30P;IPC-D1A20N;IPC-D1A20P;
IPC-D1A00N;IPC-D1A00P;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
EN 55032:2015 EN 61000-3-2:2014 EN 61000-3-3:2013 EN 50130-4:2011+A1:2014 EN 55024:2010+A1:2015	PASS



Prepared By:

Gary Zhang
Engineer Project Associate
Approved By:

Stephen Guo
Laboratory Manager

Checked By:

Shawn Wen
Laboratory Leader



2 TEST METHODOLOGY

All tests were performed in accordance with the standard EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3 and EN 50130-4.

3 ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Recognized No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p>
---------------------------	---

4 MEASURING EQUIPMENT AND SOFTWARE USED

All measuring equipment and software used are referred to the original report (report no.: SECE1607092-A), which was issued by Cerpass Technology Corporation.




5 ELECTROMAGNETIC COMPATIBILITY (EMC)

5.1 ELECTROMAGNETIC INTERFERENCE (EMI)

5.1.1 CONDUCTED EMISSION

Test Method:	EN 55032																										
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)																										
	Quasi-Peak if maximized peak within 6dB of Quasi-Peak limit																										
Limit:	<p>Limits for conducted disturbance at the mains ports of class B</p> <table><tr><th rowspan="2">Frequency Range (MHz)</th><th colspan="2">Class B Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15 to 0.50</td><td>66 to 56</td><td>56 to 46</td></tr><tr><td>0.50 to 5</td><td>56</td><td>46</td></tr><tr><td>5 to 30</td><td>60</td><td>50</td></tr></table> <p>NOTE 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE 2: The lower limit is applicable at the transition frequency.</p> <p>Limits for conducted disturbance at the wired network ports of class B</p> <table><tr><th rowspan="2">Frequency Range (MHz)</th><th colspan="2">Class B Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15 to 0.50</td><td>84 to 74</td><td>74 to 64</td></tr><tr><td>0.50 to 30</td><td>74</td><td>64</td></tr></table>		Frequency Range (MHz)	Class B Limit (dBuV)		Quasi-peak	Average	0.15 to 0.50	66 to 56	56 to 46	0.50 to 5	56	46	5 to 30	60	50	Frequency Range (MHz)	Class B Limit (dBuV)		Quasi-peak	Average	0.15 to 0.50	84 to 74	74 to 64	0.50 to 30	74	64
Frequency Range (MHz)	Class B Limit (dBuV)																										
	Quasi-peak	Average																									
0.15 to 0.50	66 to 56	56 to 46																									
0.50 to 5	56	46																									
5 to 30	60	50																									
Frequency Range (MHz)	Class B Limit (dBuV)																										
	Quasi-peak	Average																									
0.15 to 0.50	84 to 74	74 to 64																									
0.50 to 30	74	64																									

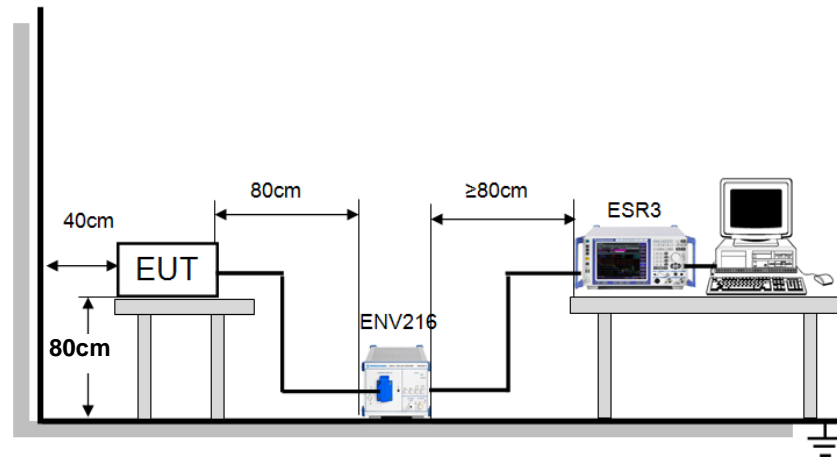
Test Setup:

Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

**Measurement Data****Conducted Emission for Power Port Test Data**

Fourth Issue

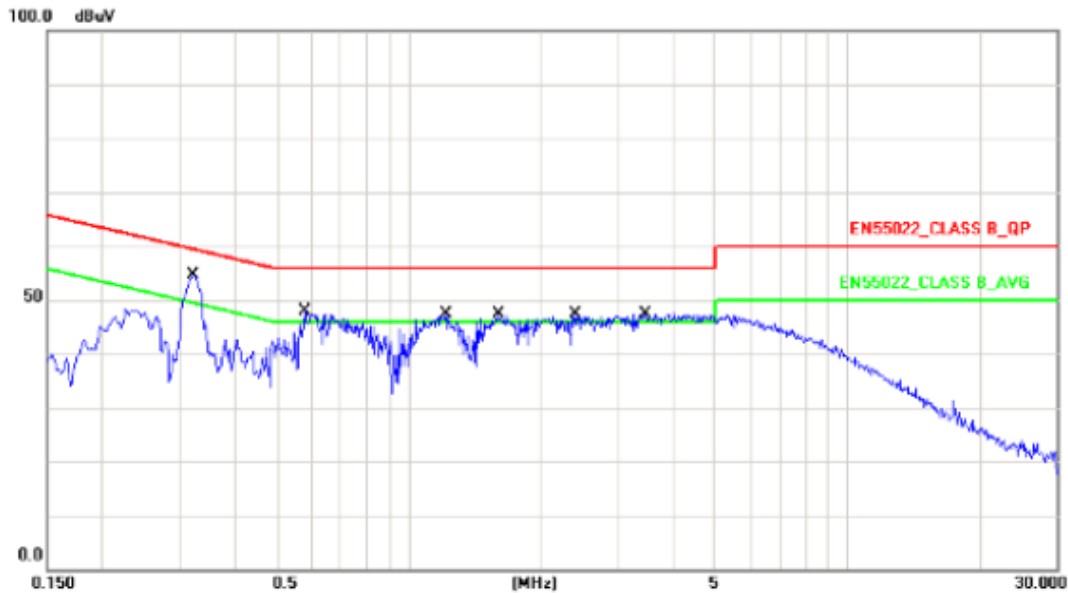Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temperature :	20℃	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/03/17




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3220	10.27	44.42	54.69	59.65	-4.96	QP
2	0.3220	10.27	35.85	46.12	49.65	-3.53	AVG
3	0.5820	10.30	33.25	43.55	56.00	-12.45	QP
4	0.5820	10.30	23.55	33.85	46.00	-12.15	AVG
5	1.2180	10.31	33.22	43.53	56.00	-12.47	QP
6	1.2180	10.31	24.45	34.76	46.00	-11.24	AVG
7	1.6019	10.30	32.17	42.47	56.00	-13.53	QP
8	1.6019	10.30	25.07	35.37	46.00	-10.63	AVG
9	2.4060	10.30	31.13	41.43	56.00	-14.57	QP
10	2.4060	10.30	22.37	32.67	46.00	-13.33	AVG
11	3.4900	10.29	32.53	42.82	56.00	-13.18	QP
12	3.4900	10.29	23.87	34.16	46.00	-11.84	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE					
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL			
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W			
Temperature :	20℃	Humidity :	54%			
Pressure(mbar) :	1002	Date :	2016/03/17			

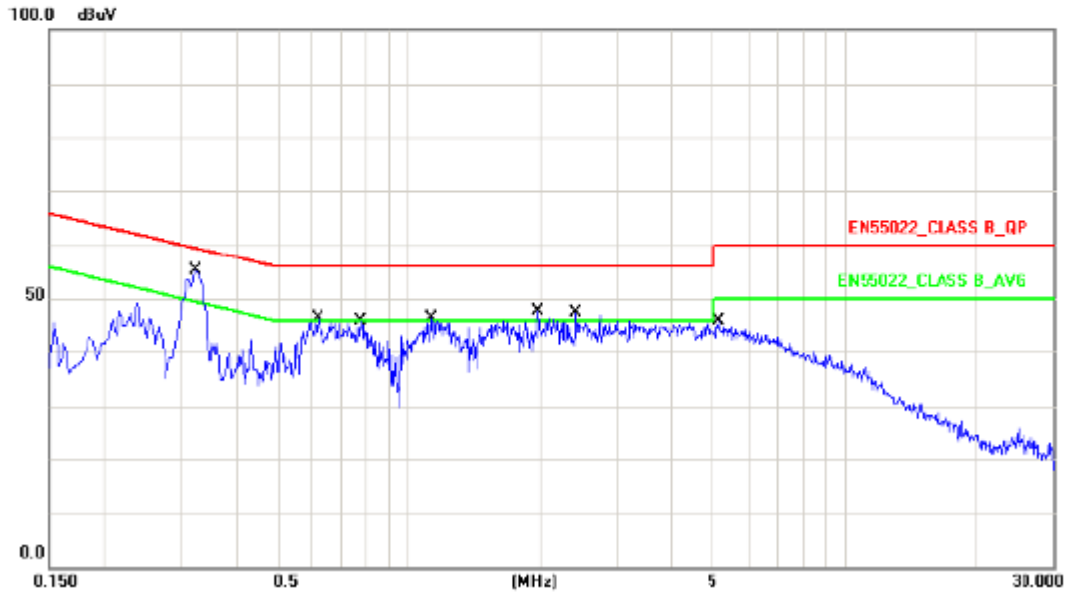

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3260	10.24	42.34	52.58	59.55	-6.97	QP
2	0.3260	10.24	35.06	45.30	49.55	-4.25	AVG
3	0.6180	10.27	31.39	41.66	56.00	-14.34	QP
4	0.6180	10.27	23.89	34.16	46.00	-11.84	AVG
5	0.7780	10.30	30.61	40.91	56.00	-15.09	QP
6	0.7780	10.30	23.26	33.56	46.00	-12.44	AVG
7	1.1300	10.35	31.23	41.58	56.00	-14.42	QP
8	1.1300	10.35	24.40	34.75	46.00	-11.25	AVG
9	1.9780	10.48	29.19	39.67	56.00	-16.33	QP
10	1.9780	10.48	22.37	32.85	46.00	-13.15	AVG
11	2.4219	10.50	28.70	39.20	56.00	-16.80	QP
12	2.4219	10.50	21.59	32.09	46.00	-13.91	AVG
13	5.1460	10.55	27.12	37.67	60.00	-22.33	QP
14	5.1460	10.55	20.22	30.77	50.00	-19.23	AVG


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Second Issue

Test Mode :	Mode 3: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temperature :	25°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/06

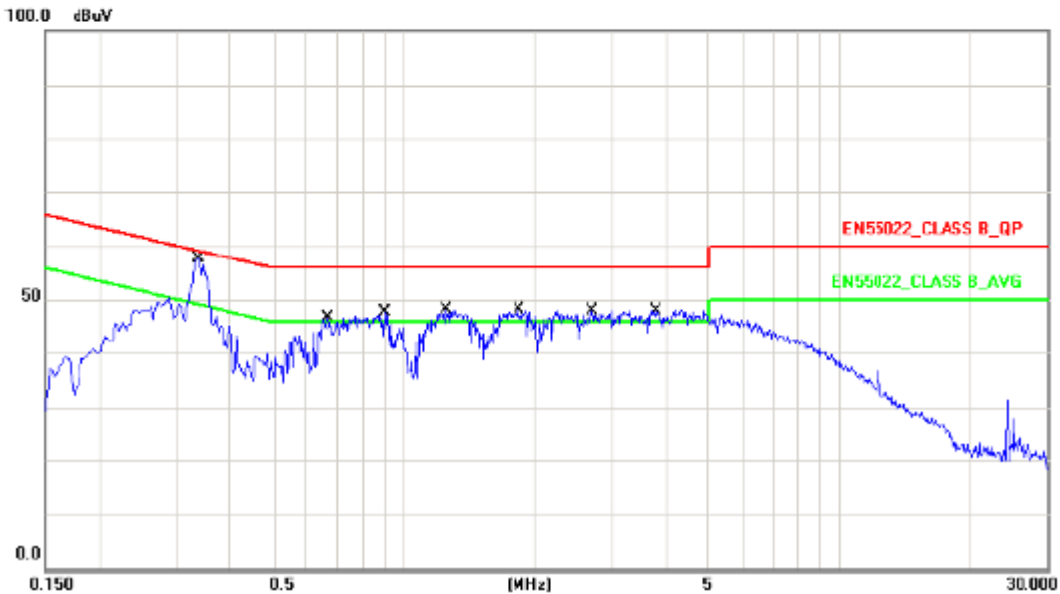


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3379	10.27	45.87	56.14	59.25	-3.11	QP
2	0.3379	10.27	36.74	47.01	49.25	-2.24	AVG
3	0.6700	10.32	33.70	44.02	56.00	-11.98	QP
4	0.6700	10.32	24.21	34.53	46.00	-11.47	AVG
5	0.9060	10.31	32.99	43.30	56.00	-12.70	QP
6	0.9060	10.31	21.67	31.98	46.00	-14.02	AVG
7	1.2579	10.30	34.46	44.76	56.00	-11.24	QP
8	1.2579	10.30	25.20	35.50	46.00	-10.50	AVG
9	1.8340	10.29	34.32	44.61	56.00	-11.39	QP
10	1.8340	10.29	25.29	35.58	46.00	-10.42	AVG
11	2.7139	10.30	33.61	43.91	56.00	-12.09	QP
12	2.7139	10.30	23.55	33.85	46.00	-12.15	AVG
13	3.7700	10.29	33.09	43.38	56.00	-12.62	QP
14	3.7700	10.29	23.48	33.77	46.00	-12.23	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temperature :	25°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/06

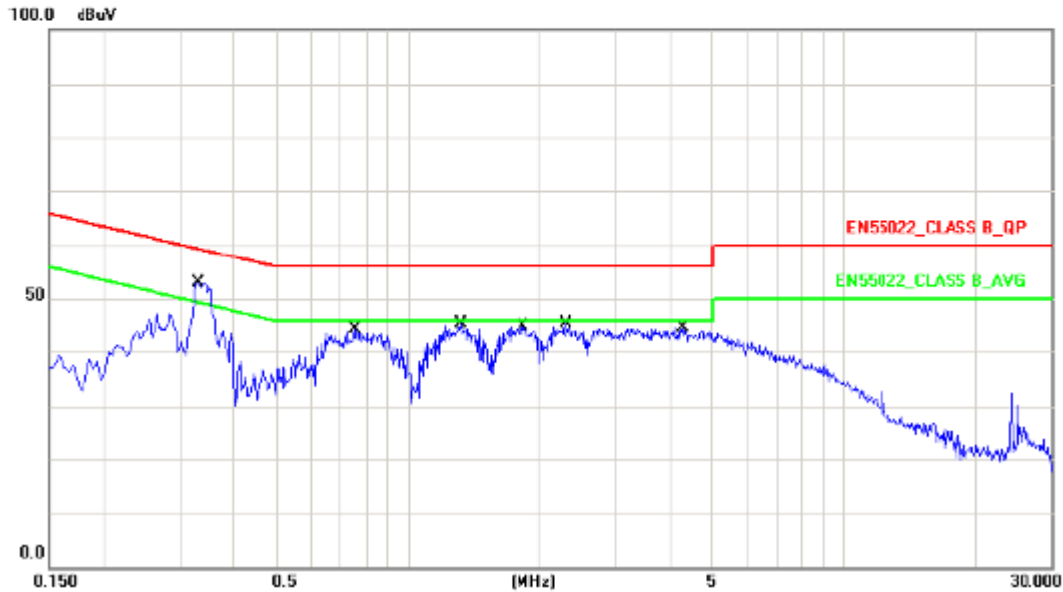

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	10.24	40.06	50.30	59.45	-9.15	QP
2	0.3300	10.24	32.03	42.27	49.45	-7.18	AVG
3	0.7539	10.30	31.05	41.35	56.00	-14.65	QP
4	0.7539	10.30	23.45	33.75	46.00	-12.25	AVG
5	1.3260	10.41	30.95	41.36	56.00	-14.64	QP
6	1.3260	10.41	23.24	33.65	46.00	-12.35	AVG
7	1.8380	10.48	30.55	41.03	56.00	-14.97	QP
8	1.8380	10.48	22.75	33.23	46.00	-12.77	AVG
9	2.3060	10.50	30.66	41.16	56.00	-14.84	QP
10	2.3060	10.50	22.71	33.21	46.00	-12.79	AVG
11	4.2980	10.54	28.68	39.22	56.00	-16.78	QP
12	4.2980	10.54	20.79	31.33	46.00	-14.67	AVG


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Initial Issue

Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

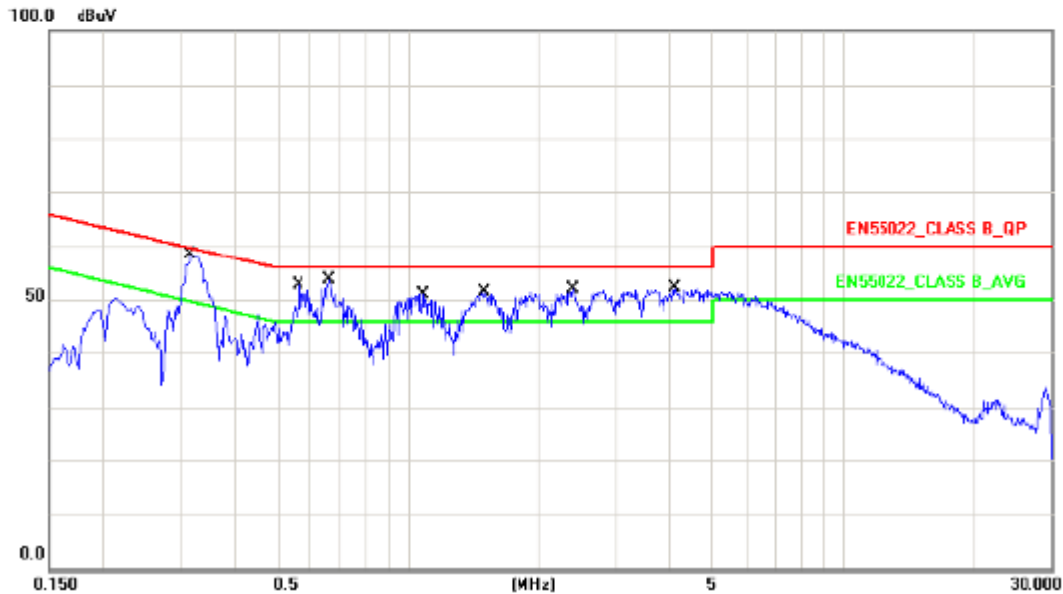


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	10.27	45.95	56.22	59.76	-3.54	QP
2	0.3180	10.27	35.26	45.53	49.76	-4.23	AVG
3	0.5620	10.30	37.13	47.43	56.00	-8.57	QP
4	0.5620	10.30	27.68	37.98	46.00	-8.02	AVG
5	0.6580	10.31	40.86	51.17	56.00	-4.83	QP
6	0.6580	10.31	28.67	38.98	46.00	-7.02	AVG
7	1.0780	10.31	37.75	48.06	56.00	-7.94	QP
8	1.0780	10.31	28.46	38.77	46.00	-7.23	AVG
9	1.5020	10.30	37.92	48.22	56.00	-7.78	QP
10	1.5020	10.30	28.29	38.59	46.00	-7.41	AVG
11	2.3900	10.30	37.10	47.40	56.00	-8.60	QP
12	2.3900	10.30	27.51	37.81	46.00	-8.19	AVG
13	4.1340	10.29	37.28	47.57	56.00	-8.43	QP
14	4.1340	10.29	27.42	37.71	46.00	-8.29	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

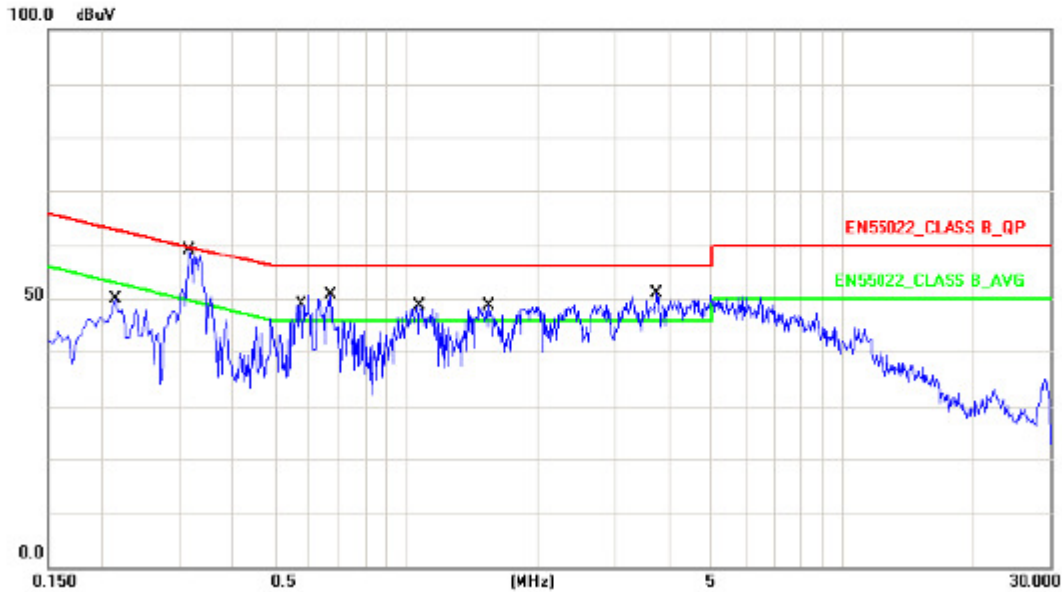


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2140	10.21	34.87	45.08	63.04	-17.96	QP
2	0.2140	10.21	24.84	35.05	53.04	-17.99	AVG
3	0.3180	10.24	43.51	53.75	59.76	-6.01	QP
4	0.3180	10.24	31.21	41.45	49.76	-8.31	AVG
5	0.5740	10.26	35.48	45.74	56.00	-10.26	QP
6	0.5740	10.26	24.38	34.64	46.00	-11.36	AVG
7	0.6700	10.28	35.13	45.41	56.00	-10.59	QP
8	0.6700	10.28	24.23	34.51	46.00	-11.49	AVG
9	1.0700	10.34	33.94	44.28	56.00	-11.72	QP
10	1.0700	10.34	22.88	33.22	46.00	-12.78	AVG
11	1.5420	10.46	33.69	44.15	56.00	-11.85	QP
12	1.5420	10.46	22.97	33.43	46.00	-12.57	AVG
13	3.7300	10.53	32.66	43.19	56.00	-12.81	QP
14	3.7300	10.53	21.71	32.24	46.00	-13.76	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

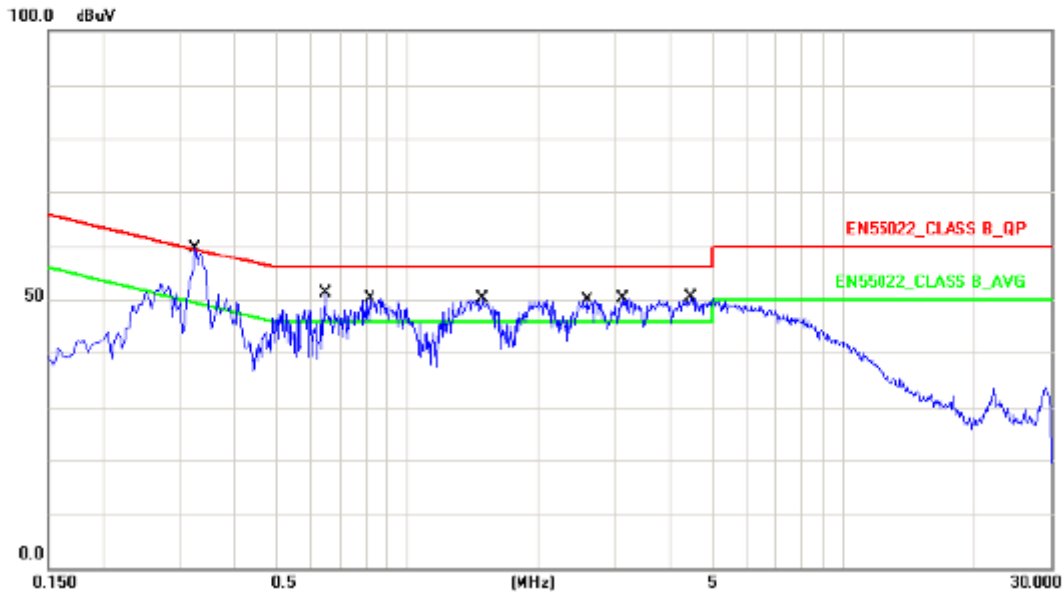


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3260	10.27	45.48	55.75	59.55	-3.80	QP
2	0.3260	10.27	35.29	45.56	49.55	-3.99	AVG
3	0.6500	10.31	36.83	47.14	56.00	-8.86	QP
4	0.6500	10.31	24.30	34.61	46.00	-11.39	AVG
5	0.8180	10.32	36.25	46.57	56.00	-9.43	QP
6	0.8180	10.32	26.85	37.17	46.00	-8.83	AVG
7	1.4900	10.30	35.88	46.18	56.00	-9.82	QP
8	1.4900	10.30	27.27	37.57	46.00	-8.43	AVG
9	2.5820	10.30	35.54	45.84	56.00	-10.16	QP
10	2.5820	10.30	26.70	37.00	46.00	-9.00	AVG
11	3.1180	10.30	35.47	45.77	56.00	-10.23	QP
12	3.1180	10.30	26.52	36.82	46.00	-9.18	AVG
13	4.4860	10.29	35.32	45.61	56.00	-10.39	QP
14	4.4860	10.29	24.79	35.08	46.00	-10.92	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

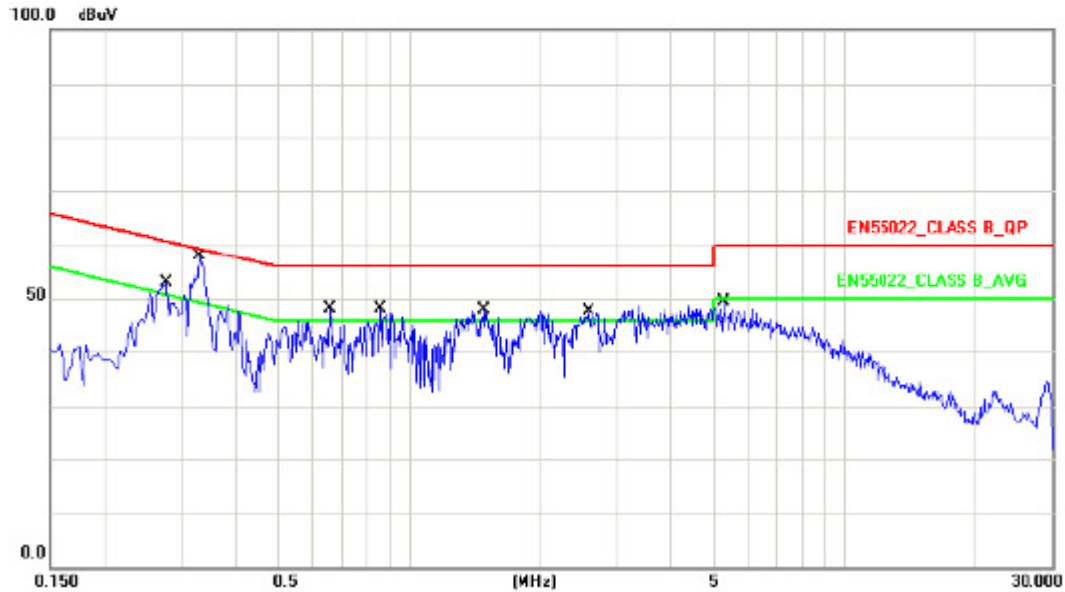


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2779	10.24	37.27	47.51	60.88	-13.37	QP
2	0.2779	10.24	27.64	37.88	50.88	-13.00	AVG
3	0.3300	10.24	43.01	53.25	59.45	-6.20	QP
4	0.3300	10.24	31.62	41.86	49.45	-7.59	AVG
5	0.6580	10.27	30.36	40.63	56.00	-15.37	QP
6	0.6580	10.27	20.12	30.39	46.00	-15.61	AVG
7	0.8660	10.31	33.66	43.97	56.00	-12.03	QP
8	0.8660	10.31	23.34	33.65	46.00	-12.35	AVG
9	1.4940	10.45	33.13	43.58	56.00	-12.42	QP
10	1.4940	10.45	22.27	32.72	46.00	-13.28	AVG
11	2.5780	10.51	32.45	42.96	56.00	-13.04	QP
12	2.5780	10.51	21.93	32.44	46.00	-13.56	AVG
13	5.2660	10.56	30.18	40.74	60.00	-19.26	QP
14	5.2660	10.56	20.54	31.10	50.00	-18.90	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

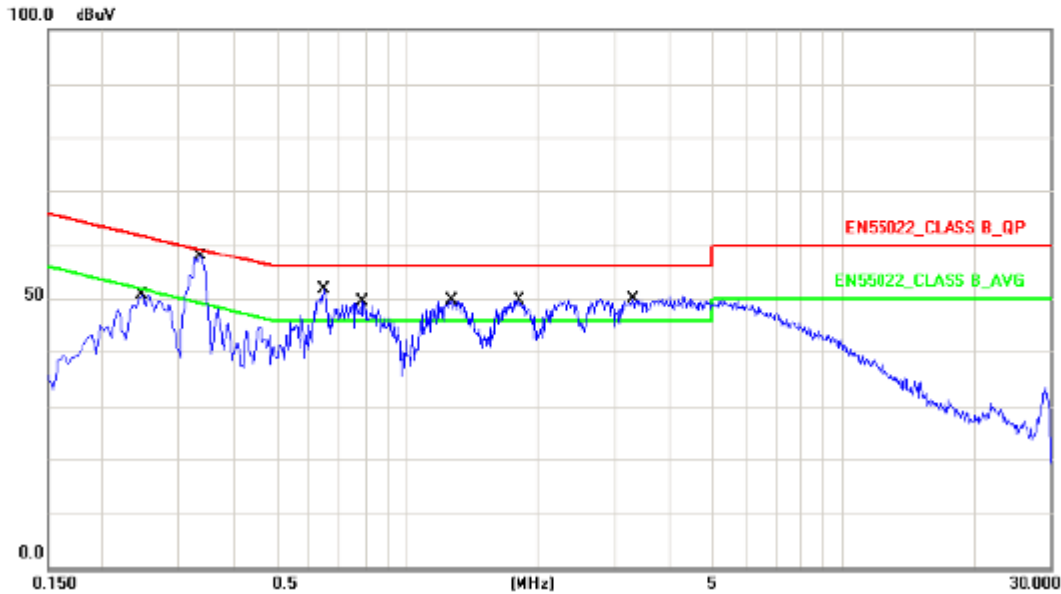


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2460	10.26	37.83	48.09	61.89	-13.80	QP
2	0.2460	10.26	29.73	39.99	51.89	-11.90	AVG
3	0.3339	10.27	46.41	56.68	59.35	-2.67	QP
4	0.3339	10.27	36.27	46.54	49.35	-2.81	AVG
5	0.6460	10.31	38.07	48.38	56.00	-7.62	QP
6	0.6460	10.31	26.53	36.84	46.00	-9.16	AVG
7	0.7860	10.32	35.93	46.25	56.00	-9.75	QP
8	0.7860	10.32	26.13	36.45	46.00	-9.55	AVG
9	1.2700	10.30	36.39	46.69	56.00	-9.31	QP
10	1.2700	10.30	27.24	37.54	46.00	-8.46	AVG
11	1.8180	10.29	35.38	45.67	56.00	-10.33	QP
12	1.8180	10.29	26.58	36.87	46.00	-9.13	AVG
13	3.3100	10.30	35.94	46.24	56.00	-9.76	QP
14	3.3100	10.30	26.69	36.99	46.00	-9.01	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

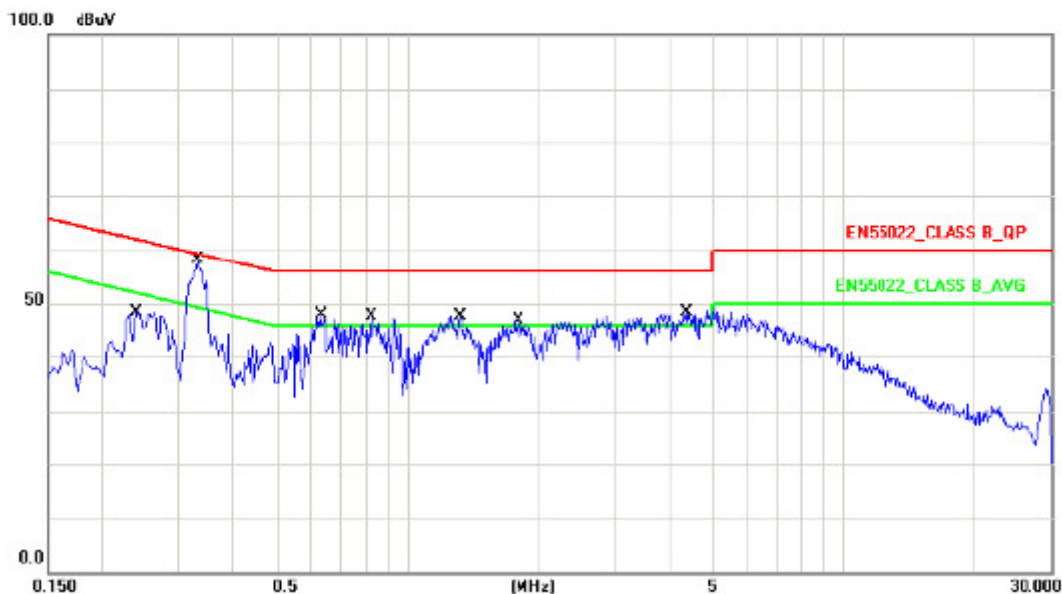


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2380	10.23	34.02	44.25	62.16	-17.91	QP
2	0.2380	10.23	24.26	34.49	52.16	-17.67	AVG
3	0.3300	10.24	42.80	53.04	59.45	-6.41	QP
4	0.3300	10.24	31.90	42.14	49.45	-7.31	AVG
5	0.6340	10.27	33.29	43.56	56.00	-12.44	QP
6	0.6340	10.27	22.47	32.74	46.00	-13.26	AVG
7	0.8300	10.30	32.18	42.48	56.00	-13.52	QP
8	0.8300	10.30	21.35	31.65	46.00	-14.35	AVG
9	1.3260	10.41	32.98	43.39	56.00	-12.61	QP
10	1.3260	10.41	22.69	33.10	46.00	-12.90	AVG
11	1.8060	10.47	32.31	42.78	56.00	-13.22	QP
12	1.8060	10.47	21.97	32.44	46.00	-13.56	AVG
13	4.3900	10.54	31.38	41.92	56.00	-14.08	QP
14	4.3900	10.54	20.93	31.47	46.00	-14.53	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temperature :	22℃	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

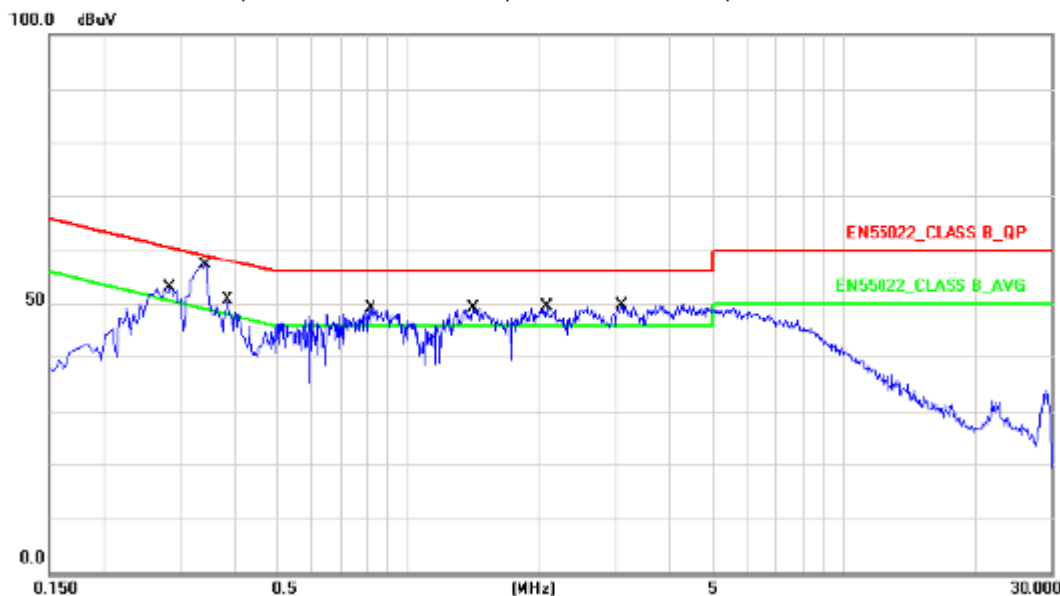


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2860	10.27	39.92	50.19	60.64	-10.45	QP
2	0.2860	10.27	30.19	40.46	50.64	-10.18	AVG
3	0.3420	10.27	43.64	53.91	59.15	-5.24	QP
4	0.3420	10.27	35.62	45.89	49.15	-3.26	AVG
5	0.3860	10.28	37.40	47.68	58.15	-10.47	QP
6	0.3860	10.28	28.97	39.25	48.15	-8.90	AVG
7	0.8220	10.32	35.50	45.82	56.00	-10.18	QP
8	0.8220	10.32	26.37	36.69	46.00	-9.31	AVG
9	1.4140	10.30	35.98	46.28	56.00	-9.72	QP
10	1.4140	10.30	27.30	37.60	46.00	-8.40	AVG
11	2.0820	10.30	34.74	45.04	56.00	-10.96	QP
12	2.0820	10.30	26.24	36.54	46.00	-9.46	AVG
13	3.1020	10.30	34.60	44.90	56.00	-11.10	QP
14	3.1020	10.30	25.77	36.07	46.00	-9.93	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

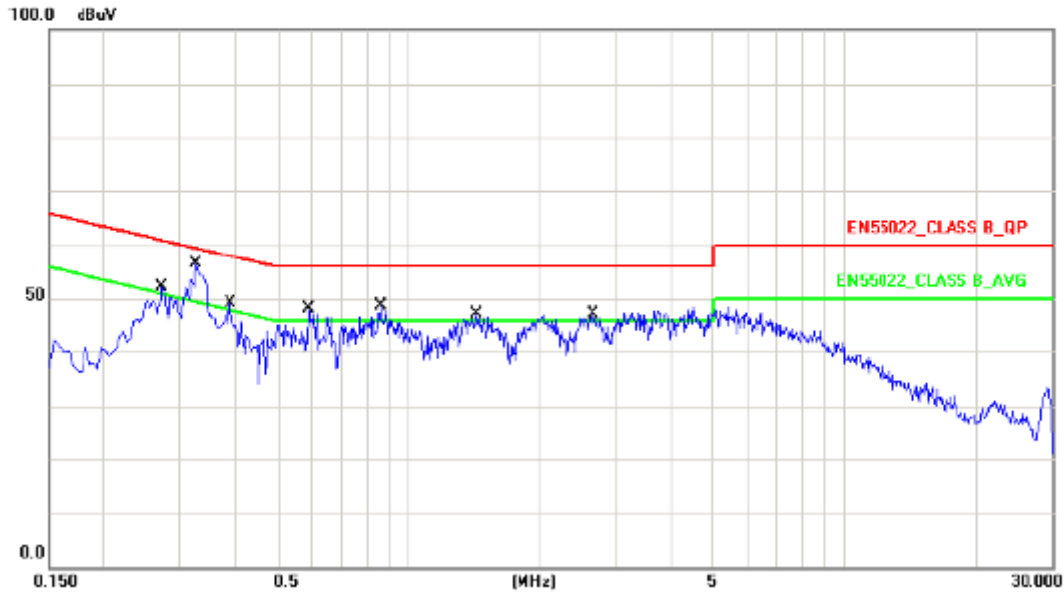


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2740	10.23	37.59	47.82	60.99	-13.17	QP
2	0.2740	10.23	28.33	38.56	50.99	-12.43	AVG
3	0.3260	10.24	41.01	51.25	59.55	-8.30	QP
4	0.3260	10.24	29.89	40.13	49.55	-9.42	AVG
5	0.3899	10.24	33.03	43.27	58.06	-14.79	QP
6	0.3899	10.24	22.96	33.20	48.06	-14.86	AVG
7	0.5940	10.26	30.96	41.22	56.00	-14.78	QP
8	0.5940	10.26	17.42	27.68	46.00	-18.32	AVG
9	0.8700	10.31	33.46	43.77	56.00	-12.23	QP
10	0.8700	10.31	23.30	33.61	46.00	-12.39	AVG
11	1.4340	10.43	31.84	42.27	56.00	-13.73	QP
12	1.4340	10.43	21.71	32.14	46.00	-13.86	AVG
13	2.6580	10.51	31.08	41.59	56.00	-14.41	QP
14	2.6580	10.51	20.82	31.33	46.00	-14.67	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 5: Normal Operation for IPC-HDBW4421EP POE Mode		
DC Power :	POE 48V	Phase :	POE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temperature :	22℃	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

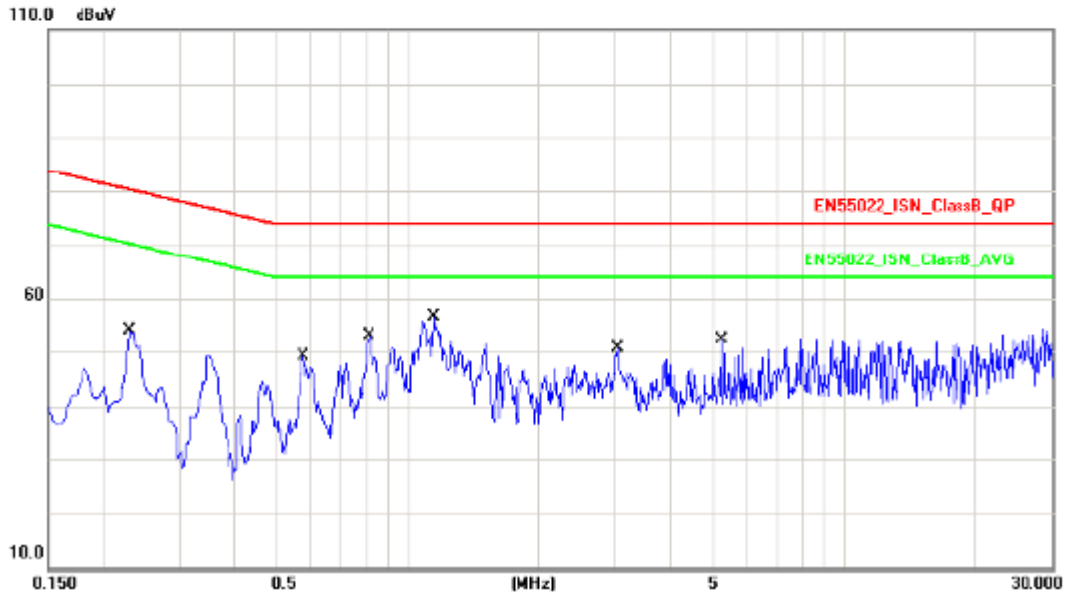


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2300	19.62	31.39	51.01	81.71	-30.70	QP
2	0.2300	19.62	26.89	46.51	71.71	-25.20	AVG
3	0.5780	19.58	25.58	45.16	74.00	-28.84	QP
4	0.5780	19.58	19.03	38.61	64.00	-25.39	AVG
5	0.8139	19.45	28.82	48.27	74.00	-25.73	QP
6	0.8139	19.45	24.11	43.56	64.00	-20.44	AVG
7	1.1460	19.28	32.21	51.49	74.00	-22.51	QP
8	1.1460	19.28	24.64	43.92	64.00	-20.08	AVG
9	3.0380	19.37	27.49	46.86	74.00	-27.14	QP
10	3.0380	19.37	23.16	42.53	64.00	-21.47	AVG
11	5.2380	19.67	30.14	49.81	74.00	-24.19	QP
12	5.2380	19.67	27.15	46.82	64.00	-17.18	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Normal Operation for IPC-HDBW4120EP POE Mode		
DC Power :	POE 48V	Phase :	POE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/05/25

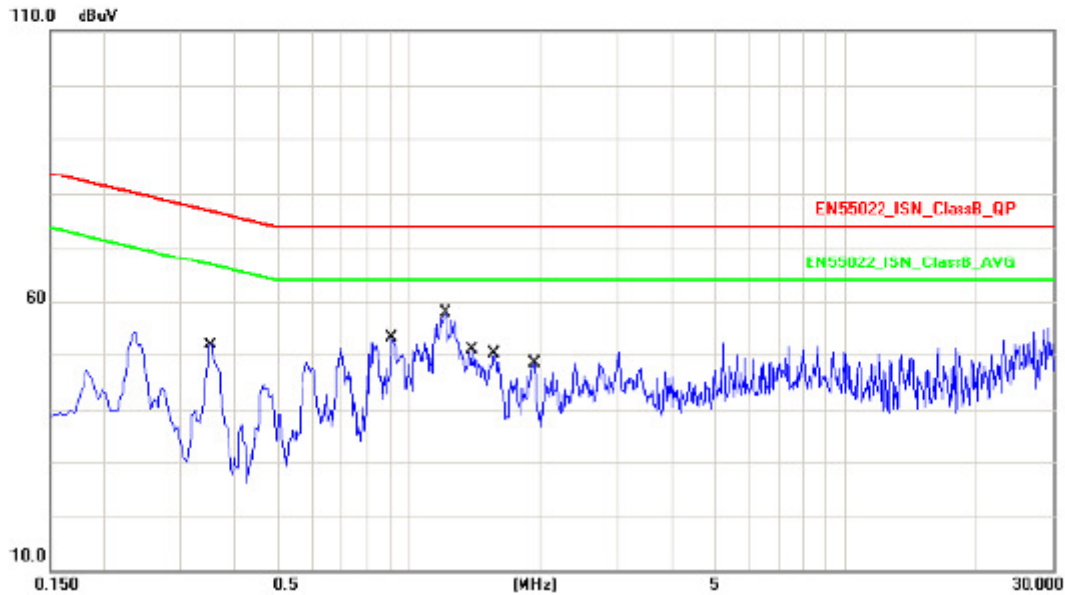


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3500	19.62	28.54	48.16	78.28	-30.12	QP
2	0.3500	19.62	24.35	43.97	68.28	-24.31	AVG
3	0.9180	19.37	28.67	48.04	74.00	-25.96	QP
4	0.9180	19.37	21.75	41.12	64.00	-22.88	AVG
5	1.2100	19.28	34.81	54.09	74.00	-19.91	QP
6	1.2100	19.28	27.44	46.72	64.00	-17.28	AVG
7	1.3900	19.26	24.72	43.98	74.00	-30.02	QP
8	1.3900	19.26	16.81	36.07	64.00	-27.93	AVG
9	1.5660	19.24	28.31	47.55	74.00	-26.45	QP
10	1.5660	19.24	21.36	40.60	64.00	-23.40	AVG
11	1.9420	19.20	23.95	43.15	74.00	-30.85	QP
12	1.9420	19.20	17.99	37.19	64.00	-26.81	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 7: Normal Operation for IPC-HDBW4221EP POE Mode		
DC Power :	POE 48V	Phase :	POE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/05/25

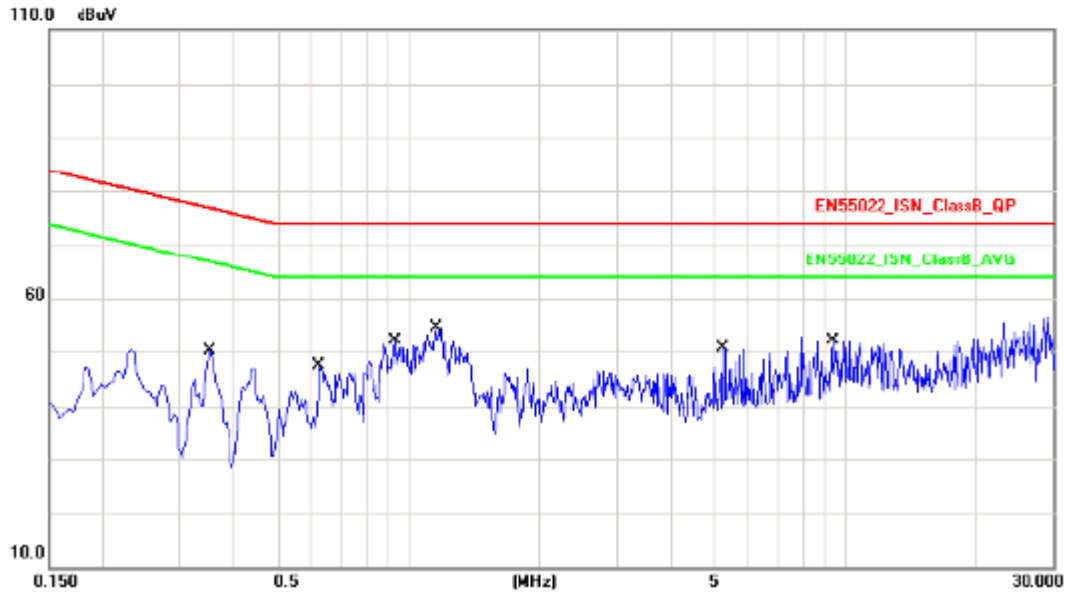


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3500	19.62	27.65	47.27	78.28	-31.01	QP
2	0.3500	19.62	24.07	43.69	68.28	-24.59	AVG
3	0.6260	19.57	22.37	41.94	74.00	-32.06	QP
4	0.6260	19.57	16.98	36.55	64.00	-27.45	AVG
5	0.9300	19.36	28.57	47.93	74.00	-26.07	QP
6	0.9300	19.36	23.64	43.00	64.00	-21.00	AVG
7	1.1539	19.28	30.78	50.06	74.00	-23.94	QP
8	1.1539	19.28	24.74	44.02	64.00	-19.98	AVG
9	5.2380	19.67	29.80	49.47	74.00	-24.53	QP
10	5.2380	19.67	26.83	46.50	64.00	-17.50	AVG
11	9.3900	19.60	30.34	49.94	74.00	-24.06	QP
12	9.3900	19.60	27.17	46.77	64.00	-17.23	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 8: Normal Operation for IPC-HDBW4220EP POE Mode		
DC Power :	POE 48V	Phase :	POE
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temperature :	23°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/05/25

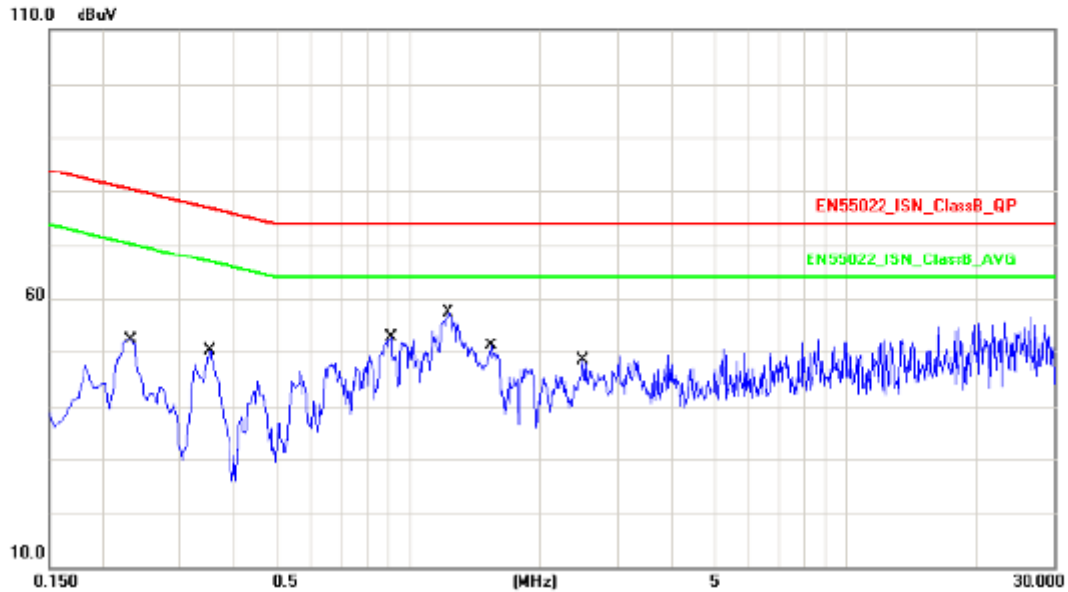

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2300	19.62	29.67	49.29	81.71	-32.42	QP
2	0.2300	19.62	26.45	46.07	71.71	-25.64	AVG
3	0.3500	19.62	27.95	47.57	78.28	-30.71	QP
4	0.3500	19.62	24.09	43.71	68.28	-24.57	AVG
5	0.9100	19.37	26.95	46.32	74.00	-27.68	QP
6	0.9100	19.37	20.16	39.53	64.00	-24.47	AVG
7	1.2340	19.27	34.47	53.74	74.00	-20.26	QP
8	1.2340	19.27	25.20	44.47	64.00	-19.53	AVG
9	1.5420	19.24	27.93	47.17	74.00	-26.83	QP
10	1.5420	19.24	22.03	41.27	64.00	-22.73	AVG
11	2.4900	19.28	24.07	43.35	74.00	-30.65	QP
12	2.4900	19.28	17.92	37.20	64.00	-26.80	AVG

Note: Measurement Level = Reading Level + Correct Factor


EN55032 Limit=EN55022 Limit



Conducted Emission for Telecommunication Port Test Data

Fourth Issue

Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W (LAN 10Mbps+POE)		
AC Power :	AC 230V/50Hz	Phase :	10Mbps
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temperature :	20°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/03/17

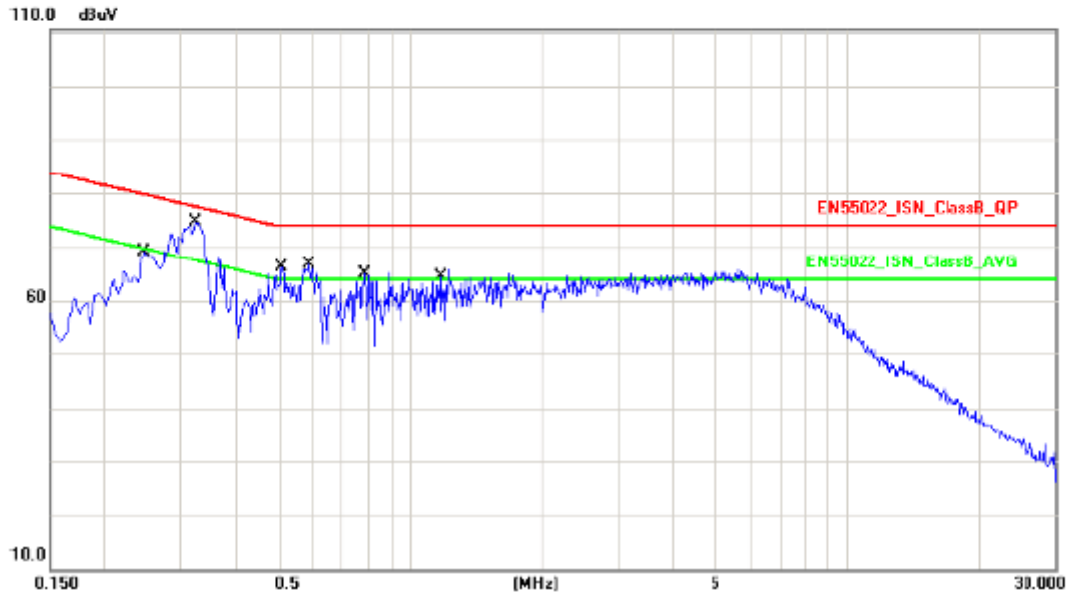


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2460	19.62	45.60	65.22	81.26	-16.04	QP
2	0.2460	19.62	35.60	55.22	71.26	-16.04	AVG
3	0.3220	19.62	56.09	75.71	79.08	-3.37	QP
4	0.3220	19.62	46.02	65.64	69.08	-3.44	AVG
5	0.5100	19.60	42.52	62.12	74.00	-11.88	QP
6	0.5100	19.60	32.18	51.78	64.00	-12.22	AVG
7	0.5860	19.58	43.50	63.08	74.00	-10.92	QP
8	0.5860	19.58	33.82	53.40	64.00	-10.60	AVG
9	0.7860	19.48	40.91	60.39	74.00	-13.61	QP
10	0.7860	19.48	31.67	51.15	64.00	-12.85	AVG
11	1.1820	19.28	39.20	58.48	74.00	-15.52	QP
12	1.1820	19.28	30.00	49.28	64.00	-14.72	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Full system for IPC-HDBW1320EN-W (LAN 100Mbps+POE)		
AC Power :	AC 230V/50Hz	Phase :	100Mbps
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temperature :	20°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/03/17

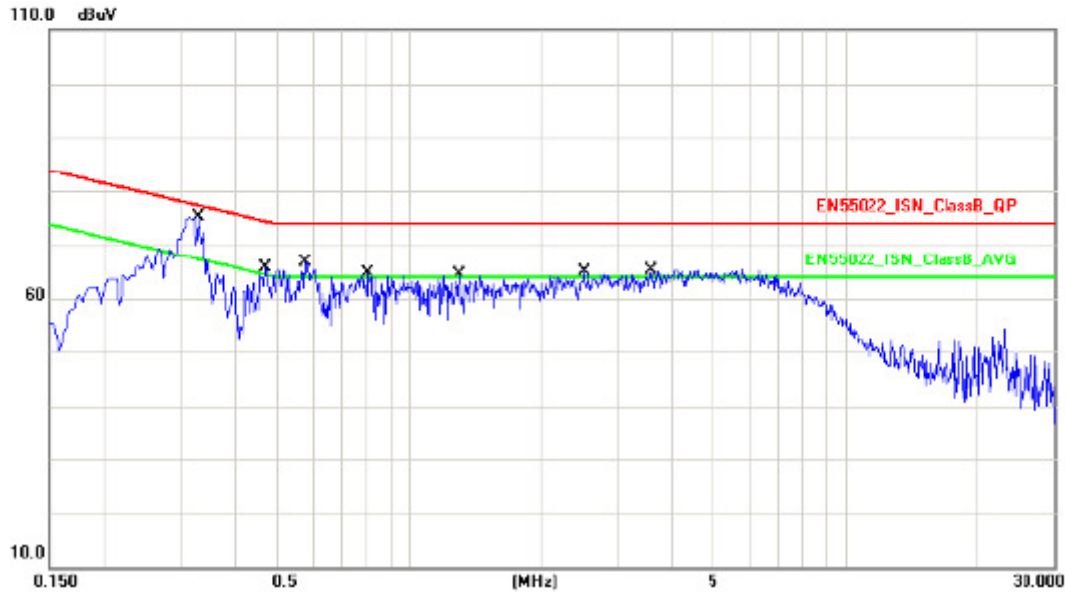

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	19.62	55.40	75.02	78.86	-3.84	QP
2	0.3300	19.62	45.86	65.48	68.86	-3.38	AVG
3	0.4700	19.60	42.06	61.66	74.86	-13.20	QP
4	0.4700	19.60	31.25	50.85	64.86	-14.01	AVG
5	0.5780	19.58	42.71	62.29	74.00	-11.71	QP
6	0.5780	19.58	33.10	52.68	64.00	-11.32	AVG
7	0.8059	19.46	40.90	60.36	74.00	-13.64	QP
8	0.8059	19.46	30.73	50.19	64.00	-13.81	AVG
9	1.2980	19.27	38.84	58.11	74.00	-15.89	QP
10	1.2980	19.27	28.95	48.22	64.00	-15.78	AVG
11	2.5260	19.29	39.23	58.52	74.00	-15.48	QP
12	2.5260	19.29	30.90	50.19	64.00	-13.81	AVG
13	3.5940	19.46	39.31	58.77	74.00	-15.23	QP
14	3.5940	19.46	30.74	50.20	64.00	-13.80	AVG


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Second Issue

Test Mode :	Mode 5: Full system for DH-IPC-HDBW4421EP-AS (LAN 10Mbps+POE)		
AC Power :	AC 230V/50Hz	Phase :	10Mbps
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temperature :	25°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/06

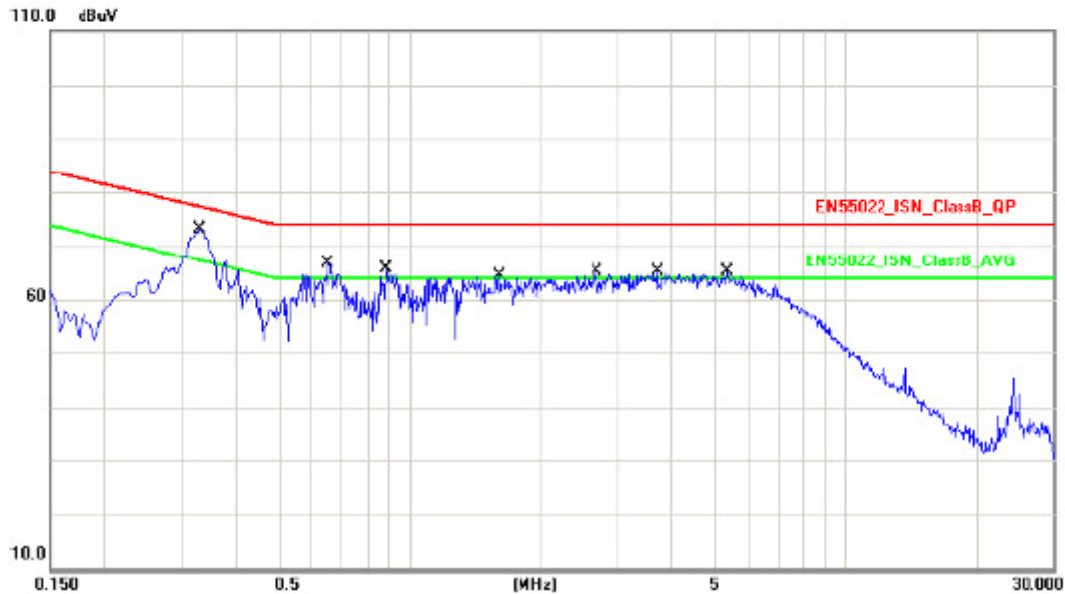

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	19.62	55.95	75.57	78.86	-3.29	QP
2	0.3300	19.62	46.33	65.95	68.86	-2.91	AVG
3	0.6540	19.57	43.34	62.91	74.00	-11.09	QP
4	0.6540	19.57	32.98	52.55	64.00	-11.45	AVG
5	0.8860	19.39	42.74	62.13	74.00	-11.87	QP
6	0.8860	19.39	32.68	52.07	64.00	-11.93	AVG
7	1.6019	19.23	40.95	60.18	74.00	-13.82	QP
8	1.6019	19.23	30.79	50.02	64.00	-13.98	AVG
9	2.6860	19.31	40.73	60.04	74.00	-13.96	QP
10	2.6860	19.31	30.91	50.22	64.00	-13.78	AVG
11	3.6820	19.47	40.57	60.04	74.00	-13.96	QP
12	3.6820	19.47	31.35	50.82	64.00	-13.18	AVG
13	5.3340	19.65	39.59	59.24	74.00	-14.76	QP
14	5.3340	19.65	30.39	50.04	64.00	-13.96	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Full system for DH-IPC-HDBW4421EP-AS (LAN 100Mbps+POE)		
AC Power :	AC 230V/50Hz	Phase :	100Mbps
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temperature :	25°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/06



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3420	19.62	54.95	74.57	78.51	-3.94	QP
2	0.3420	19.62	46.38	66.00	68.51	-2.51	AVG
3	0.5580	19.59	42.29	61.88	74.00	-12.12	QP
4	0.5580	19.59	31.92	51.51	64.00	-12.49	AVG
5	0.6660	19.57	43.15	62.72	74.00	-11.28	QP
6	0.6660	19.57	33.42	52.99	64.00	-11.01	AVG
7	0.9020	19.38	43.26	62.64	74.00	-11.36	QP
8	0.9020	19.38	33.88	53.26	64.00	-10.74	AVG
9	1.7620	19.22	40.20	59.42	74.00	-14.58	QP
10	1.7620	19.22	29.07	48.29	64.00	-15.71	AVG
11	2.4180	19.27	41.15	60.42	74.00	-13.58	QP
12	2.4180	19.27	31.58	50.85	64.00	-13.15	AVG
13	4.5140	19.62	40.16	59.78	74.00	-14.22	QP
14	4.5140	19.62	30.95	50.57	64.00	-13.43	AVG


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Initial Issue

Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temperature :	23℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/05/25

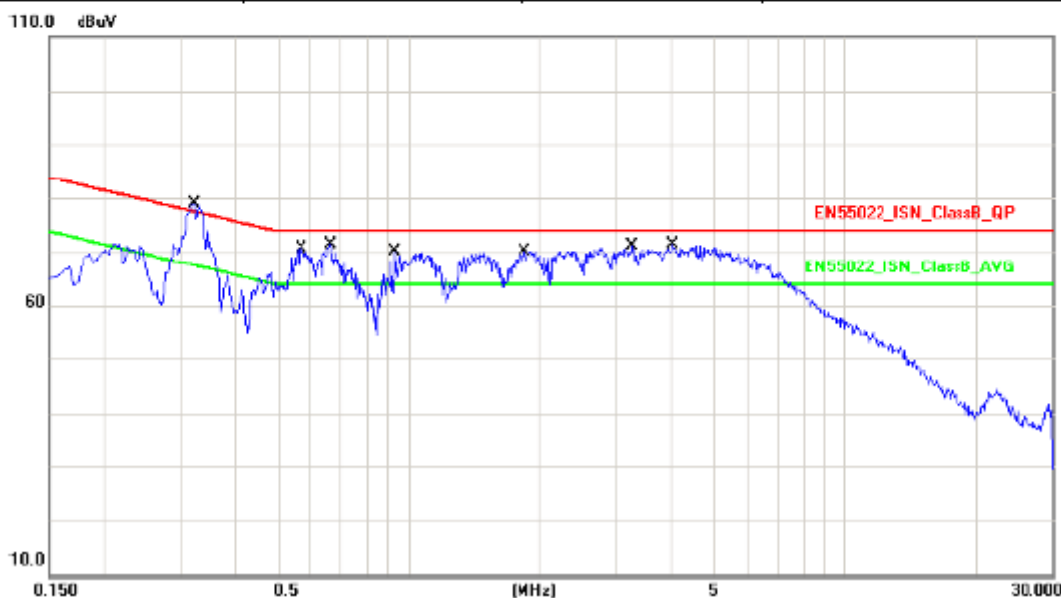


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3220	19.70	57.33	77.03	79.08	-2.05	QP
2	0.3220	19.70	47.32	67.02	69.08	-2.06	AVG
3	0.5700	19.62	48.59	68.21	74.00	-5.79	QP
4	0.5700	19.62	38.59	58.21	64.00	-5.79	AVG
5	0.6620	19.62	48.91	68.53	74.00	-5.47	QP
6	0.6620	19.62	38.10	57.72	64.00	-6.28	AVG
7	0.9380	19.61	45.08	64.69	74.00	-9.31	QP
8	0.9380	19.61	33.17	52.78	64.00	-11.22	AVG
9	1.8500	19.62	46.67	66.29	74.00	-7.71	QP
10	1.8500	19.62	37.86	57.48	64.00	-6.52	AVG
11	3.2620	19.63	46.42	66.05	74.00	-7.95	QP
12	3.2620	19.63	36.12	55.75	64.00	-8.25	AVG
13	4.0580	19.64	46.65	66.29	74.00	-7.71	QP
14	4.0580	19.64	37.13	56.77	64.00	-7.23	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

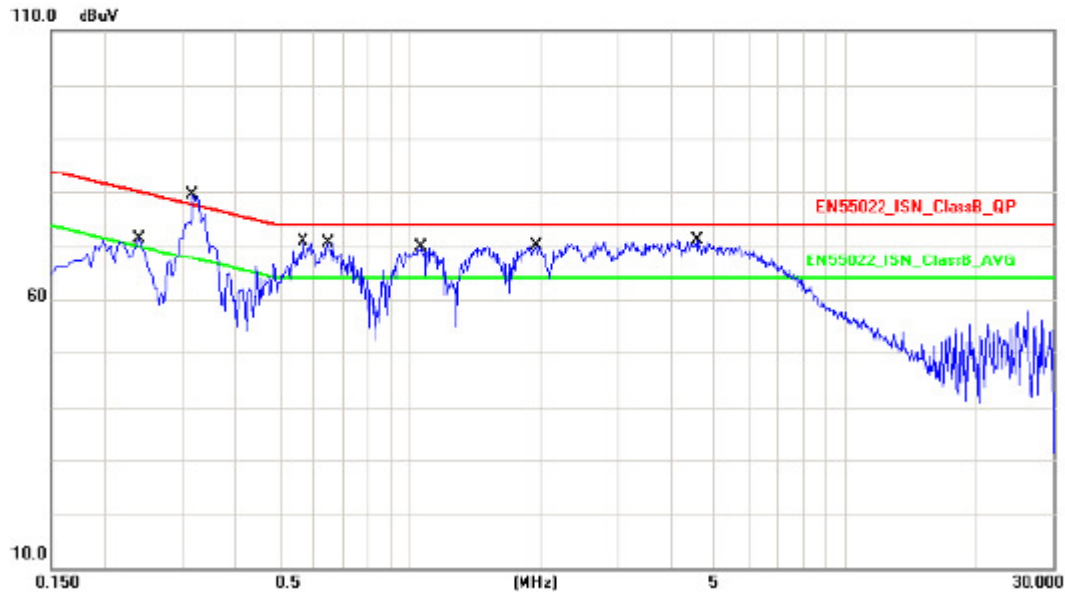


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2380	19.73	48.40	68.13	81.48	-13.35	QP
2	0.2380	19.73	38.16	57.89	71.48	-13.59	AVG
3	0.3180	19.70	56.21	75.91	79.20	-3.29	QP
4	0.3180	19.70	44.51	64.21	69.20	-4.99	AVG
5	0.5700	19.62	47.94	67.56	74.00	-6.44	QP
6	0.5700	19.62	38.15	57.77	64.00	-6.23	AVG
7	0.6500	19.62	48.58	68.20	74.00	-5.80	QP
8	0.6500	19.62	38.21	57.83	64.00	-6.17	AVG
9	1.0620	19.61	47.16	66.77	74.00	-7.23	QP
10	1.0620	19.61	37.73	57.34	64.00	-6.66	AVG
11	1.9500	19.62	46.64	66.26	74.00	-7.74	QP
12	1.9500	19.62	37.38	57.00	64.00	-7.00	AVG
13	4.5620	19.65	46.43	66.08	74.00	-7.92	QP
14	4.5620	19.65	36.42	56.07	64.00	-7.93	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

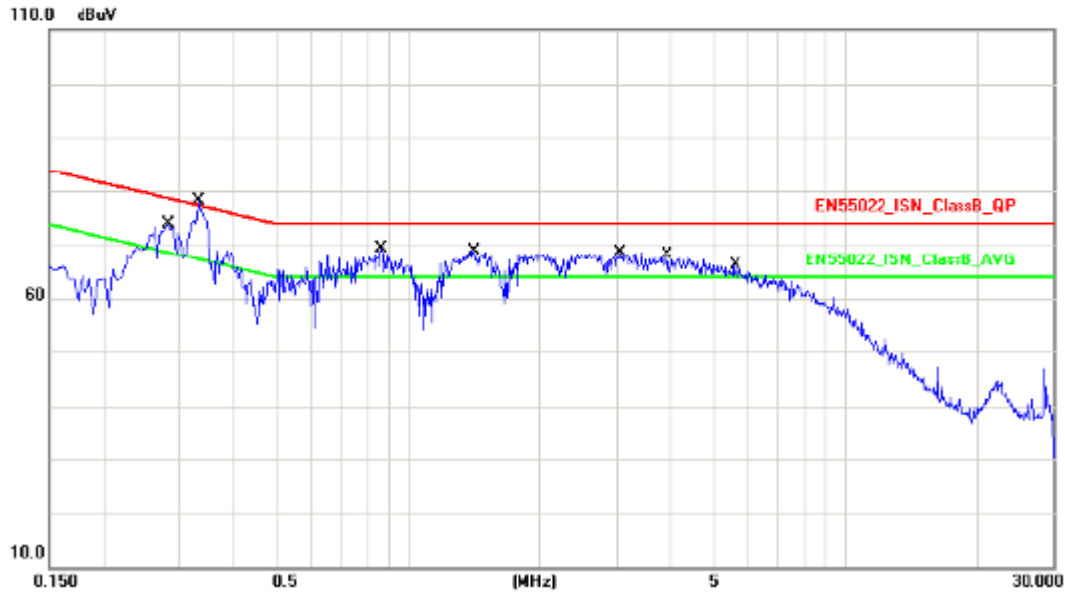


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2819	19.72	50.74	70.46	80.23	-9.77	QP
2	0.2819	19.72	40.67	60.39	70.23	-9.84	AVG
3	0.3300	19.70	56.32	76.02	78.86	-2.84	QP
4	0.3300	19.70	45.96	65.66	68.86	-3.20	AVG
5	0.8700	19.61	46.53	66.14	74.00	-7.86	QP
6	0.8700	19.61	37.82	57.43	64.00	-6.57	AVG
7	1.4180	19.61	45.84	65.45	74.00	-8.55	QP
8	1.4180	19.61	36.28	55.89	64.00	-8.11	AVG
9	3.0540	19.63	45.13	64.76	74.00	-9.24	QP
10	3.0540	19.63	35.47	55.10	64.00	-8.90	AVG
11	3.9100	19.64	43.75	63.39	74.00	-10.61	QP
12	3.9100	19.64	34.05	53.69	64.00	-10.31	AVG
13	5.6020	19.66	41.62	61.28	74.00	-12.72	QP
14	5.6020	19.66	33.69	53.35	64.00	-10.65	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

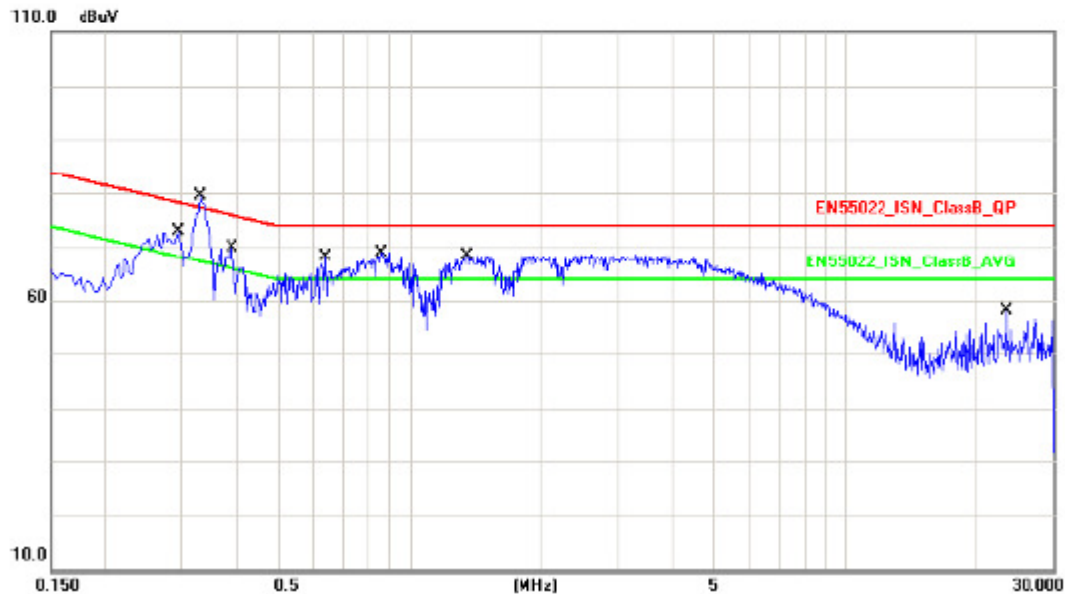


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2940	19.72	49.47	69.19	79.88	-10.69	QP
2	0.2940	19.72	40.11	59.83	69.88	-10.05	AVG
3	0.3300	19.70	56.49	76.19	78.86	-2.67	QP
4	0.3300	19.70	46.04	65.74	68.86	-3.12	AVG
5	0.3899	19.67	46.83	66.50	77.14	-10.64	QP
6	0.3899	19.67	37.40	57.07	67.14	-10.07	AVG
7	0.6419	19.62	42.79	62.41	74.00	-11.59	QP
8	0.6419	19.62	32.60	52.22	64.00	-11.78	AVG
9	0.8620	19.61	46.43	66.04	74.00	-7.96	QP
10	0.8620	19.61	37.29	56.90	64.00	-7.10	AVG
11	1.3540	19.61	45.77	65.38	74.00	-8.62	QP
12	1.3540	19.61	36.69	56.30	64.00	-7.70	AVG
13	23.3260	19.81	33.02	52.83	74.00	-21.17	QP
14	23.3260	19.81	14.59	34.40	64.00	-29.60	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

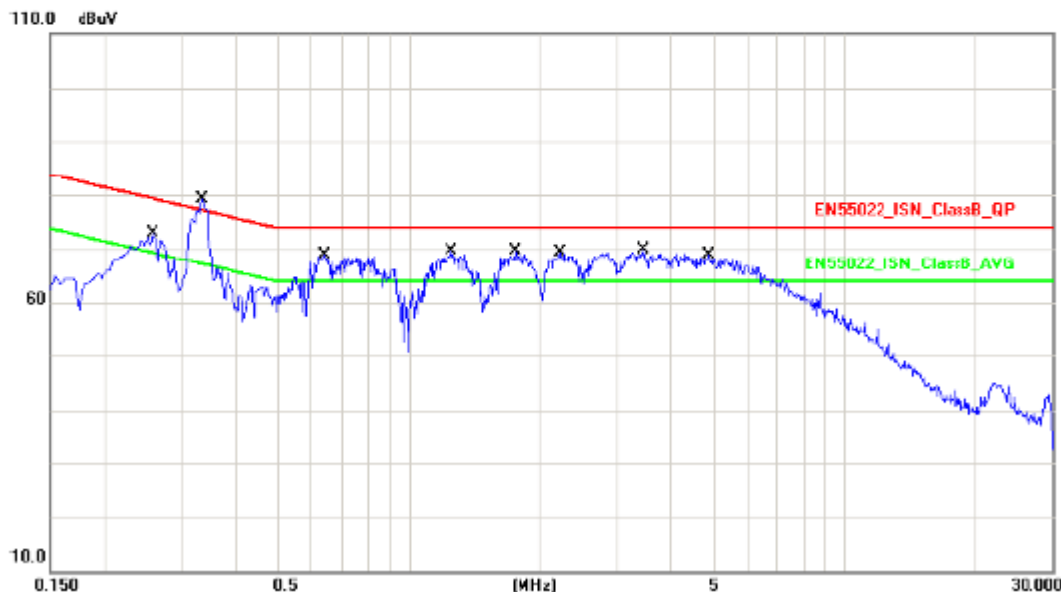


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	19.72	50.27	69.99	80.91	-10.92	QP
2	0.2580	19.72	39.80	59.52	70.91	-11.39	AVG
3	0.3339	19.70	56.51	76.21	78.74	-2.53	QP
4	0.3339	19.70	46.75	66.45	68.74	-2.29	AVG
5	0.6419	19.62	47.10	66.72	74.00	-7.28	QP
6	0.6419	19.62	36.64	56.26	64.00	-7.74	AVG
7	1.2500	19.61	46.62	66.23	74.00	-7.77	QP
8	1.2500	19.61	37.54	57.15	64.00	-6.85	AVG
9	1.7500	19.62	46.31	65.93	74.00	-8.07	QP
10	1.7500	19.62	37.55	57.17	64.00	-6.83	AVG
11	2.2139	19.63	45.57	65.20	74.00	-8.80	QP
12	2.2139	19.63	36.80	56.43	64.00	-7.57	AVG
13	3.4380	19.63	45.36	64.99	74.00	-9.01	QP
14	3.4380	19.63	34.06	53.69	64.00	-10.31	AVG
15	4.8940	19.66	44.74	64.40	74.00	-9.60	QP
16	4.8940	19.66	35.58	55.24	64.00	-8.76	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

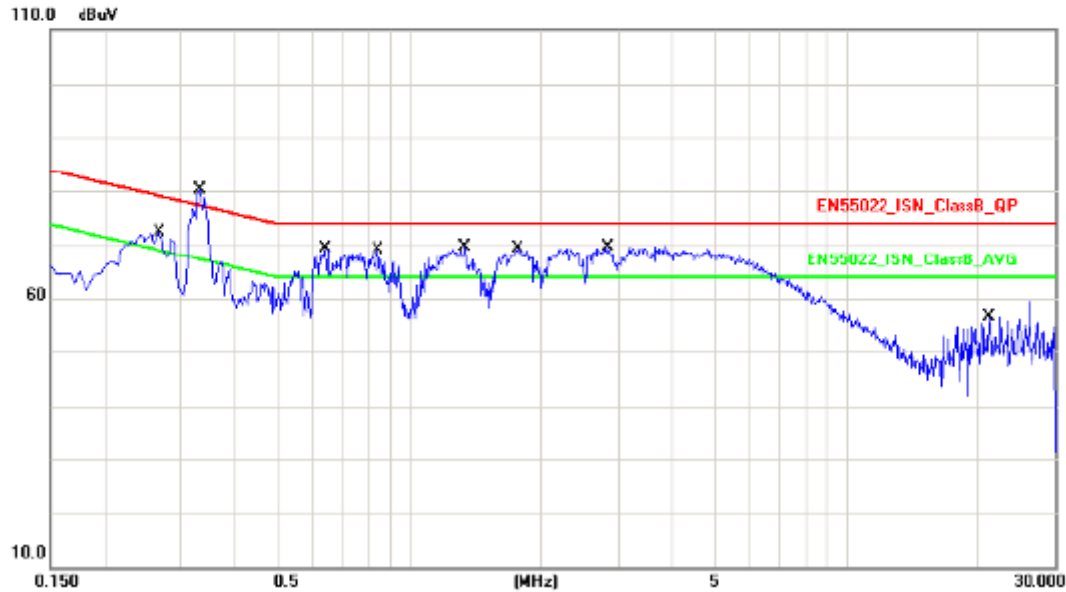


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2660	19.72	50.40	70.12	80.68	-10.56	QP
2	0.2660	19.72	41.29	61.01	70.68	-9.67	AVG
3	0.3300	19.70	57.09	76.79	78.86	-2.07	QP
4	0.3300	19.70	46.67	66.37	68.86	-2.49	AVG
5	0.6419	19.62	46.92	66.54	74.00	-7.46	QP
6	0.6419	19.62	36.91	56.53	64.00	-7.47	AVG
7	0.8460	19.61	45.47	65.08	74.00	-8.92	QP
8	0.8460	19.61	36.16	55.77	64.00	-8.23	AVG
9	1.3380	19.61	45.51	65.12	74.00	-8.88	QP
10	1.3380	19.61	35.48	55.09	64.00	-8.91	AVG
11	1.7540	19.62	46.32	65.94	74.00	-8.06	QP
12	1.7540	19.62	37.45	57.07	64.00	-6.93	AVG
13	2.8460	19.63	45.72	65.35	74.00	-8.65	QP
14	2.8460	19.63	35.56	55.19	64.00	-8.81	AVG
15	21.1900	19.82	30.36	50.18	74.00	-23.82	QP
16	21.1900	19.82	13.93	33.75	64.00	-30.25	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Phase :	10M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temperature :	22℃	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

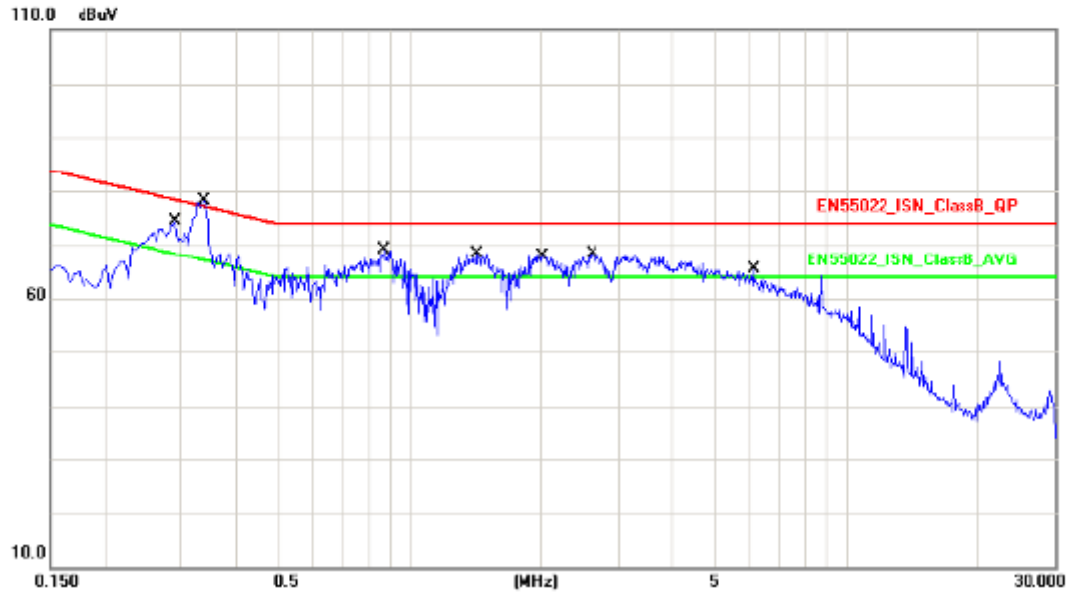


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2900	19.72	50.89	70.61	80.00	-9.39	QP
2	0.2900	19.72	41.40	61.12	70.00	-8.88	AVG
3	0.3379	19.70	55.35	75.05	78.63	-3.58	QP
4	0.3379	19.70	46.81	66.51	68.63	-2.12	AVG
5	0.8780	19.61	45.73	65.34	74.00	-8.66	QP
6	0.8780	19.61	37.09	56.70	64.00	-7.30	AVG
7	1.4260	19.61	45.38	64.99	74.00	-9.01	QP
8	1.4260	19.61	36.40	56.01	64.00	-7.99	AVG
9	2.0220	19.63	45.49	65.12	74.00	-8.88	QP
10	2.0220	19.63	36.62	56.25	64.00	-7.75	AVG
11	2.6180	19.63	45.44	65.07	74.00	-8.93	QP
12	2.6180	19.63	35.99	55.62	64.00	-8.38	AVG
13	6.1420	19.66	39.82	59.48	74.00	-14.52	QP
14	6.1420	19.66	32.64	52.30	64.00	-11.70	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Phase :	100M
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/15

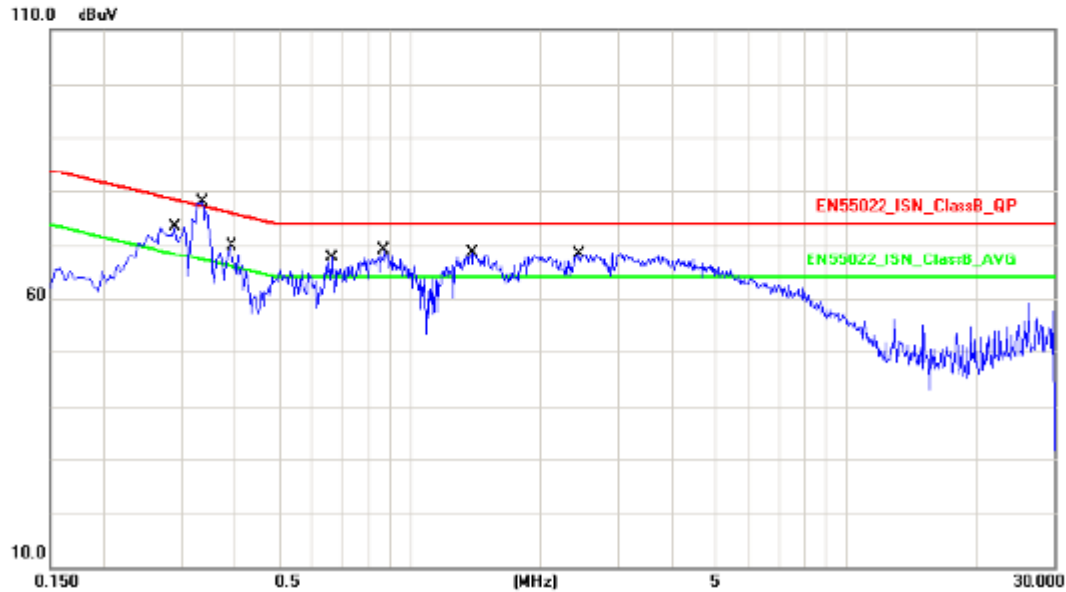

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2900	19.72	50.59	70.31	80.00	-9.69	QP
2	0.2900	19.72	41.09	60.81	70.00	-9.19	AVG
3	0.3339	19.70	55.51	75.21	78.74	-3.53	QP
4	0.3339	19.70	46.37	66.07	68.74	-2.67	AVG
5	0.3899	19.67	46.84	66.51	77.14	-10.63	QP
6	0.3899	19.67	37.56	57.23	67.14	-9.91	AVG
7	0.6620	19.62	43.00	62.62	74.00	-11.38	QP
8	0.6620	19.62	33.55	53.17	64.00	-10.83	AVG
9	0.8780	19.61	46.11	65.72	74.00	-8.28	QP
10	0.8780	19.61	37.52	57.13	64.00	-6.87	AVG
11	1.3980	19.61	45.69	65.30	74.00	-8.70	QP
12	1.3980	19.61	36.63	56.24	64.00	-7.76	AVG
13	2.4380	19.63	44.21	63.84	74.00	-10.16	QP
14	2.4380	19.63	34.76	54.39	64.00	-9.61	AVG

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit

5.1.2 RADIATED EMISSION

Test Method:	EN 55032		
Limit:	Frequency	Limit(@3m)	Remark
	30MHz-230MHz	40dBuV/m	QP value
	230MHz-1GHz	47dBuV/m	QP value
	1GHz-3GHz	50dBuV/m	Average value
		70dBuV/m	PK value
	3GHz-6GHz	54dBuV/m	Average value
		74dBuV/m	PK value

Test Setup:

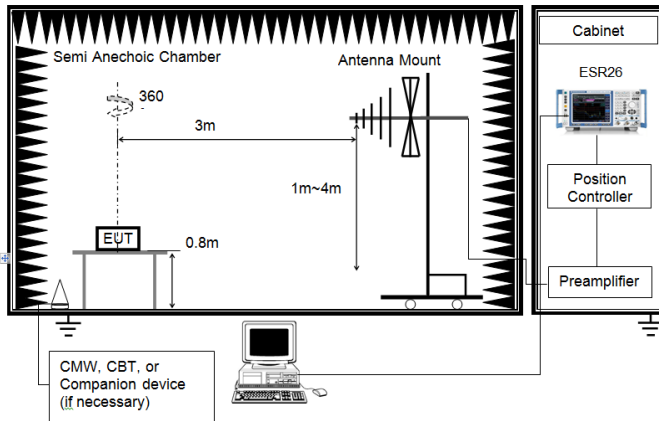


Figure 1. 30MHz to 1GHz

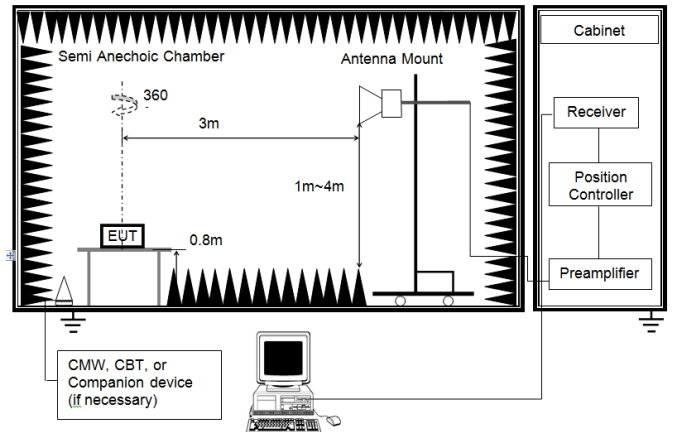


Figure 2. Above 1 GHz

Test Procedure:


- From 30 MHz to 1GHz test procedure as below:
 - The radiated emissions were tested in a semi-anechoic chamber.
 - The EUT is placed on a turntable, which is 0.8m above ground plane.
 - The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
 - EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
 - Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
 - And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
 - Repeat above procedures until the measurements for all frequencies are complete.
- Above 1GHz test procedure as below:
 - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber.

Measurement Data:

30MHz ~ 1000MHz

Fourth Issue

Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

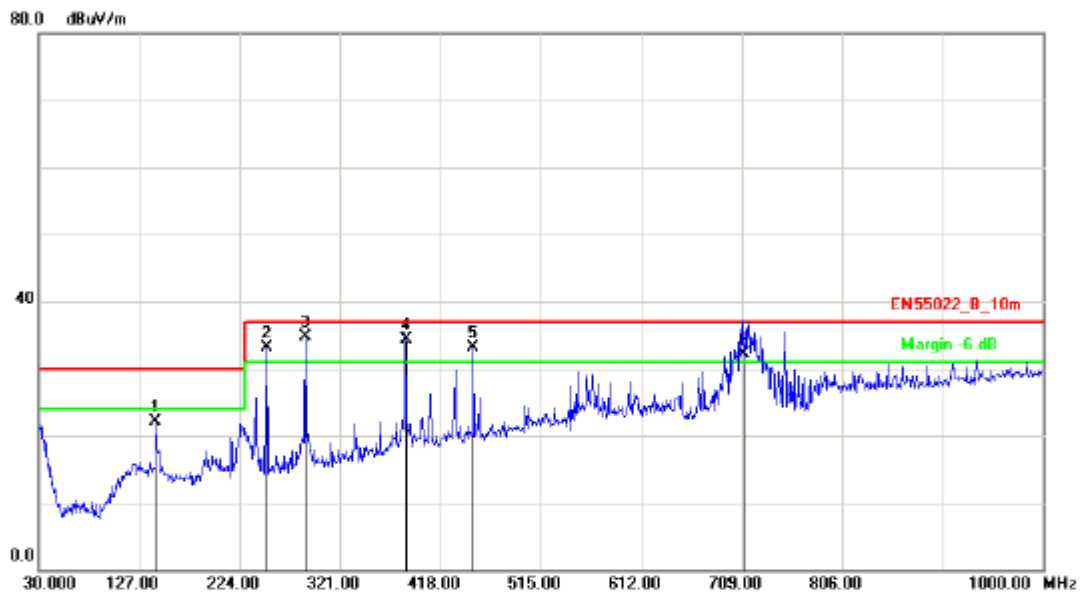


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	143.4900	-10.50	32.57	22.07	30.00	-7.93	QP	100	337
2	250.1899	-10.44	43.61	33.17	37.00	-3.83	QP	100	326
3	288.0199	-8.80	43.47	34.67	37.00	-2.33	QP	100	123
4	385.6200	-6.05	40.44	34.39	37.00	-2.61	QP	100	254
5	450.0099	-4.55	37.57	33.02	37.00	-3.98	QP	100	84
6	710.6500	0.09	32.11	32.20	37.00	-4.80	QP	100	92

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

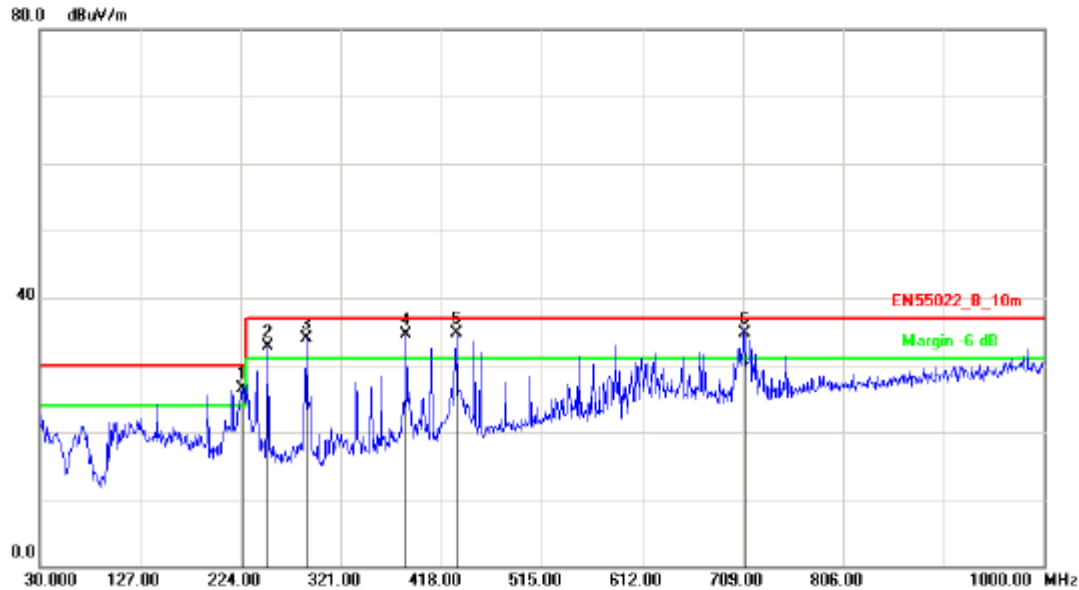


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	225.9400	-11.61	38.11	26.50	30.00	-3.50	QP	100	118
2	250.1900	-10.44	43.19	32.75	37.00	-4.25	QP	100	51
3	288.0200	-8.80	42.78	33.98	37.00	-3.02	QP	100	40
4	384.0500	-6.14	40.63	34.49	37.00	-2.51	QP	100	359
5	432.5500	-4.97	39.71	34.74	37.00	-2.26	QP	100	61
6	710.6500	0.09	34.56	34.65	37.00	-2.35	QP	100	274

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Full system for IPC-HDBW1320EN-W with POE		
DC Power :	POE 48V	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

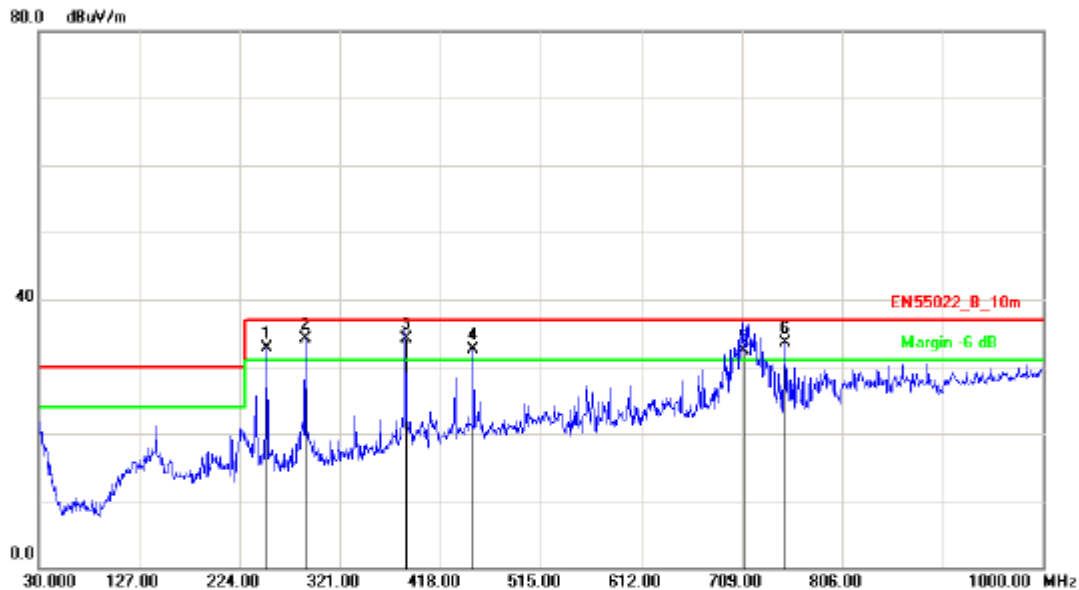


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	250.1899	-10.44	43.11	32.67	37.00	-4.33	QP	400	97
2	288.0199	-8.80	42.97	34.17	37.00	-2.83	QP	400	320
3	385.6200	-6.05	40.16	34.11	37.00	-2.89	QP	100	256
4	450.0099	-4.55	37.07	32.52	37.00	-4.48	QP	400	158
5	710.6500	0.09	32.14	32.23	37.00	-4.77	QP	100	102
6	750.7100	1.10	32.33	33.43	37.00	-3.57	QP	100	221

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Full system for IPC-HDBW1320EN-W with POE		
DC Power :	POE 48V	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

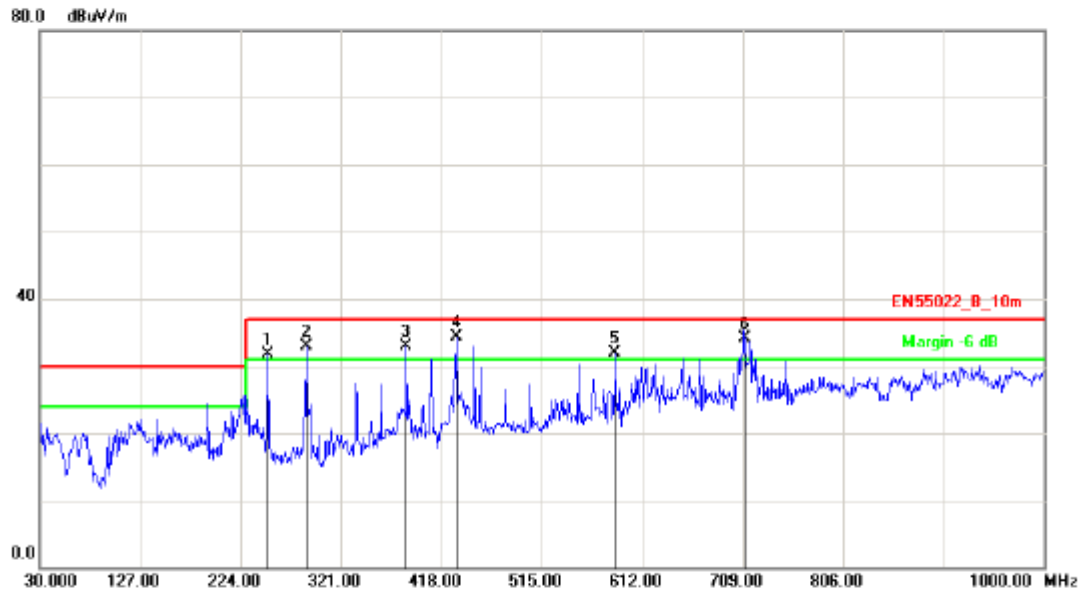


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	250.1899	-10.44	42.19	31.75	37.00	-5.25	QP	400	69
2	288.0199	-8.80	41.78	32.98	37.00	-4.02	QP	100	300
3	384.0500	-6.14	39.13	32.99	37.00	-4.01	QP	400	142
4	432.5500	-4.97	39.21	34.24	37.00	-2.76	QP	100	77
5	585.8099	-1.44	33.28	31.84	37.00	-5.16	QP	100	360
6	710.6500	0.09	34.03	34.12	37.00	-2.88	QP	100	320

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit

Second Issue

Test Mode :	Mode 5: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

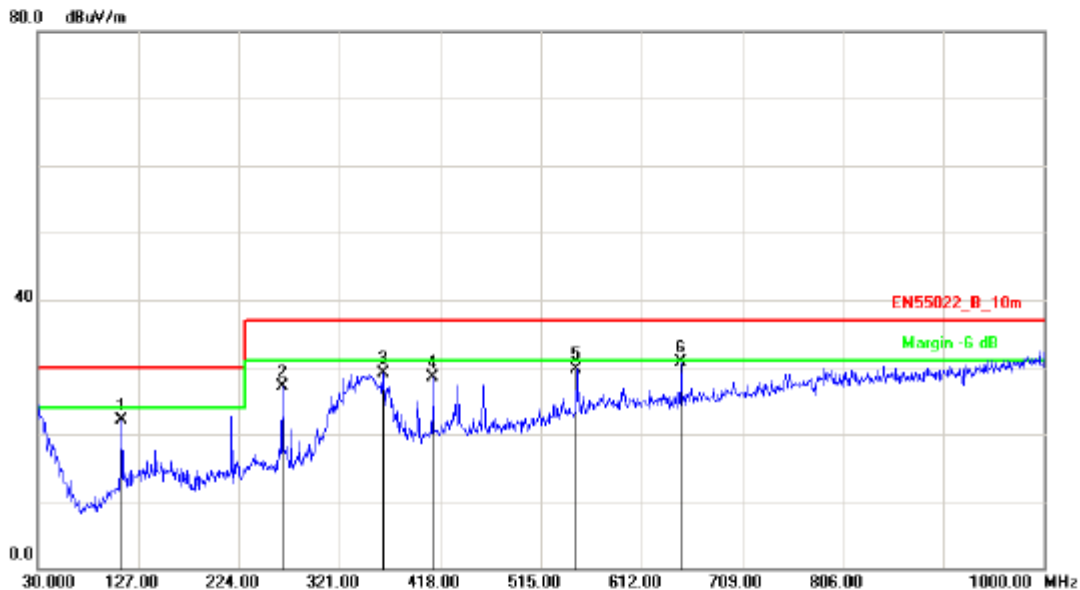


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	110.5100	-12.36	34.44	22.08	30.00	-7.92	QP	100	0
2	265.7099	-9.61	36.66	27.05	37.00	-9.95	QP	200	281
3	362.7099	-5.97	34.98	29.01	37.00	-7.99	QP	200	193
4	411.2099	-4.54	33.05	28.51	37.00	-8.49	QP	200	310
5	549.9198	-1.39	31.04	29.65	37.00	-7.35	QP	200	109
6	650.7998	0.59	30.20	30.79	37.00	-6.21	QP	100	155

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 5: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

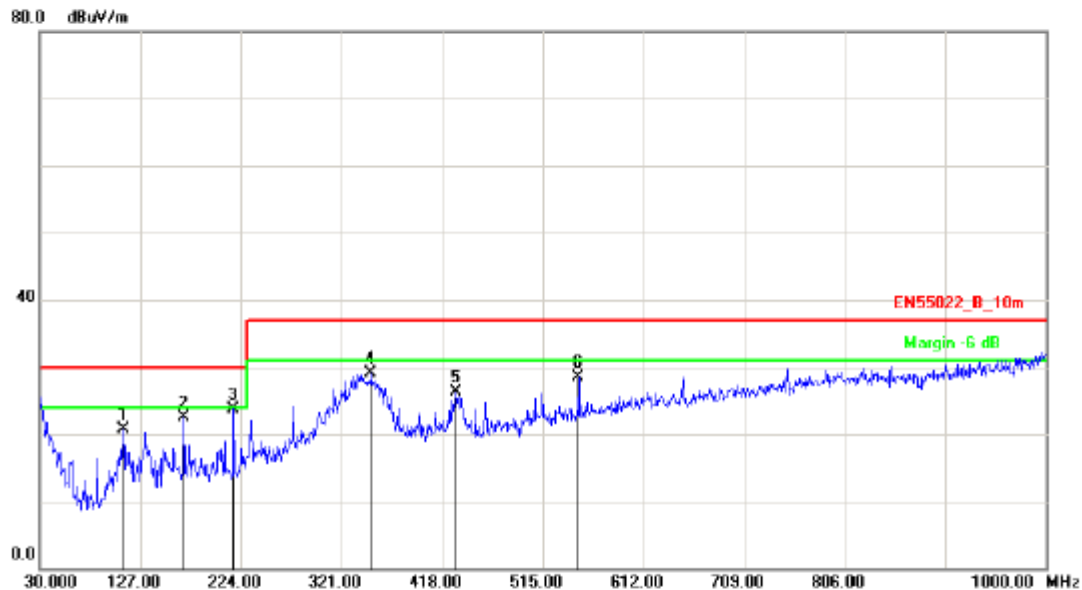


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	110.5100	-12.36	32.99	20.63	30.00	-9.37	QP	200	69
2	168.7100	-11.55	34.08	22.53	30.00	-7.47	QP	100	175
3	217.2100	-10.86	34.66	23.80	30.00	-6.20	QP	100	150
4	349.1298	-6.40	35.53	29.13	37.00	-7.87	QP	100	26
5	431.5799	-4.09	30.44	26.35	37.00	-10.65	QP	100	320
6	549.9199	-1.39	29.89	28.50	37.00	-8.50	QP	200	188

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Full system for DH-IPC-HDBW4421EP-AS with POE		
DC Power :	POE 48V	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

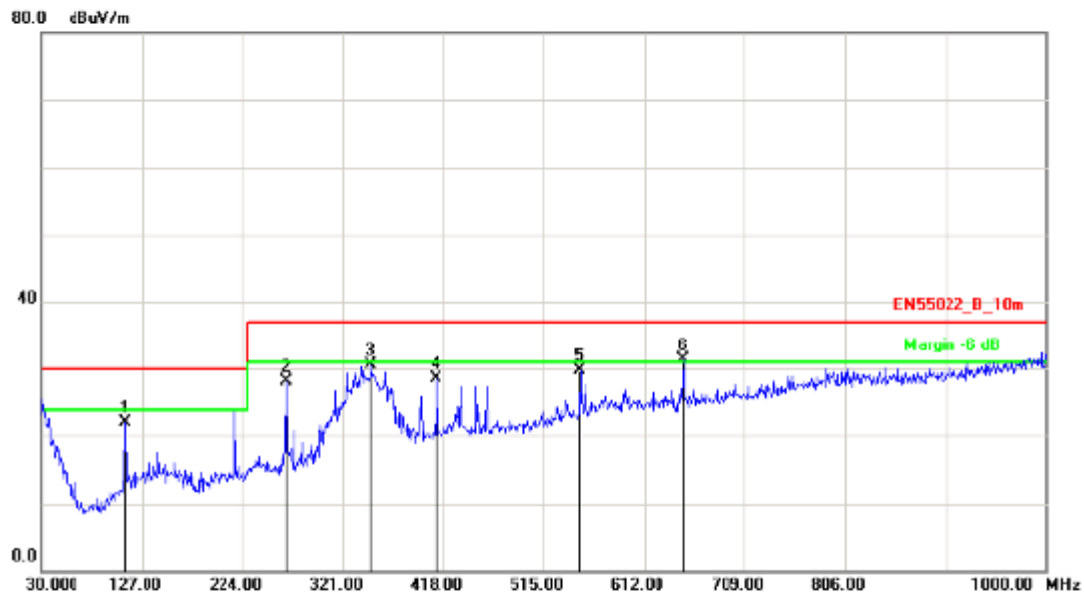


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	110.5100	-12.36	34.44	22.08	30.00	-7.92	QP	100	0
2	265.7099	-9.61	37.66	28.05	37.00	-8.95	QP	200	270
3	349.1298	-6.40	36.81	30.41	37.00	-6.59	QP	200	270
4	411.2099	-4.54	33.05	28.51	37.00	-8.49	QP	200	281
5	549.9199	-1.39	31.04	29.65	37.00	-7.35	QP	200	104
6	650.7999	0.59	30.70	31.29	37.00	-5.71	QP	100	299

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Full system for DH-IPC-HDBW4421EP-AS with POE		
DC Power :	POE 48V	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

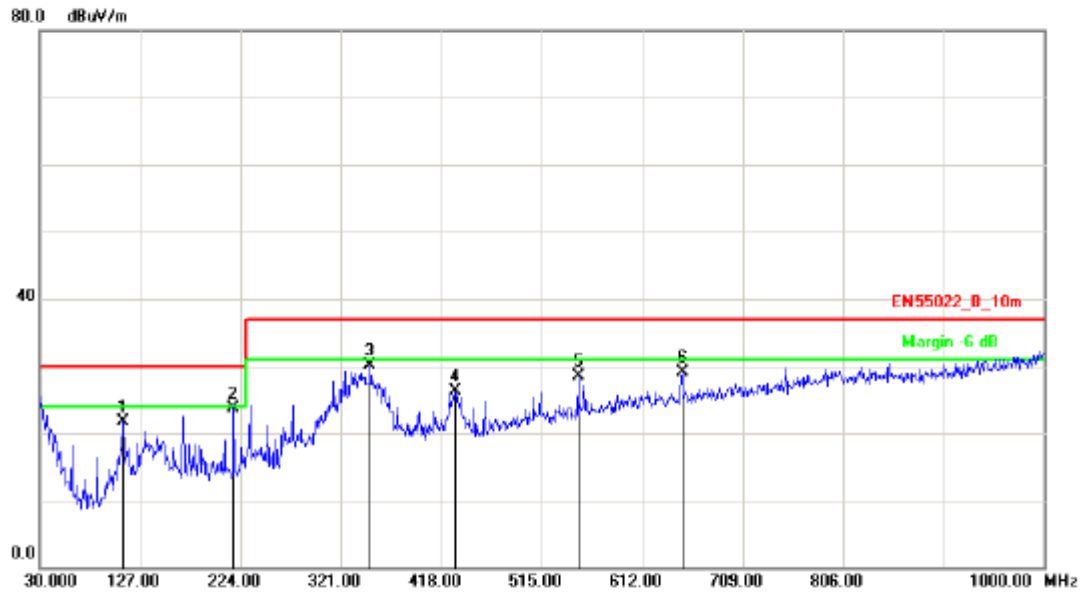

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	110.5100	-12.36	33.99	21.63	30.00	-8.37	QP	200	284
2	217.2100	-10.86	34.66	23.80	30.00	-6.20	QP	100	240
3	349.1300	-6.40	36.53	30.13	37.00	-6.87	QP	100	26
4	431.5800	-4.09	30.44	26.35	37.00	-10.65	QP	100	302
5	549.9200	-1.39	29.89	28.50	37.00	-8.50	QP	200	176
6	650.8000	0.59	28.50	29.09	37.00	-7.91	QP	200	36


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Initial Issue

Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

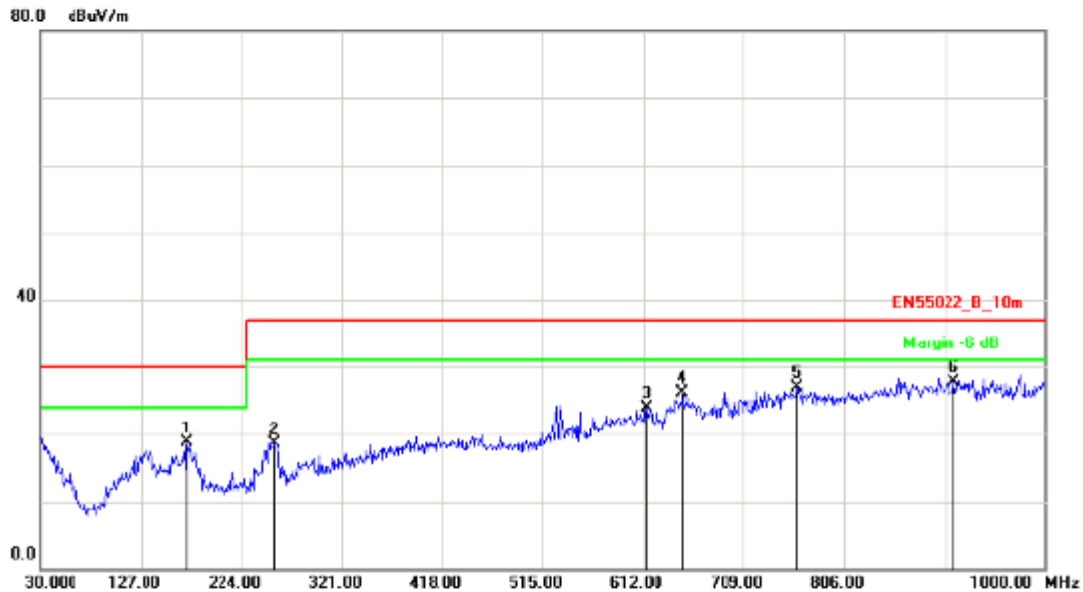


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	171.6200	-12.17	30.84	18.67	30.00	-11.33	QP	100	21
2	256.0099	-12.10	30.68	18.58	37.00	-18.42	QP	100	44
3	614.9098	-1.48	25.38	23.90	37.00	-13.10	QP	200	226
4	650.7998	-0.06	26.23	26.17	37.00	-10.83	QP	200	360
5	760.4098	0.49	26.51	27.00	37.00	-10.00	QP	100	85
6	912.7000	2.33	25.45	27.78	37.00	-9.22	QP	400	187

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

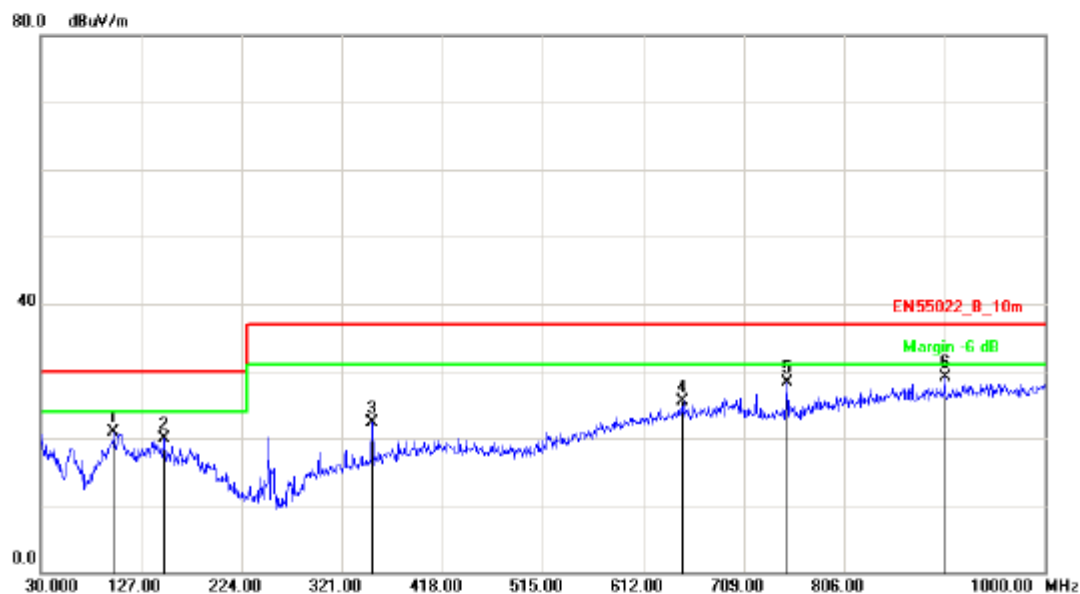


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	100.8100	-12.67	33.62	20.95	30.00	-9.05	QP	100	57
2	149.3100	-10.60	30.47	19.87	30.00	-10.13	QP	200	82
3	350.1000	-7.21	29.51	22.30	37.00	-14.70	QP	400	11
4	650.7998	-0.06	25.53	25.47	37.00	-11.53	QP	100	360
5	750.7100	0.42	27.86	28.28	37.00	-8.72	QP	100	226
6	903.0000	2.26	26.83	29.09	37.00	-7.91	QP	100	178

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

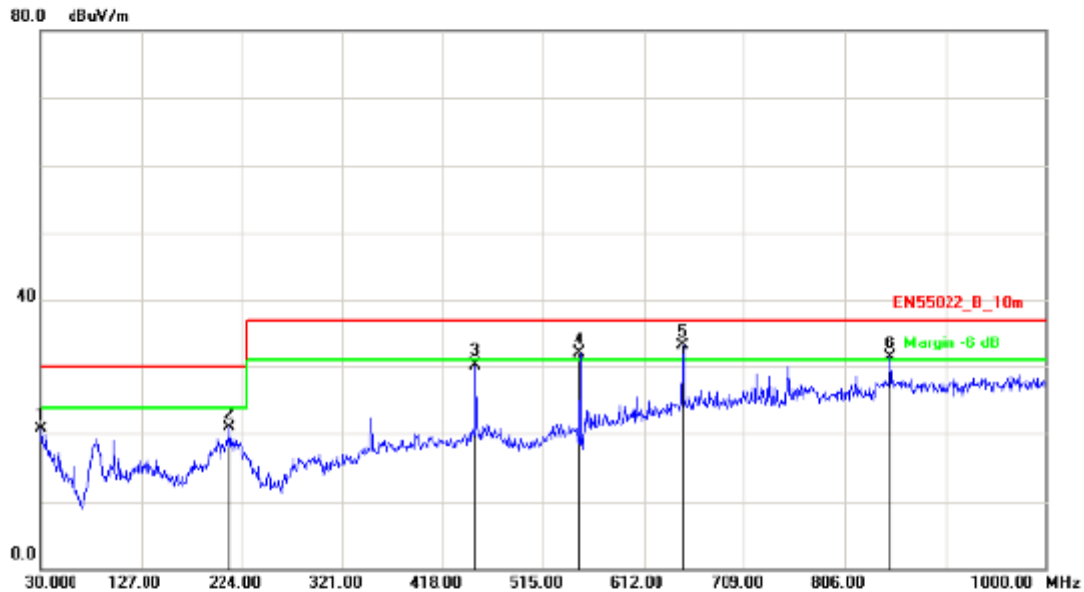


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9697	-5.75	26.43	20.68	30.00	-9.32	QP	100	52
2	213.3300	-12.27	33.23	20.96	30.00	-9.04	QP	200	114
3	450.0099	-5.47	35.56	30.09	37.00	-6.91	QP	200	360
4	549.9198	-3.67	35.64	31.97	37.00	-5.03	QP	100	5
5	650.7998	-0.06	33.23	33.17	37.00	-3.83	QP	100	2
6	850.6200	1.70	29.63	31.33	37.00	-5.67	QP	400	157

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

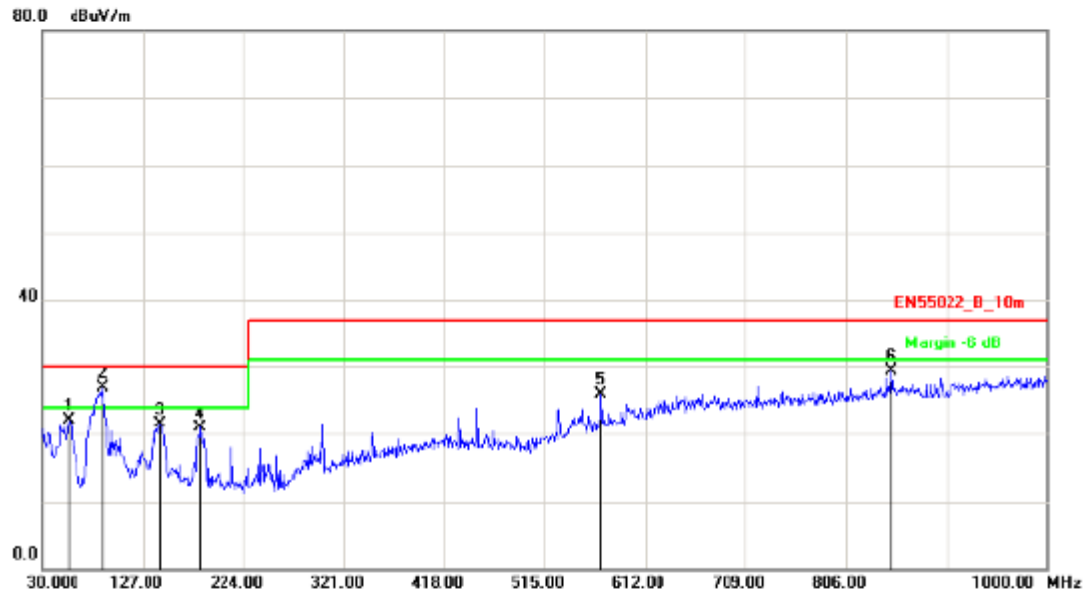


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	55.2199	-11.86	34.01	22.15	30.00	-7.85	QP	100	221
2	88.2000	-15.37	42.33	26.96	30.00	-3.04	QP	200	15
3	144.4600	-10.20	31.63	21.43	30.00	-8.57	QP	100	360
4	182.2898	-12.63	33.50	20.87	30.00	-9.13	QP	200	2
5	570.2898	-2.94	28.88	25.94	37.00	-11.06	QP	100	226
6	850.6200	1.70	27.65	29.35	37.00	-7.65	QP	400	185

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

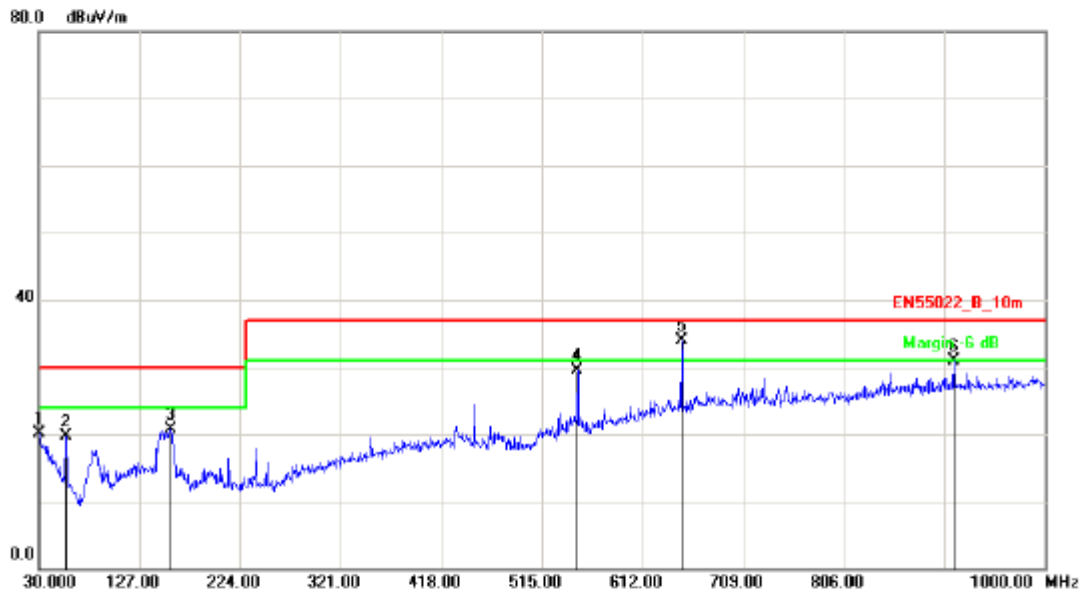


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9697	-5.75	25.93	20.18	30.00	-9.82	QP	200	117
2	56.1899	-12.02	31.69	19.67	30.00	-10.33	QP	100	8
3	157.0697	-11.24	32.02	20.78	30.00	-9.22	QP	200	220
4	549.9198	-3.67	33.26	29.59	37.00	-7.41	QP	100	154
5	650.7998	-0.06	34.01	33.95	37.00	-3.05	QP	100	336
6	912.7000	2.33	28.49	30.82	37.00	-6.18	QP	400	196

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

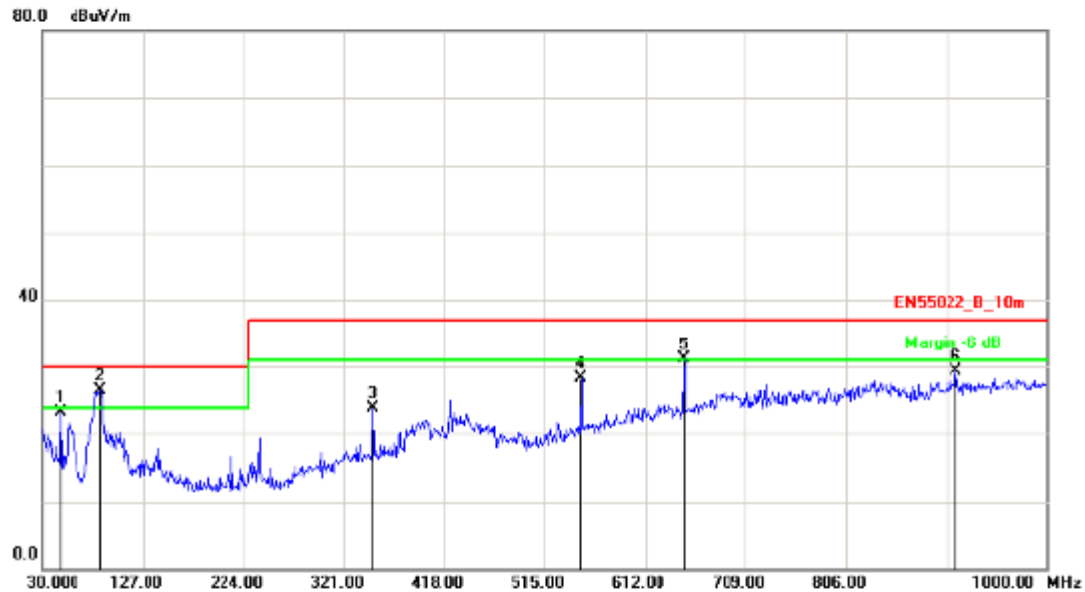


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	47.4600	-10.29	33.53	23.24	30.00	-6.76	QP	200	114
2	86.2600	-15.53	42.00	26.47	30.00	-3.53	QP	200	87
3	350.1000	-7.21	31.18	23.97	37.00	-13.03	QP	100	52
4	549.9198	-3.67	31.97	28.30	37.00	-8.70	QP	100	215
5	650.7998	-0.06	31.07	31.01	37.00	-5.99	QP	100	336
6	912.7000	2.33	27.01	29.34	37.00	-7.66	QP	400	196

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

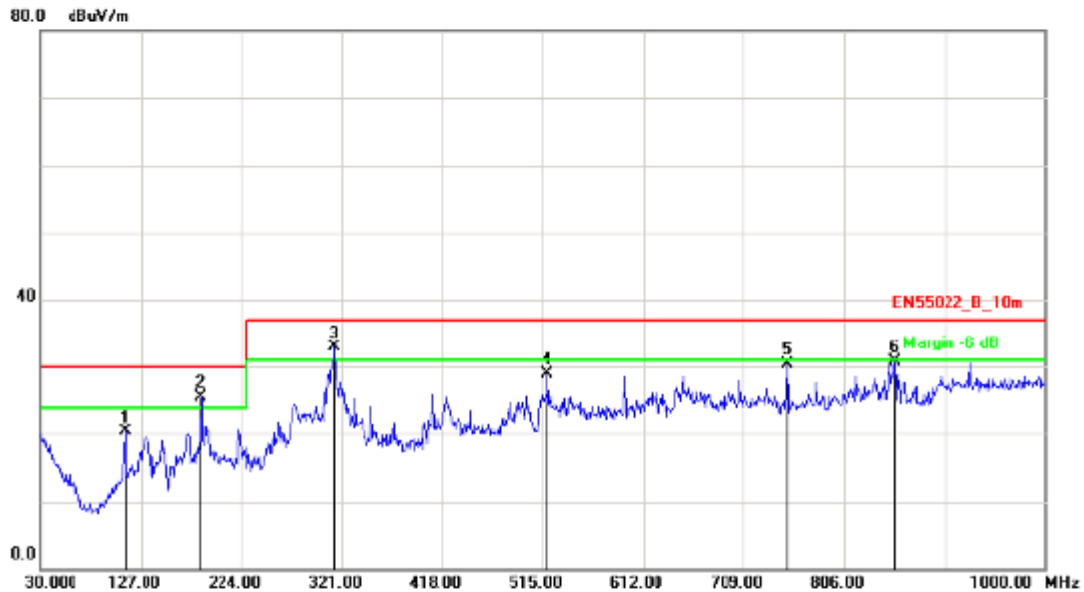


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	111.4800	-11.09	31.42	20.33	30.00	-9.67	QP	200	21
2	185.1999	-12.60	38.06	25.46	30.00	-4.54	QP	200	336
3	314.2099	-8.54	41.46	32.92	37.00	-4.08	QP	114	29
4	519.8500	-4.95	33.88	28.93	37.00	-8.07	QP	100	8
5	750.7100	0.42	29.97	30.39	37.00	-6.61	QP	100	41
6	855.4700	1.82	28.90	30.72	37.00	-6.28	QP	400	187

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

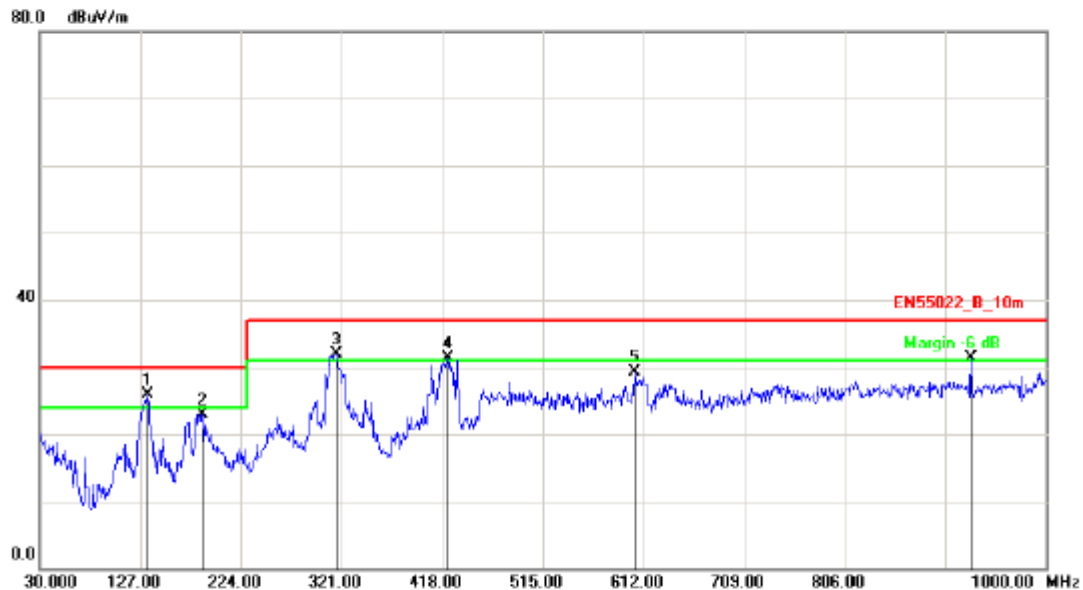

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	133.7898	-9.83	35.77	25.94	30.00	-4.06	QP	100	226
2	187.1399	-12.58	35.58	23.00	30.00	-7.00	QP	100	214
3	316.1499	-8.44	40.44	32.00	37.00	-5.00	QP	200	360
4	423.8199	-5.30	36.58	31.28	37.00	-5.72	QP	100	5
5	603.2699	-1.85	31.16	29.31	37.00	-7.69	QP	200	225
6	928.2200	2.44	28.82	31.26	37.00	-5.74	QP	400	187

Note: Measurement Level = Reading Level + Correct Factor


EN55032 Limit=EN55022 Limit



Above 1000MHz

Fourth Issue

Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

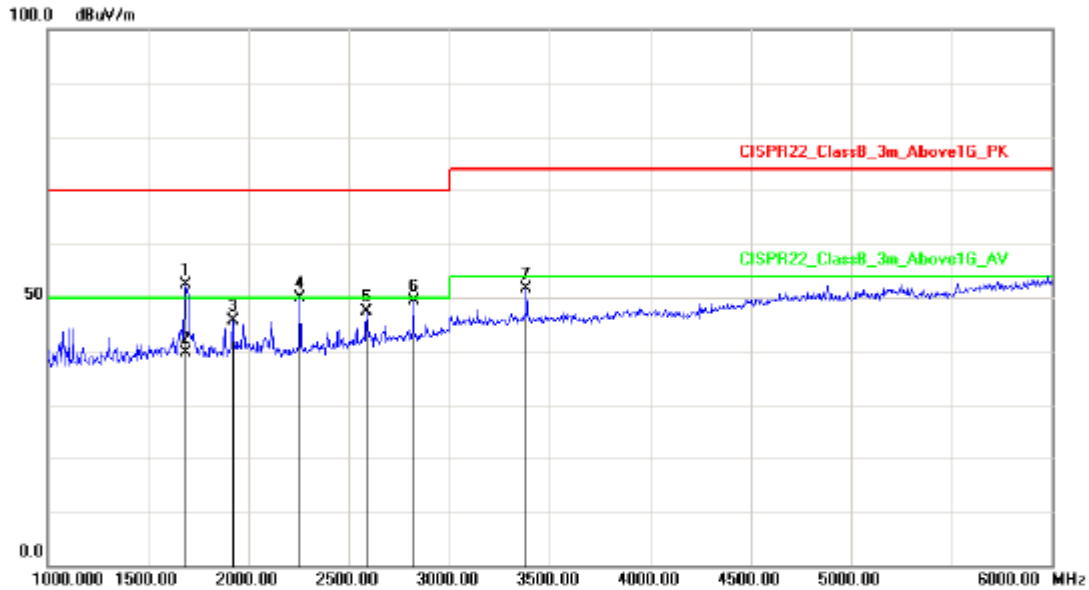


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1690.000	-2.09	54.35	52.26	70.00	-17.74	peak	100	195
2	1690.000	-2.09	41.60	39.51	50.00	-10.49	AVG	100	195
3	1920.000	-1.43	47.12	45.69	70.00	-24.31	peak	200	212
4	2255.000	0.10	49.82	49.92	70.00	-20.08	peak	100	145
5	2590.000	1.85	45.54	47.39	70.00	-22.61	peak	200	211
6	2820.000	3.12	46.35	49.47	70.00	-20.53	peak	100	152
7	3385.000	5.31	46.28	51.59	74.00	-22.41	peak	100	147

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Full system for IPC-HDBW1320EN-W with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

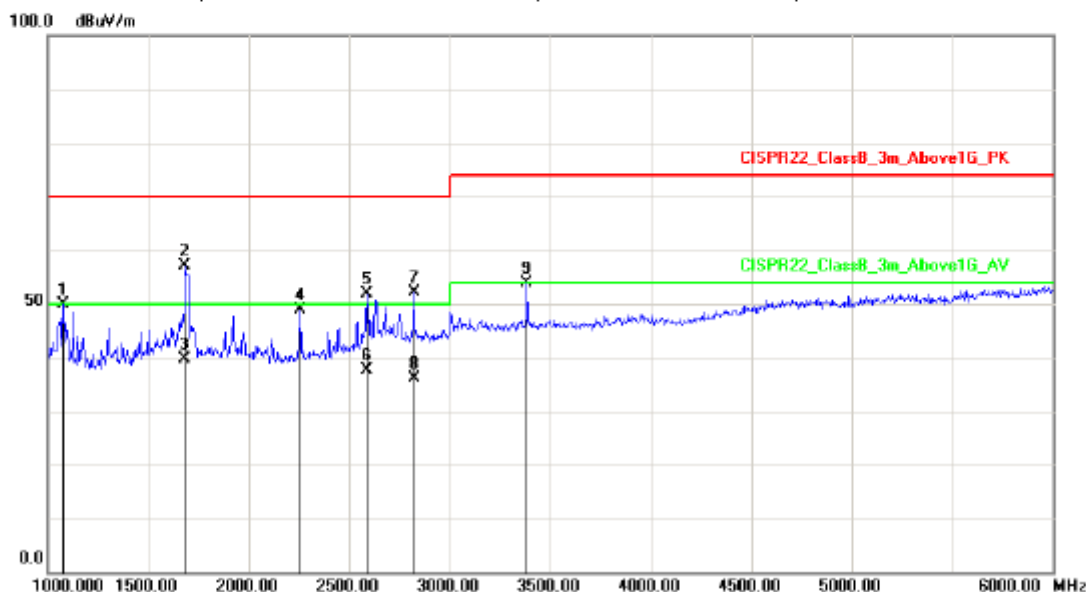


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1075.000	-5.48	55.36	49.88	70.00	-20.12	peak	100	79
2	1685.000	-2.11	59.30	57.19	70.00	-12.81	peak	100	324
3	1685.000	-2.11	41.72	39.61	50.00	-10.39	AVG	100	324
4	2255.000	0.10	48.89	48.99	70.00	-21.01	peak	100	173
5	2590.000	1.85	50.10	51.95	70.00	-18.05	peak	100	232
6	2590.000	1.85	35.90	37.75	50.00	-12.25	AVG	100	232
7	2820.000	3.12	49.04	52.16	70.00	-17.84	peak	200	85
8	2820.000	3.12	33.00	36.12	50.00	-13.88	AVG	200	85
9	3385.000	5.31	48.51	53.82	74.00	-20.18	peak	139	360

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Full system for IPC-HDBW1320EN-W with POE		
DC Power :	POE 48V	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

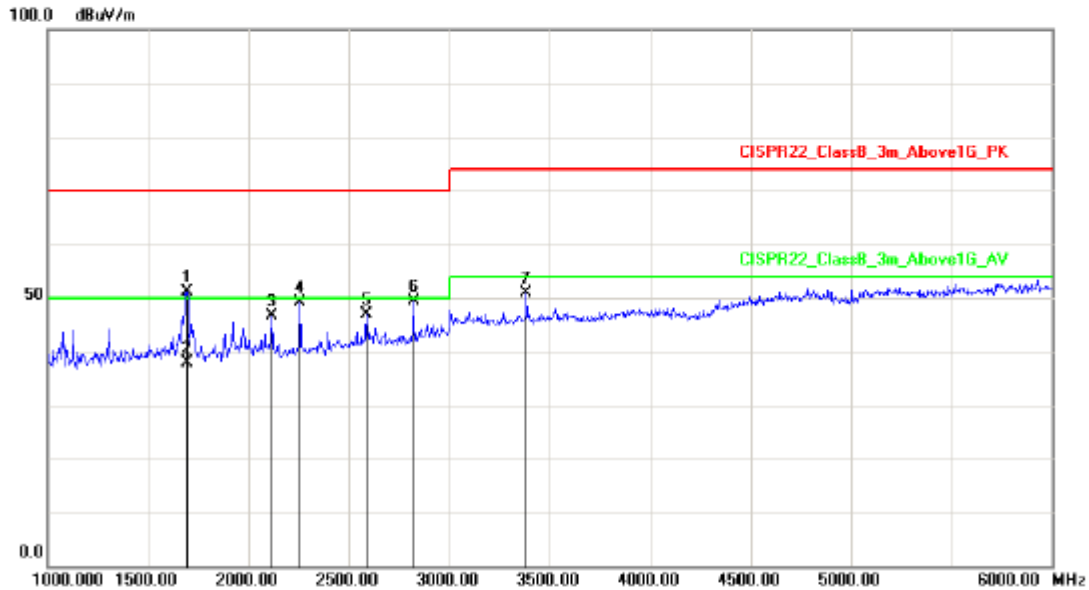


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1695.000	-2.08	53.28	51.20	70.00	-18.80	peak	200	260
2	1695.000	-2.08	39.90	37.82	50.00	-12.18	AVG	200	260
3	2115.000	-0.61	47.15	46.54	70.00	-23.46	peak	100	125
4	2255.000	0.10	49.07	49.17	70.00	-20.83	peak	100	140
5	2590.000	1.85	44.92	46.77	70.00	-23.23	peak	200	221
6	2820.000	3.12	46.15	49.27	70.00	-20.73	peak	100	149
7	3385.000	5.31	45.59	50.90	74.00	-23.10	peak	100	142

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Full system for IPC-HDBW1320EN-W with POE		
DC Power :	POE 48V	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW1320EN-W
Temp :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2016/03/21

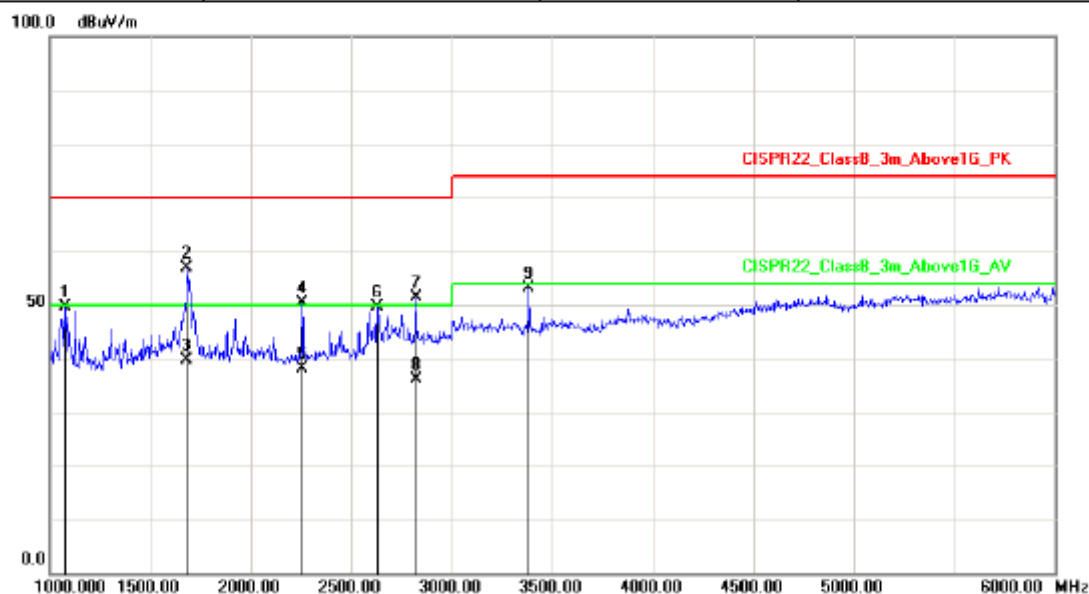

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1075.000	-5.48	55.17	49.69	70.00	-20.31	peak	100	74
2	1685.000	-2.11	58.94	56.83	70.00	-13.17	peak	100	327
3	1685.000	-2.11	41.79	39.68	50.00	-10.32	AVG	100	327
4	2255.000	0.10	50.40	50.50	70.00	-19.50	peak	100	185
5	2255.000	0.10	38.02	38.12	50.00	-11.88	AVG	100	185
6	2630.000	2.07	47.67	49.74	70.00	-20.26	peak	100	192
7	2820.000	3.12	48.37	51.49	70.00	-18.51	peak	200	82
8	2820.000	3.12	33.07	36.19	50.00	-13.81	AVG	200	82
9	3385.000	5.31	47.83	53.14	74.00	-20.86	peak	176	360


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Second Issue

Test Mode :	Mode 5: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

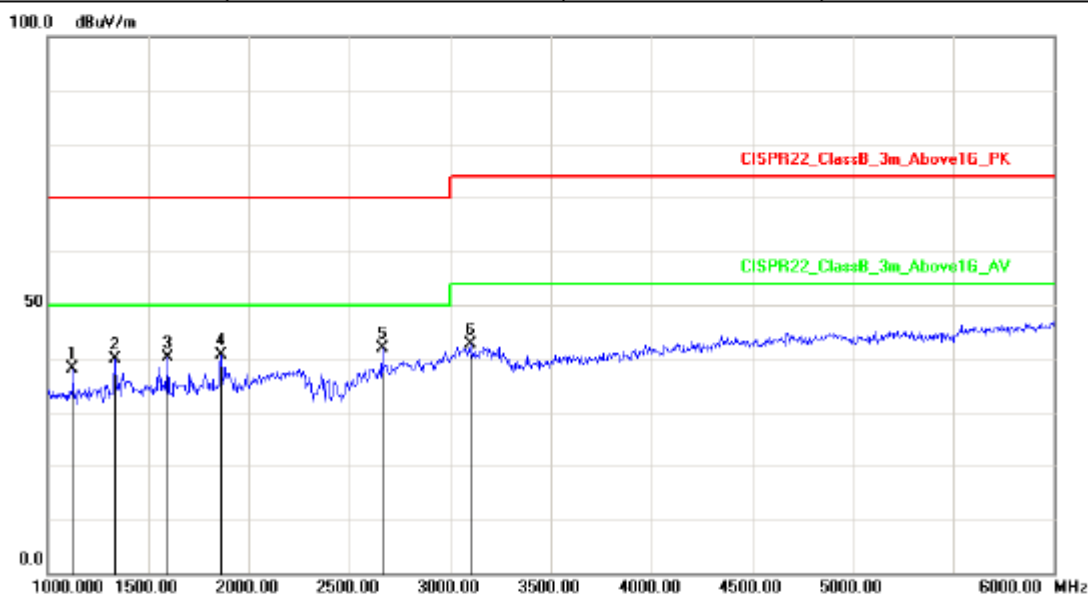


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1125.000	-14.94	53.05	38.11	70.00	-31.89	peak	100	201
2	1335.000	-13.11	53.05	39.94	70.00	-30.06	peak	100	112
3	1595.000	-12.02	52.22	40.20	70.00	-29.80	peak	400	32
4	1860.000	-10.13	50.74	40.61	70.00	-29.39	peak	100	1
5	2660.000	-4.68	46.56	41.88	70.00	-28.12	peak	100	166
6	3100.000	-2.37	45.02	42.65	74.00	-31.35	peak	200	189

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 5: Full system for DH-IPC-HDBW4421EP-AS with Adapter + POE		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

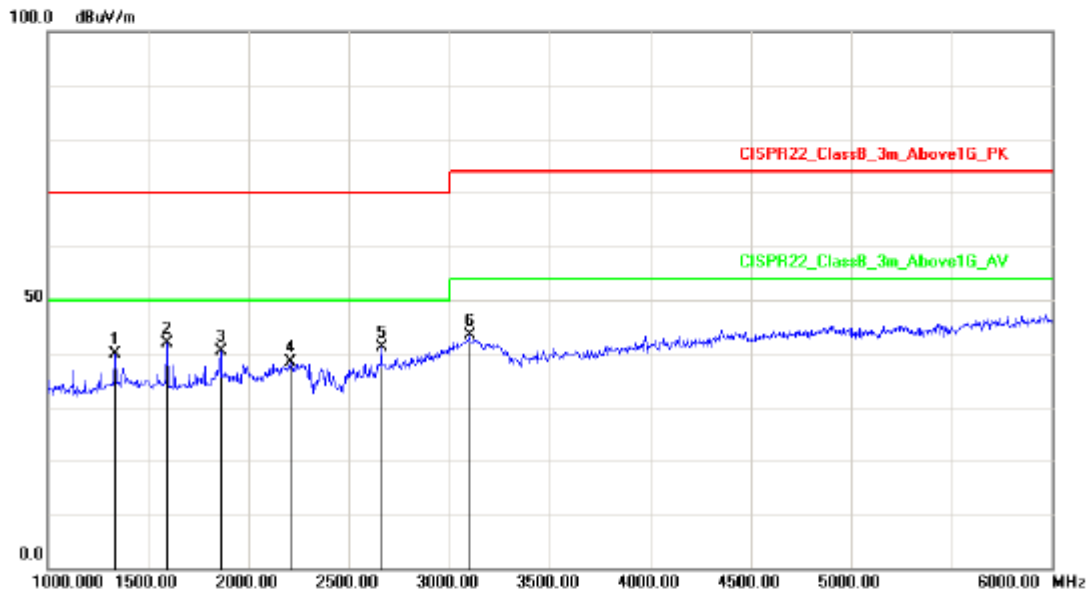


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1335.000	-13.11	52.87	39.76	70.00	-30.24	peak	100	210
2	1595.000	-12.02	53.88	41.86	70.00	-28.14	peak	100	85
3	1860.000	-10.13	50.50	40.37	70.00	-29.63	peak	400	36
4	2210.000	-5.39	43.79	38.40	70.00	-31.60	peak	100	214
5	2660.000	-4.68	45.79	41.11	70.00	-28.89	peak	100	157
6	3100.000	-2.37	45.72	43.35	74.00	-30.65	peak	200	125

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Full system for DH-IPC-HDBW4421EP-AS with POE		
DC Power :	POE 48V	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24℃	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

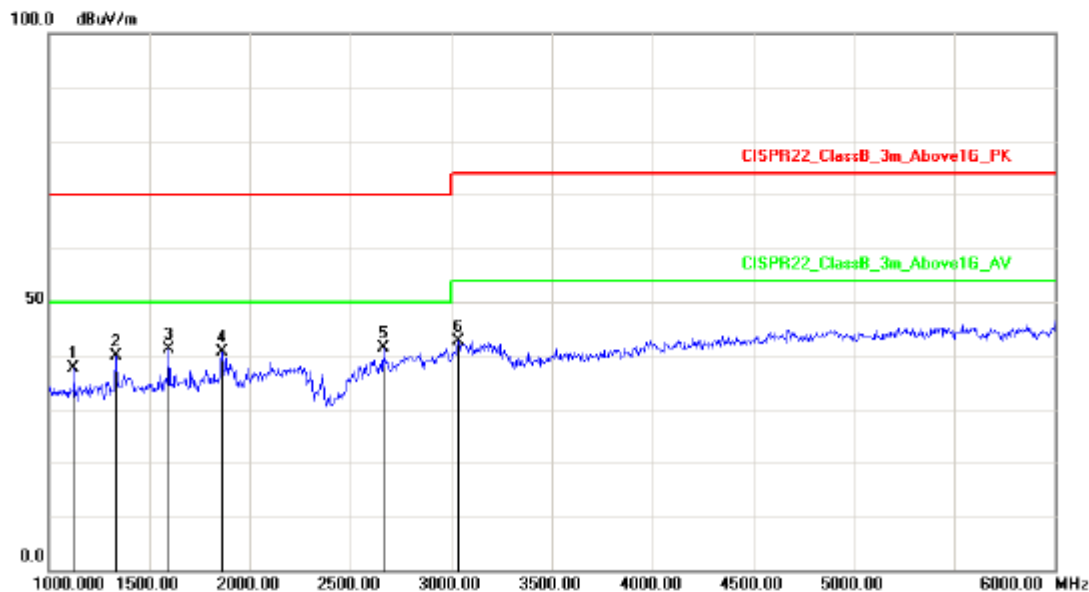


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1125.000	-14.94	52.55	37.61	70.00	-32.39	peak	200	0
2	1335.000	-13.11	53.05	39.94	70.00	-30.06	peak	400	126
3	1595.000	-12.02	53.22	41.20	70.00	-28.80	peak	100	52
4	1860.000	-10.13	50.74	40.61	70.00	-29.39	peak	100	74
5	2660.000	-4.68	46.06	41.38	70.00	-28.62	peak	400	221
6	3035.000	-2.53	45.28	42.75	74.00	-31.25	peak	100	125

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 6: Full system for DH-IPC-HDBW4421EP-AS with POE		
DC Power :	POE 48V	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	DH-IPC-HDBW4421EP-AS
Temp :	24°C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/08/07

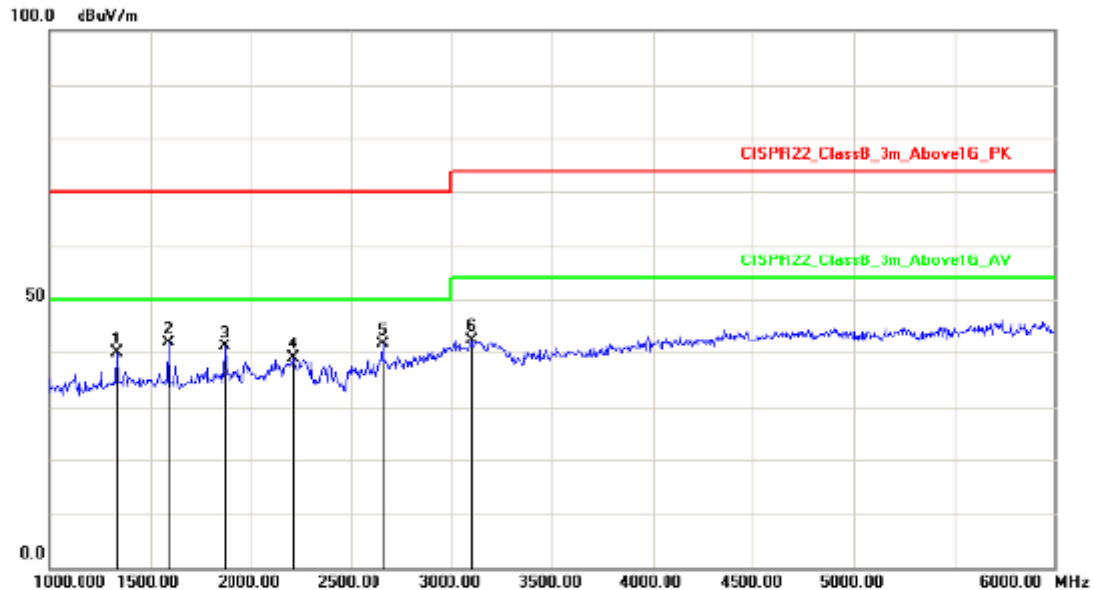

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1335.000	-13.11	52.87	39.76	70.00	-30.24	peak	100	120
2	1595.000	-12.02	53.88	41.86	70.00	-28.14	peak	100	88
3	1870.000	-10.06	51.22	41.16	70.00	-28.84	peak	200	153
4	2210.000	-5.39	44.29	38.90	70.00	-31.10	peak	100	95
5	2660.000	-4.68	46.29	41.61	70.00	-28.39	peak	200	62
6	3100.000	-2.37	44.72	42.35	74.00	-31.65	peak	100	168


Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Initial Issue

Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

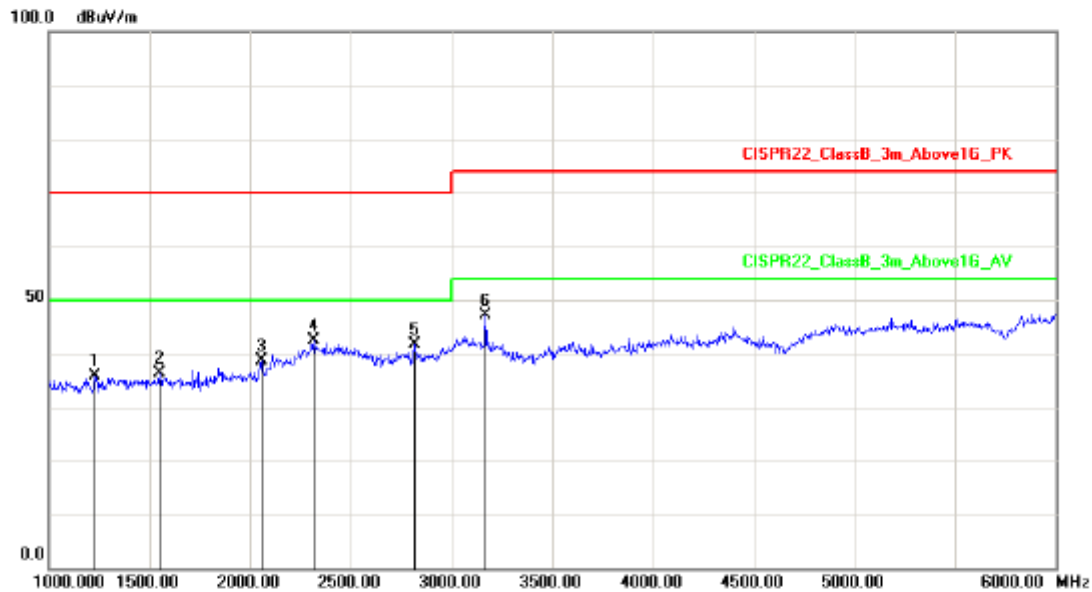


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1230.000	-14.17	50.01	35.84	70.00	-34.16	peak	100	31
2	1550.000	-12.18	48.62	36.44	70.00	-33.56	peak	100	339
3	2055.000	-7.82	46.53	38.71	70.00	-31.29	peak	100	325
4	2315.000	-2.98	45.40	42.42	70.00	-27.58	peak	100	0
5	2815.000	-4.32	46.07	41.75	70.00	-28.25	peak	100	310
6	3170.000	-2.41	49.42	47.01	74.00	-26.99	peak	100	0

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 1: Normal Operation for IPC-HDBW4421EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4421EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

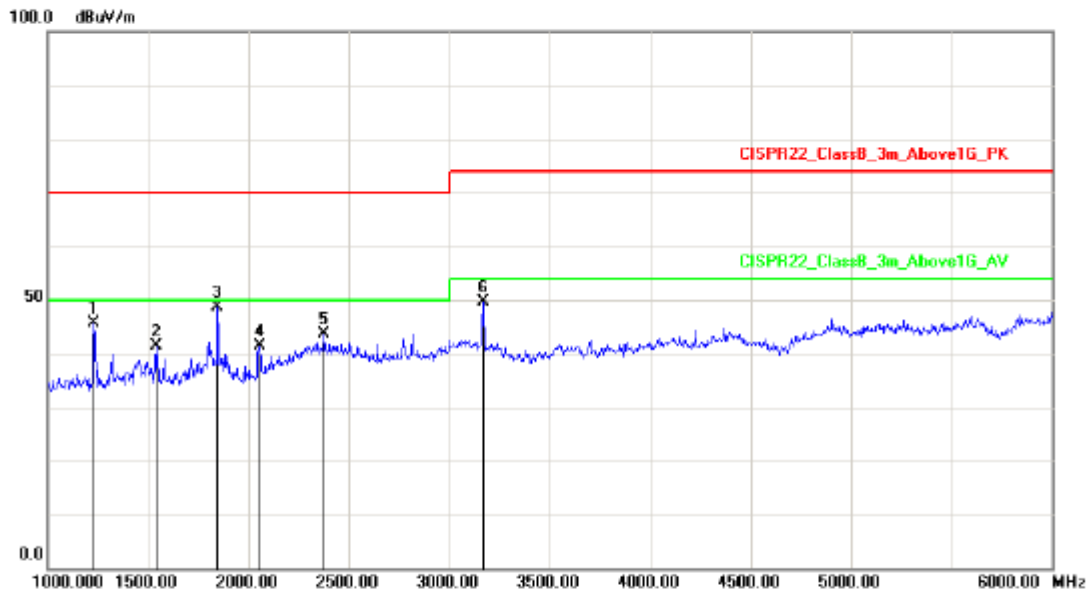


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1230.000	-14.17	59.83	45.66	70.00	-24.34	peak	100	82
2	1540.000	-12.22	53.50	41.28	70.00	-28.72	peak	100	269
3	1845.000	-10.25	58.77	48.52	70.00	-21.48	peak	100	299
4	2055.000	-7.82	49.18	41.36	70.00	-28.64	peak	100	89
5	2375.000	-3.18	46.83	43.65	70.00	-26.35	peak	100	21
6	3170.000	-2.41	51.98	49.57	74.00	-24.43	peak	100	289

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

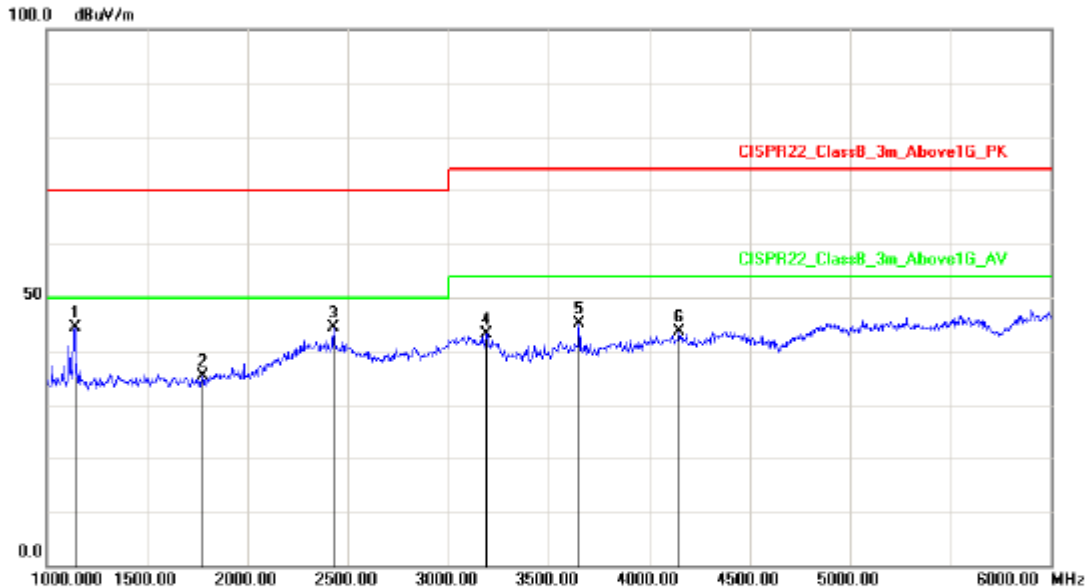


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1140.000	-14.86	59.28	44.42	70.00	-25.58	peak	100	284
2	1775.000	-10.82	46.08	35.26	70.00	-34.74	peak	100	81
3	2430.000	-3.44	47.89	44.45	70.00	-25.55	peak	100	291
4	3190.000	-2.42	45.57	43.15	74.00	-30.85	peak	100	102
5	3650.000	-3.00	48.04	45.04	74.00	-28.96	peak	100	86
6	4150.000	0.00	43.58	43.58	74.00	-30.42	peak	100	360

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 2: Normal Operation for IPC-HDBW4120EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4120EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

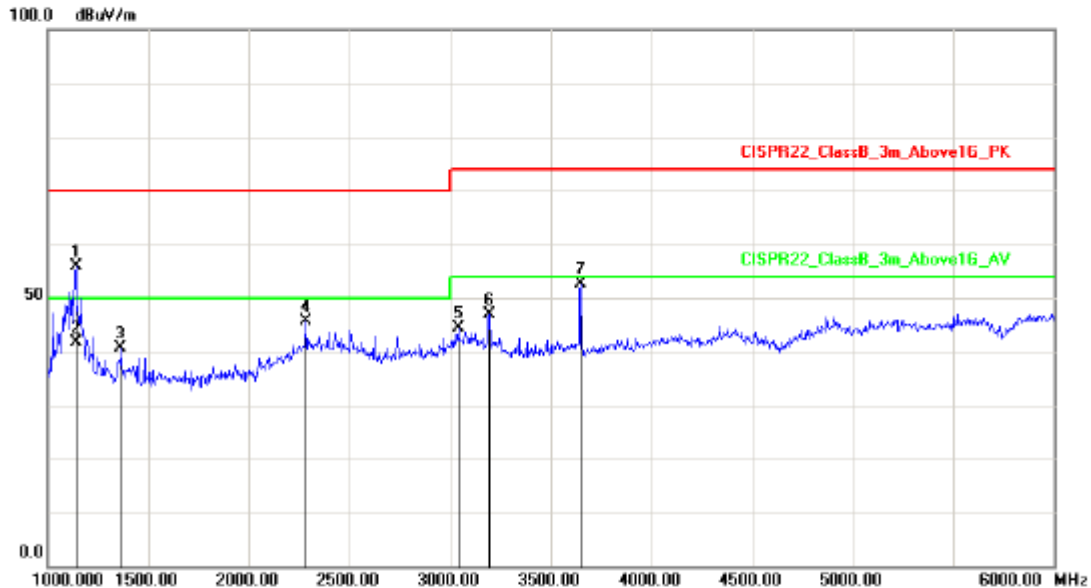


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1140.000	-14.86	70.79	55.93	70.00	-14.07	peak	100	0
2	1140.000	-14.86	56.48	41.62	50.00	-8.38	AVG	100	0
3	1365.000	-12.90	53.41	40.51	70.00	-29.49	peak	100	286
4	2280.000	-3.48	48.99	45.51	70.00	-24.49	peak	100	0
5	3040.000	-2.51	46.98	44.47	74.00	-29.53	peak	100	288
6	3195.000	-2.43	49.31	46.88	74.00	-27.12	peak	100	296
7	3650.000	-3.00	55.55	52.55	74.00	-21.45	peak	100	0

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

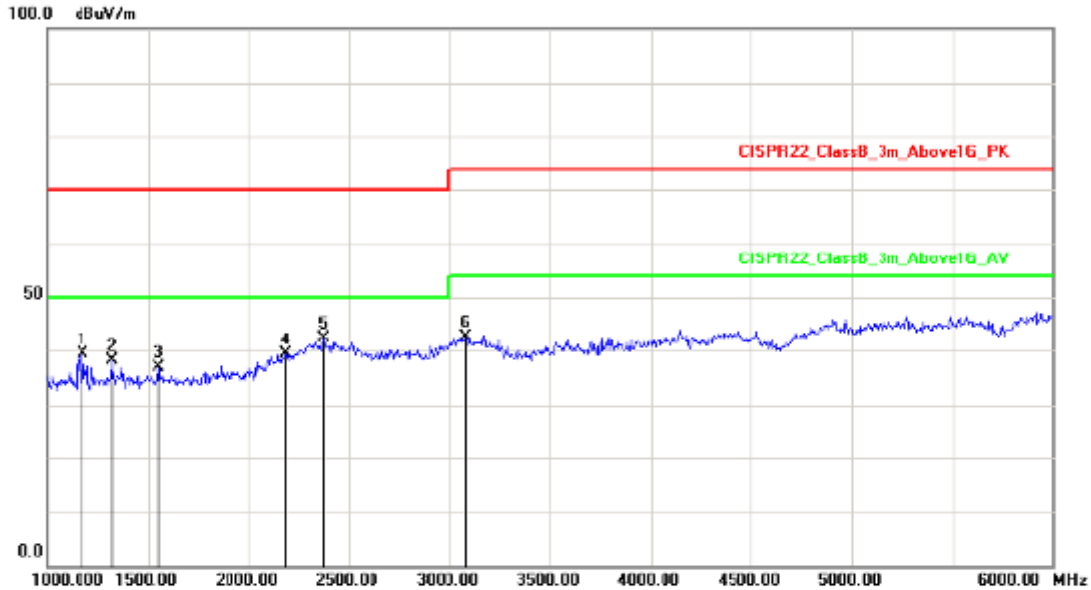


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1175.000	-14.66	54.04	39.38	70.00	-30.62	peak	100	119
2	1320.000	-13.21	51.22	38.01	70.00	-31.99	peak	100	315
3	1555.000	-12.17	49.06	36.89	70.00	-33.11	peak	100	307
4	2185.000	-5.84	45.14	39.30	70.00	-30.70	peak	100	171
5	2375.000	-3.18	45.51	42.33	70.00	-27.67	peak	100	328
6	3085.000	-2.41	45.08	42.67	74.00	-31.33	peak	100	320

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 3: Normal Operation for IPC-HDBW4221EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4221EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

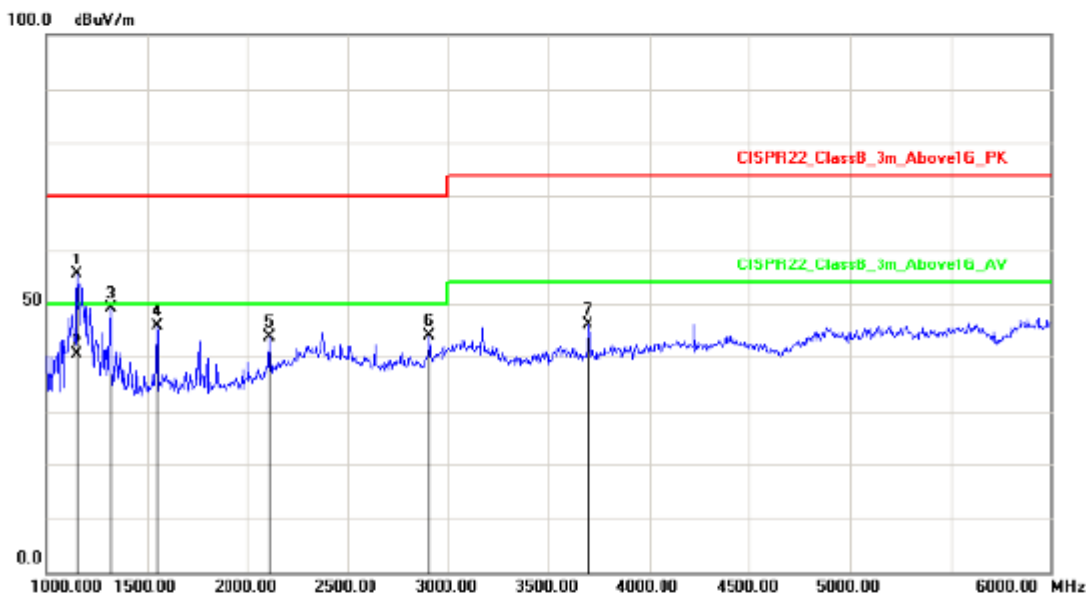


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1150.000	-14.80	70.21	55.41	70.00	-14.59	peak	100	56
2	1150.000	-14.80	55.10	40.30	50.00	-9.70	AVG	100	56
3	1320.000	-13.21	62.34	49.13	70.00	-20.87	peak	100	326
4	1555.000	-12.17	57.93	45.76	70.00	-24.24	peak	100	251
5	2110.000	-6.73	50.54	43.81	70.00	-26.19	peak	100	95
6	2905.000	-4.04	48.17	44.13	70.00	-25.87	peak	100	21
7	3695.000	-2.99	49.19	46.20	74.00	-27.80	peak	100	345

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

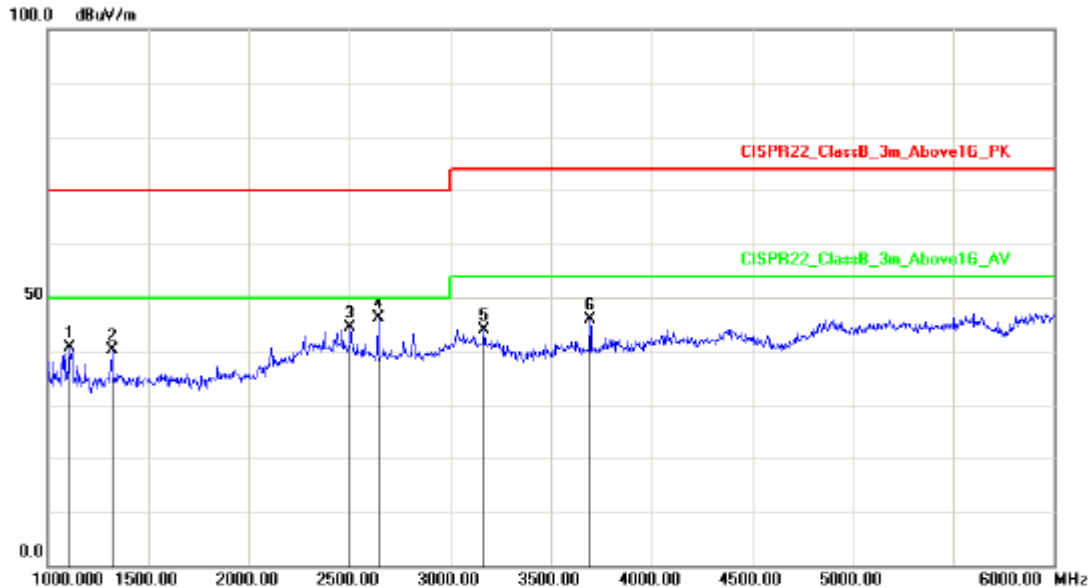


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1110.000	-15.02	55.58	40.56	70.00	-29.44	peak	100	1
2	1320.000	-13.21	53.40	40.19	70.00	-29.81	peak	100	39
3	2505.000	-3.89	48.25	44.36	70.00	-25.64	peak	100	348
4	2640.000	-4.62	50.80	46.18	70.00	-23.82	peak	100	17
5	3170.000	-2.41	46.39	43.98	74.00	-30.02	peak	100	3
6	3695.000	-2.99	48.96	45.97	74.00	-28.03	peak	100	19

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit



Test Mode :	Mode 4: Normal Operation for IPC-HDBW4220EP		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	IP CAMERA	Model No :	IPC-HDBW4220EP
Temp :	23℃	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/16

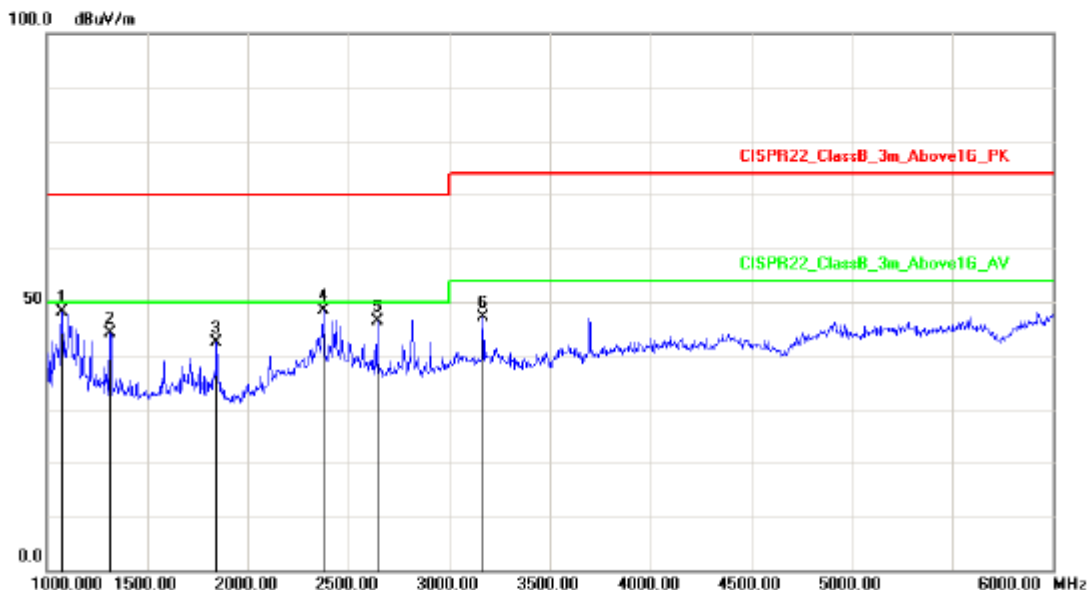


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1075.000	-15.19	63.42	48.23	70.00	-21.77	peak	100	26
2	1315.000	-13.25	57.37	44.12	70.00	-25.88	peak	100	175
3	1845.000	-10.25	52.67	42.42	70.00	-27.58	peak	100	339
4	2375.000	-3.18	51.57	48.39	70.00	-21.61	peak	100	332
5	2640.000	-4.62	51.03	46.41	70.00	-23.59	peak	100	331
6	3170.000	-2.41	49.65	47.24	74.00	-26.76	peak	100	315

Note: Measurement Level = Reading Level + Correct Factor

EN55032 Limit=EN55022 Limit


5.1.3 FLICKER TEST

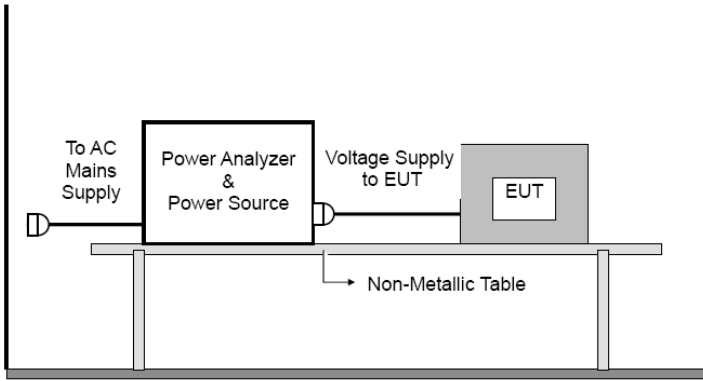Test Method:	EN 61000-3-3		
Limits:	Test items	Limits(EN61000-3-3)	Descriptions
	P_{st}	≤ 1.0 , T _p =10min	short-term flicker indicator
	P_{lt}	≤ 0.65 , T _p =2h	long-term flicker indicator
	d_c	$\leq 3.3\%$	relative steady-state voltage change
	d_{max}	$\leq 4\%$ (or 6% ^{Note(1)} , 7% ^{Note(2)})	maximum relative voltage change:
	d_(t)	$\leq 3.3\%$, more than 500ms	relative voltage change characteristic
Test Setup:	 <ol style="list-style-type: none"> The test supply voltage (open-circuit voltage) was the rated voltage of the EUT. The Test voltage: was maintained within $\pm 2\%$ of the nominal value. The frequency was 50 Hz $\pm 0.5\%$. The voltage fluctuations and flicker were measured at the supply terminals of the EUT. The observation period, T_p, for the assessment of flicker values by flicker measurement, flicker simulation, or analytical method was: <ul style="list-style-type: none"> — for P_{st}, T_p = 10 min; — for P_{lt}, T_p = 2 h. <p>The observation period included that part of the whole operation cycle in which the EUT produces the most unfavorable sequence of voltage changes.</p>		

**Measurement Data:**

Fourth issue

Flickermeter 1000-4-15 for 230V/50Hz

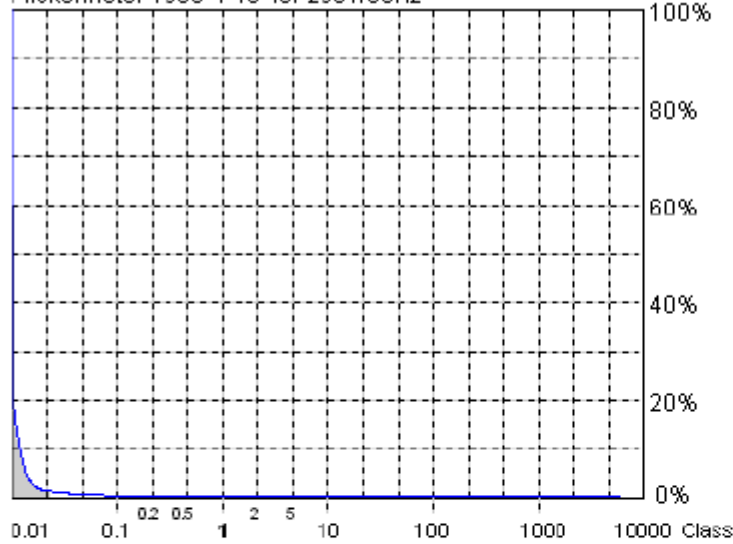**Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)**

Urms = 229.9 V P = 3.583 W
Irms = 0.036 A pf = 0.434

Actual Flicker (Fli): 0.02**Short-term Flicker (Pst): 0.10**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.10

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.13%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

2016-3-18 10:25:19 harmonic.hsu

Range: 0.5 A

V-nom: 230 V

TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.9V Freq = 50.000 Range: 0.5 A

Irms = 0.036A Ipk = 0.184A cf = 5.136

P = 3.583W S = 8.251VA pf = 0.434

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00

dmax : 4.00 % dc : 3.30 %


dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Second issue

Flickermeter 1000-4-15 for 230V/50Hz

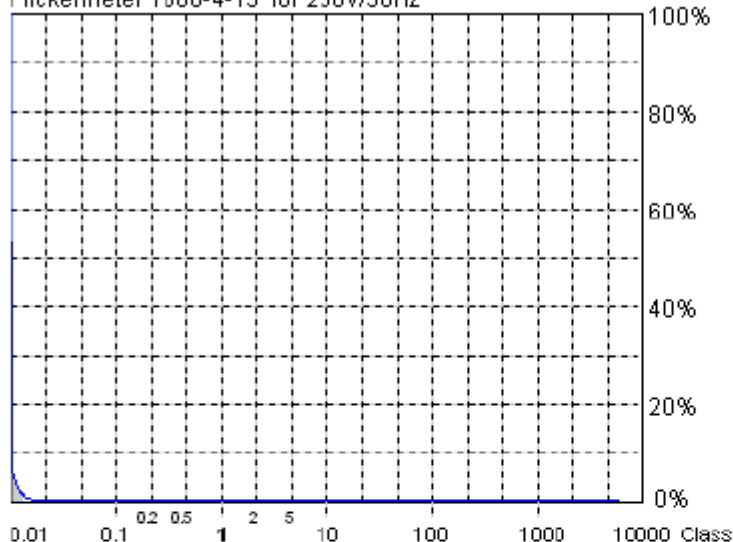**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.07**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.07

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.01%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.04%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2015-8-11 15:49:23 harmonic.hsu

Urms = 229.9 V P = 2.583 W

Range: 0.25 A

Irms = 0.032 A pf = 0.346

V-nom: 230 V

TestTime: 10 min (100%)

Test completed, Result: PASSED

MODE3

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.9V Freq = 50.000 Range: 0.25 A

Irms = 0.032A Ipk = 0.202A cf = 6.214

P = 2.583W S = 7.465VA pf = 0.346

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00

dmax : 4.00 % dc : 3.30 %


dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Initial issue

Flickermeter 1000-4-15 for 230V/50Hz

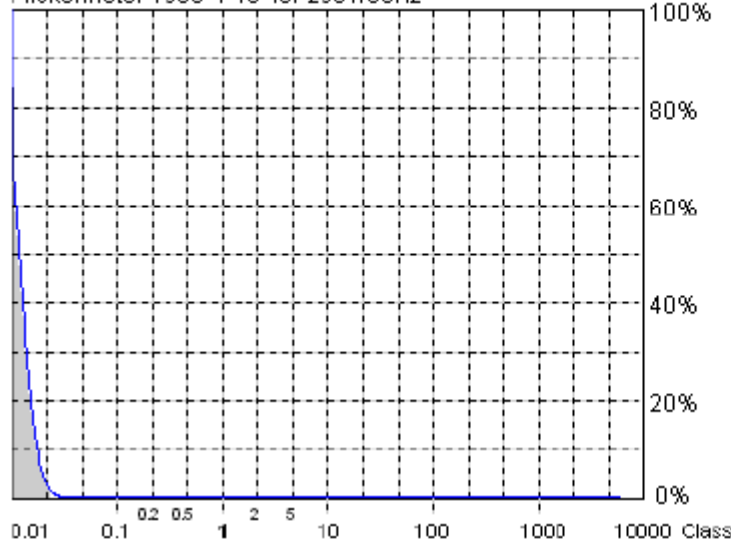

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2015-4-10 13:35:43 harmonic.hsu

Urms = 229.7 V P = 4.123 W
 Irms = 0.051 A pf = 0.352

Range: 0.5 A
 V-nom: 230 V
 TestTime: 10 min (100%)

IPC-HDBW4421E

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.5 A
 Irms = 0.051A Ipk = 0.307A cf = 6.014
 P = 4.123W S = 11.72VA pf = 0.352

Test - Time : 1 x 10min = 10min (100 %)


LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
 dmax : 4.00 % dc : 3.30 %
 dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Flickermeter 1000-4-15 for 230V/50Hz

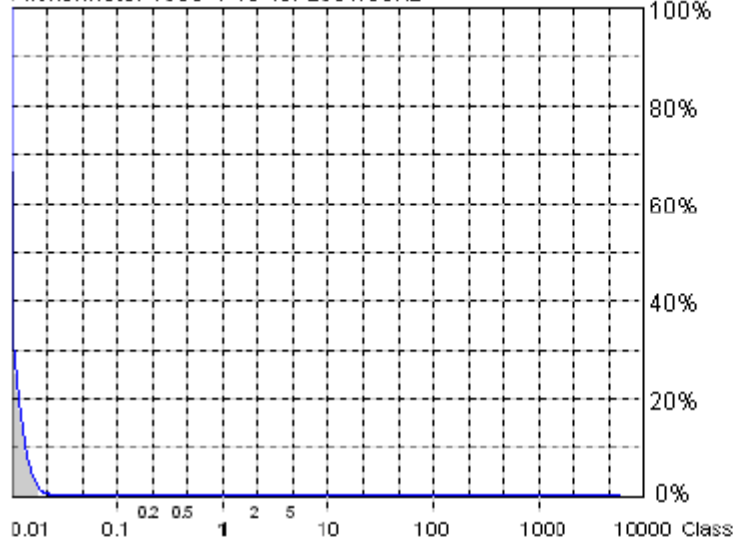**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.09**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.09

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.08%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2015-4-10 15:14:33 harmonic.hsu

Urms = 229.7 V P = 2.147 W

Range: 0.25 A

Irms = 0.027 A pf = 0.350

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW4120E

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.25 A

Irms = 0.027A Ipk = 0.175A cf = 6.534

P = 2.147W S = 6.141VA pf = 0.350

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00


dmax : 4.00 % dc : 3.30 %

dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Flickermeter 1000-4-15 for 230V/50Hz

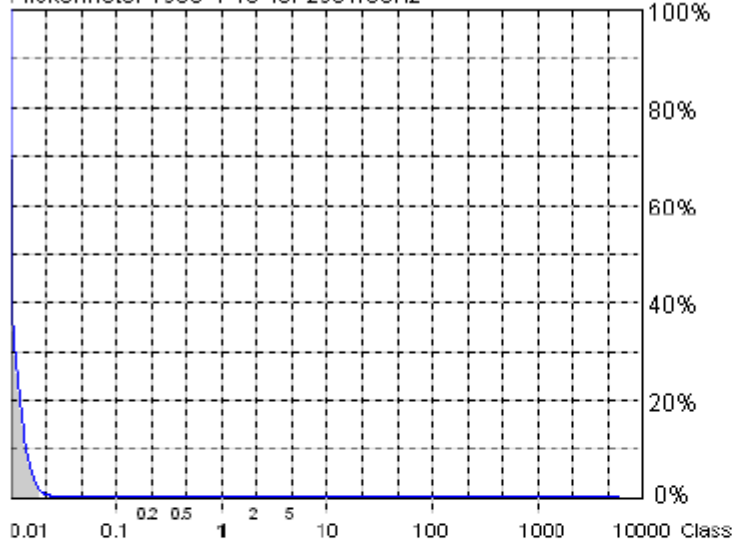

Actual Flicker (Fli):	0.01
Short-term Flicker (Pst):	0.09
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.09
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.07%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	>1000ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

2015-4-9 17:11:54 harmonic.hsu

Urms = 229.7 V P = 2.749 W
Irms = 0.034 A pf = 0.351

Range: 0.25 A
V-nom: 230 V
TestTime: 10 min (100%)

IPC-HDBW4221E

Test completed, Result: PASSED

HAR-1000 EMC-Parber

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.25 A
Irms = 0.034A Ip k = 0.210A cf = 6.179
P = 2.749W S = 7.824VA pf = 0.351

Test - Time : 1 x 10min = 10min (100 %)


LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED



Flickermeter 1000-4-15 for 230V/50Hz

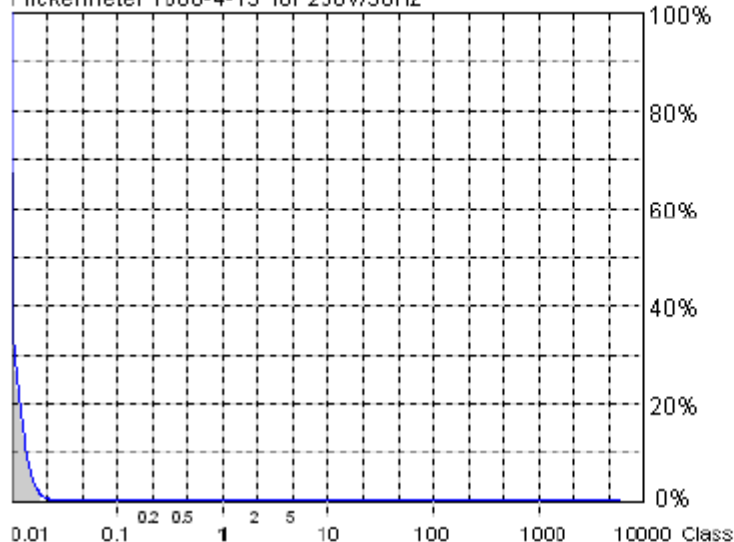**Actual Flicker (Fli): 0.01****Short-term Flicker (Pst): 0.09**

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.09

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.03%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2015-4-9 17:41:05 harmonic.hsu

Urms = 229.7 V P = 2.025 W

Range: 0.25 A

Irms = 0.025 A pf = 0.349

V-nom: 230 V

TestTime: 10 min (100%)

IPC-HDBW4220E

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.25 A

Irms = 0.025A Ipk = 0.163A cf = 6.454

P = 2.025W S = 5.805VA pf = 0.349

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00

dmax : 4.00 % dc : 3.30 %

dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED




5.2 ELECTROMAGNETIC SUSCEPTIBILITY (IMMUNITY)

Performance Criteria Description

Criterion A:
<p>The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.</p>
Criterion B:
<p>The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.</p>
Criterion C:
<p>Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.</p>

5.2.1 ELECTROSTATIC DISCHARGE (ESD)

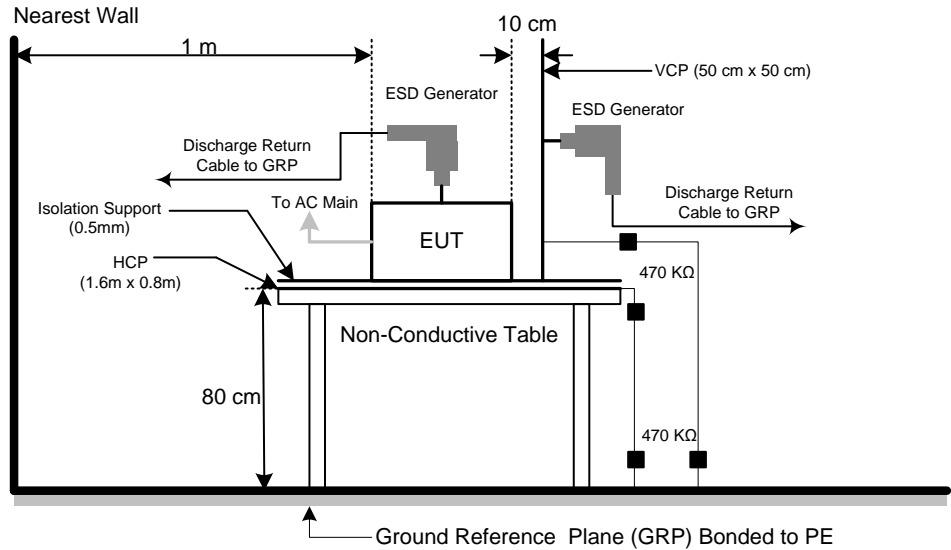Test Method:	EN61000-4-2
Criterion Required:	B
Discharge Impedance:	330 Ω / 150 pF
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point (for EN50130-4) At least 200 discharges and 100 each for polarity (for EN55024)
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Equipment Used:	Refer to section 5 for details.
Test Setup:	 <p style="text-align: center;">Test set-up for tabletop equipment</p>
Test Procedure:	<ol style="list-style-type: none"> 1) Contact discharges to the conductive surfaces and to coupling planes: Air discharge at slots and apertures, and insulating surfaces: On those parts of the EUT where it was not possible to perform contact discharge testing, the equipment was investigated to identify user accessible points where breakdown may occur. This investigation was restricted to those areas normally handled by the user. A minimum of 10 single air discharges were applied to the selected test point for each such area. The application of electrostatic discharges to the contacts of open connectors was not required by this standard. 2) The EUT was put on a 0.8m high wooden table for table-top equipment or 0.1m high for floor standing equipment standing on the ground reference plane (GRP). 3) A horizontal coupling plane(HCP) 1.6m by 0.8m in size was placed on the table, and the EUT with its cables were isolated from the HCP by an insulating support thick than 0.5mm. The VCP 0.5m by 0.5m in size & HCP were constructed from the same material type & think mess as that of the GRP, and connected to the GRP via a 470kΩ resistor at each end. The



	<p>distance between EUT and any of the other metallic surfaces excepted the GRP, HCP and VCP was greater than 1m.</p> <p>4) During the contact discharges, the tip of the discharge electrode was touch the EUT before the discharge switch is operated. During the air discharges, the round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.</p> <p>5) After each discharge, the ESD generator was removed from the EUT, the generator was then retrigged for a new single discharge. For ungrounded product, a discharge cable with two resistances was used after each discharge to remove remnant electrostatic voltage. 10 times of each polarity single discharge were applied to HCP and VCP.</p>
--	--



Test Results:

Fourth issue

For EN 55024: 2010

Test Mode 1:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-11	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13-21	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
22,23	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 50130-4: 2011

Test Mode 1:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13-21	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
22,23	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13-21	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
22,23	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-11	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
12	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
13-21	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
22,23	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Second issue

For EN 55024: 2010

Test Mode 3:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-23	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
24, 25	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Mode 3:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24, 25	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24, 25	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-23	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
24, 25	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Initial issue

For EN 55024: 2010

Test Mode 1:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-12	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
13-26	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
27-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 2:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Mode 3:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-14	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
15-28	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
29-34	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 4:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Mode 1:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-26	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
27-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point/Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-26	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
27-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point/Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-12	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
13-26	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
27-32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 2:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 3:

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-14	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
15-28	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
29-34	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point/Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-14	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
15-28	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
29-34	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point/Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-14	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
15-28	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
29-34	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 4:



Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point/Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



Test Voltage: 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage:253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-13	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
14-27	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
28-33	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

5.2.2 RADIATED IMMUNITY

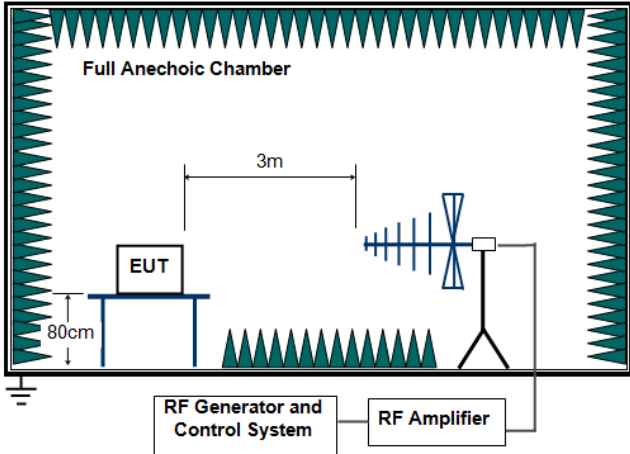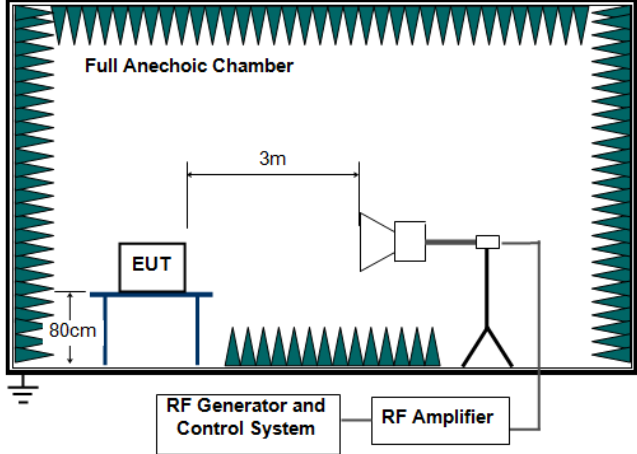Test Method:	EN 61000-4-3
Criterion Required:	A
Test Setup:	
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Figure 1. 80MHz to 1GHz ,</p> </div> <div style="text-align: center;">  <p>Figure 2 1GHz to 2.7GHz</p> </div> </div>	
Test Procedure:	<ol style="list-style-type: none"> 1) For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2) If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3) The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4) The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1% of the preceding frequency value. 5) The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5s. 6) The test normally was performed with the generating antenna facing each side of the EUT. 7) The polarization of the field generated by each antenna necessitates testing



	<p>each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.</p> <p>8) The EUT was performed in a configuration to actual installation conditions, a video camera, test data and/or an audio monitor were used to monitor the performance of the EUT.</p>
--	---

**Test Results:**

Fourth issue

For EN 55024: 2010

Test Mode 1

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal &Vertical	Front	3 V/m	A
80~1000	Horizontal &Vertical	Rear	3 V/m	A
80~1000	Horizontal &Vertical	Left	3 V/m	A
80~1000	Horizontal &Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Mode 1

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Second issue

For EN 55024: 2010

Test Mode 3

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal & Vertical	Front	3 V/m	A
80~1000	Horizontal & Vertical	Rear	3 V/m	A
80~1000	Horizontal & Vertical	Left	3 V/m	A
80~1000	Horizontal & Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Mode 1 & Mode 2 & Mode 3 & Mode 4

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A



Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A



Initial issue

For EN 55024: 2010

Test Mode 1& Mode 2& Mode 3& Mode 4

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Horizontal & Vertical	Front	3 V/m	A
80~1000	Horizontal & Vertical	Rear	3 V/m	A
80~1000	Horizontal & Vertical	Left	3 V/m	A
80~1000	Horizontal & Vertical	Right	3 V/m	A

For EN 50130-4: 2011

Test Mode 1& Mode 2& Mode 3& Mode 4

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A



Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A


Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S

Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal & Vertical	Front	10 V/m	A
80~2700	Horizontal & Vertical	Rear	10 V/m	A
80~2700	Horizontal & Vertical	Left	10 V/m	A
80~2700	Horizontal & Vertical	Right	10 V/m	A

5.2.3 ELECTRICAL FAST TRANSIENTS (EFT)

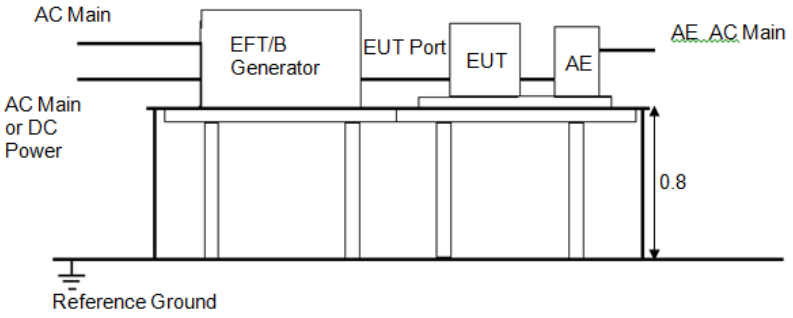Test Method:	EN 61000-4-4
Test Level:	$\pm 2.0\text{kV}$ on AC port (for EN50130-4) $\pm 1.0\text{kV}$ on AC port (for EN55024) $\pm 1.0\text{kV}$ on Signal port (for EN50130-4) $\pm 0.5\text{kV}$ on Signal port (for EN55024)
Polarity:	Positive & Negative
Repetition Frequency:	100kHz (for EN50130-4) 5kHz (for EN55024)
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The GRP shall project beyond the EUT and the clamp by at least 0.1m on all sides. The distance between the EUT and any other of the metallic surface except the GRP was greater than 0.5m. All cables to the EUT was placed on the insulation support 0.1m above GRP. A cable not subject to EFT was routed as far as possible from cable under test to minimize the coupling between the cables. 3) The length of signal and power cable between the EUT and EFT generator was 0.5m. If the cable is a non-detachable supply cable more than 0.5m, the excess length of this cable shall be folded to avoid a flat coil and situated at a distance of 0.1m above the GRP. 4) The EUT was conducted the below specified test voltages for line and neutral or line, neutral and earth simultaneously (for telecommunication, single, control and DC port line with capacitive coupling clamp), 120 seconds duration. If the equipment contains identical ports, only one was tested; multicomputer cables, such as a 50-pair telecommunication cable, were tested as a single cable. Cables did not be split or divided into groups of conductors for this test; interface ports, which were intended by the manufacturer to be connected to data cables not longer than 3 m, did not be tested.



Test Results:

Fourth issue

Test Mode 1

For EN 55024: 2010

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		0.5 kV		1.0 kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---



Test Mode 1

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---



Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---

Second issue

Test Mode 3

For EN 55024: 2010

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---



Test Mode 3

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---



Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		1 kV		2.0 kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45(10Mbps+POE)	A	A	---	---
	RJ45(100Mbps+POE)	A	A	---	---

Initial issue

Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 55024: 2010

Pulse : 5/50 ns		Repetition Rate: 5 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		0.5 kV		1.0 kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		1 kV		2.0 kV	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---




Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: 5/100 kHz			
Burst : 15m/300ms		Test time : 1 min/each condition			
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	RJ45	A	A	---	---

5.2.4 SURGE IMMUNITY

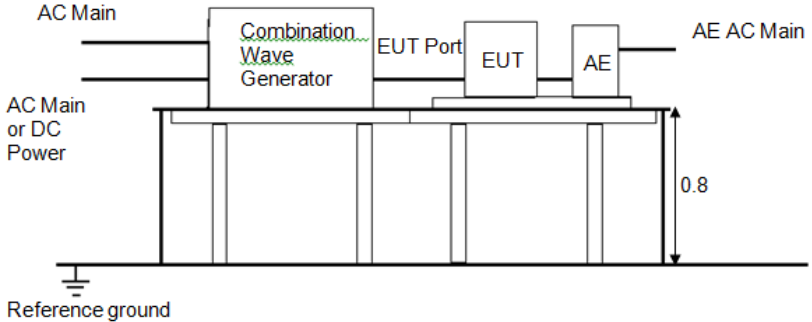Test Method:	EN 61000-4-5	
Test Level:	FOR EN50130-4:2011/A1:2014 ± 0.5/1.0 kV Line to Line, ± 0.5/1.0 kV Signal port	For EN55024: ±1 kV Line-to-Line ± 0.5/1.0 kV Signal port
Criterion Required:	B	
Polarity:	Positive & Negative	
Interval:	60s between each surge	
No. of Surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.	
Test Setup:	 <p style="text-align: center;">For AC port</p>	
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The 1.2/50 μs surge was to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks were required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave so that the specified wave may be applied on the lines under test. 3) The power cord between the EUT and the coupling/decoupling network was not exceed 2 m in length. The interconnection line between the EUT and the coupling/ decoupling network shall not exceed 2 m in length. 4) The EUT was conducted 0.5 kV and 1 kV test voltage for line to line and line to neutral and conducted 0.5 kV, 1 kV and 2 kV test voltage for line to earth and neutral to earth, five positive pulses and five negative pulses each at 0°, 90°, 180° and 270° for a.c. power ports and five positive pulses and five negative surge pulses for d.c. power ports (for telecommunication port, It was 0.5 kV for indoor cable longer than 10m line to ground and 0.5kV,1kV test voltage for outdoor cable line to ground, five positive pulses and five negative surge pulses), The test levels were applied on the EUT with a 2 Ω generator source impedance for power supply terminals and 40Ω output impedance for interconnection lines. The tests were done at repetition rate one per minute. 	

**Test Results:**

Fourth issue

Test Mode 1

For EN 55024: 2010

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform :10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A



Test Mode 1

For EN 50130-4: 2011

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Power Port

Test Voltage:195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

**Signal Port**

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Power Port

Test Voltage:253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 Kv</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A



Waveform : 10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Second issue

Test Mode 3

For EN 55024: 2010

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50 μ s(8/20 μ s) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform :10/700 μ s Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A



Test Mode 3

For EN 50130-4: 2011

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage		<u>0.5 kV</u>		<u>1 kV</u>
Mode / Polarity / Result		+	—	+
RJ45(10Mbps+POE)		A	A	A
RJ45(100Mbps+POE)		A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage		<u>0.5 kV</u>		<u>1 kV</u>
Mode / Polarity / Result		+	—	+
RJ45(10Mbps+POE)		A	A	A
RJ45(100Mbps+POE)		A	A	A

Power Port

Test Voltage:195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

**Signal Port**

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 kV	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Power Port

Test Voltage:253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5/1.0 kV	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1 Kv	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A



Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45(10Mbps+POE)	A	A	A	A
RJ45(100Mbps+POE)	A	A	A	A

Initial issue

Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 55024: 2010

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A



Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 50130-4: 2011

Power Port

Test Voltage:230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Power Port

Test Voltage:195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

**Signal Port**

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Power Port

Test Voltage:253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Signal Port

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 Kv</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1 kV</u>	
Mode / Polarity / Result	+	—	+	—
RJ45	A	A	A	A

5.2.5 CONDUCTED IMMUNITY

Test Method:	EN 61000-4-6
Criterion Required:	A
Test Setup:	<p style="text-align: center;">For AC port</p>
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on an insulating support of 0.1m height above a ground reference Plane, arranged and connected to satisfy its functional requirement. All cables exiting the EUT was supported at a height of at least 30 mm above the ground reference plane. 2) The coupling and decoupling devices were required; they were located between 0.1m and 0.3m from the EUT. This distance was to be measured horizontally from the projection of the EUT on to the ground reference plane to the coupling and decoupling device. 3) Each AE, used with clamp injection, shall be placed on an insulating support 0.1m above the ground reference plane. A decoupling network shall be installed on each cable between the EUT and AE except the cable under test. All cables connected to each AE, other than those being connected to the EUT, shall be provided with decoupling networks. The decoupling networks connected to each AE (except those on cables between the EUT and AE) shall be applied no further than 0.3m from the AE. The cable(s) between the AE and the decoupling network (s) or in between the AE and the injection clamp shall not be bundled nor wrapped and shall be kept between 30mm and 50mm above the ground reference plane. 4) The frequency range was swept from 150 kHz to 80MHz, using the signal levels established during the setting process, and with the disturbance signal 80 % amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or to change coupling devices as necessary. Where the frequency was swept incrementally, the step size does not exceed 1% of the preceding frequency value. The dwell time of the amplitude modulated carrier at each frequency was not less than the time necessary for the EUT to be exercised and to respond, and was not less than 0.5 s.



Test Results:

Fourth issue

Test Mode 1

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%, 1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45(10Mbps+POE)	3	A
0.15 ~ 80MHz	RJ45(100Mbps+POE)	3	A



Test Mode 1

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A



Second issue

Test Mode 3

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%, 1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45(10Mbps+POE)	3	A
0.15 ~ 80MHz	RJ45(100Mbps+POE)	3	A



Test Mode 3

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45(10Mbps+POE)	10	A
0.15 ~ 100MHz	RJ45(100Mbps+POE)	10	A



Initial issue

Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~80MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	RJ45	3	A

Test Mode 1& Mode 2& Mode 3& Mode 4

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s

Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A




Test Voltage: AC 195.5V/50Hz			
Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	RJ45	10	A

5.2.6 Voltage Dips and Interruptions

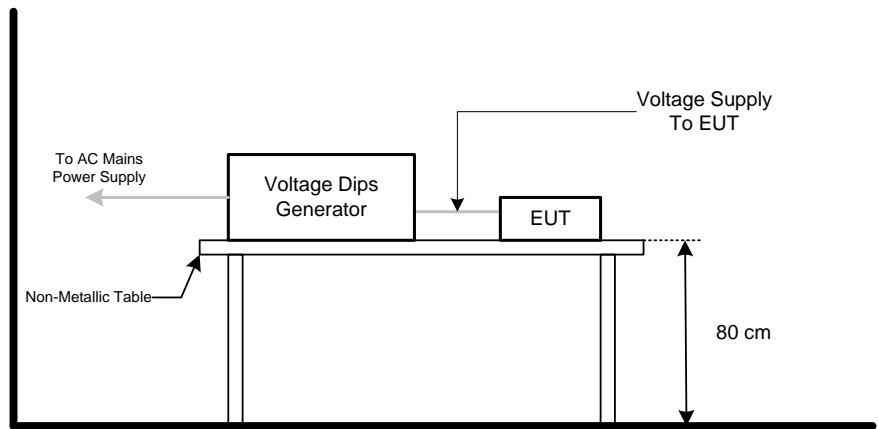Test Method:	EN 61000-4-11
Test Level:	<p>For EN50130-4: 80% for 250 Periods 70 % for 25 Periods 40 % for 10 Periods 0% for 250 Periods</p> <p>For EN55024: >95 % for 0.5 Periods 30 % for 25 Periods >95 % for 250 Periods</p>
No. of Dips / Interruptions:	3 per Level
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1) The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. 2) The test was performed with the EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer. 3) The EUT was tested for each selected combination of test level and duration with a sequence of three dips /interruptions with intervals of 10 s minimum. Each representative mode of operation was tested. 4) For EUT with more than one power cord, each power cord was tested individually.



Test Results:

This project does not need to test.

6 PHOTOGRAPHS OF EMC TEST CONFIGURATION


6.1 CONDUCTED EMISSION






6.2 RADIATED EMISSION TEST SETUP

30MHz ~ 1000MHz

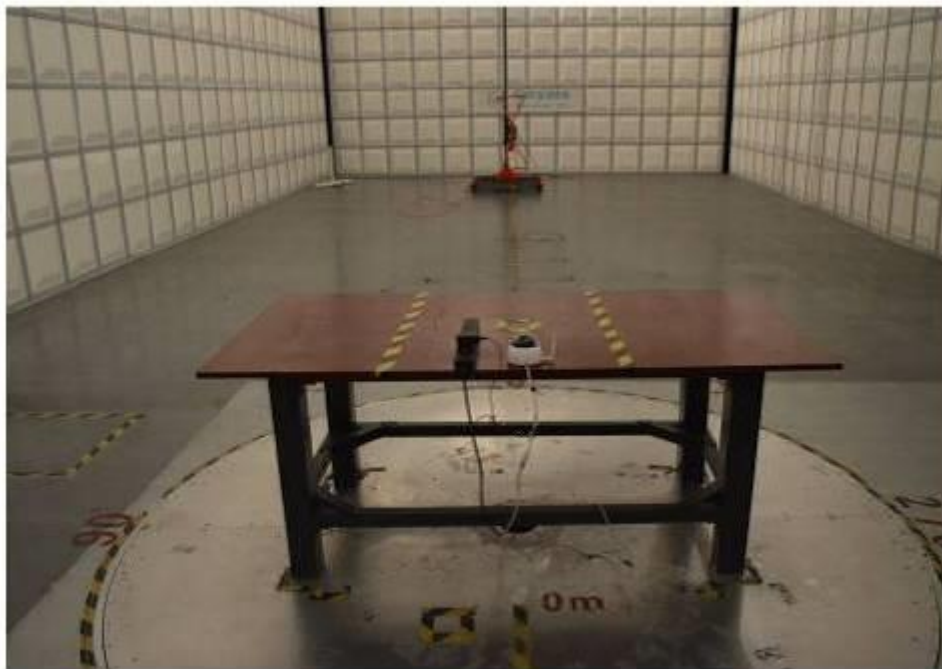

Above 1000MHz

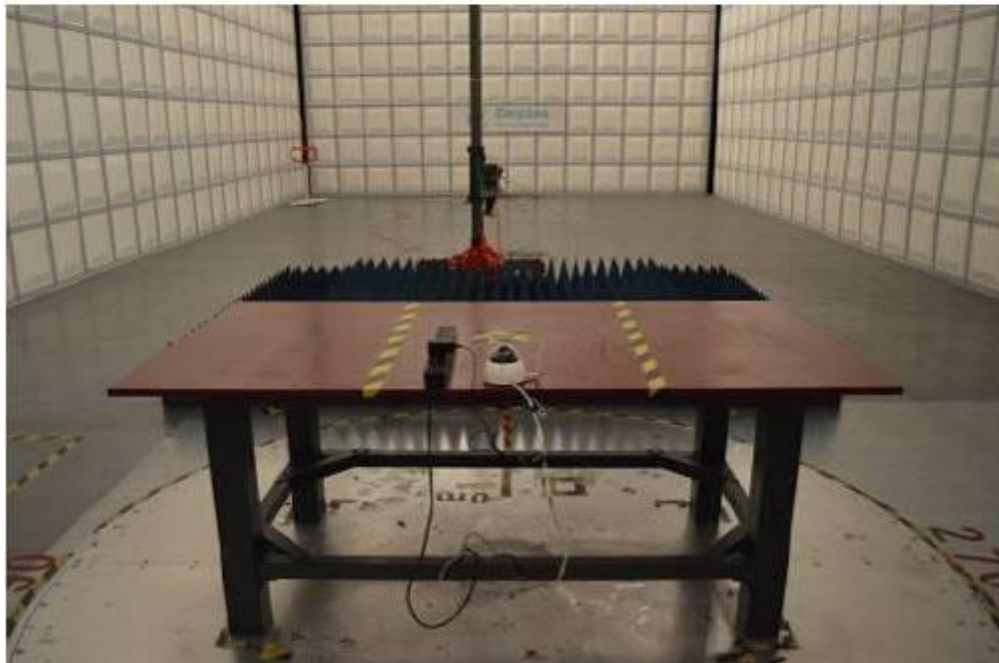

6.3 VOLTAGE FLUCTUATION AND FLICK MEASUREMENT

Flicker






6.4 ESD



6.5 RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY

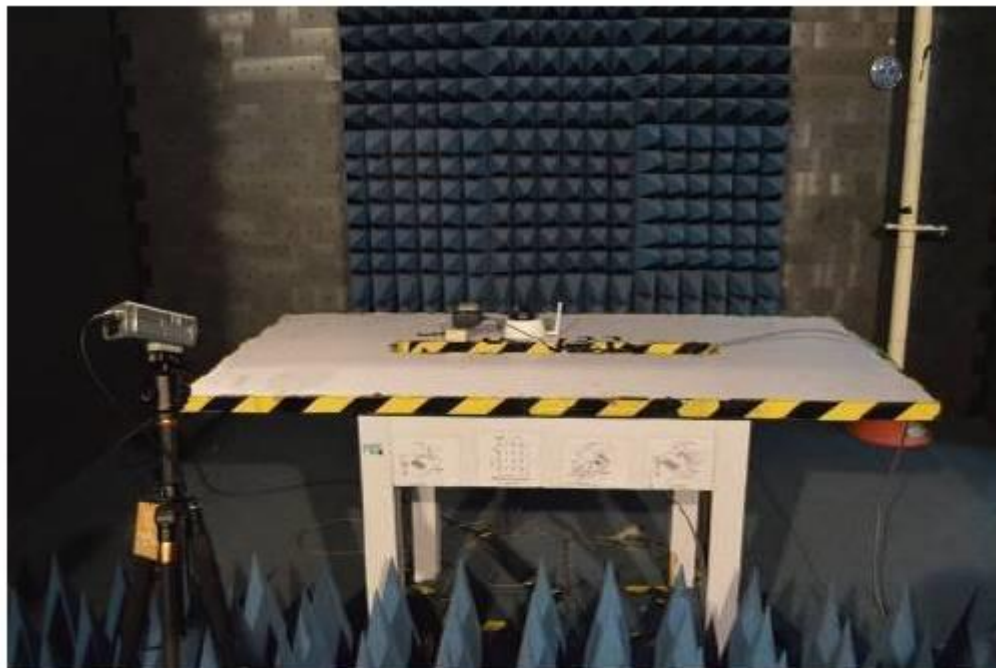

6.6 ELECTRICAL FAST TRANSIENT/BURST / SURGE IMMUNITY



Main



LAN



6.7 CONDUCTED IMMUNITY

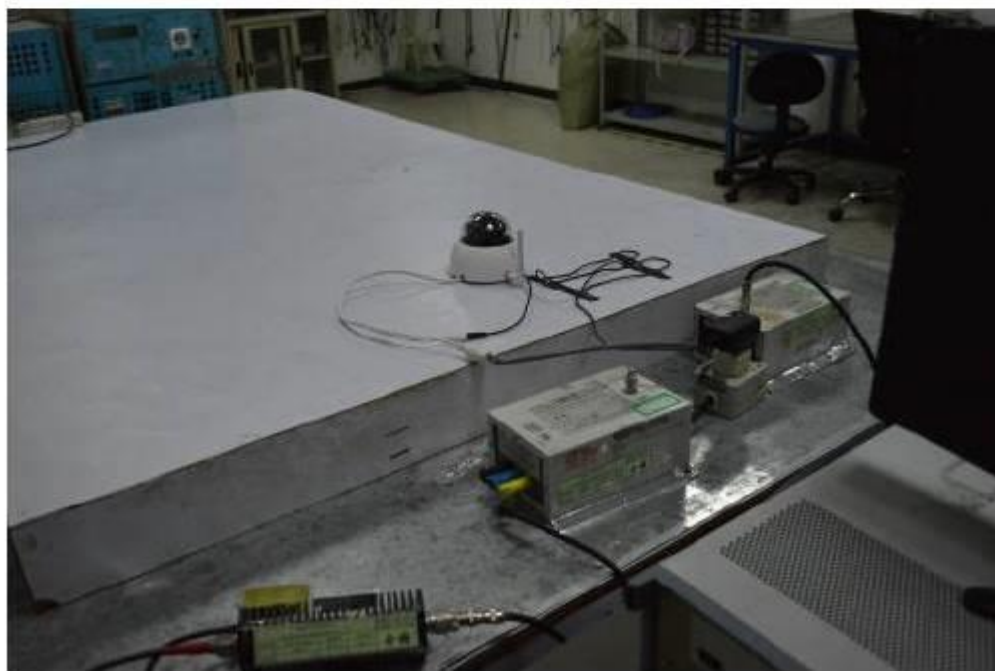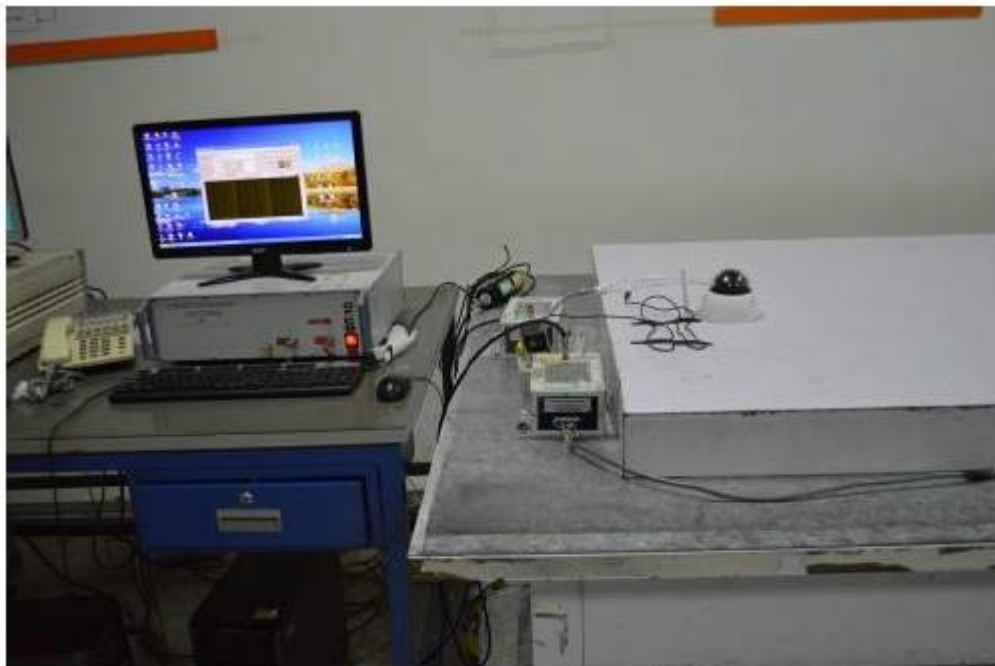

7 Photographs of the EUT

Fourth Issue

IPC-HDBW1320EN-W

1) EUT Photo



2) EUT Photo



3) EUT Photo



4) EUT Photo



IPC-HDBW1120EN-W

5) EUT Photo



6) EUT Photo



7) EUT Photo



8) EUT Photo



Second Issue
DH-IPC-HDBW4120EP-AS
9) EUT Photo



10) EUT Photo



11) EUT Photo



12) EUT Photo



13) EUT Photo



DH-IPC-HDBW4220EP-AS

14) EUT Photo



15) EUT Photo



16) EUT Photo



17) EUT Photo



18) EUT Photo



DH-IPC-HDBW4221EP-AS

19) EUT Photo



20) EUT Photo




21) EUT Photo



22) EUT Photo



23) EUT Photo

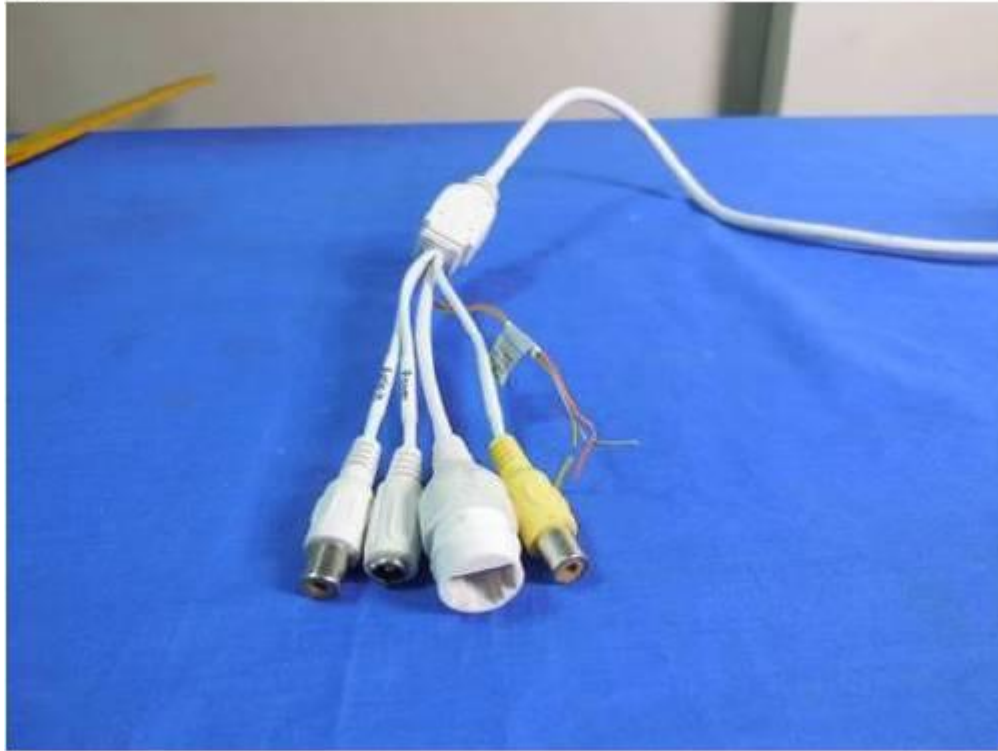

DH-IPC-HDBW4421EP-AS

24) EUT Photo



25) EUT Photo



26) EUT Photo



27) EUT Photo



28) EUT Photo



Initial Issue
IPC-HDBW4421EP
29) EUT Photo



30) EUT Photo



31) EUT Photo



32) EUT Photo



IPC-HDBW4120EP


33) EUT Photo



34) EUT Photo



35) EUT Photo

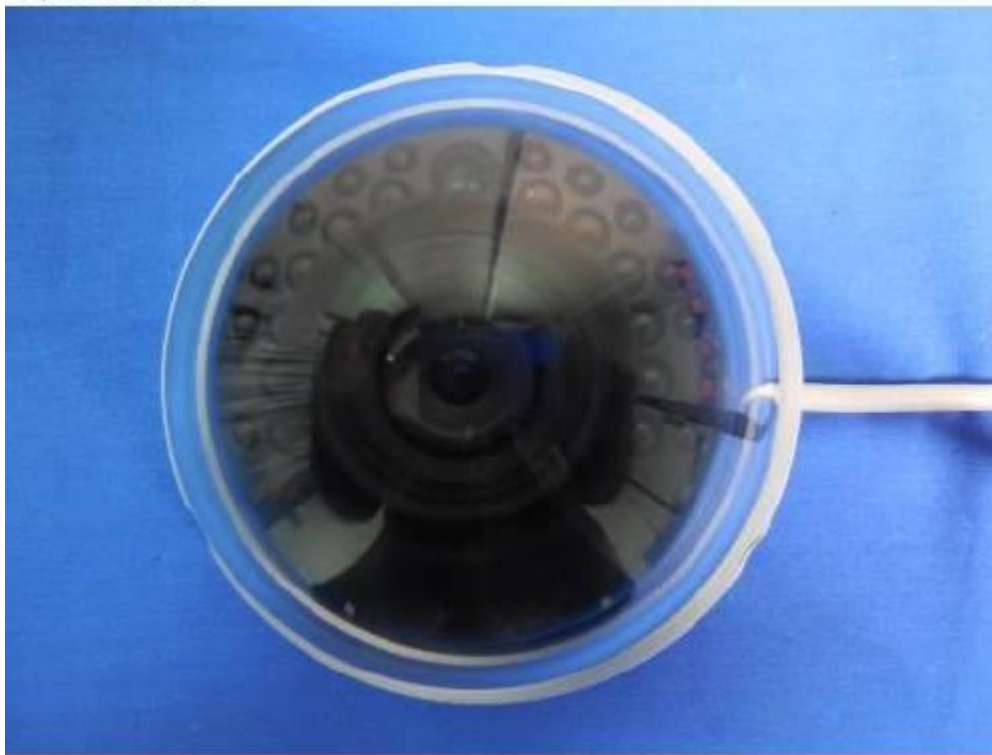

36) EUT Photo



37) EUT Photo



IPC-HDBW4221EP


38) EUT Photo



39) EUT Photo



40) EUT Photo

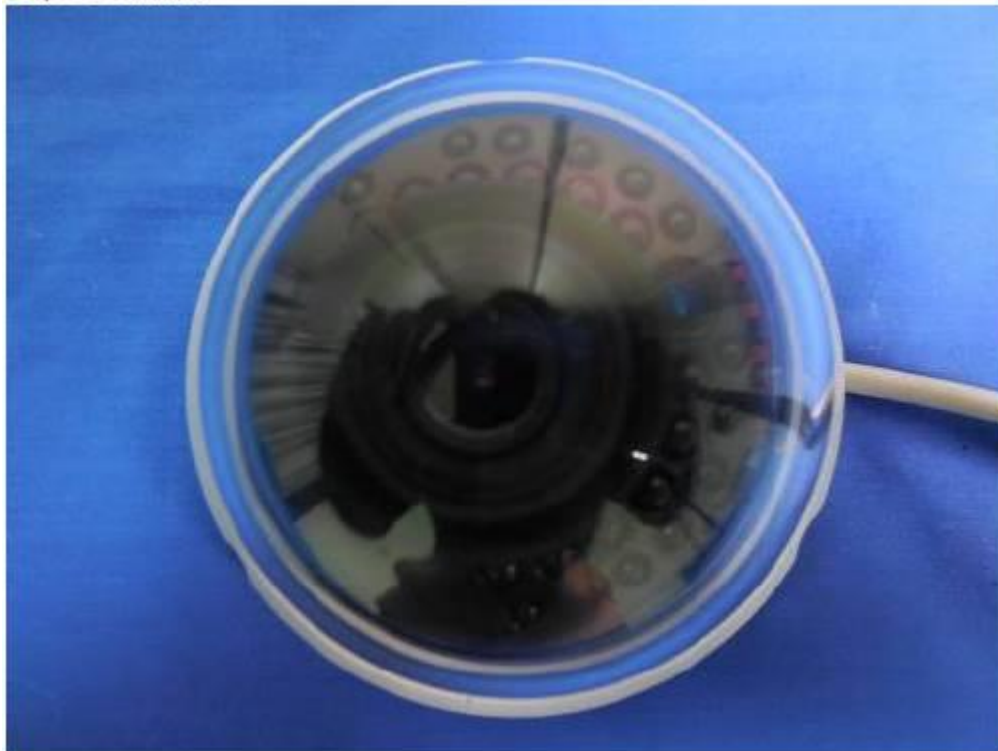

41) EUT Photo



IPC-HDBW4220EP


42) EUT Photo



43) EUT Photo



44) EUT Photo

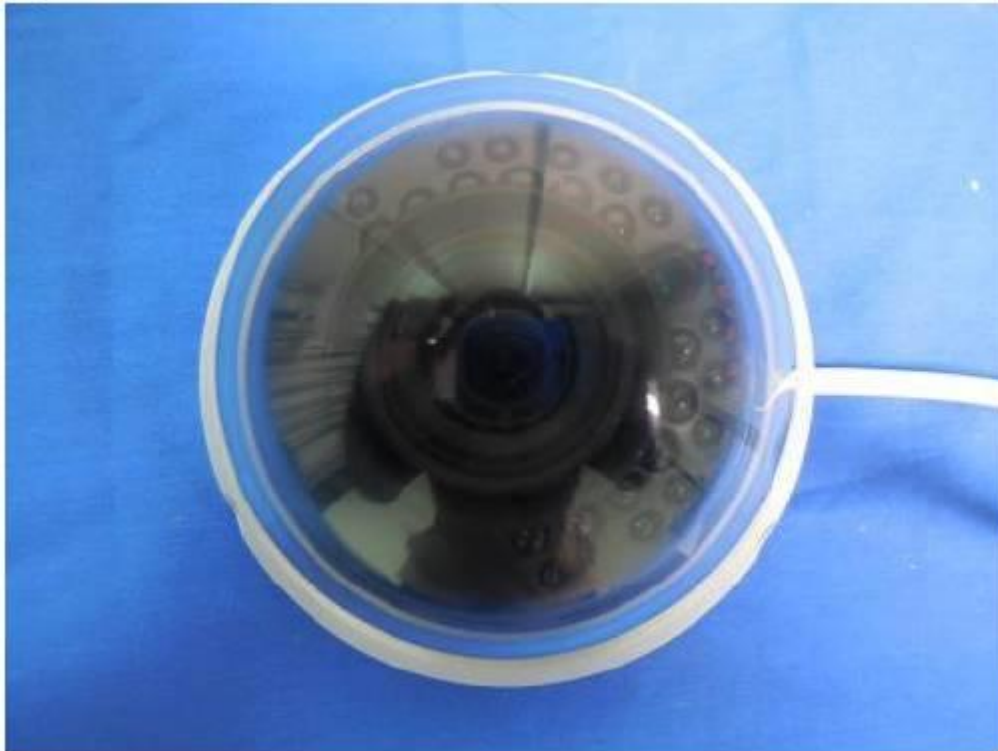


45) EUT Photo



46) EUT Photo



47) EUT Photo

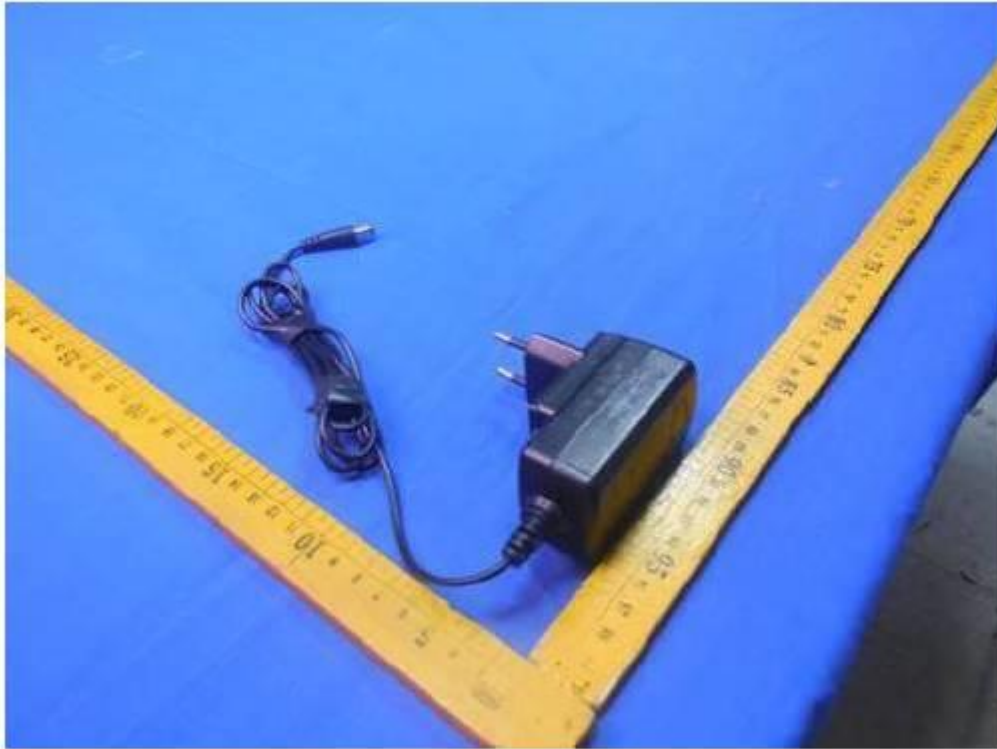

48) EUT Photo



49) EUT Photo



50) EUT Photo



END OF REPORT