





TEST REPORT IEC 60950-1 Information technology equipment - Safety - Part 1: General requirements	
Report Reference No	E234884-A390-IT-3
Date of issue	2019-10-08
Total number of pages	59
Applicant's name	ZHEJIANG DAHUA VISION TECHNOLOGY CO LTD
Address	NO.1199 BIN'AN RD. BINJIANG DISTRICT HANGZHOU ZHEJIANG 310053 CHINA
Test specification:	
Standard	IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013
Test procedure	Informative
Non-standard test method	N/A
Test Report Form No.	IEC60950_1F
Test Report Form originator	SGS Fimko Ltd
Master TRF	Dated 2014-02
Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description	NETWORK VEDIO RECORDER
Trade Mark	 
Manufacturer	ZHEJIANG DAHUA VISION TECHNOLOGY CO LTD 1199 BIN AN RD CHANGHE ST BINJIANG DISTRICT HANGZHOU ZHEJIANG 310053 CHINA
Model/Type reference	<p>(1)DHI-NVR5208-8P-I,DHI-NVR5216-8P-I,DHI-NVR5232-8P-I,NVR5208-8P-I,NVR5216-8P-I,NVR5232-8P-I,DHI-NVR52xy-8P-ab,NVR52xy-8P-ab(xy can be 08,16,32,64,128;ab can be A~Z or 1~9 or blank)</p> <p>(2)DHI-NVR5216-16P-I,DHI-NVR5232-16P-I,DHI-NVR5264-16P-I,NVR5216-16P-I,NVR5232-16P-I,NVR5264-16P-I,DHI-NVR52xy-16P-ab,NVR52xy-16P-ab(xy can be 08,16,32,64,128;ab can be A~Z or 1~9 or blank)</p> <p>(3) DHI-NVR4216-16P-I DHI-NVR4232-16P-I NVR4216-16P-I NVR4232-16P-I DHI-NVR42xy-16P-ab NVR42xy-16P-ab (xy=04,08,16,32,64, ab = A~Z or 1-9 or blank)</p> <p>(4)DHI-NVR4208-8P-I, DHI-NVR4216-8P-I, DHI-NVR4232-8P-I, NVR4208-8P-I, NVR4216-8P-I, NVR4232-8P-I, DHI-NVR42xy-8P-ab, NVR42xy-8P-ab (xy can be 08,16,32,64,128; ab can be A~Z or 1~9 or blank)</p>
Ratings	100-240Vac,47-63Hz,3.5A

Testing procedure and testing location:		
	Testing location / address	UL-CCIC Company Limited No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China
	Tested by (name + signature)	Matt Ma(T)/Xing Liu 
	Approved by (+ signature)	Jie Qian 

List of Attachments

National Differences (33 pages)

Enclosures (53 pages)

Summary Of Testing

Unless otherwise indicated, all tests were conducted at UL-CCIC Company Limited No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China.

Tests performed (name of test and test clause)	Testing location / Comments
End Product Reference Page Input: Single-Phase (1.6.2) Limited Power Source Measurements (2.5) Heating (4.5.1, 1.4.12, 1.4.13) Abnormal Operation (5.3.1 - 5.3.9)	
Summary of Compliance with National Differences: Countries outside the CB Scheme membership may also accept this report. List of countries addressed: AT, BE, BG, BY, CA, CH, CS, CZ, DE, DK, EU, FI, FR, GB, GR, HU, IT, NL, NO, PL, RO, SE, SI, SK, UA, US The product fulfills the requirements of: EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013	

Copy of Marking Plate - Refer to Enclosure titled Marking Plate for copy.

Test item particulars :

Equipment mobility	movable
Connection to the mains	pluggable A
Operating condition	continuous
Access location	operator accessible
Over voltage category (OVC)	OVC II
Mains supply tolerance (%) or absolute mains supply values	N/A
Tested for IT power systems	No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	Class I (earthed)
Considered current rating of protective device as part of the building installation (A)	20A
Pollution degree (PD)	PD 2
IP protection class	IP X0
Altitude of operation (m)	no more than 2000
Altitude of test laboratory (m)	less than 2000 meters
Mass of equipment (kg)	Approximately.max.3.65kg with two HDD

Possible test case verdicts:

- test case does not apply to the test object : N / A
- test object does meet the requirement : P(Pass)
- test object does not meet the requirement : F(Fail)

Testing:

Date(s) of receipt of test item	2019-02-02, 2019-07-15
Date(s) of Performance of tests	2019-03-06 to 2019-03-08, 2019-07-16 to 2019-08-08

General remarks:

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

Name and address of Factory(ies):	ZHEJIANG DAHUA VISION TECHNOLOGY CO LTD 1199 BIN AN RD CHANGHE ST BINJIANG DISTRICT HANGZHOU ZHEJIANG 310053 CHINA
--	---

GENERAL PRODUCT INFORMATION:**Report Summary**

Product Description

The unit consists of electronic components mounted on a V-1 PWB, housed in a metal enclosure and supplied by internal R/C power supply.

Two HDD provided.

Model Differences

(1)Models in series (1) are identical to each other except for software designation and model names.

(2)Models in series (2) are identical to models in series (1) except for mainboard, software designation and model names.

(3)Models in series(3) are identical to models in series(2) except for mainboard, Fan and model names.

(4)Models in series(4) are identical to models in series(1) except for mainboard, Fan and model names.

Additional Information

Underwriters Laboratories Inc. has not tested the performance or reliability of the security or signaling aspects of this product. UL has only tested for fire, shock and casualty hazards as outlined in UL's Standard for Safety UL 60950-1. UL Certification does not cover the performance or reliability of the security or signaling aspects of this product. UL MAKES NO REPRESENTATIONS, WARRANTIES OR CERTIFICATIONS WHATSOEVER REGARDING THE PERFORMANCE OR RELIABILITY OF ANY SECURITY OR SIGNALING RELATED FUNCTIONS OF THIS PRODUCT.

For test record 2:

(1)Alternate new mainboard, Fan and plastic front panel for models in series (2).

(2)Add new model names in series (3).

Test record 3:(for project number 4789096993)

1.Alternate new mainboard and fan for models in series (1)

2.Add new models DHI-NVR4208-8P-I, DHI-NVR4216-8P-I, DHI-NVR4232-8P-I, NVR4208-8P-I, NVR4216-8P-I, NVR4232-8P-I, DHI-NVR42xy-8P-ab, NVR42xy-8P-ab (xy can be 08,16,32,64,128; ab can be A~Z or 1~9 or blank), considered as series (4), the differences refer to model difference.

Technical Considerations

- The means of connection to the mains supply is: Detachable power cord, Pluggable A
- The product is intended for use on the following power systems: TN
- The equipment disconnect device is considered to be: Appliance inlet
- The product was investigated to the following additional standards: EN 60950-1:2006 + A11:2009 + A12:2010 + A12:2011 + A2:2013 (which includes all European national differences, including those specified in this test report).
- The following circuit locations (with circuit/schematic designation) were investigated as a limited power source (LPS): all data output ports
- The product only consider about indoor use only. If it will intend for use outdoors, additional requirement or evaluation may be necessary. --
- The following are available from the Applicant upon request: Installation (Safety) Instructions / Manual --
- LEDs provided in the product are considered low power devices: Yes --
- The product was submitted and evaluated for use at the maximum ambient temperature (Tma)

permitted by the manufacturer's specification of: 55 °C --

Abbreviations used in the report:

- normal condition	N.C.	- single fault condition	S.F.C
- operational insulation	OP	- basic insulation	BI
- basic insulation between parts of opposite polarity:	BOP	- supplementary insulation	SI
- double insulation	DI	- reinforced insulation	RI

Indicate used abbreviations (if any)

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		Pass
1.5	Components		Pass
1.5.1	General		Pass
	Comply with IEC 60950-1 or relevant component standard	(see appended table 1.5.1)	Pass
1.5.2	Evaluation and testing of components	<p>-Components certified to IEC harmonized standard and checked for correct application.</p> <p>-Components, for which no relevant IEC-Standard exist, have been tested under the conditions occurring in the equipment, using applicable parts of IEC 60950-1.</p> <p>-Components not certified are used in accordance with their ratings and they comply with applicable parts of IEC 60950-1 and the relevant component Standard.</p>	Pass
1.5.3	Thermal controls		N/A
1.5.4	Transformers		N/A
1.5.5	Interconnecting cables	Interconnecting cables comply with the relevant requirements of this standard.	Pass
1.5.6	Capacitors bridging insulation		N/A
1.5.7	Resistors bridging insulation		N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems		N/A
1.5.9	Surge suppressors		N/A
1.5.9.1	General		N/A
1.5.9.2	Protection of VDRs		N/A
1.5.9.3	Bridging of functional insulation by a VDR		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A
1.6	Power interface		Pass
1.6.1	AC power distribution systems		Pass
1.6.2	Input current	The steady state input current of the equipment did not exceed the RATED CURRENT under NORMAL LOAD.	Pass
1.6.3	Voltage limit of hand-held equipment	The unit is not a hand-held equipment.	N/A
1.6.4	Neutral conductor		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.7	Marking and instructions		Pass
1.7.1	Power rating and identification markings		Pass
1.7.1.1	Power rating marking		Pass
	Multiple mains supply connections		N/A
	Rated voltage(s) or voltage range(s) (V)	100-240Vac	Pass
	Symbol for nature of supply, for d.c. only		N/A
	Rated frequency or rated frequency range (Hz)	47-63Hz	Pass
	Rated current (mA or A)	3.5A	Pass
1.7.1.2	Identification markings		Pass
	Manufacturer's name or trademark or identification mark.....	Zhejiang Dahua Vision Technology Co., Ltd.	Pass
	Model identification or type reference	(1)DHI-NVR5208-8P-I,DHI-NVR5216-8P-I,DHI-NVR5232-8P-I,NVR5208-8P-I,NVR5216-8P-I,NVR5232-8P-I,DHI-NVR52xy-8P-ab,NVR52xy-8P-ab(xy can be 08,16,32,64,128;ab can be A~Z or 1~9 or blank) (2)DHI-NVR5216-16P-I,DHI-NVR5232-16P-I,DHI-NVR5264-16P-I,NVR5216-16P-I,NVR5232-16P-I,NVR5264-16P-I,DHI-NVR52xy-16P-ab,NVR52xy-16P-ab(xy can be 08,16,32,64,128;ab can be A~Z or 1~9 or blank) (3)DHI-NVR4216-16P-I DHI-NVR4232-16P-I NVR4216-16P-I NVR4232-16P-I DHI-NVR42xy-16P-ab NVR42xy-16P-ab (xy=04,08,16,32,64, ab = A~Z or 1-9 or blank) (4)DHI-NVR4208-8P-I, DHI-NVR4216-8P-I, DHI-NVR4232-8P-I, NVR4208-8P-I, NVR4216-8P-I, NVR4232-8P-I	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
		I, DHI-NVR42xy-8P-ab, NVR42xy-8P-ab (xy can be 08,16,32,64,128; ab can be A~Z or 1~9 or blank)	
	Symbol for Class II equipment only..... :		N/A
	Other markings and symbols..... :		N/A
1.7.1.3	Use of graphical symbols		N/A
1.7.2	Safety instructions and marking	Operating/safety instructions made available to the user.	Pass
1.7.2.1	General		Pass
1.7.2.2	Disconnect devices		Pass
1.7.2.3	Overcurrent protective device		Pass
1.7.2.4	IT Power distribution systems		N/A
1.7.2.5	Operator access with a tool		N/A
1.7.2.6	Ozone		N/A
1.7.3	Short duty cycles		N/A
1.7.4	Supply voltage adjustment :		N/A
	Method and means of adjustment; reference to installation instructions :		N/A
1.7.5	Power outlets on the equipment..... :	No standard power outlets are provided.	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference) :		N/A
1.7.7	Wiring terminals		N/A
1.7.7.1	Protective earthing and bonding terminals :		N/A
1.7.7.2	Terminals for a.c. mains supply conductors		N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators		Pass
1.7.8.1	Identification, location and marking..... :	No controls will affect safety .	N/A
1.7.8.2	Colours :	Only functional indicators use color.	Pass
1.7.8.3	Symbols according to IEC 60417 :	The mains switch is marked with the symbols: "I" and "O" (60417-1-IEC-5007 and IEC- 5008).	Pass
1.7.8.4	Markings using figures..... :		N/A
1.7.9	Isolation of multiple power sources :		N/A
1.7.10	Thermostats and other regulating devices :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.11	Durability	All markings provided on UL Recognized Component labels suitable for surface they are applied upon and meet the durability test.	Pass
1.7.12	Removable parts	No marking is located on (a) removable part(s).	N/A
1.7.13	Replaceable batteries	The lithium battery is not located in an Operator Access Area. The required warning is in both the operation and service manuals.	Pass
	Language(s)	Only English language reviewed.	-
1.7.14	Equipment for restricted access locations		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2	PROTECTION FROM HAZARDS		Pass
2.1	Protection from electric shock and energy hazards		Pass
2.1.1	Protection in operator access areas		Pass
2.1.1.1	Access to energized parts	The operator has access to bare parts of SELV CIRCUITS.	Pass
	Test by inspection..... :	All accessible circuits are SELV circuits.	Pass
	Test with test finger (Figure 2A) :	The test finger was unable to contact bare hazardous parts, basic insulation, or ELV circuits.	Pass
	Test with test pin (Figure 2B)..... :	The test pin was unable to contact bare hazardous parts.	Pass
	Test with test probe (Figure 2C) :	No TNV present.	N/A
2.1.1.2	Battery compartments		N/A
2.1.1.3	Access to ELV wiring		N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm) :		-
2.1.1.4	Access to hazardous voltage circuit wiring		N/A
2.1.1.5	Energy hazards :		N/A
2.1.1.6	Manual controls	The equipment does not contain any knobs, handles, levers, or the like.	N/A
2.1.1.7	Discharge of capacitors in equipment		N/A
	Measured voltage (V); time-constant (s) :		-
2.1.1.8	Energy hazards - d.c. mains supply		N/A
	a) Capacitor connected to the d.c. mains supply .. :		N/A
	b) Internal battery connected to the d.c. mains supply :		N/A
2.1.1.9	Audio amplifiers :		N/A
2.1.2	Protection in service access areas	Hazardous bare parts are guarded and unintentional contact with such parts is unlikely during servicing operations involving other parts of the equipment.	Pass
2.1.3	Protection in restricted access locations		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.2	SELV circuits		Pass
2.2.1	General requirements	SELV levels are maintained after single fault condition.	Pass
2.2.2	Voltages under normal conditions (V)	All accessible voltages are less than 42.4Vpk or 60Vdc and are classified as SELV.	Pass
2.2.3	Voltages under fault conditions (V)	Under fault conditions voltages never exceed 71Vpk and 120Vdc and do not exceed 42.4Vpk or 60Vdc for more than 0.2s.	Pass
2.2.4	Connection of SELV circuits to other circuits	SELV circuits are only connected to other secondary circuits.	Pass

2.3	TNV circuits		N/A
2.3.1	Limits		N/A
	Type of TNV circuits		-
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements	No TNV-2, TNV-3 circuit	N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed.....		-
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed.....		-
2.3.5	Test for operating voltages generated externally		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.4	Limited current circuits		N/A
2.4.1	General requirements	No limited current circuits.	N/A
2.4.2	Limit values		N/A
	Frequency (Hz)		-
	Measured current (mA)		-
	Measured voltage (V)		-
	Measured circuit capacitance (nF or μ F)		-
2.4.3	Connection of limited current circuits to other circuits		N/A

2.5	Limited power sources		Pass
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition	USB ports	Pass
	Use of integrated circuit (IC) current limiters		-
	d) Overcurrent protective device limited output	POE ports	Pass
	Max. output voltage (V), max. output current (A), max. apparent power (VA)	see table 2.5 for details.	-
	Current rating of overcurrent protective device (A) :	1.25A	-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6	Provisions for earthing and bonding		Pass
2.6.1	Protective earthing		Pass
2.6.2	Functional earthing		Pass
	Use of symbol for functional earthing :		N/A
2.6.3	Protective earthing and protective bonding conductors		Pass
2.6.3.1	General		Pass
2.6.3.2	Size of protective earthing conductors	Power supply cord earthing conductor complies with Table 3B.	Pass
	Rated current (A), cross-sectional area (mm ²), AWG :	8A, Min. 18AWG, 0.75mm ²	-
2.6.3.3	Size of protective bonding conductors	Protective bonding conductors evaluated based on 2.6.3.4.	Pass
	Rated current (A), cross-sectional area (mm ²), AWG :	-	-
	Protective current rating (A), cross-sectional area (mm ²), AWG..... :	-	-
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (ohm), voltage drop (V), test current (A), duration (min) :	0.4713V,0.0118ohm after 40A for 2mins(for Model: DHI-NVR5216-8P-I). 0.55V,0.0138ohm after 40A for 2mins(for Model: DHI-NVR5216-16P-I).	Pass
2.6.3.5	Colour of insulation..... :	Protective bonding conductors are green with yellow stripe.	Pass
2.6.4	Terminals		Pass
2.6.4.1	General		Pass
2.6.4.2	Protective earthing and bonding terminals	Terminals comply with Table 3E.	Pass
	Rated current (A), type, nominal thread diameter (mm) :	Test according to 2.6.3.4.	-
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N/A
2.6.5	Integrity of protective earthing		Pass
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N/A
2.6.5.3	Disconnection of protective earth		N/A
2.6.5.4	Parts that can be removed by an operator		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.5.5	Parts removed during servicing		N/A
2.6.5.6	Corrosion resistance	No risk of corrosion. Complies with Annex J.	Pass
2.6.5.7	Screws for protective bonding	Metal thickness at least twice the pitch of the screw.	Pass
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A
2.7	Overcurrent and earth fault protection in primary circuits		Pass
2.7.1	Basic requirements		Pass
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7	The protective device is properly sized and mounted.	Pass
2.7.3	Short-circuit backup protection	The building installation is considered as providing short-circuit backup protection.	Pass
2.7.4	Number and location of protective devices :	One protective device in the "LIVE" phase	Pass
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel :		N/A
2.8	Safety interlocks		N/A
2.8.1	General principles	No Safety interlocks	N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm) :		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.9	Electrical insulation		Pass
2.9.1	Properties of insulating materials		Pass
2.9.2	Humidity conditioning		Pass
	Relative humidity (%), temperature (°C)..... :	93%, 25 Deg.C for internal power supply	-
2.9.3	Grade of insulation	Double or Reinforced insulation was provided between primary wiring and secondary circuit. Basic insulation was provided between primary wiring and metal enclosure.	Pass
2.9.4	Separation from hazardous voltages		Pass
	Method(s) used..... :	Method 1.	-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10	Clearances, creepage distances and distances through insulation		Pass
2.10.1	General	Evaluated in R/C power supply.	Pass
2.10.1.1	Frequency..... :		N/A
2.10.1.2	Pollution degrees..... :		N/A
2.10.1.3	Reduced values for functional insulation		N/A
2.10.1.4	Intervening unconnected conductive parts		N/A
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A
2.10.2	Determination of working voltage		N/A
2.10.2.1	General		N/A
2.10.2.2	RMS working voltage		N/A
2.10.2.3	Peak working voltage		N/A
2.10.3	Clearances	Evaluated in R/C power supply.	Pass
2.10.3.1	General		Pass
2.10.3.2	Mains transient voltages		Pass
	a) AC mains supply :	2500Vpk	Pass
	b) Earthed d.c. mains supplies :		N/A
	c) Unearthed d.c. mains supplies :		N/A
	d) Battery operation :		N/A
2.10.3.3	Clearances in primary circuits		N/A
2.10.3.4	Clearances in secondary circuits	See 5.3.4 method c.	N/A
2.10.3.5	Clearances in circuits having starting pulses		N/A
2.10.3.6	Transients from a.c. mains supply..... :		N/A
2.10.3.7	Transients from d.c. mains supply..... :		N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems :		N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply :		N/A
	For a d.c. mains supply :		N/A
	b) Transients from a telecommunication network		N/A
2.10.4	Creepage distances	Creepages in primary circuits covered in power supply	Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
		evaluation.	
2.10.4.1	General		Pass
2.10.4.2	Material group and comparative tracking index		N/A
	CTI tests		-
2.10.4.3	Minimum creepage distances		N/A
2.10.5	Solid insulation		Pass
2.10.5.1	General		N/A
2.10.5.2	Distances through insulation		Pass
2.10.5.3	Insulating compound as solid insulation		N/A
2.10.5.4	Semiconductor devices		N/A
2.10.5.5	Cemented joints		N/A
2.10.5.6	Thin sheet material - General		N/A
2.10.5.7	Separable thin sheet material		N/A
	Number of layers (pcs)		-
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material - standard test procedure		N/A
	Electric strength test		-
2.10.5.10	Thin sheet material - alternative test procedure		N/A
	Electric strength test		-
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components		N/A
	Working voltage		N/A
	a) Basic insulation not under stress		N/A
	b) Basic, supplementary, reinforced insulation.....		N/A
	c) Compliance with Annex U		N/A
	Two wires in contact inside wound component; angle between 45° and 90°		N/A
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		-
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage		N/A
	- Basic insulation not under stress		N/A
	- Supplementary, reinforced insulation		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.6	Construction of printed boards		Pass
2.10.6.1	Uncoated printed boards		Pass
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs) :		N/A
2.10.7	Component external terminations		N/A
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N/A
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3	WIRING, CONNECTIONS AND SUPPLY		Pass
3.1	General		Pass
3.1.1	Current rating and overcurrent protection		Pass
3.1.2	Protection against mechanical damage	The wires are routed away from sharp edges and parts which could damage insulation.	Pass
3.1.3	Securing of internal wiring	The wires are positioned in such a manner that prevents excessive strain, loosening of terminal connections and damage of conductor insulation.	Pass
3.1.4	Insulation of conductors		Pass
3.1.5	Beads and ceramic insulators		N/A
3.1.6	Screws for electrical contact pressure		N/A
3.1.7	Insulating materials in electrical connections		N/A
3.1.8	Self-tapping and spaced thread screws		N/A
3.1.9	Termination of conductors		N/A
	10 N pull test		N/A
3.1.10	Sleeving on wiring		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2	Connection to a mains supply		Pass
3.2.1	Means of connection	The unit is provided with an appliance inlet.	Pass
3.2.1.1	Connection to an a.c. mains supply		Pass
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment		N/A
	Number of conductors, diameter of cable and conduits (mm)		-
3.2.4	Appliance inlets	Appliance inlet can be inserted without difficulty and so placed that, after insertion of the connector, the equipment is not supported by the connector for any position of normal use on a flat surface.	Pass
3.2.5	Power supply cords	Power supply cord suitable for application and subject to country's national code and regulations to be provided by the manufacturer.	Pass
3.2.5.1	AC power supply cords		Pass
	Type.....	See table 1.5.1 for details.	-
	Rated current (A), cross-sectional area (mm ²), AWG	See table 1.5.1 for details.	-
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N)		-
	Longitudinal displacement (mm)		-
3.2.7	Protection against mechanical damage		Pass
3.2.8	Cord guards		N/A
	Diameter of minor dimension D (mm); test mass (g)		-
	Radius of curvature of cord (mm)		-
3.2.9	Supply wiring space		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²) :		-
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type and nominal thread diameter (mm) :		-
3.3.6	Wiring terminals design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

3.4	Disconnection from the mains supply		Pass
3.4.1	General requirement		Pass
3.4.2	Disconnect devices	The equipment is provided with an appliance coupler.	Pass
3.4.3	Permanently connected equipment		N/A
3.4.4	Parts which remain energized		N/A
3.4.5	Switches in flexible cords		N/A
3.4.6	Number of poles - single-phase and d.c. equipment		Pass
3.4.7	Number of poles - three-phase equipment		N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment		Pass
3.4.11	Multiple power sources		N/A

3.5	Interconnection of equipment		Pass
3.5.1	General requirements		Pass
3.5.2	Types of interconnection circuits :	Interconnection circuits are SELV CIRCUITS.	Pass
3.5.3	ELV circuits as interconnection circuits		N/A
3.5.4	Data ports for additional equipment		Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4	PHYSICAL REQUIREMENTS		Pass
4.1	Stability		N/A
	Angle of 10°	Based on construction, the test was deemed not necessary.	N/A
	Test force (N)..... :		N/A

4.2	Mechanical strength		Pass
4.2.1	General		Pass
	Rack-mounted equipment		N/A
4.2.2	Steady force test, 10 N		N/A
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	No hazards as a result of the 250 N test.	Pass
4.2.5	Impact test		Pass
	Fall test		Pass
	Swing test		N/A
4.2.6	Drop test; height (mm)..... :		N/A
4.2.7	Stress relief test		N/A
4.2.8	Cathode ray tubes		N/A
	Picture tube separately certified :		N/A
4.2.9	High pressure lamps		N/A
4.2.10	Wall or ceiling mounted equipment; force (N) :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3	Design and construction		Pass
4.3.1	Edges and corners	All edges and corners are judged to be sufficiently well rounded so as not to constitute a hazard.	Pass
4.3.2	Handles and manual controls; force (N)..... :	Two handles are capable of supporting four times the weight of the product .	Pass
4.3.3	Adjustable controls		Pass
4.3.4	Securing of parts	No loosening of parts impairing creepage distances or clearances over supplementary or reinforced insulation is likely to occur.	Pass
4.3.5	Connection by plugs and sockets	IEC 60083 or IEC 60320 type connectors not used for SELV circuits.	Pass
4.3.6	Direct plug-in equipment		N/A
	Torque :		N/A
	Compliance with the relevant mains plug standard:		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries		Pass
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease		N/A
4.3.10	Dust, powders, liquids and gases		N/A
4.3.11	Containers for liquids or gases		N/A
4.3.12	Flammable liquids..... :		N/A
	Quantity of liquid (l)..... :		N/A
	Flash point (°C)..... :		N/A
4.3.13	Radiation	The equipment does not generate ionizing radiation or contain flammable liquids or gases.	Pass
4.3.13.1	General		N/A
4.3.13.2	Ionizing radiation		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Measured radiation (pA/kg)		-
	Measured high-voltage (kV)		-
	Measured focus voltage (kV)		-
	CRT markings.....		-
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	This product contains only visible indicator LEDs (Class 1) operating in the range of 400 - 700 nm wavelength. No IEC60825-1 evaluation was deemed necessary. Additional review may be required at the discretion of the accepting NCB.	Pass
4.3.13.5.1	Lasers (including laser diodes)		N/A
	Laser class		-
4.3.13.5.2	Light emitting diodes (LEDs)		Pass
4.3.13.6	Other types		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.4	Protection against hazardous moving parts		Pass
4.4.1	General		Pass
4.4.2	Protection in operator access areas		N/A
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A
4.4.5	Protection against moving fan blades		Pass
4.4.5.1	General		Pass
	Not considered to cause pain or injury. a)	Class a	Pass
	Is considered to cause pain, not injury. b)		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		Pass
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A

4.5	Thermal requirements		Pass
4.5.1	General		Pass
4.5.2	Temperature tests	(see appended table 4.5)	Pass
	Normal load condition per Annex L	Operated in the most unfavorable way of operation given in the operating instructions until steady conditions established.	-
4.5.3	Temperature limits for materials	(see appended table 4.5)	Pass
4.5.4	Touch temperature limits	(see appended table 4.5)	Pass
4.5.5	Resistance to abnormal heat.....		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.6	Openings in enclosures		Pass
4.6.1	Top and side openings		Pass
	Dimensions (mm) :	See enclosure 4-01, 4-10, 4-11 for opening details.	-
4.6.2	Bottoms of fire enclosures		Pass
	Construction of the bottom, dimensions (mm)..... :	No opening	-
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm) :		-
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks) :		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.7	Resistance to fire		Pass
4.7.1	Reducing the risk of ignition and spread of flame		Pass
	Method 1, selection and application of components wiring and materials		Pass
	Method 2, application of all of simulated fault condition tests		N/A
4.7.2	Conditions for a fire enclosure		Pass
4.7.2.1	Parts requiring a fire enclosure		Pass
4.7.2.2	Parts not requiring a fire enclosure	Circuit supplied by a limited power source complying with 2.5 and with components mounted on materials of Class V-1 or better and motors.	Pass
4.7.3	Materials		Pass
4.7.3.1	General	Metal on the body, front panel is V-1	Pass
4.7.3.2	Materials for fire enclosures		Pass
4.7.3.3	Materials for components and other parts outside fire enclosures	Decorative parts and parts outside of the fire enclosure are made of minimum HB material.	Pass
4.7.3.4	Materials for components and other parts inside fire enclosures	PWBs are rated min V-1 internal wiring is UL Recognized, marked VW-1 or FT-1 and strapped by individual cable ties (where needed), see table 1.5.1 for material information.	Pass
4.7.3.5	Materials for air filter assemblies		N/A
4.7.3.6	Materials used in high-voltage components		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		Pass
5.1	Touch current and protective conductor current		Pass
5.1.1	General		Pass
5.1.2	Configuration of equipment under test (EUT)		Pass
5.1.2.1	Single connection to an a.c. mains supply		Pass
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Single phase equipment intended only for connection to star TN or TT system.	Pass
5.1.4	Application of measuring instrument	Tested using D.1 measuring instrument.	Pass
5.1.5	Test procedure		Pass
5.1.6	Test measurements		Pass
	Supply voltage (V)	264Vac/63Hz	-
	Measured touch current (mA).....	See Table 5.1.	-
	Max. allowed touch current (mA).....	See Table 5.1.	-
	Measured protective conductor current (mA)	-	-
	Max. allowed protective conductor current (mA) ...	-	-
5.1.7	Equipment with touch current exceeding 3,5 mA		N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks		N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V)		-
	Measured touch current (mA).....		-
	Max. allowed touch current (mA).....		-
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	Electric strength		Pass
5.2.1	General		Pass
5.2.2	Test procedure		Pass

5.3	Abnormal operating and fault conditions		Pass
5.3.1	Protection against overload and abnormal operation		Pass
5.3.2	Motors		N/A
5.3.3	Transformers		N/A
5.3.4	Functional insulation..... :	Method c,a	Pass
5.3.5	Electromechanical components		N/A
5.3.6	Audio amplifiers in ITE..... :		N/A
5.3.7	Simulation of faults		Pass
5.3.8	Unattended equipment		N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	No fire, emission of molten metal or deformation was noted during the tests.	Pass
5.3.9.1	During the tests	No fire, emission of molten metal or deformation was noted during the tests.	Pass
5.3.9.2	After the tests	Electric Strength tests performed after abnormal and fault tests.	Pass

6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements	No TNV circuits.	N/A
	Supply voltage (V) :		-
	Current in the test circuit (mA)..... :		-
6.1.2.2	Exclusions..... :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)		-
	Current limiting method		-

7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	General		N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system	No cable distribution systems.	N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples..... :		-
	Wall thickness (mm) :		-
A.1.2	Conditioning of samples; temperature (°C) :		N/A
A.1.3	Mounting of samples :		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D :		N/A
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s) :		-
	Sample 2 burning time (s) :		-
	Sample 3 burning time (s) :		-
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material..... :		-
	Wall thickness (mm) :		-
A.2.2	Conditioning of samples; temperature (°C) :		N/A
A.2.3	Mounting of samples :		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C :		-
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s) :		-
	Sample 2 burning time (s) :		-
	Sample 3 burning time (s) :		-
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s) :		-
	Sample 2 burning time (s) :		-
	Sample 3 burning time (s) :		-
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

A.3.3	Compliance criterion		N/A
-------	----------------------	--	-----

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		-
	Manufacturer		-
	Type		-
	Rated values		-
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		-
	Electric strength test: test voltage (V)		-
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N/A
	Position		-
	Manufacturer		-
	Type		-
	Rated values		-
	Method of protection		-
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings		N/A
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		Pass
D.1	Measuring instrument		Pass
D.2	Alternative measuring instrument		N/A
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances.....		N/A

H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
---	---	--	-----

J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		Pass
	Metal(s) used	-	-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V)..... :		N/A
K.3	Thermostat endurance test; operating voltage (V) :		N/A
K.4	Temperature limiter endurance; operating voltage (V) :		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A

L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		Pass
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A
L.7	Other business equipment		Pass

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz) :		-
M.3.1.2	Voltage (V) :		-
M.3.1.3	Cadence; time (s), voltage (V) :		-
M.3.1.4	Single fault current (mA) :		-
M.3.2	Tripping device and monitoring voltage..... :		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V) :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A
P	ANNEX P, NORMATIVE REFERENCES		Pass
Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
	- Preferred climatic categories..... :		N/A
	- Maximum continuous voltage..... :		N/A
	- Combination Pulse current..... :		N/A
	Body of the VDR Test according to IEC60695-11-5 :		N/A
	Body of the VDR. Flammability class of material (min V-1) :		N/A
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
 :		-
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
 :		-
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		Pass
V.1	Introduction		Pass
V.2	TN power distribution systems		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus..... :		N/A
Y.2	Mounting of test samples..... :		N/A
Y.3	Carbon-arc light-exposure apparatus..... :		N/A
Y.4	Xenon-arc light-exposure apparatus :		N/A
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		Pass
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
BB	ANNEX BB, CHANGES IN THE SECOND EDITION		Pass
CC	ANNEX CC, EVALUATION OF INTEGRATED CIRCUIT (IC) CURRENT LIMITERS		N/A
CC.1	General		N/A
CC.2	Test program 1 :		N/A
CC.3	Test program 2 :		N/A
CC.4	Test program 3 :		N/A
CC.5	Compliance..... :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

DD	ANNEX DD, REQUIREMENTS FOR THE MOUNTING MEANS OF RACK-MOUNTED EQUIPMENT		N/A
DD.1	General		N/A
DD.2	Mechanical strength test, variable N		N/A
DD.3	Mechanical strength test, 250 N, including end stops		N/A
DD.4	Compliance.....		N/A

EE	ANNEX EE, HOUSEHOLD AND HOME/OFFICE DOCUMENT/MEDIA SHREDDERS		N/A
EE.1	General		N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols		N/A
	Information of user instructions, maintenance and/or servicing instructions		N/A
EE.3	Inadvertent reactivation test		N/A
EE.4	Disconnection of power to hazardous moving parts		N/A
	Use of markings or symbols		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A)		N/A
	Test with wedge probe (Figure EE1 and EE2)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: list of critical components					Pass
object/part or Description	manufacturer/ trademark	type/model	technical data	standard (Edition or year)	mark(s) of conformity ¹⁾	
01. Metal Enclosure	Interchangeable	Interchangeable	Metallic, thickness,details see enclosure 4-02,4-03,4-05,thickness min.0.6mm	--	--, --	
02.Plastic enclosure on the front panel	Interchangeable	Interchangeable	HB or better	UL94 UL746C	UL, --	
03.Internal plastic	Interchangeable	Interchangeable	V-2 or better	UL94 UL746C	UL, --	
04. Power supply	DELTA ELECTRONICS, INC	DPS-200PB-185B	INPUT:100-240V~,3.5A 47Hz-63Hz OUTPUT:12Vdc, 5.0A,52Vdc,2.5A ,45 degree C, Class II	UL/IEC 60950-1 2nd Edition	UL, --	
05. SELV connector	Interchangeable	Interchangeable	Metal/Plastic	UL 498, UL 1977,	UL, --	
05a. SELV connector (Alternate)	Interchangeable	Interchangeable	Copper alloy pins housed in bodies of plastic rated V-2 minimum.	UL 94, UL 746C	UL, --	
06. Interconnecting Cable (Optional)	Interchangeable	Interchangeable	Minimum 80 degree C, 60V, maximum 3.05m long, jacketed, rated VW-1 or FT-1.	UL 758	UL, --	
07. Internal Wiring (Secondary, SELV circuit)	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or surface marked "VW-1" or "FT-1".Rated minimum. 80 degree C, 60 V.	UL 758	UL, --	
08. Internal metal	Interchangeable	Interchangeable	Metallic	--	--, --	
09. Insulating Tubing / Sleeving (Optional)	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or	UL 224, UL 1441	UL, --	

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
			marked VW-1 or FT-1, 105 degree C, 60V		
10. Label	Interchangeable	Interchangeable	Minimum 70 degree C, suitable for affixed material.	UL 969	UL, --
11. PWB	Interchangeable	Interchangeable	V-1 or better, minimum 105 degree C	UL 796	UL, --
12.Fuse for POE	WALTER ELECTRONIC CO LTD	1206T	1.25A,63Vdc	UL248-1	UL, --
13.IC for USB	SILERGY TECHNOLOGY	SY6288CCAC	2.5-5.5 Vdc; Continuous Current Rating: 2.0 A; Protection Current Rating: 3.7A	UL2367	UL, --
14.RTC battery	CHANGZHOU JINTAN CHAOCHUANG BATTERY CO LTD	CR1220	Max Abnormal ChargingVoltage :12Vdc, Max Abnormal ChargingCurrent :2mA	UL1642	UL, --
15.Fan(For models in series 1,2)	SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO LTD	EF40101B1-1Q08C-S99	12Vdc,0.084A,Max. 1.01W,0.77CFM	UL 507	UL, --
16.HDD(Two provided)	Interchangeable	Interchangeable	5Vdc, 0.75A max/12Vdc, 0.75A max	--	UL, --
17.Heatsink	--	--	Aluminium,Details see enclosure 4-01	--	--, --
17a.Heatsink	--	--	Aluminium,Details see enclosure 4-04	--	--, --
18.IC for HDMI ports	DIODES INC	AP2331	2.7-5.2 Vdc; Continuous Current Rating: 0.2 A; Protection Current Rating: 0.5A;-30 to 70 degree C. -45 to 80	UL2367	UL, --
19.Fan (For		HA40101V4-	12Vdc,0.065A,Ai	UL507	UL, --

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
models in series 3, 4)	SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO LTD	D26C-999	r flow:5.2CFM		
20.Protective PTC for Alarm out_CTRL port	CYG WAYON CIRCUIT PROTECTION CO LTD	LP-MSM150/24	24 Vdc max., Ih=1.5 A, It=3.0 A, CA=1(111),2.3.4 #	UL1434	UL, --
20a. Protective PTC for Alarm out_CTRL Port-Alternate	LITTELFUSE INC	1812L150/24	24 Vdc max., Ih=1.5 A, It=3.0 A, CA=1(105),2.3.4 #	UL1434	UL, --
21.IC for USB(for models in series 4)	SILERGY TECHNOLOGY	SY6288CAAC	2.5-5.5 Vdc; Continuous Current Rating: 2.0 A; Protection Current Rating: 3.7A	UL2367	UL, --
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: Opto Electronic Devices			N/A
Manufacturer				
Type				
Separately tested				
Bridging insulation				
External creepage distance				
Internal creepage distance				
Distance through insulation				
Tested under the following conditions				
Input				
Output				
supplementary information:				
Additional types may be described in Enclosure - Miscellaneous				

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.6.2	TABLE: Electrical data (in normal conditions)					Pass
U (V)	I (A)	I rated (A)	P (W)	Fuse #	I fuse (A)	condition/status
Model:DHI-NVR5216-8P-I	-	-	-	-	-	-
90V/47Hz	1.9062	-	166.35	F1	1.9062	Max normal load
90V/63Hz	1.8759	-	166.26	F1	1.8759	Ditto
100V/47Hz	1.6890	3.5	164.83	F1	1.6890	Ditto
100V/63Hz	1.6688	3.5	164.53	F1	1.6688	Ditto
240V/47Hz	0.6788	3.5	155.32	F1	0.6788	Ditto
240V/63Hz	0.6801	3.5	155.32	F1	0.6801	Ditto
264V/47Hz	0.6225	-	155.13	F1	0.6225	Ditto
264V/63Hz	0.6276	-	155.14	F1	0.6276	Ditto
Model:DHI-NVR5216-16P-I	-	-	-	-	-	-
90V/47Hz	2.03	-	167.3	F1	2.03	Max normal load
90V/63Hz	2.06	-	168.4	F1	2.06	Ditto
100V/47Hz	1.77	3.5	165.3	F1	1.77	Ditto
100V/63Hz	1.79	3.5	166.0	F1	1.79	Ditto
240V/47Hz	0.68	3.5	157.2	F1	0.68	Ditto
240V/63Hz	0.68	3.5	157.2	F1	0.68	Ditto
264V/47Hz	0.62	-	156.9	F1	0.62	Ditto
264V/63Hz	0.635	-	157.0	F1	0.635	Ditto
For test record 2:	-	-	-	-	-	-
Model: DHI-NVR4216-16P-I	-	-	-	-	-	-
90V/47Hz	2.091	-	188.14	F1	2.091	Max normal load
90V/63Hz	2.092	-	188.50	F1	2.092	Ditto
100V/47Hz	1.884	3.5	186.53	F1	1.884	Ditto
100V/63Hz	1.868	3.5	186.93	F1	1.868	Ditto
240V/47Hz	0.777	3.5	179.10	F1	0.777	Ditto
240V/63Hz	0.778	3.5	179.25	F1	0.778	Ditto
264V/47Hz	0.712	-	178.86	F1	0.712	Ditto
264V/63Hz	0.719	-	178.98	F1	0.719	Ditto
For test record 3:	-	-	-	-	-	-
Model: DHI-NVR4208-8P-I	-	-	-	-	-	-
90/47	2.327	--	205.0	--	--	Maximum normal load
90/63	2.277	--	204.6	--	--	Ditto
100/47	2.021	3.5	199.7	--	--	Ditto
100/63	2.020	3.5	200.4	--	--	Ditto
240/47	0.819	3.5	190.5	--	--	Ditto

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

240/63	0.825	3.5	191.2	--	--	Ditto
254.4/47	0.779	--	190.2	--	--	Ditto
254.4/63	0.778	--	191.3	--	--	Ditto
264/47	0.756	--	190.3	--	--	Ditto
264/63	0.753	--	190.8	--	--	Ditto

supplementary information:

Maximum normal load : Continuously worked. Each USB3.0 port loaded 4.5W, each USB2.0 port loaded 2.5W. HDD: Two provided, 5Vdc, 0.75A max/12Vdc, 0.75A max All POE ports together load 104W. For test record 3: Max normal load:Continuously worked. Connect to power, with two HDDs which I/P is 12Vdc, 0.75A and 5Vdc, 0.75A, one USB 2.0 load 0.5A, one USB3.0 load 0.9A, +12V output for alarm is load 1A, All PoE together load 130W, Continuous record of video.

2.1.1.5 c) 1)	TABLE: Max. V, A, VA test					N/A
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)		
supplementary information:						

2.1.1.5 c) 2)	TABLE: Stored energy			N/A
Capacitance C (??F)		Voltage U (V)	Energy E (J)	
supplementary information:				

2.2	TABLE: Evaluation of voltage limiting components in SELV circuits					N/A
Component (measured between)			max. voltage (V) (normal operation)		Voltage limiting components	
			V peak	V d.c.		
Fault test performed on voltage limiting components			Voltage measured (V) in SELV circuits (V peak or V d.c.)			
supplementary information:						

2.5	TABLE: Limited power sources					Pass
Circuit output tested:						
Note: Measured Uoc (V) with all load circuits disconnected:						
Components	Test condition (Single fault)	Uoc (V)	Isc (A)		VA	
			Meas.	Limit	Meas.	Limit

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Model:DHI-NVR5216-8P-I	--	--	--	--	--	--
Mic out	1841105	0	0	8	0	100
RS232	1841105	0	0	8	0	100
RJ45 port	1841105	0	0	8	0	100
USB on the back panel	1841105	Pin1~pin3:0 Pin4:4.9590Vdc Pin5~pin10:0	Pin1~pin3:0 Pin4:2.803 Pin5~pin10:0	8	Pin1~pin3:0 Pin4:11.50 Pin5~pin10:0	100
HDMI	1841105	Pin1:0 Pin2:4.9590Vdc Pin3:0 Pin4~pin5:4.887 0Vdc Pin6~pin19:0	Pin1:0 Pin2:0.350 Pin3~pin19:0	8	Pin1:0 Pin2:1.10 Pin3~pin19:0	100
VGA	1841105	Pin1:0 Pin2:0 Pin3~pin12:0.10 Vdc Pin13:0.14Vdc Pin14~pin15:0	0	8	0	100
Alarm out_C1	1841105	0	0	8	0	100
Alarm out_C2	1841105	0	0	8	0	100
Alarm out_NO1	1841105	0	0	8	0	100
Alarm out_NO2	1841105	0	0	8	0	100
Alarm out_A	1841105	4.5890Vdc	0	8	0	100
Alarm out_B	1841105	0	0	8	0	100
Alarm out_1,2,3,4	1841105	4.9593Vdc	0	8	0	100
POE ports 1~8	1841105	50.760Vdc	0.600	8	30.95	100
Model:DHI-NVR5216-16P-I	--	--	--	--	--	--
Mic out	1959574	0	0	8	0	100
RS232	1959574	0	0	8	0	100
RJ45 port	1959574	0	0	8	0	100
USB on the back panel	1959574	Pin1~pin3:0 Pin4:4.98Vdc Pin5~pin10:0	Pin1~pin3:0 Pin4:2.81 Pin5~pin10:0	8	Pin1~pin3:0 Pin4:10.9 Pin5~pin10:0	100
HDMI	1959574	Pin1:0 Pin2:4.98Vdc Pin3:0 Pin4~pin5:4.96V dc Pin6~pin19:0	Pin1:0 Pin2:0.38A Pin3~pin19:0	8	Pin1:0 Pin2:1.05w Pin3~pin19:0	100
VGA	1959574	Pin1:0 Pin2:0 Pin3~pin12:0.12 Vdc Pin13:0.16Vdc Pin14~pin15:0	0	8	0	100

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Alarm out_C1	1959574	0	0	8	0	100
Alarm out_C2	1959574	0	0	8	0	100
Alarm out_NO1	1959574	0	0	8	0	100
Alarm out_NO2	1959574	0	0	8	0	100
Alarm out_A	1959574	4.61	0	8	0	100
Alarm out_B	1959574	0	0	8	0	100
Alarm out_1,2,3,4	1959574	4.91Vdc	0	8	0	100
POE ports 1~16	1959574	50.20	0.61	8	29.81	100
For test record 2:	--	--	--	--	--	--
Model: DHI-NVR4216-16P-I	--	--	--	--	--	--
Mic out	2066692	0Vdc	0	8	0	100
RS232	2066692	Pin 2:-5.31Vdc	0	8	0	100
RS232	2066692	Other pin:0	0	8	0	100
RJ45 port	2066692	All pin 0Vdc	0	8	0	100
USB on the back panel	2066692	5.12Vdc	3.00	8	12.34	100
HDMI	2066692	Pin 2:5.12Vdc	0.4	8	1.38	100
HDMI	2066692	Pin 4,5:5.06Vdc	0	8	0	100
HDMI	2066692	Other pin: 0Vdc	0	8	0	100
VGA	2066692	0	0	8	0	100
Alarm out_C1	2066692	0	0	8	0	100
Alarm out_NO1	2066692	0	0	8	0	100
Alarm out_1	2066692	5.06Vdc	0	8	0	100
Alarm out_2	2066692	5.06Vdc	0	8	0	100
Alarm out_CTRL	2066692	11.6Vdc	2.6	8	24.5	100
Alarm out_P	2066692	11.6	2.5	8	27.2	100
Alarm out_3,4	2066692	5.06Vdc	0	8	0	100
POE ports 1~162	2066692	50Vdc	0.6	8	29.8	100
J10	2082790	Pin 1,2:4.9Vdc	3.8	8	11.4	100
J10	2082790	Pin 3,4:5.0Vdc	0.43	8	2.0	100
J10	2082790	Pin 11,12,13,14:3.25 Vdc	0	8	0	100
12V to 5V fault 1:U9 pin3 to pin2 SC1	2082790	Pin 1,2:0Vdc	0	8	0	100
12V to 5V fault 1:R235 SC	2082790	Pin 1,2:4.9Vdc	0	8	0	100
12V to 5V fault 1: U31 pin 2 to pin 3 SC	2082790	Pin 3,4:12V	5.5	8	51.15	100
For test record 3:	--	--	--	--	--	--
Model: DH-NVR4208-8P-I	--	--	--	--	--	--

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
USB(Back panel) Pin 1 to GND(Protected by U8)	1#	5.09Vdc	2.9	8	13.13	100
USB(Back panel) Pin 2, 3 to GND	1#	0	0	8	0	100
USB(Front panel) Pin 1 to GND(Protected by U34)	1#	5.09Vdc	3.1	8	12.75	100
USB(Front panel) Pin 2, 3 to GND	1#	0	0	8	0	100
HDMI(Back Panel)HDMI(Bac k Panel) Pin 18 to GND(Protected by U28)	1#	5.09Vdc	0.4	8	1.81	100
HDMI(Back Panel)HDMI(Bac k Panel) Pin 15, 16 to GND	1#	5.01Vdc	0	8	0	100
HDMI(Back Panel)HDMI(Bac k Panel) Pin 1, 3, 4, 6, 7, 9, 10, 12, 19 to GND	1#	0	0	8	0	100
POE ports(Protected by F1-F8)	1#	51.05Vdc	0.62	8	30.96	100
RJ45(Back Panel) Pin 1-8 to GND	1#	0	0	8	0	100
Audio in/out(Back Panel) Pin 1 to GND	1#	1.28Vdc	0	8	0	100
Audio in/out(Back Panel) Pin 2 to GND	1#	0	0	8	0	100
VGA(Back Panel)	1#	0	0	8	0	100

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Pin 1, 2, 3, 13, 14 to GND						
Alarm(Back Panel) Pin 1, 2, 3, 4 to GND	1#	5.03Vdc	0	8	0	100
Alarm(Back Panel) Pin NO, C to GND	1#	0	0	8	0	100
Alarm(Back Panel) Pin CTRL to GND(Protected by U72)	1#	12.06Vdc	1.5	8	16.8	100
Alarm(Back Panel) Pin P GND(Protected by RT8(Wayon))	1#	12.06Vdc	2.8	8	30.2	100
Alarm(Back Panel) Pin P GND(Protected by RT8(Littelfuse))	1#	12.06Vdc	2.9	8	30.4	100
supplementary information:						
Sc=Short circuit, Oc=Open circuit POE are protected by Fuse, Fuse load 2.1 times rate current shutdown within 2min. USB,HDMI are protected by recognized IC. For test record 2: Unit shut down and damage after U45 SC. For test record 3: U28 Mfr.: DIODES, Type: AP2331, U8, U34 Mfr.: SILETGY TECHNOLOGY, Type: SY6288CAAC; All 8 PoE ports have same circuit design, F1-F8 Mfr.: WATER ELECTRONIC CO LTD, Type: 1206T; U72 Mfr.: TEXAS INSTRUMENTS INC, Type: TPS259241DRCR, RT8 Mfr.: Shanghai Changyuan Wayon Circuit protection Co., Ltd, Type: LP-MSM150/24(Alt. Mfr.: Littelfuse, Inc, Type: 18121150/24						

2.10.2	TABLE: Working voltage measurements				N/A
Location		RMS voltage (V)	Peak voltage (V)	Comments	
supplementary information:					

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						Pass
	Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
Functional:							
	Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Basic/supplementary:						
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
Reinforced:						
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
supplementary information:						

2.10.5	TABLE: Distance through insulation measurements					Pass
Distance through insulation (DTI) at/of:		Upeak (V)	Urms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)
supplementary information:						

4.3.8	TABLE: Batteries								Pass	
The tests of 4.3.8 are applicable only when appropriate battery data is not available.										
Is it possible to install the battery in a reverse polarity position?										
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. specs.		Meas. current	Manuf. specs.	Meas. current	Manuf. specs.	Meas. current	Manuf. specs.	
Test results:								Verdict		
- Chemical leaks					NO			Pass		
- Explosion of the battery					NO			Pass		
- Emission of flame or expulsion of molten metal					NO			Pass		
- Electric strength tests of equipment after completion of tests					N/A			N/A		
supplementary information:										
Supplementary information: -The test of battery is waived according to the battery is protected by two diodes in series, and a resistor of 2.2kohm. --for test record3: according to the battery is protected by a diodes in series, and a resistor of 2kohm.										

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.3.8	TABLE: Batteries			Pass
Battery category (lithium, NiMh, NiCad, lithium ion, etc.)		Lithium		
Manufacturer		CHANGZHOU JINTAN CHAOCHUANG BATTERY CO LTD		
Type / model		CR1220		
Voltage		Refer to the CCL		
Capacity (mAh)		Refer to the CCL		
Tested and Certified by (incl. Ref. No.)		Refer to the CCL		
Circuit protection diagram (refer to indicated supplement of Enclosure - Miscellaneous)		Refer to the CCL		
MARKINGS AND INSTRUCTIONS (1.7.12, 1.7.15)				
Location of replaceable battery				
Language(s)				
Close to the battery				
In the servicing instructions				
In the operating instructions				
supplementary information:				
Additional devices may be described in Enclosure - Miscellaneous				

4.5	TABLE: Thermal requirements						Pass
	Supply voltage (V) :	-	-	-	-	-	---
	Ambient Tmin (??C) :	-	-	-	-	-	---
	Ambient Tmax (??C) :	-	-	-	-	-	---

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Maximum measured temperature T of part/at:	T (??C) #1	T (??C) #2	T (??C) #3	T (??C) #4	T (??C) #5	Allowed Tmax (??C)
Model: DHI-NVR5216-8P-I	90V/4 7Hz	90V/4 7Hz	264V/ 63Hz	264V/ 63Hz	--	--
Power supply board (1-9) , Mainboard(10-17)	--	--	--	--	--	--
1.T351 coil	48.9	81.3	48.1	80.4	--	110
2.T351 core	54.7	87.1	53.6	85.9	--	110
3. T501 coil	42.7	75.1	42.2	74.5	--	110
4. T501 core	42.8	75.2	42.2	74.5	--	110
5. CX2 body near FL3	48.4	80.8	40.0	72.3	--	100
6.C801 body near T351 core	41.7	74.1	38.6	70.9	--	85
7. C901 body	36.1	68.5	35.7	68.0	--	85
8. CY7	49.0	81.4	40.2	72.5	--	125
9.CY8	50.4	82.8	40.5	72.8	--	125
10. Battery body	34.9	67.3	34.4	66.7	--	100
11.PWB between U17 and U26	39.2	71.6	39.0	71.3	--	105
12.PWB near U20	45.2	77.6	44.8	77.1	--	105
13.PWB near U22	47.8	80.2	47.4	79.7	--	105
14.PWB center on the bottom side of mainboard	48.8	81.2	48.4	80.7	--	105
15.HDD	31.0	63.4	30.7	63.0	--	105
16.Metal enclosure near power supply	27.1	59.5	26.1	58.4	--	70
17.AC inlet	25.0	57.4	24.3	56.6	--	70
18. Ambient	22.6	55	22.7	55	--	--
Model: DHI-NVR5216-16P-I	90V/4 7Hz	90V/4 7Hz	264V/ 63Hz	264V/ 63Hz	--	--
Power supply board (1-9) , Mainboard(10-17)	--	--	--	--	--	--
1.T351 coil	50.2	82.4	49.2	81.2	--	110
2.T351 core	48.9	81.1	47.9	79.9	--	110
3. T501 coil	44.9	77.1	44.6	76.6	--	110
4. T501 core	42.2	74.4	41.8	73.8	--	110
5. CX2 body near FL3	46.2	78.4	40.0	72.0	--	100
6.C801 body near T351 core	42.0	74.2	39.3	71.3	--	85
7. C901 body	37.7	69.9	37.3	69.3	--	85
8. CY7	47.1	79.3	39.2	71.2	--	125
9.CY8	48.2	80.4	39.7	71.7	--	125
10. Battery body	38.0	70.2	38.0	70.0	--	100
11.PWB between U17 and U26	39.2	71.4	39.7	71.7	--	105
12.PWB between U22 and U25	48.1	80.3	48.9	80.9	--	105
13.PWB between T2 and T5	45.8	78.0	45.9	77.9	--	105
14.PWB near U20	50.3	82.5	50.3	82.3	--	105
15.PWB center on the bottom side of mainboard	48.7	80.9	48.9	80.9	--	105
16.HDD	31.3	63.5	31.7	63.7	--	105
17.Metal near power supply	27.7	59.9	27.0	59.0	--	70
18.AC inlet	26.5	58.7	26.0	58.0	--	70
19. Ambient	22.8	55	23.0	55	--	--
For test record 2:	--	--	--	--	--	--

IEC 60950-1						
Clause	Requirement + Test		Result - Remark		Verdict	
Model: DHI-NVR4216-16P	90V/4 7Hz	90V/4 7Hz Shift to Tma	264V/ 63Hz	264V/ 63Hz Shift to Tma	--	--
Power supply board:	--	--	--	--	--	110
1.T351 coil	62.5	94.8	61.4	93.6	--	110
2.T351 core	72.1	104.4	70.9	103.1	--	110
3. T501 coil	46.1	78.4	46.0	78.2	--	110
4. T501 core	44.8	77.1	44.3	76.5	--	100
5. CX2 body near FL3	49.8	82.1	43.5	75.7	--	85
6.C801 body near T351 core	49.6	81.9	47.0	79.2	--	85
7. C901 body	42.0	74.3	41.8	74.0	--	125
8. CY7	55.6	87.9	44.8	77.0	--	125
9.CY8	56.1	88.4	44.6	76.8	--	--
Mainboard:	--	--	--	--	--	100
10. Battery body	32.4	64.7	32.3	64.5	--	105
11.PWB between U24 and U25	36.0	68.3	36.2	68.4	--	105
12.PWB between U46 and U4	39.8	72.1	40.0	72.2	--	105
13.PWB between T2 and T3	50.8	83.1	50.5	82.7	--	105
14.PWB near U32	46.8	79.1	46.9	79.1	--	105
15.PWB center on the bottom side of mainboard	48.7	81.0	48.5	80.7	--	105
16.HDD	35.4	67.7	35.2	67.4	--	70
17.Metal near power supply	26.8	59.1	26.7	58.9	--	70
18.AC inlet	27.1	59.4	27.0	59.2	--	95
19.Plastic on the front panel	23.6	55.9	23.8	56.0	--	--
20. Ambient	22.7	55	22.8	55	--	--
For test record 3:	--	--	--	--	--	--
Model: DH-NVR4208-8P-I	90V/6 3Hz	90V/6 3Hz Shift to Tma	264V/ 63Hz	264V/ 63Hz Shift to Tma	--	--
AC inlet(Built-in power)	33.3	62.9	--	33.5	63.0	70
FL3(Built-in power)	43.6	73.2	--	41.3	70.8	105
PCB near BD1(Built-in power)	55.9	85.5	--	47.1	76.6	105
T351 coil(Built-in power)	77.6	107.2	--	77.6	107.1	110
T351 core(Built-in power)	65.4	95.0	--	65.4	94.9	110
T501 coil(Built-in power)	47.2	76.8	--	47.3	76.8	110
T501 core(Built-in power)	43.3	72.9	--	43.3	72.8	110
PCB near U21(39_220 board)	54.8	84.4	--	54.9	84.4	105
PCB near U2(39_220 board)	57.9	87.5	--	58.0	87.5	105
T2 body(39_220 board)	37.3	66.9	--	37.2	66.7	105
PCB near U90(39_217 board)	33.2	62.8	--	33.2	62.7	105
PCB near U3(39_217 board)	34.0	63.6	--	34.0	63.5	105
BT2 body(39_217 board)	31.6	61.2	--	31.7	61.2	100
Plastic inside near power	27.9	57.5	--	27.9	57.4	60

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Plastic outside near power				27.7	57.3	--	27.7	57.2	95
Metal case outside near power				28.2	57.8	--	28.2	57.7	70
Power Switch				27.7	57.3	--	27.7	57.2	85
Ambient				25.4	55.0	--	25.5	55.0	--
Temperature T of winding:	t1 (??C)	R1 (ohm)	t2 (??C)	R2 (ohm)	T (??C)	Allowed Tmax (??C)	Insulation class		
supplementary information:									
Note: The temperatures were measured under worst-case normal mode defined in 1.2.2.1 and as described in sub-clause 1.6.2 and at voltages as described in sub-clause 1.4.5. --With a specified ambient temperature of 55 degree C. --Tmax of components listed below: User accessible parts: Metal chassis, which may be touched - 70 Deg.C Plastic enclosure, which may be touched - 95 Deg.C									

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	allowed impression diameter (mm) :	less than or equal to 2.0		---
part		test temperature (??C)	impression diameter (mm)	
supplementary information:				

4.7	TABLE: Resistance to fire					Pass
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
supplementary information:						
For details see table 1.5.1 .						

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.1	TABLE: Touch current measurement			Pass
Measured between	Measured (mA)	Limit (mA)	Comments/conditions	
Model:DHI-NVR5216-8P-I(switch on)	--	--	--	
Metal enclosure	0.21	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.21	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports (RJ45)	0	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports (RJ45)	0	0.25	“e” – OC; P1 – R; Pri S. - Off	
(switch off)	--	--	--	
Metal enclosure	0.38	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.09	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports (RJ45)	0	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports (RJ45)	0	0.25	“e” – OC; P1 – R; Pri S. - Off	
Model: DHI-NVR5216-16P-I(switch on)	--	--	--	
Metal enclosure	0.22	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.20	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports	0.09	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports	0.09	0.25	“e” – OC; P1 – R; Pri S. - Off	
(switch off)	--	--	--	
Metal enclosure	0.04	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.36	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports	0	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports	0	0.25	“e” – OC; P1 – R; Pri S. - Off	
For test record 2:	--	--	--	
Model: DHI-NVR4216-16P(switch on)	--	--	--	
Metal enclosure	0.26	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.26	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports	0.02	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports	0.02	0.25	“e” – OC; P1 – R; Pri S. - Off	
(switch off)				
Metal enclosure	0.04	3.5	“e” – O; P1 – N Pri S. - On	
Metal enclosure	0.46	3.5	“e” – O; P1 – R Pri S. - On	
Secondary ports	0	0.25	“e” – OC; P1 – N; Pri S. - Off	
Secondary ports	0.04	0.25	“e” – OC; P1 – R; Pri S. - Off	
supplementary information:				

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			Pass
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Functional:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Basic/supplementary:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Primary to metal enclosure	AC	2285	No
model :DHI-NVR4216-16P	--	--	--
Primary to metal enclosure	AC	2300	NO
Test record 3	--	--	--
Model:DHI-NVR4208-8P-I	--	--	--
AC inlet to metal enclosure	AC	2285	NO
Reinforced:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Primary to secondary	AC	3000	No
model :DHI-NVR4216-16P	--	--	--
Primary to secondary	AC	3000	NO
Test record 3	--	--	--
Model:DHI-NVR4208-8P-I	--	--	--
AC inlet to SELV terminal	DC	4242	NO
AC inlet to Plastic enclosure wrap with metal foil	AC	3000	NO
supplementary information:			

5.3	TABLE: Fault condition tests		Pass
	Ambient temperature (??C) :		---
	Power source for EUT: Manufacturer, model/type, output rating :		---

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
System Fan(DHI-NVR5216-8P-I)	Stalled	264Vac	1h59 min	--	0.6337A	Unit normal operation. NC,NT The maximum temperature of key components: T351 coil: 49.2 degree C at ambient 22.4 degree C T351 core: 54.6 degree C at ambient 22.4 degree C T501 coil: 45.0 degree C at ambient 22.4 degree C T501 core: 44.6 degree C at ambient 22.4 degree C
Opening(DHI-NVR5216-8P-I)	Blocked	264Vac	1h7min	--	0.6340A	Unit normal operation. NC,NT The maximum temperature of key components: T351 coil: 68.6 degree C at ambient 22.5 degree C T351 core: 76.2 degree C at ambient 22.5 degree C T501 coil: 57.1 degree C at ambient 22.5 degree C T501 core: 56.1 degree C at ambient 22.5 degree C
System Fan(DHI-NVR5216-16P-I)	Stalled	264Vac	42min	--	0.66A	Unit normal operation. NC,NT The maximum temperature of key components: T351 coil: 70.7 degree C at ambient 22.4 degree C T351 core: 49.0 degree C at ambient 22.4 degree C T501 coil: 54.7 degree C at ambient 22.4 degree C T501 core: 39.2 degree C at ambient 22.4 degree C
Opening(DHI-NVR5216-16P-I)	Blocked	264Vac	2h14 min	--	0.6469A	Unit normal operation. NC,NT The maximum temperature of key components: T351 coil: 113.3 degree C at ambient 22.9 degree C T351 core: 109.1 degree C at ambient 22.9 degree C T501 coil: 83.7 degree C at ambient 23.1 degree C T501 core: 81.6 degree C at ambient 23.1 degree C
For test record 2:	--	--	--	--	--	--
Syatem Fan	Stalled	264Vac	33min	F1	0.719	Unit normal operation NT,NB,NC Maximum temperature of key components T351 Coil:66.9(C at ambient 22.8(C T351 Core:73.8(C at ambient 22.8(C T501 Coil:45.3(C at ambient 22.8(C T501 Core:42.4(C at ambient 22.7(C
Openning	Blocked	264Vac	1h12	F1	0.729	Unit normal operation NT,NB,NC

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

			min			Maximum temperature of key components T351 Coil:116.9(C at ambient 22.6(C T351 Core:119.7(C at ambient 22.6(C T501 Coil:73.8(C at ambient 22.6(C T501 Core:70.7(C at ambient 22.6(C
For test record 3:	--	--	--	--	--	--
Model: DH-NVR4208-8P-I	--	--	--	--	--	--
Fan for main board	Locked	240Vac	2 hrs.	--	--	Normal operation, NC, NT, NB, no damage ,no hazard. Max. temp of T351 coil(Built-in power) =77.2(C, Ambient=25.2(C
Fan for power	Locked	240Vac	1.5 hrs.	--	--	NC, NT, NB, Unit shut down while T351 coil(Built-in power) =98.7(C, Ambient=23.2(C no damage ,no hazard.
Ventilation Opening	Blocked	240Vac	1.5 hrs.	--	--	NC, NT, NB, Unit shut down while T351 core(Built-in power) =107.7(C, Ambient=23.1(C no damage ,no hazard.
supplementary information:						
Results Key: IP = Internal protection operated (component indicated) CT = Constant temperatures were obtained TW = Transformer winding opened CD = Components damaged (damaged components indicated) NB = No indication of dielectric breakdown YB = Dielectric breakdown (time and location indicated) NC = Cheesecloth remained intact YC = Cheesecloth charred or flamed NT = Tissue paper remained intact YT = Tissue paper charred or flamed						

C.2	TABLE: Transformers							N/A
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)		Required distance thr. insul. (2.10.5)
Loc.	Tested insulation				Test voltage / V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
Transformer type number			Enclosure - Miscellaneous ID					
supplementary information:								

Enclosure

National Differences

Austria**
Belarus*
Belgium**
Bulgaria**
Czech Republic**
Denmark
Finland
France**
Germany
Greece**
Group
Hungary**
Italy**
Netherlands**
Norway
Poland**
Romania**
Serbia**
Slovakia**
Slovenia**
Sweden
Switzerland
USA / Canada
Ukraine*
United Kingdom

* No National Differences Declared

** Only Group Differences

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Denmark - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
1.2.4.1	In Denmark, certain types of Class I appliances (see sub-clause 3.2.1.1) may be provided with plug not establishing earthing continuity when inserted into Danish socket-outlets.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: : "Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord."		N/A
1.7.5	In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For stationary equipment, the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.		N/A
1.7.5	For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a. (Heavy Current Regulations, Section 107-2-D1)		N/A
3.2.1.1	Supply cord of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contact or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	Regulations, Section 107-2-D1 or EN 60309-2.		

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Finland - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"		N/A
2.3.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.3	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
5.1.7.1	Touch current measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment: - STATIONARY PLUGGABLE EQUIPMENT TYPE A that: (1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and (2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and (3) is provided with instructions for the installation of that conductor by a SERVICE PERSON; - STATIONARY PLUGGABLE EQUIPMENT TYPE B - STATIONARY PERMANENTLY CONNECTED EQUIPMENT		N/A
6.1.2.1	Add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994 (EN 60384-14:2005), subclass Y2.</p> <p>A capacitor classified Y3 according to EN 132400 [EN 60384-14:2005], may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14]. 		
6.1.2.2	The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication center, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		
7.2	Requirements according to this annex 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A

Germany - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
1.7.2.1	If for the assurance of safety and health certain rules during use, amending or maintenance of a technical labour equipment or readymade consumer product are to be followed, a manual in German language has to be delivered when placing the product on the market. Of this requirement, rules for use even only by SERVICE PERSONS are not exempted.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Group - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
General	Group Differences also includes the requirements in A11:2009 and A12:2011		Pass
1.3	A12:2011 - In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010		N/A
1.5.1	Add the following NOTE Z1: The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC		Pass
1.7.2.1	Delete NOTE Z1 and the addition for Portable Sound System Add the following Zx clauses and annex to the existing standard and amendments		N/A
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		N/A
2.7.2	Void		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
Zx.1	<p>General - This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none"> - is designed to allow the user to listen to recorded or broadcast sound or video; and - primarily uses headphones or earphones that can be worn in or on or around the ears; and - allows the user to walk around while in use. <p>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none"> - while the personal music player is connected to an external amplifier; or - while the headphones or earphones are not used. <p>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> - hearing aid equipment and professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> - analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before 		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>the end of 2015.</p> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		
Zx.2	<p>Equipment Requirements - No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> - equipment provided as a package (personal music player with its listening device), where the acoustic output LAeq,T is ≤ 85 dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and - a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1. <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level LAeq,T is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ul style="list-style-type: none"> a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated 		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. For music where the average sound pressure (long term LAeq,T) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term LAeq,T) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p>		
Zx.3	Warning - The warning shall be placed on the		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> - the symbol of Figure 1 (IEC 60417-6044) with a minimum height of 5 mm; and - the following wording, or similar: "To prevent possible hearing damage, do not listen at high volume levels for long periods." Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level 		
Zx.4	Requirements for Listening devices (headphones and earphones)		N/A
Zx.4.1	<p>Wired listening devices with analogue input With 94 dBA sound pressure output LAeq,T, the input voltage of the fixed "programme simulation noise" described in EN 50332-2 shall be ≥ 75 mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>		N/A
Zx.4.2	<p>Wired listening devices with digital input With any playing device playing the fixed "programme simulation noise" described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>		N/A
Zx.4.3	<p>Wireless listening devices In wireless mode:</p> <ul style="list-style-type: none"> - with any playing and transmitting device playing the fixed programme simulation noise described in 		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>EN 50332-1; and</p> <ul style="list-style-type: none">- respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and- with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA. <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>		
Zx.5	<p>Measurement Methods</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Norway - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
General	Norway has national differences declared for 60950-1:2005, Am 1:2009 (below).		Pass
1.2.13.14	For requirements see 1.7.2.1 and 7.3.		N/A
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.8	Due to the IT power system used (see annex V, figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Apparatet må tilkoples jordet stikkontakt"		N/A
1.7.2.1	In Norway, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: "Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing - and to a cable distribution system using coaxial cable, may in		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."</p> <p>NOTE: In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway): "Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr - og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel-TV nettet."</p>		
2.2.4	Requirements according to this annex, 1.7.2.1, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.3.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.3.4	Requirements according to this annex, 1.7.2.1, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.13	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
5.1.7.1	<p>TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment:</p> <ul style="list-style-type: none"> - STATIONARY PLUGGABLE EQUIPMENT TYPE A that: <ul style="list-style-type: none"> (1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and (2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and (3) is provided with instructions for the installation of that conductor by a SERVICE PERSON; - STATIONARY PLUGGABLE EQUIPMENT TYPE B - STATIONARY PERMANENTLY CONNECTED EQUIPMENT 		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
6.1.2.1	<p>Add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 123400 [EN 60384-14:2005], may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14.] 		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
6.1.2.2	The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3	Refer to EN 60728-11:2005 for installation conditions		N/A
7.3	Requirements according to this annex 1.2.13.14 and 1.7.2.1 apply.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Sweden - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
1.2.13.14	For requirements see 1.7.2.1 and 7.3.		N/A
1.5.1	(Ordinance (1990:944)) Add NOTE: Switches containing mercury are not permitted.		N/A
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Apparaten skall anslutas till jordat uttag"		N/A
1.7.2.1	<p>In Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>"Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing - and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard.</p> <p>Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range</p>		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>(galvanic isolator, see EN 60728-11)."</p> <p>NOTE: In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Swedish: "Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet."</p>		
2.3.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.13	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
5.1.7.1	<p>TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment:</p> <p>STATIONARY PLUGGABLE EQUIPMENT TYPE A that:</p> <p>(1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and</p> <p>(2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and</p> <p>(3) is provided with instructions for the installation of that conductor by a SERVICE PERSON;</p> <p>- STATIONARY PLUGGABLE TYPE B</p> <p>- STATIONARY PERMANENTLY CONNECTED EQUIPMENT</p>		N/A
6.1.2.1	<p>Add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance</p>		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	<p>through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 132400 [EN 60384-14:2005], may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14]. 		
6.1.2.2	<p>The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.</p>		N/A
7.2	Requirements according to this annex, 6.1.2.1 and		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		
7.3	Requirements according to this annex 1.2.13.14 and 1.7.2.1 apply.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Switzerland - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
General	Includes update from 60950-1:2005, AC:2011		Pass
1.5.1	Ordinance on environmentally hazardous substances SR 814.81, Annex 1.7, Mercury - Annex 1.7 of SR 814.81 applies for mercury. Switches containing mercury such as thermostats, relays and level controllers are not allowed.		N/A
1.7.13	Ordinance on chemical hazardous risk reduction SR 814.81, Annex 2.15, Batteries - Annex 2.15 of SR 814.81 applies for batteries containing cadmium and mercury. Note: Ordinance relating to environmentally hazardous substances, SR 814.013 of 1986-06-09 is no longer in force and superseded by SR 814.81 of 2009-02-01 (ChemRRV).		N/A
3.2.1.1	<p>Supply cords of portable electrical appliances having a rated current not exceeding 10 A shall be provided with a plug complying with IEC 60884-1 (3rd Ed.) + Amd. 1, SEV 1011 and one of the following dimension sheets:</p> <ul style="list-style-type: none"> - SEV 6533-2:2009, Plug type 11, L+N, 250 V, 10 A - SEV 6534-2:2009, Plug type 12, L+N+PE, 250 V, 10 A - SEV 6532-2:2009, Plug type 15, 3P+N+PE, 250/400 V, 10 A <p>Supply cords of portable electrical appliances having a rated current not exceeding 16 A shall be provided with a plug complying with IEC 60884-1 (3rd Ed.) + Amd. 1, SEV 1011 and one of the following dimension sheets:</p> <ul style="list-style-type: none"> - SEV 5933-2:2009, Plug type 21, L+N, 250 V, 16 A - SEV 5934-2:2009, Plug type 23, L+N+PE, 250 V, 16 A - SEV 5932-2:2009, Plug type 25, 3P+N+PE, 230/400 V, 16 A <p>NOTE: 16 A plugs are not often used in Swiss domestic installation systems.</p>		N/A
3.2.4	Requirements according to this annex 3.2.1.1		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	apply.		

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

USA / Canada - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
1.1.1	Equipment able to be installed in accordance with the National Electrical Code ANSI/NFPA 70 and the Canadian Electrical Code, Part1, and when applicable, the National Electrical Safety Code, IEEE C2.		Pass
1.1.1	Equipment able to be installed in accordance with ANSI/NFPA 75 and NEC Art. 645 unless intended for use outside of computer room and provided with such instructions.		Pass
1.1.2	Baby monitors are required to additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
1.1.2	Equipment in wire-line communication facilities serving high-voltage electric power stations operating at greater than 1kV are excluded.		N/A
1.1.2	Special requirements apply to equipment intended for use outdoors.		N/A
1.4.14	For PLUGGABLE EQUIPMENT TYPE A, the protection in the installation is assumed to be 20 A.		N/A
1.5.1	All IEC standards for components identified in Annex P.1 replaced by the relevant requirements of CSA and UL component standards in Annex P.1.		Pass
1.5.1	All IEC standards for components identified in Annex P.2 alternatively satisfied by the relevant requirements of CSA and UL component standards in Annex P.2.		Pass
1.5.5	Interconnecting cables acceptable for the application regarding voltage, current, temperature, flammability, mechanical serviceability and the like.		Pass
1.5.5	For other than limited power and TNV circuits, the type of output circuit identified for output connector.		N/A
1.5.5	External cable assemblies that exceed 3.05 m in length to be types specified in the NEC and CEC.		N/A
1.5.5	Detachable external interconnecting cables 3.05 m or less in length and provided with equipment marked to identify the responsible organization and the designation for the cable.		Pass
1.5.5	Building wiring and cable for use in ducts, plenums and other air handling space subject to special requirements and excluded from scope.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
1.5.5	Telephone line and extension cords and the like comply with UL 1863 and CSA C22.2 No. 233.		N/A
1.6.1.2	Equipment intended for connection to a d.c. power (mains) distribution system is subject to special circuit classification requirements (e.g., TNV-2)		N/A
1.6.1.2	Earthing of d.c. powered equipment provided.		N/A
1.7	Lamp replacement information indicated on lampholder in operator access area.		N/A
1.7.1	Special marking format for equipment intended for use on a supply system with an earthed neutral and more than one phase conductor.		N/A
1.7.1	Equipment voltage rating not higher than rating of the plug except under special conditions.		N/A
1.7.6	Special fuse replacement marking for operator accessible fuses.		N/A
1.7.7	Identification of terminal connection of the equipment earthing conductor.		N/A
1.7.7	Connectors and field wiring terminals for external Class 2 or Class 3 circuits provided with marking indicating minimum Class of wiring to be used.		N/A
1.7.7	Marking located adjacent to terminals and visible during wiring.		N/A
2.1.1.1	Bare TNV conductive parts in the interior of equipment normally protected against contact by a cover intended for occasional removal are exempt provided instructions include directions for disconnection of TNV prior to removal of the cover.		N/A
2.3.1.b	Other telecommunication signaling systems (e.g., message waiting) than described in 2.3.1(b) are subject to M.4.		N/A
2.3.1.b	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 Vp or 60 V d.c., the maximum current limit through a 2000 Ohm or greater resistor with loads disconnected is 7.1 mA peak or 30 mA d.c. under normal conditions.		N/A
2.3.1.b	Limits for measurements across 5000 ohm resistor in the event of a single fault are replaced after 200 ms with the limits of M.3.1.4.		N/A
2.3.2.1	In the event of a single fault, the limits of 2.2.3 apply to SELV circuits and accessible conductive parts.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
2.5	Overcurrent protection device required for Class 2 and Class 3 limiting in accordance with the NEC, or for a Limited Power Source, not interchangeable with devices of higher ratings if operator replaceable.		N/A
2.6	Equipment having receptacles for output a.c. power connectors generated from an internal separately derived source have the earthed (grounded) circuit conductor suitably bonded to earth.		N/A
2.6.2	Equipment with functional earthing is required to be marked with the functional earthing symbol (IEC 60417-6092).		N/A
2.6.3.3	For PLUGGABLE EQUIPMENT TYPE A, if a) b) or c) are not applicable, the current rating of the circuit is taken as 20 A		N/A
2.6.3.3	The first column on Table 2D requirement: "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
2.6.3.4	Capacity of connection between earthing terminal and parts required to be earthed subject to special conditions based on the current rating of the circuit.		N/A
2.6.3.4	Protective bonding conductors and their terminals of non-standard constructions (e.g. PWB traces) evaluated to limited short-circuit test of CSA C22.2 No.0.4.		N/A
2.6.4.1	Field wiring terminals for earthing conductors suitable for wire sizes (gauge) used in US and Canada.		N/A
2.7.1	Data for selection of special external branch circuit overcurrent devices marked on the equipment.		N/A
2.7.1	Standard supply outlets protected by overcurrent device in accordance with the NEC, and CEC, Part 1.		N/A
2.7.1	Overcurrent protection for individual transformers that distribute power to other units over branch circuit wiring.		N/A
2.7.1	Additional requirements for overcurrent protection apply to equipment provided with panelboards.		N/A
2.7.1	Non-motor-operated equipment requiring special overcurrent protective device marked with device rating.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
2.10.5.12	Multi-layer winding wire subject to UL component wire requirements in addition to 2.10.5.12 and Annex U.		N/A
3.1.1	Permissible combinations of internal wiring/external cable sizes for overcurrent and short circuit protection.		Pass
3.1.1	All interconnecting cables protected against overcurrent and short circuit.		Pass
3.2	Wiring methods permit connection of equipment to primary power supply in accordance with the NEC and CEC, Part 1.		N/A
3.2.1	Permitted use for flexible cords and plugs.		N/A
3.2.1	Flexible cords provided with attachment plug rated 125% of equipment current rating.		N/A
3.2.1	Any Class II equipment provided with 15 or 20 A standard supply outlets, Edison-base lampholders or single pole disconnect device provided with a polarized type attachment plug.		N/A
3.2.1.2	Equipment intended for connection to DC mains supply power systems complies with special wiring requirements (e.g., no permanent connection to supply by flexible cord).		N/A
3.2.1.2	Equipment with one pole of the DC mains supply connected to both the equipment mains input terminal and the main protective earthing terminal provided with special instructions and construction provisions for earthing.		N/A
3.2.1.2	Equipment with means for connecting supply to earthing electrode conductor has no switches or protective devices between supply connection and earthing electrode connection.		N/A
3.2.1.2	Special markings and instructions for equipment with provisions to connect earthed conductor of a DC supply circuit to earthing conductor at the equipment.		N/A
3.2.1.2	Special markings and instructions for equipment with earthed conductor of a DC supply circuit connected to the earthing conductor at the equipment.		N/A
3.2.1.2	Terminals and leads provided for permanent connection of DC powered equipment to supply marked to indicate polarity if reverse polarity may		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	result in a hazard.		
3.2.3	Permanently connected equipment has provision for connecting and securing a field wiring system (i.e. conduit, or leads etc.) per the NEC and CEC, Part 1.		N/A
3.2.3	Permanently connected equipment may have terminals or leads not smaller than No. 18 AWG (0.82 mm ²) and not less than 150 mm in length for connection of field installed wiring.		N/A
3.2.3	If supply wires exceed 60 °C, marking indicates use of 75 °C or 90 °C wiring for supply connection as appropriate.		N/A
3.2.3	Equipment compatible with suitable trade sizes of conduits and cables.		N/A
3.2.5	Power supply cords are required to be no longer than 4.5 m in length. Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
3.2.5	Conductors in power supply cords sized according to NEC and CEC, Part I.		N/A
3.2.5	Power supply cords and cord sets incorporate flexible cords suitable for the particular application.		N/A
3.2.6	Strain relief provided for non-detachable interconnecting cables not supplied by a limited power source.		N/A
3.2.9	Adequate wire bending space and volume of field wiring compartment required to properly make the field connections.		N/A
3.2.9	Equipment intended solely for installation in Restricted Access Locations using low voltage d.c. systems may not need provision for connecting and securing a field wiring system. A method of securing wiring or instructions provided to ensure the wiring is protected from abuse.		N/A
3.3	Field wiring terminals provided for interconnection of units for other than LPS or Class 2 circuits also		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	comply with 3.3.		
3.3	Interconnection of units by LPS or Class 2 conductors may have field wiring connectors other than those specified in 3.3 if wiring is reliably separated.		N/A
3.3.1	Terminals for the connection of neutral conductor identified by a distinctive white marking or other equally effective means.		N/A
3.3.3	Wire binding screw terminal permitted for connection of No. 10 AWG (5.3 mm ²) or smaller conductor if provided with upturned lugs, cupped washer or equivalent retention.		N/A
3.3.4	Terminals accept wire sizes (gauge) used in the U.S. and Canada.		N/A
3.3.4	Terminals accept current-carrying conductors rated 125% of the equipment current rating.		N/A
3.3.5	First column of Table 3E revised to require "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
3.3.6	Field wiring terminals marked to indicate the material(s) of the conductor appropriate for the terminals used.		N/A
3.3.6	Connection of an aluminum conductor not permitted to terminal for equipment earthing conductor.		N/A
3.3.6	Field wiring connections made through the use of suitable pressure connectors (including set screw type), solder lugs or splices to flexible leads.		N/A
3.4.2	Separate motor control device(s) required for cord-connected equipment rated more than 12 A, or with motor rated more than 1/3 hp or more than 120 V.		N/A
3.4.8	Vertically mounted disconnect devices oriented so up position of handle is "on".		N/A
3.4.11	For computer-room applications, equipment with battery systems capable of supplying 750 VA for 5 min require battery disconnect means.		N/A
4.2.8.1	Special opening restrictions for enclosures around CRTs with face dimension of 160 mm or more.		N/A
4.2.9	Compartment housing high-pressure lamp marked to indicate risk of explosion.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
4.3.2	Loading test for equipment with handle(s) used to support more than 9 kg tested at four times the weight of the unit.		N/A
4.3.6	In addition to the IEC requirements, Direct Plug-in Equipment complies with UL 1310 or CSA 223 mechanical assembly requirements.		N/A
4.3.8	Battery packs for both portable and stationary applications are required to comply with special component requirements.		N/A
4.3.12	The maximum quantity of flammable liquid stored in equipment complies with ANSI/NFPA 30(Table NAE.6).		N/A
4.3.12	Equipment using replenishable liquids marked to indicate type of liquid to be used.		N/A
4.3.13.2	Equipment that produces x-radiation and does not comply with 4.3.12 under all conditions of servicing marked to indicate the presence of radiation where readily visible.		N/A
4.3.13.5.1	Requirements contained in the applicable national codes and regulations apply to lasers (21 CFR 1040 and REDR C1370).		N/A
4.7	Automated information storage equipment intended to contain more than 0.76 m ³ of combustible media requires provision for automatic sprinklers or a gaseous agent extinguishing system.		N/A
4.7.3.1	Equipment for use in environmental air space other than ducts or plenums provided with metal enclosure or with non-metallic enclosure having adequate fire-resistance and low smoke producing characteristics. Low smoke-producing characteristics evaluated according to UL 2043. Equipment for installation in space used for environmental air as described in Sec. 300-22(c) of the NEC provided with instructions indicating suitability for installation in such locations.		N/A
4.7.3.1	Flame spread rating for external surface of combustible material with exposed area greater than 0.9 m ² or a single dimension greater than 1.8 m; 50 or less for computer room applications or 200 or less for other applications.		N/A
4.7.3.4	Wire marked "VW-1" or "FT-1" considered equivalent.	PWBs are rated min. V-1. See Table 1.5.1 for material information.	Pass

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
		Internal wiring is UL Recognized, marked VW-1 or FT-1 and strapped by individual cable ties (where needed).	
5.1.8.2	Special earthing provisions and instructions for equipment with high touch current due to telecommunication network connections.		N/A
5.1.8.3	Touch current due to ringing voltage for equipment containing telecommunication network leads.		N/A
5.3.7	Overloading of SELV connectors and printed wiring board receptacles accessible to the operator.		N/A
5.3.7	Tests interrupted by opening of a component repeated two additional times.		N/A
5.3.9.1	Test interrupted by opening of wire or trace subject to certain conditions.		N/A
6	Specialized instructions provided for telephones that may be connected to a telecommunications network.		N/A
6	Marking identifying function of telecommunication type connectors not used for connection to a telecommunication network.		N/A
6.3	Equipment remotely powered over telecommunication wiring systems provided with specialized markings adjacent to the connection.		N/A
6.3	Overcurrent protection incorporated into equipment to provide power over telecommunication wiring system not interchangeable with devices of higher ratings if operator replaceable.		N/A
6.4	Additional requirements for equipment intended for connection to a telecommunication network using cable subject to overvoltage from power line failures (Fig. 6C).		N/A
6.4	Where 26 AWG line cord required by Fig. 6C, either the cord is provided with the equipment or described in the safety instructions.		N/A
7	Equipment associated with the cable distribution system may need to be subjected to applicable parts of Chapter 8 of the NEC.		N/A
H	Ionizing radiation measurements made under single fault conditions in accordance with the requirements of the Code of Federal Regulations		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	21 CFR 1020 and the Canadian Radiation Emitting Devices Act, REDR C1370.		
M.2	Continuous ringing signals evaluated to Method A subjected to special accessibility considerations.		N/A
M.4	Special requirements for message waiting and similar telecommunications signals.		N/A
NAC	Equipment intended for use with a generic secondary protector marked with suitable instructions.		N/A
NAC	Equipment intended for use with a specific primary or secondary protector marked with suitable instructions.		N/A
NAD	Acoustic pressure from an ear piece less than 140 dBA for short duration disturbances, and less than 125 dBA for handsets, 118 dBA for headsets and insert earphones, for long duration disturbances.		N/A
NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A
EE.5	UL articulated accessibility probe (Fig. EE.3) required for assessing accessibility to document/media shredders, instead of Figure 2A test finger.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

United Kingdom - Differences to IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013			
2.6.3.3	The current rating of the circuit shall be taken as 13 A, not 16 A.		N/A
2.7.1	To protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
3.2.1.1	Apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a "standard plug" in accordance with Statutory Instrument 1786: 1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations. NOTE: "Standard plug" is defined in SI 1786: 1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
3.2.5.1	A power supply cord with conductor of 1.25 mm ² is allowed for equipment with a rated current over 10A and up to and including 13A.		N/A
3.3.4	The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current of over 10 A up to and including 13 A is 1.25 mm ² to 1.5 mm ² nominal cross-sectional area.		N/A
4.3.6	The torque test is performed using a socket outlet complying with BS 1363 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125°C.		N/A
4.3.6	Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A

Enclosures

Enclosures

<u>Type</u>	<u>Supplement Id</u>	<u>Description</u>
Marking Plate	13-01	Label for DHI-NVR5216-8P-I
Marking Plate	13-02	Label for DHI-NVR5216-16P-I
Marking Plate	13-03	Label for DHI-NVR4208-8P-I
Photographs	3-01	Overall view-1 of model DHI-NVR5216-8P-I
Photographs	3-02	Overall view-2 of model DHI-NVR5216-8P-I
Photographs	3-03	Overall view-3 of model DHI-NVR5216-8P-I
Photographs	3-04	Overall view-4 of model DHI-NVR5216-8P-I
Photographs	3-05	Overall view-5 of model DHI-NVR5216-8P-I
Photographs	3-06	Overall view-6 of model DHI-NVR5216-8P-I
Photographs	3-07	Internal view of model DHI-NVR5216-8P-I
Photographs	3-08	Mainboard topside view of model DHI-NVR5216-8P-I
Photographs	3-09	Mainboard bottom side view of model DHI-NVR5216-8P-I
Photographs	3-10	Overall view-1 of model DHI-NVR5216-16P-I
Photographs	3-11	Overall view-2 of model DHI-NVR5216-16P-I
Photographs	3-12	Overall view-3 of model DHI-NVR5216-16P-I
Photographs	3-13	Overall view-4 of model DHI-NVR5216-16P-I
Photographs	3-14	Overall view-5 of model DHI-NVR5216-16P-I
Photographs	3-15	Internal view of model DHI-NVR5216-16P-I
Photographs	3-16	Mainboard topside view of model DHI-NVR5216-16P-I
Photographs	3-17	Mainboard bottom side view of model DHI-NVR5216-16P-I
Photographs	3-18	Internal view of model DHI-NVR4216-16P
Photographs	3-19	Mainboard topside view of model DHI-NVR4216-16P
Photographs	3-20	Mainboard bottom side view of model DHI-NVR4216-16P
Photographs	3-21	Front panel view of model DHI-NVR4216-16P
Photographs	3-22	Connector board topside view near front panel of model DHI-NVR4216-16P
Photographs	3-23	Connector board bottom side view near front panel of model DHI-NVR4216-16P
Photographs	3-24	Front panel
Photographs	3-25	Overall view-1 of model DH-NVR4208-8P-I
Photographs	3-26	Overall view-2 of model DH-NVR4208-8P-I
Photographs	3-27	Overall view-3 of model DH-NVR4208-8P-I
Photographs	3-28	Overall view-4 of model DH-NVR4208-8P-I
Photographs	3-29	Overall view-5 of model DH-NVR4208-8P-I

Enclosures

Photographs	3-30	Overall view-6 of model DH-NVR4208-8P-I
Photographs	3-31	Internal view-1 of model DH-NVR4208-8P-I
Photographs	3-32	Internal view-2 of model DH-NVR4208-8P-I
Photographs	3-33	Power board topside view of model DH-NVR4208-8P-I
Photographs	3-34	Power board bottom side view of model DH-NVR4208-8P-I
Photographs	3-35	Mainboard topside view of model DH-NVR4208-8P-I
Photographs	3-36	Mainboard bottom side view of model DH-NVR4208-8P-I
Photographs	3-37	Sensor board topside view of model DH-NVR4208-8P-I
Photographs	3-38	Sensor board bottom side view of model DH-NVR4208-8P-I
Photographs	3-39	Fan of model DH-NVR4208-8P-I
Diagrams	4-01	Spec of heatsink
Diagrams	4-02	Enclosure spec of model DHI-NVR5216-8P-I
Diagrams	4-03	Enclosure spec of model DHI-NVR5216-16P-I
Diagrams	4-04	spec of heatsink for model DHI-NVR4208-8P-I
Diagrams	4-05	Enclosure spec of model DHI-NVR4208-8P-I
Miscellaneous	7-01	TEST INSTRUMENTS

MarkingPlate ID 13-01

NETWORK VIDEO RECORDER

DHI-NVR5216-8P-I

100-240V ~, 3.5A, 47-63Hz

P/N: 1.0.01.23.12319



S/N: 4H05CFBYAG00001

MADE IN CHINA

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China



MarkingPlate ID 13-02

NETWORK VIDEO RECORDER

DHI-NVR5216-16P-I

100-240V ~, 3.5A, 47-63HZ

P/N: 1.0.01.23.12318



S/N: 4H08CFBYAG00001

MADE IN CHINA

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China



MarkingPlate ID 13-03

NETWORK VIDEO RECORDER

DHI-NVR4208-8P-I

100-240V ~ ,3.5A,47-63Hz

P/N: 1.0.01.23.12441



S/N: 2M0024EPAG05175

MADE IN CHINA

ZHEJIANG DAHUA VISION TECHNOLOGY CO.,LTD.

No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China



Photographs ID 3-01



Enclosures

Photographs ID 3-02



Enclosures

Photographs ID 3-03



Enclosures

Photographs ID 3-04




Enclosures

Photographs ID 3-05



Enclosures

Photographs ID 3-06

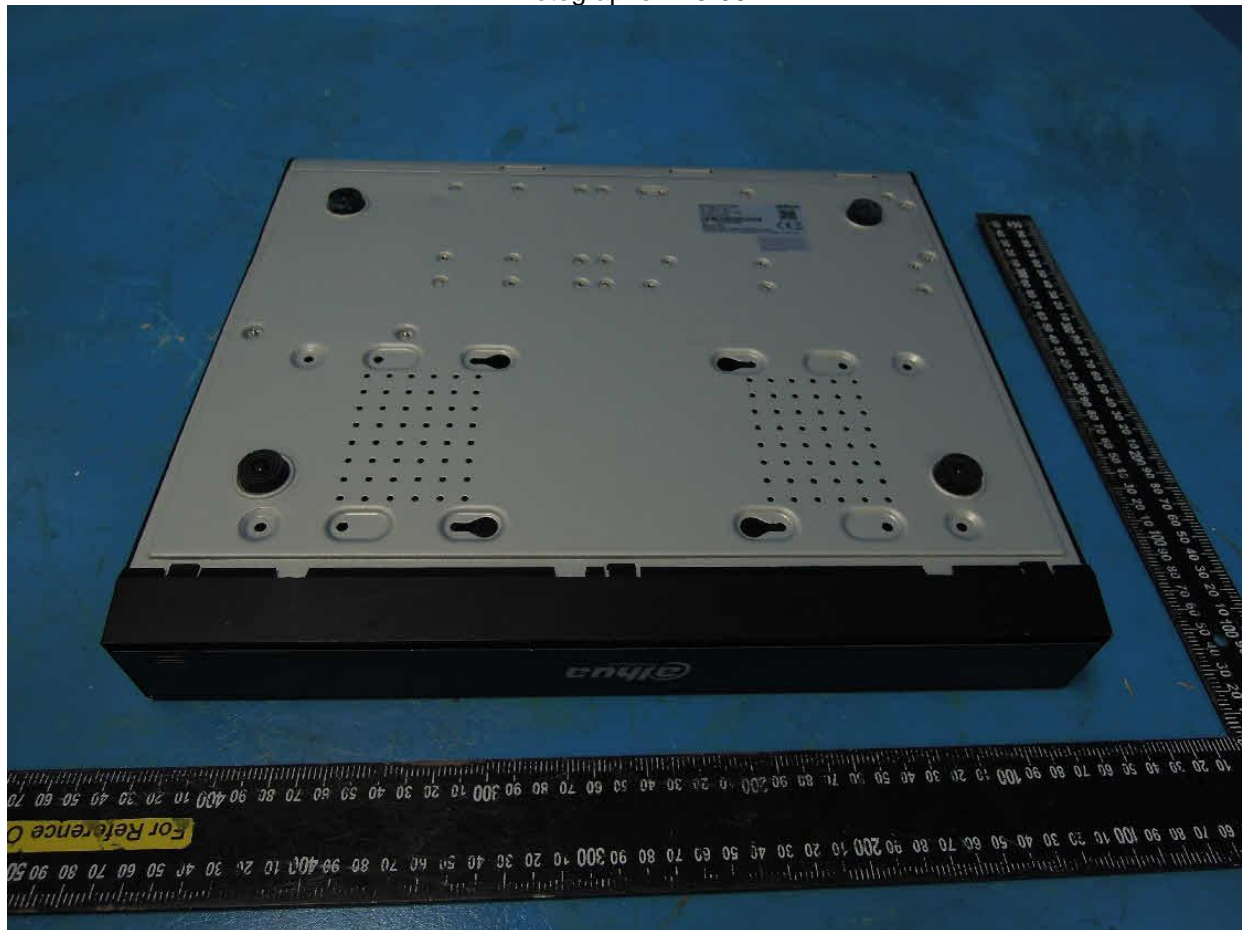

Enclosures

Photographs ID 3-07



Enclosures

Photographs ID 3-08



Enclosures

Photographs ID 3-09



Enclosures

Photographs ID 3-10



Enclosures

Photographs ID 3-11



Enclosures

Photographs ID 3-12



Enclosures

Photographs ID 3-13



Enclosures

Photographs ID 3-14




Enclosures

Photographs ID 3-15



Enclosures

Photographs ID 3-16

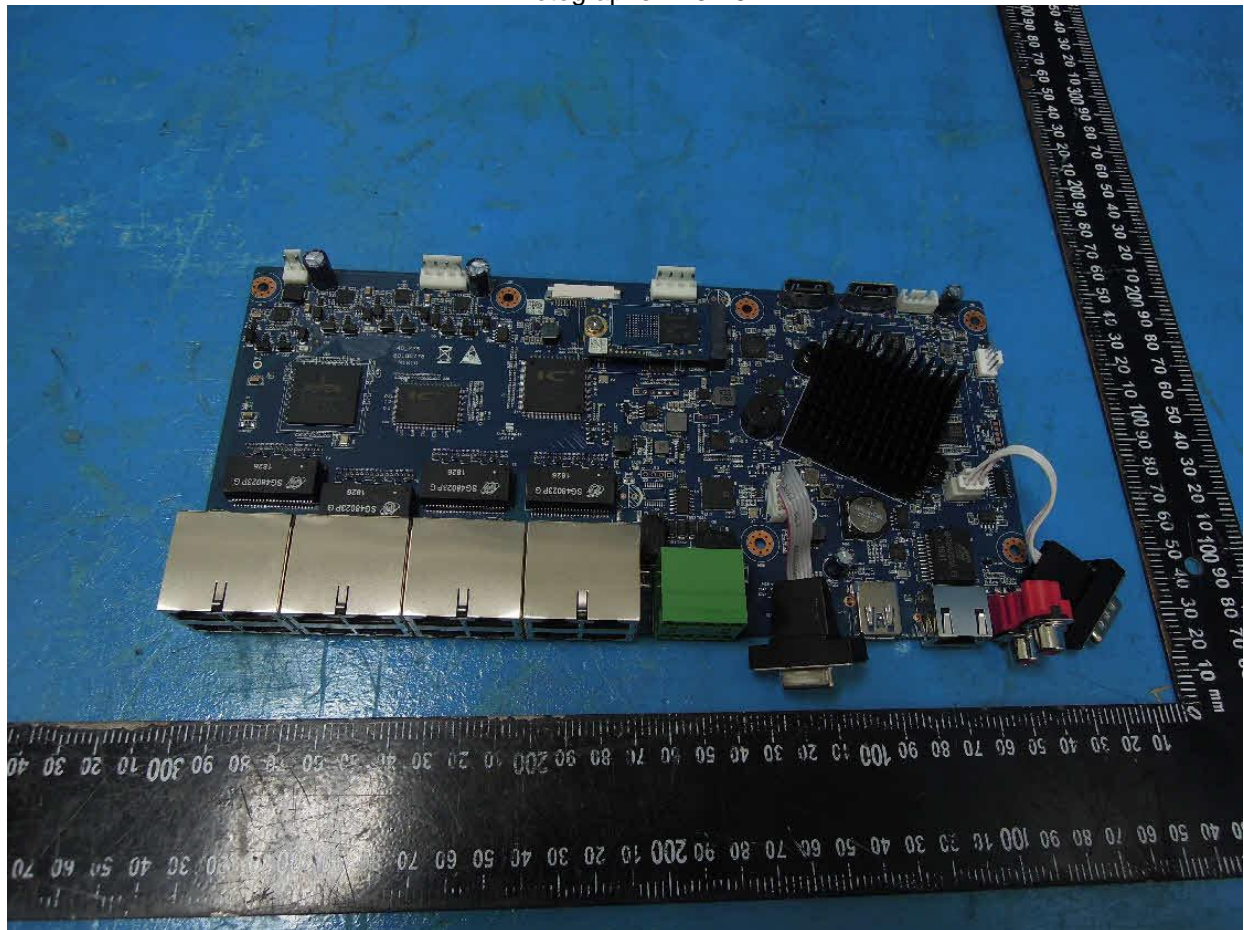


Enclosures

Photographs ID 3-17



Enclosures

Photographs ID 3-18

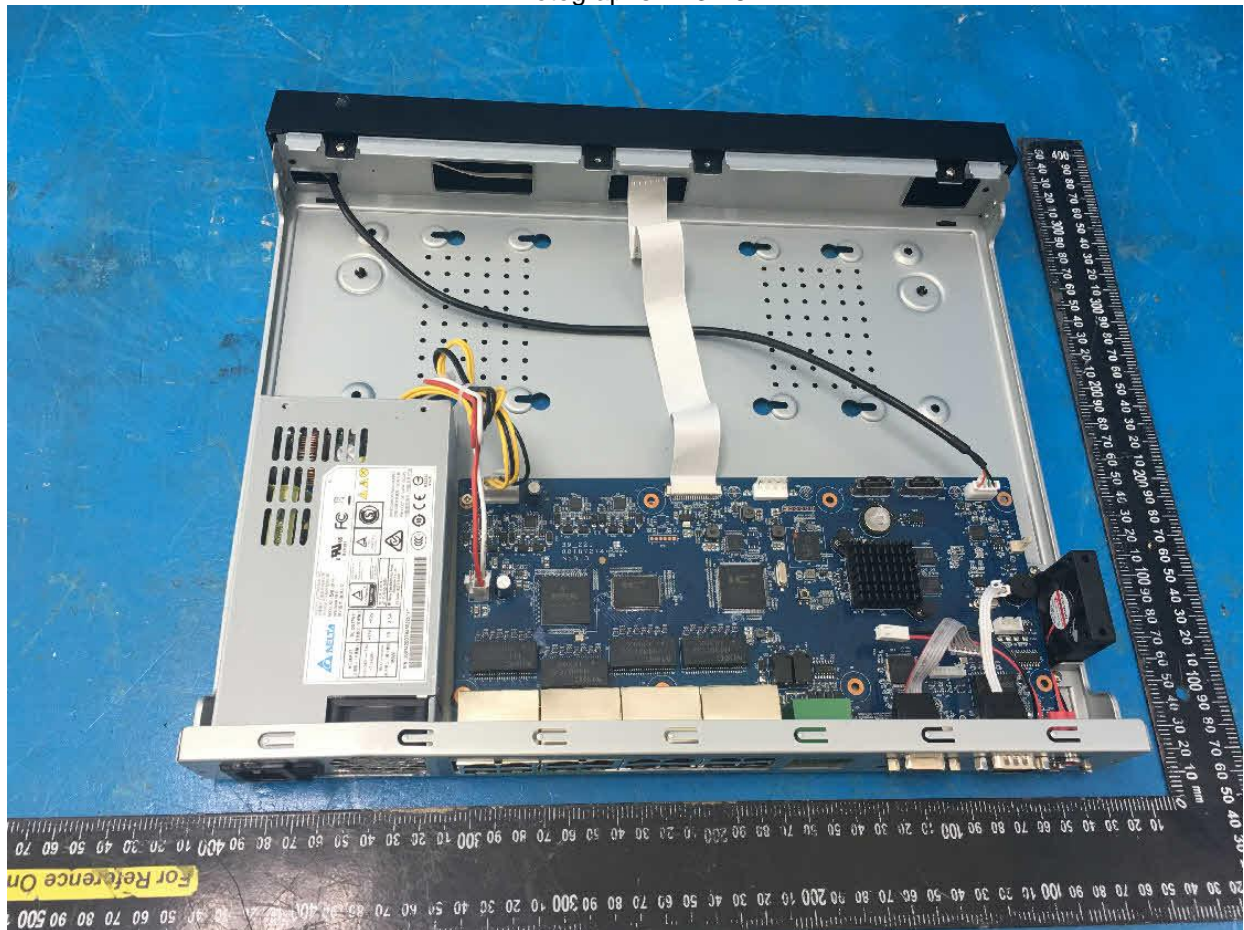

Enclosures

Photographs ID 3-19



Enclosures

Photographs ID 3-20



Enclosures

Photographs ID 3-21




Enclosures

Photographs ID 3-22



Enclosures

Photographs ID 3-23

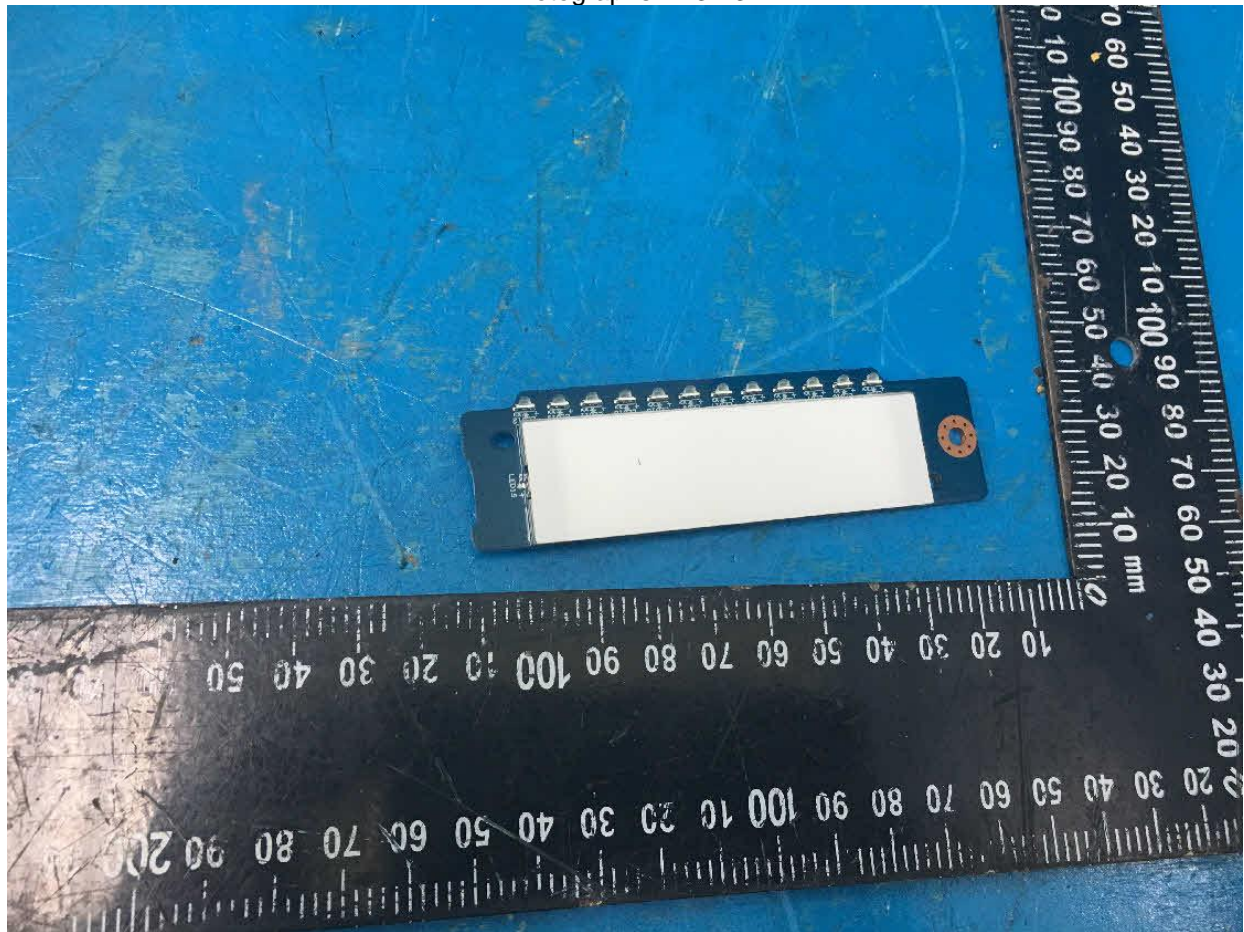


Photographs ID 3-24




Enclosures

Photographs ID 3-25

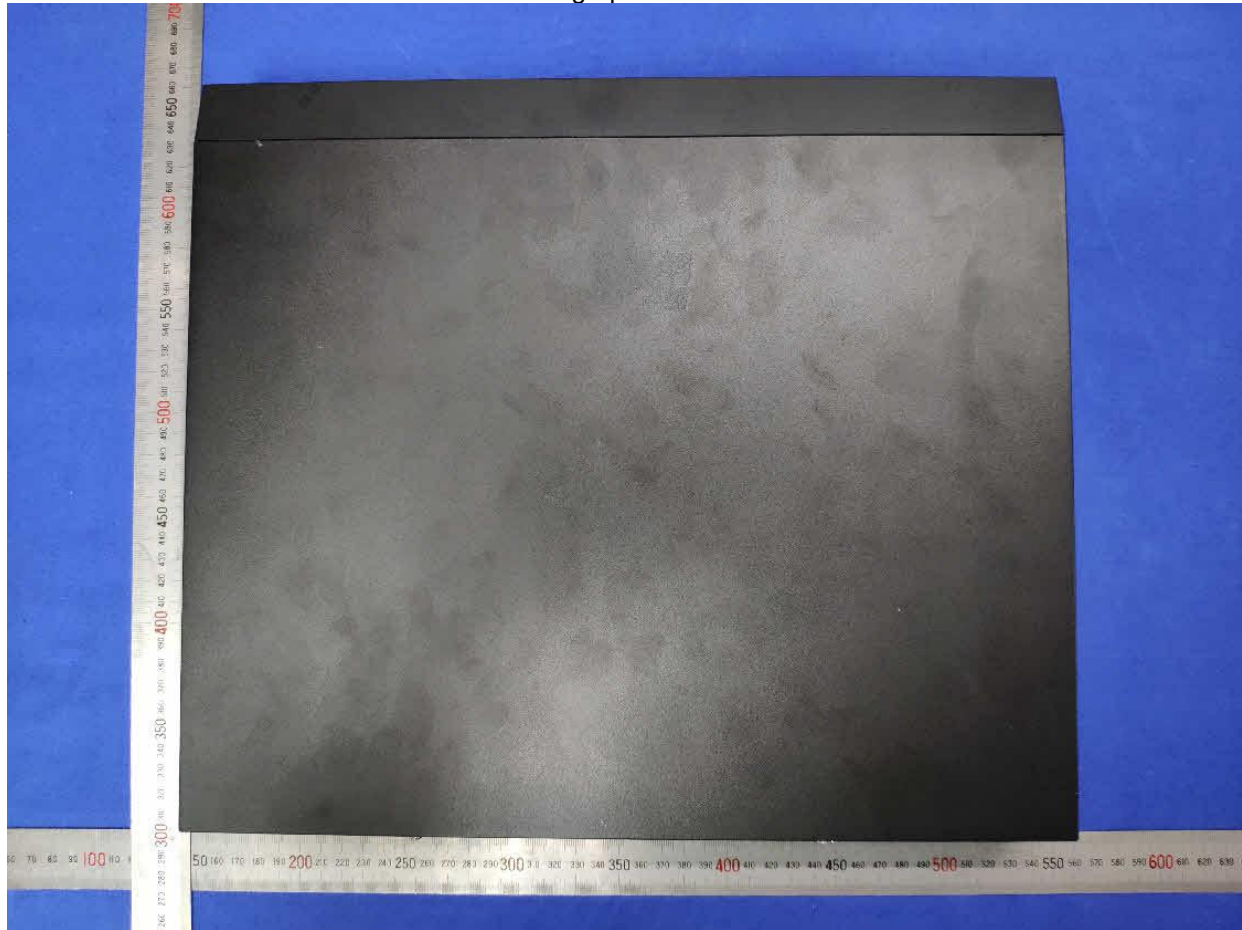

Photographs ID 3-26

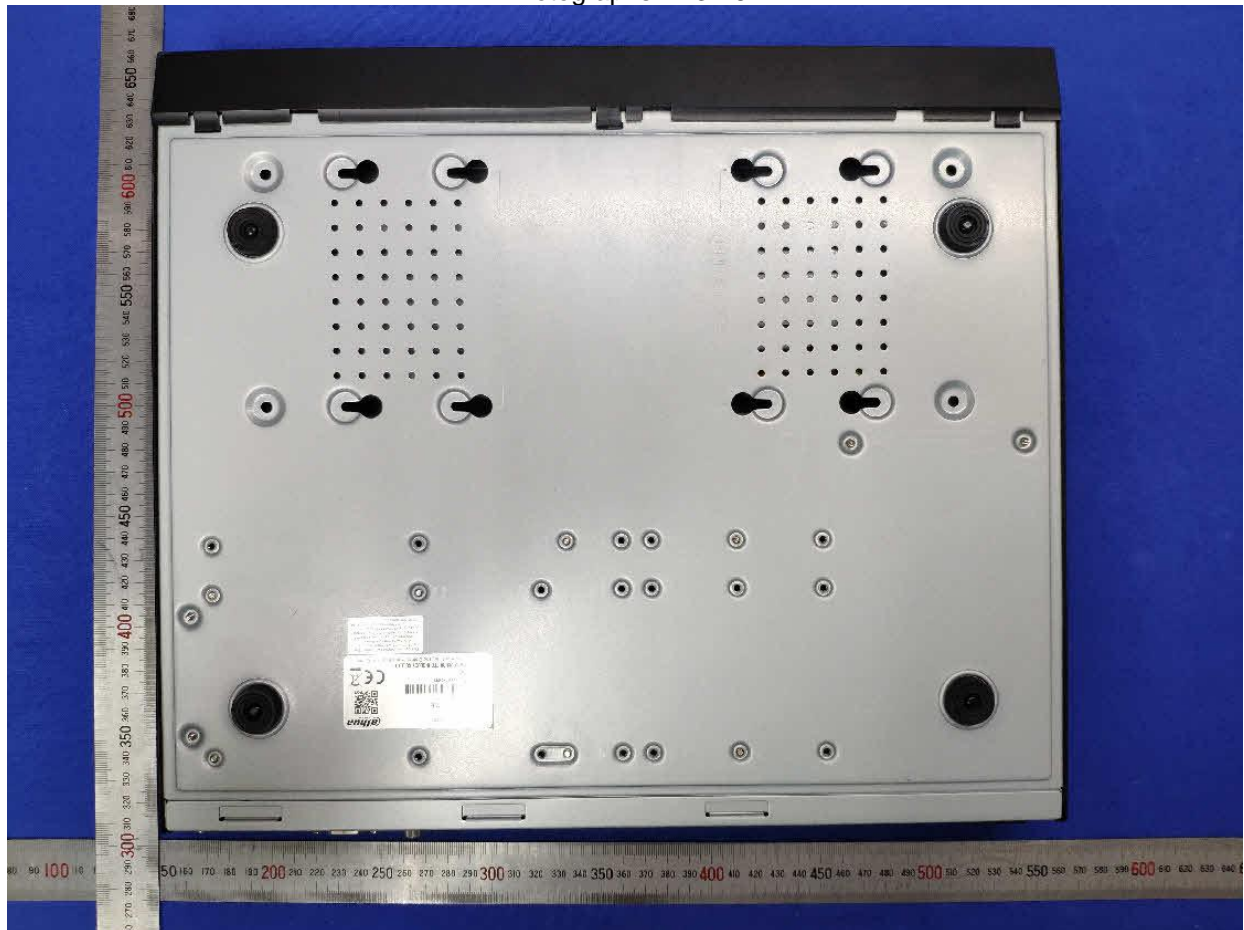

Enclosures

Photographs ID 3-27



Enclosures

Photographs ID 3-28



Enclosures

Photographs ID 3-29




Enclosures

Photographs ID 3-30




Enclosures

Photographs ID 3-31

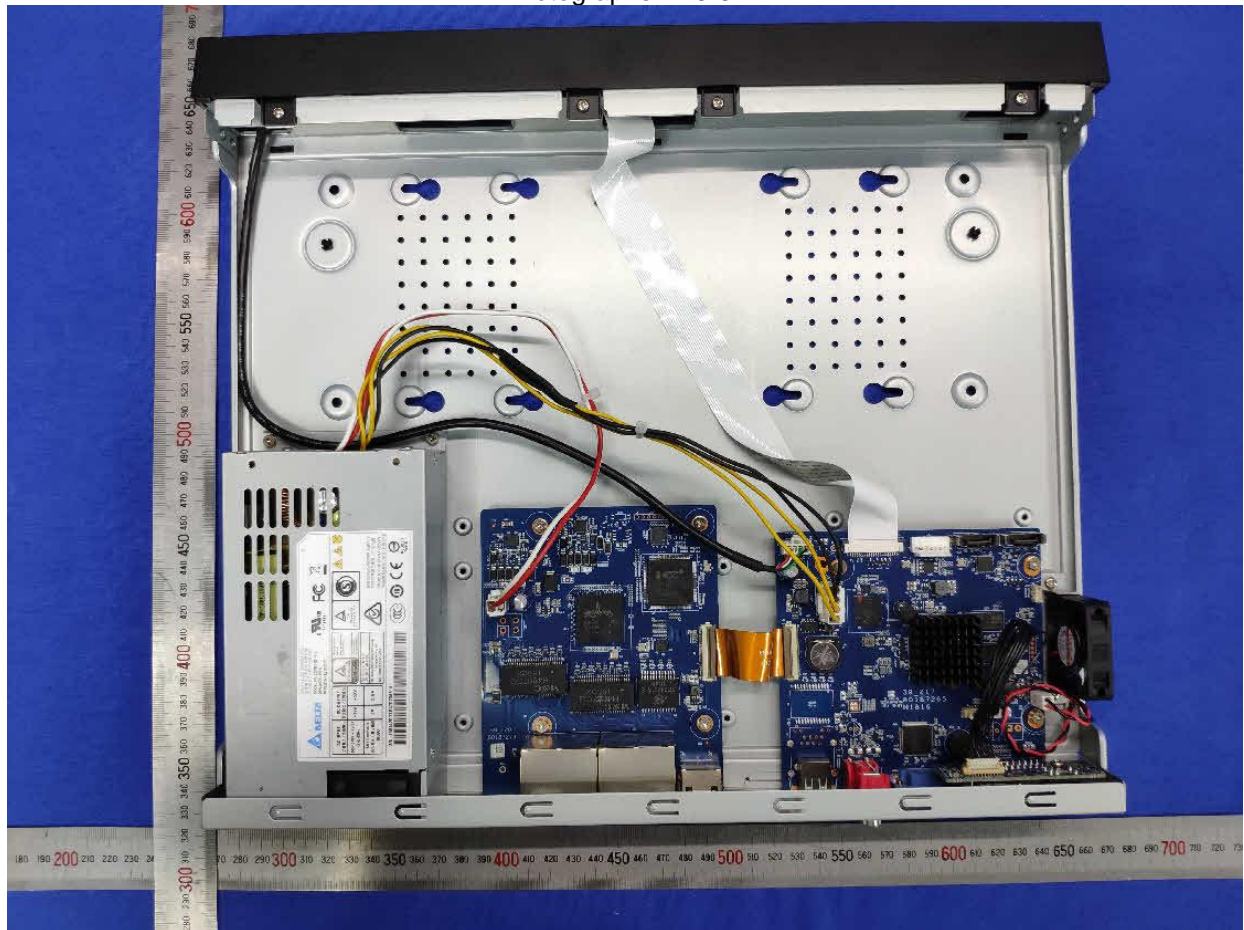


Enclosures

Photographs ID 3-32

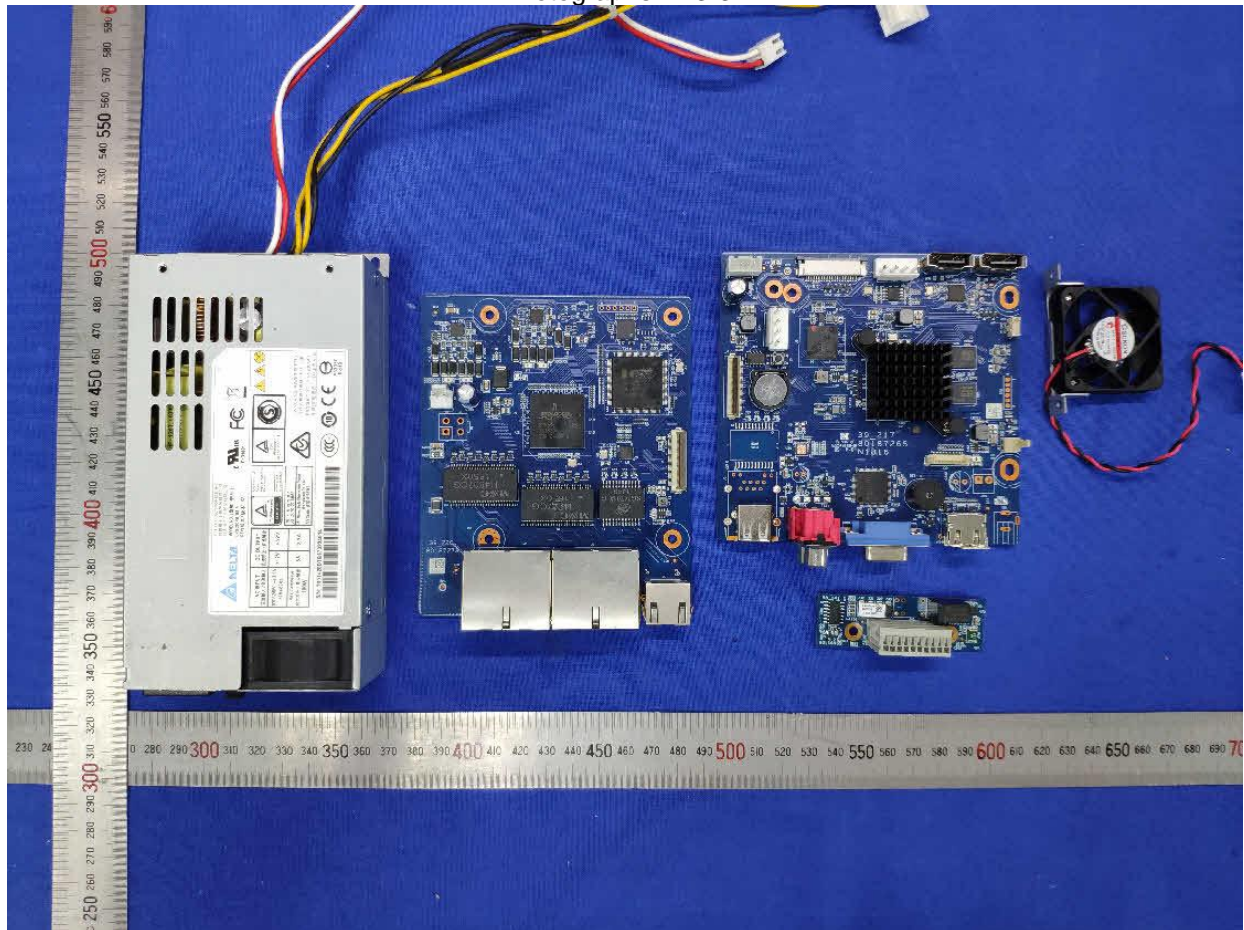


Enclosures

Photographs ID 3-33

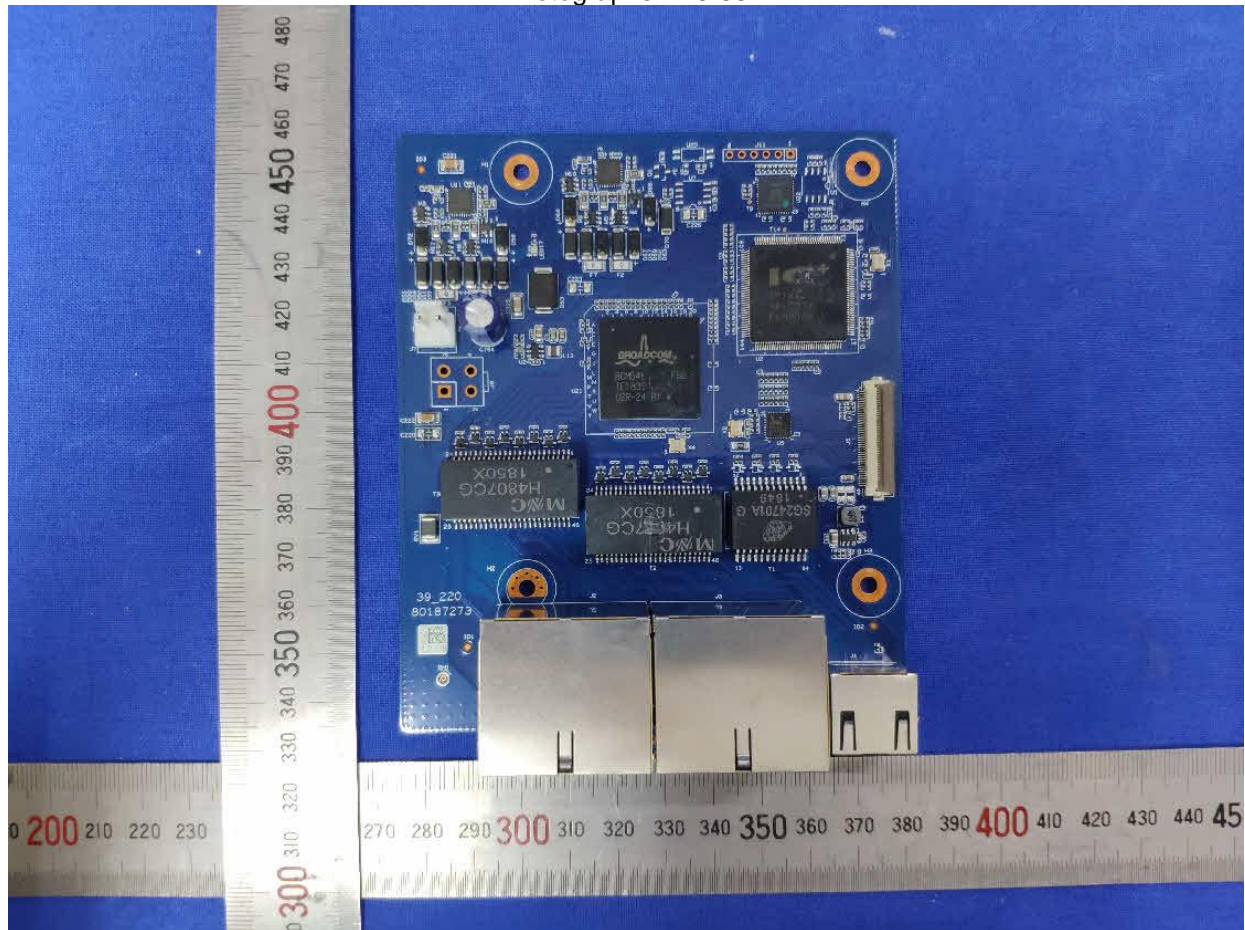


Enclosures

Photographs ID 3-34

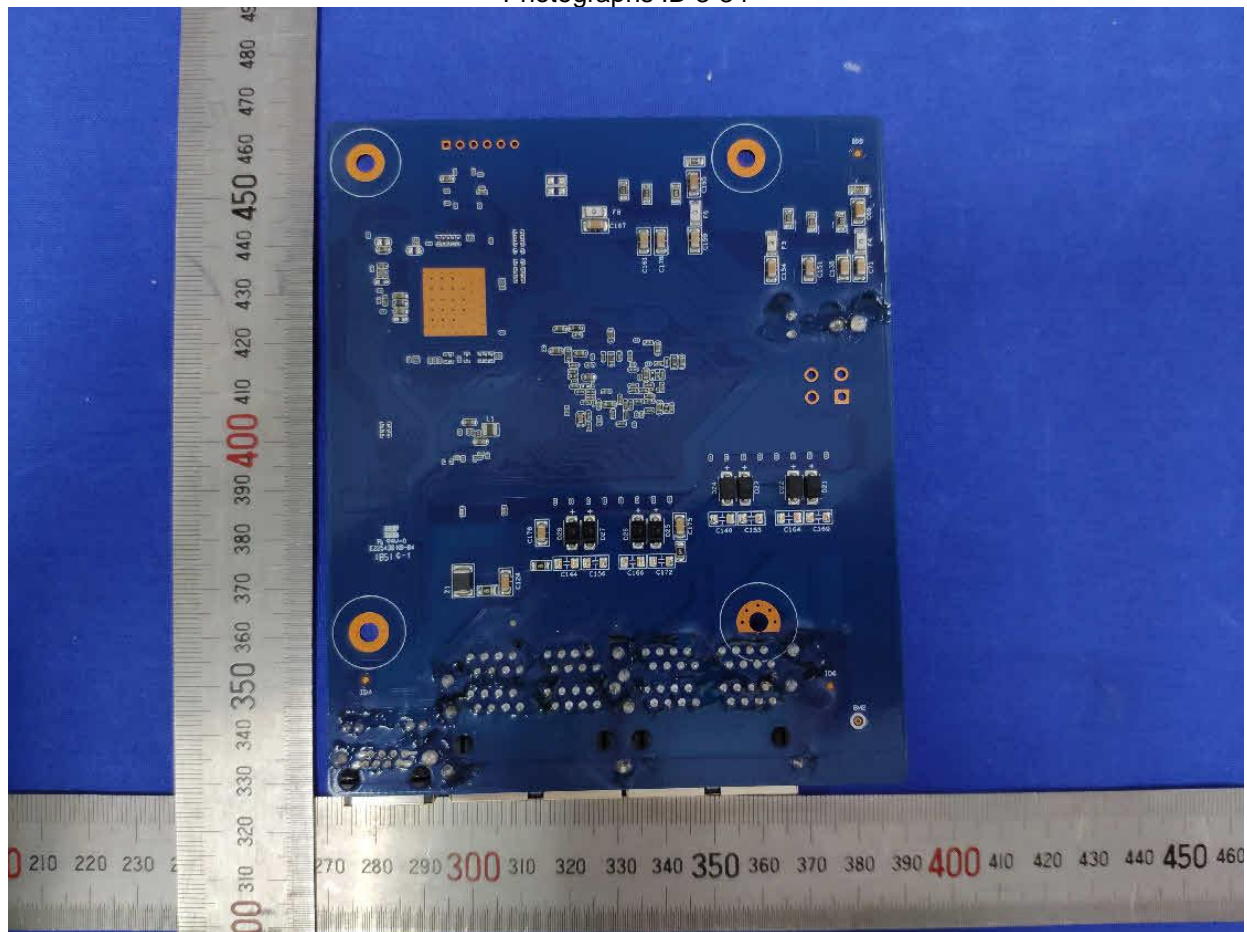


Enclosures

Photographs ID 3-35

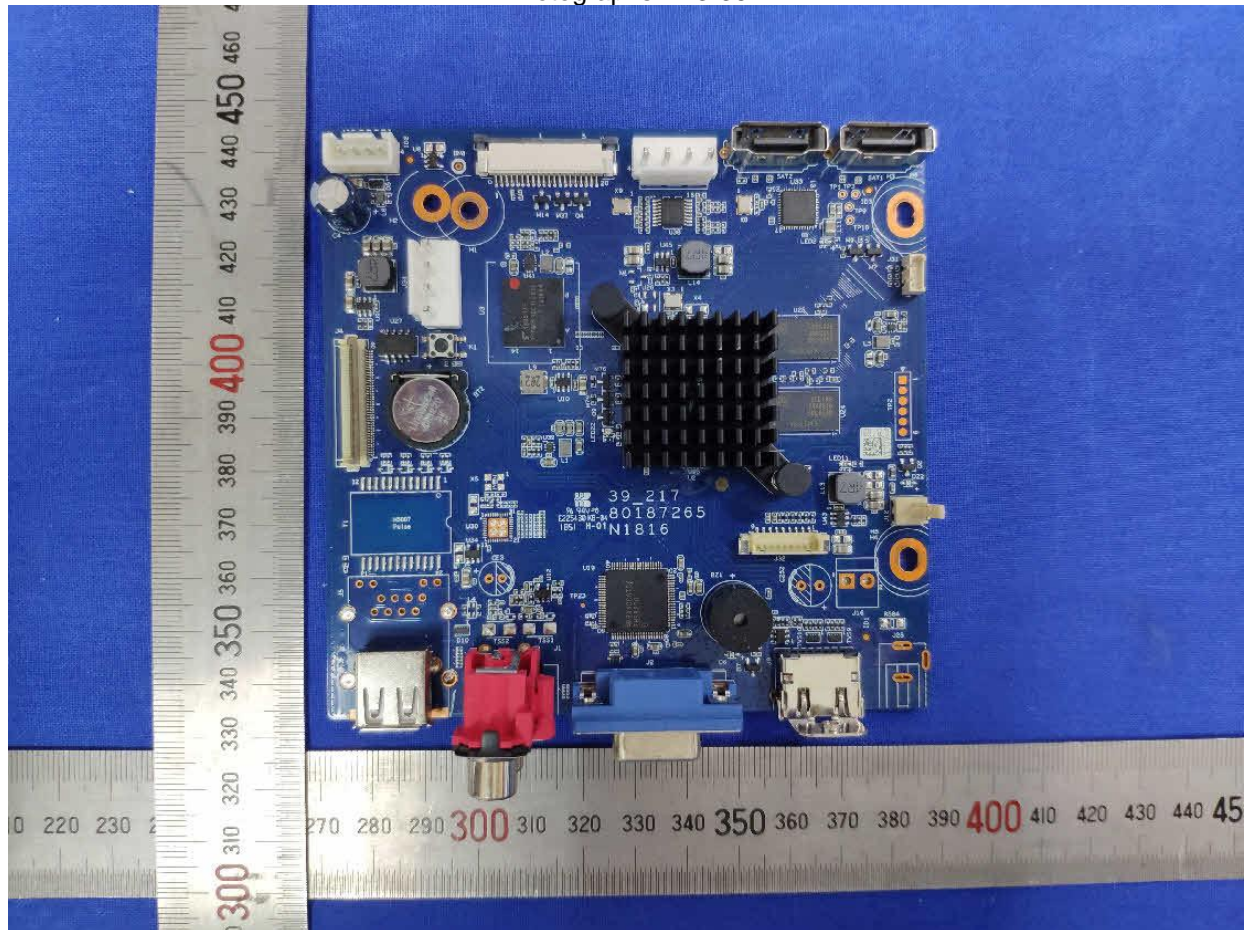

Enclosures


Photographs ID 3-36

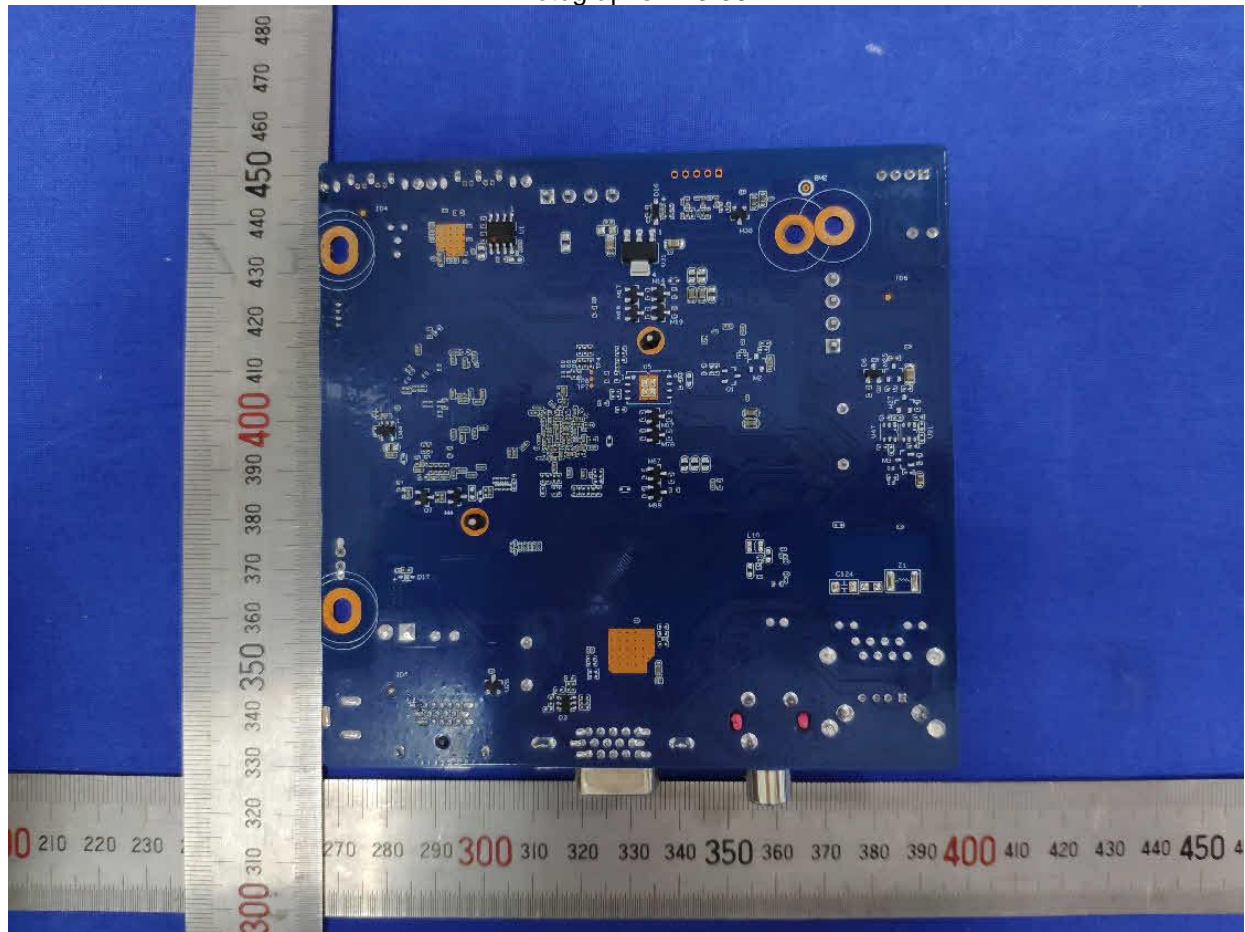

This report issued under the responsibility of UL


Enclosures

Photographs ID 3-38

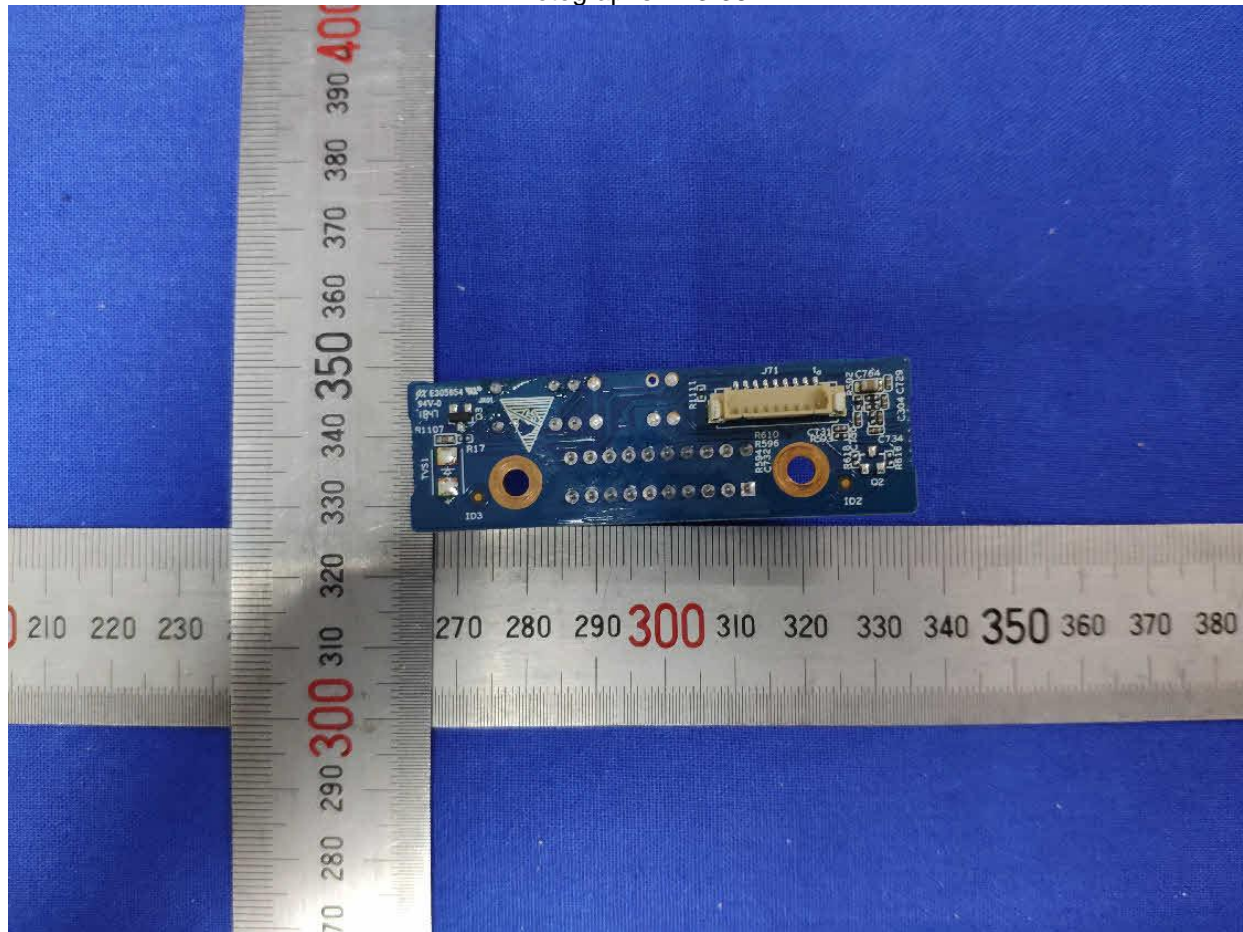


Enclosures


Photographs ID 3-39

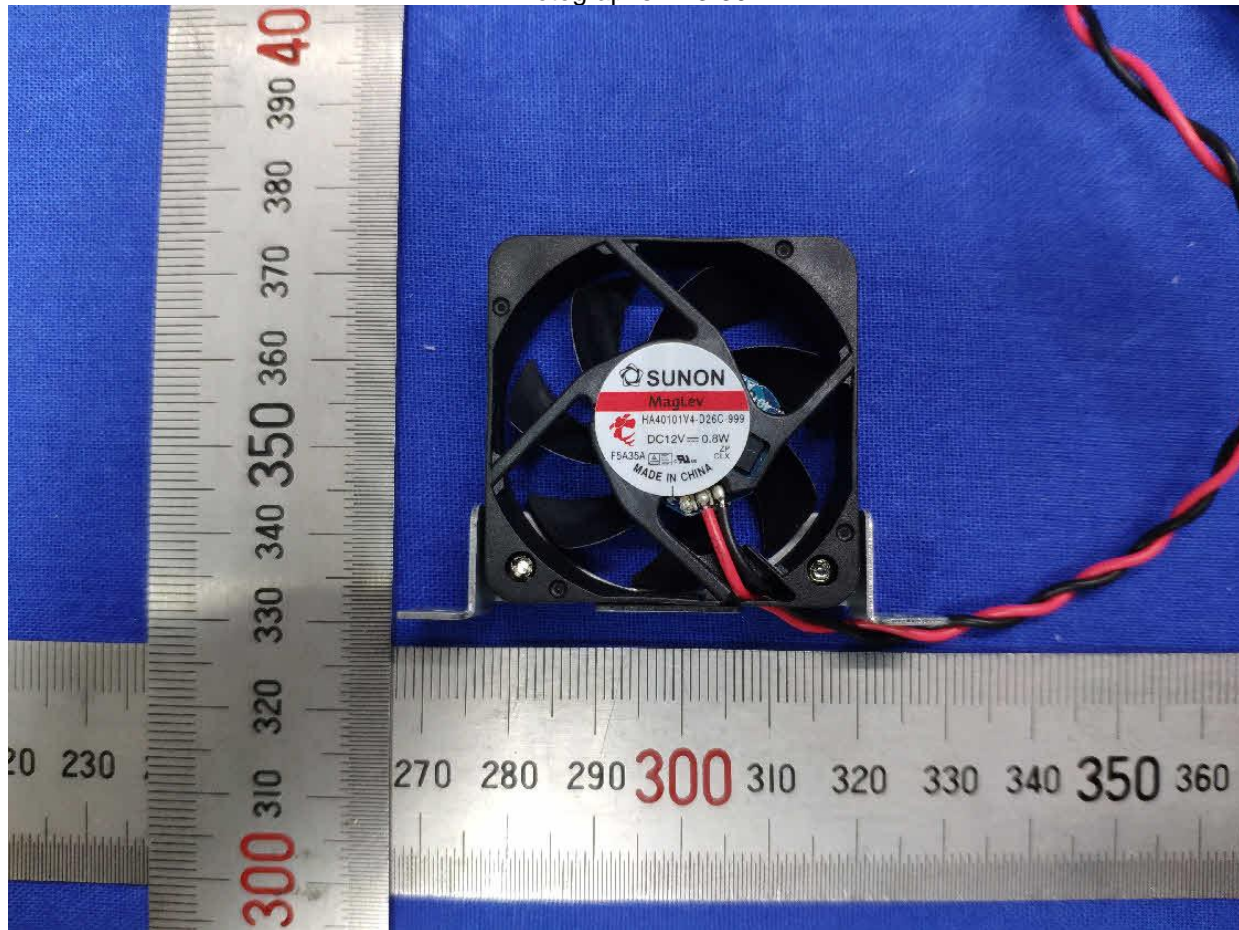


Diagrams ID 4-01

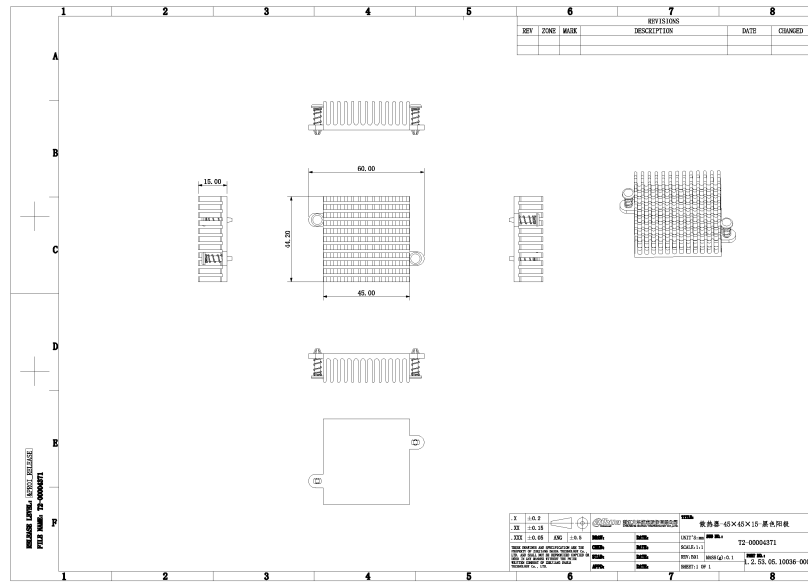

Diagrams ID 4-02

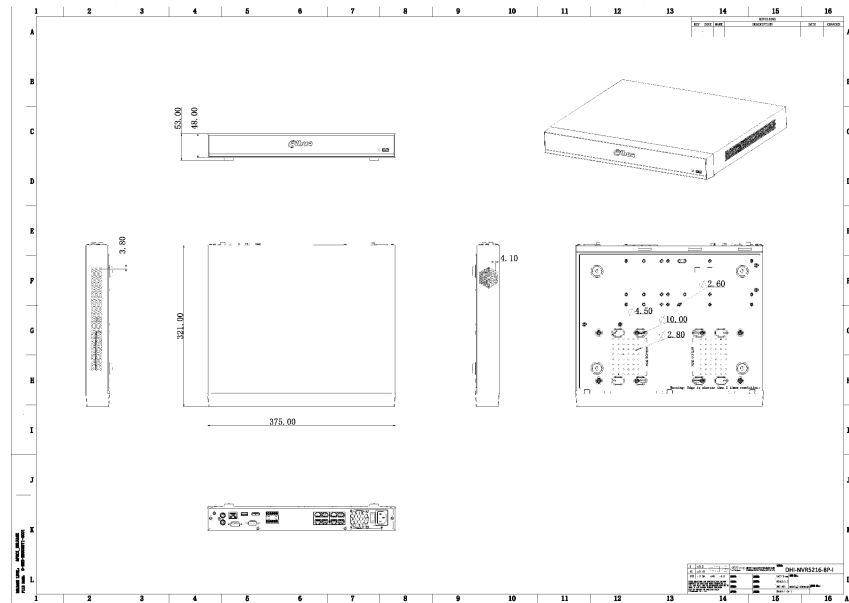

Diagrams ID 4-03

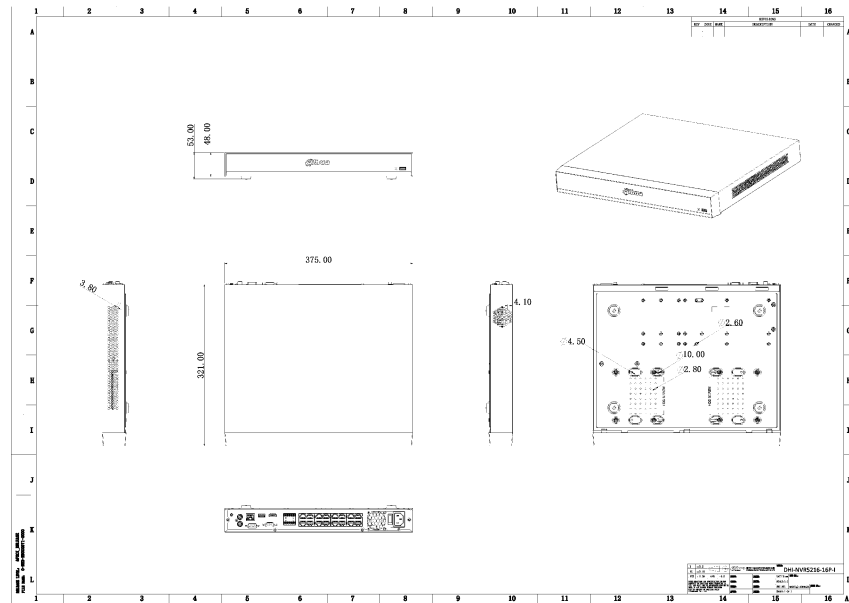

Enclosures

Misc ID 7-01

[illegible]

Misc ID 7-01

EA VI. 0

Page: 1, Total: 4

浙江大华技术股份有限公司
ZHANGDA DATA TECHNOLOGY CO., LTD.

制表人: Yali Wen
审核人: Jun Xie
日期: 2019.08.01

<div><div>anua</div><div>ANUA</div></div>														
39	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES
40	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES
41	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES
42	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES
43	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES
44	A	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES	TES