


## ME4 4 zones expander module

### Description

ME4 is an expander module for built-in mounting in the box of MAG8plus conventional fire alarm panel. The module provides 4 additional fire zone to the fire system.

Up to two ME4 expander modules can be mounted in the box of standard configuration of MAG8plus fire alarm panel thus expanding the existing conventional system to 16 fire zones.

Together with the PCB of the expander module are delivered also four EOL modules and a transparent light pipe for LED indication.

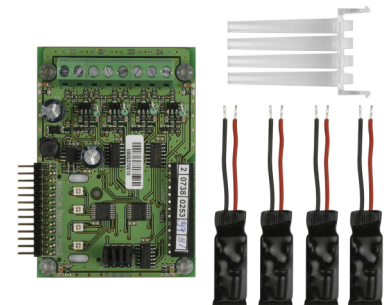

### Technical and Environmental Specifications

Power supply (directly from the fire alarm control panel) . . . . .	+24VDC
Zone circuits. . . . .	4
Detectors per zone / max. number of detectors . . . . .	32/ 128
Consumption ( <i>main and battery power supply for the fire alarm panel</i> ) . .	2.1VA
Consumption in stand-by mode . . . . .	130mA
Consumption in alarm mode. . . . .	330mA
Instant action mode for zones. . . . .	YES
LED indication for zone circuits . . . . .	YES
Operating temperature. . . . .	0°C to +40°C
Relative humidity resistance . . . . .	(93 ± 3)% @ 40°C
Weight . . . . .	~0.2kg
Dimensions . . . . .	57x81mm

### Packing Information

- **Single packing box** - 1 unit ME4 zone expander, dimensions 85x85x33mm
- **Carton packing box** - 60 units ME4 zone expander, dimensions 440x295x238mm

### Compatible Product Range


- **MAG8plus** - Conventional fire alarm panel
- **SensoMAG Series** - Conventional detectors

### Contact Information:



## ME4 4 zones expander module

● Connection diagram

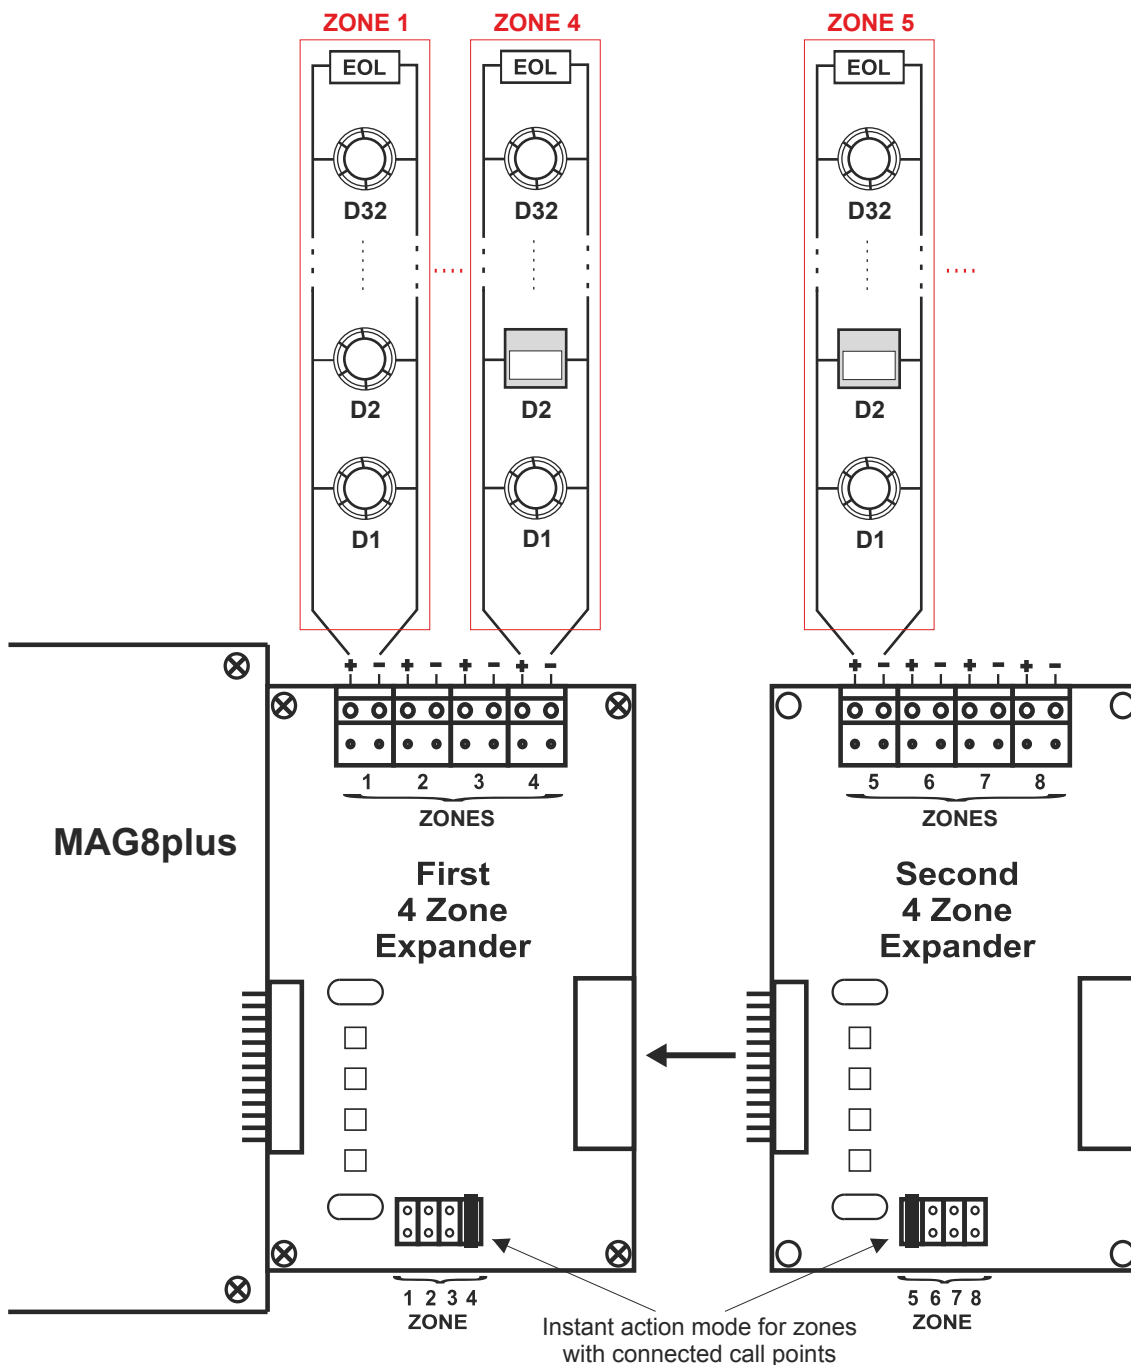

● Contact Information: