



Synthesized Intelligent PIR

# SIP-5030 SIP-100



The SIP-5030 offers wide angle-detection for large areas outside. It has an intelligent detection system that uses data from the ambient environment, such as temperature and illuminance conditions, to automatically adjust the sensitivity.

In addition, the SIP-5030 has another PIR detector on the bottom of the unit to cover the creep zone. The PIR detector on the bottom has an independent output that is separate from the main output. The main output can trigger the CCTV system, and the output from creep zone detection can be used for protection of the unit.

The SIP-100 offers detection with a long range of 100 m (300 ft.) and a total of three outputs: two separate outputs for far and near areas and another for creep-zone detection. Multiple outputs are useful for activating video transmission systems and controlling PTZ cameras. The detection angle in the main area of the SIP-5030 and SIP-100 can be adjusted to easily match the camera field of view. And, the creep zone detector can be used for detection below and around the unit.

The SIP-5030 and SIP-100 are also equipped with antirotation and anti-masking functions, which can detect vandalism or tampering with the unit.

- Intelligent PIR detection system
- Detection of ambient temperature and illuminance for automatic sensitivity management
- Advanced detection algorithm
- Double Dual/One Quad pyro-elements with patented Double Conductive Shielding for main area SIP-5030
- Double Quad pyro-elements with patented Double Conductive Shielding for main area SIP-100
- Built-in creep zone detector (Double dual pyro-elements)
- Anti-vandalism functions
- Anti-rotation function with 3-axis accelerometer
- Anti-masking function with photo-beam

- Reinforced polycarbonate housing
- Max. 4m (13ft.) installation height
- Independent sensitivity selector for creep/near/far areas
- Independent N.C. and N.O. output for main area SIP-5030
- 2 x N.C. and N.O. independent output for main areas (Near and Far areas) SIP-100
- Adjustable alarm interval time
- BS8418 Compliant U.K.

AVF-1 Area View Finder

Weight

SIP-HU Heating Unit (When the SIP-HU is used, the power for SIP series should be 22-26VAC.)


OPM-WT Audio Walk Tester SIP-MIDI HOOD Sun/Snow shield

#### SIP-5030 SIP-100 Mode Detection method Passive infrared 50 x 30 m (165 x 100 ft.) 100 x 3 m (330 x 10 ft.) Coverage (main area 30 x 30 m (165 x 100 m.) 3x 5m (10 x 16ft.) installed at 2.3m (7.6ft.) height, 6 x 9m (20 x 30ft.) installed at 4m (13ft.) height, Detection angle adjustable horizontally 11-16VDC 22-26 VAC, 22-26VAC with optional heating unit Coverage (creep zone) Power input 40mA max. (12VDC) 75mA max. (24VAC), 45mA max. (12VDC) 80mA max. (24VAC), Current draw 415mA max. (24VAC) with optional heating uni 420mA max. (24VAC) with optional heating unit 2.3 to 4 m (7.6 to 13 ft.) Far: SH/H/M/L Near: SH/H/M/L Creep zone: SH/H/M/L Mounting height Sensitivity selector Detection logic selecto Far area:N.O., N.C. 28VDC 0.2A max. Near area:N.O., N.C. 28VDC 0.2A max Alarm output (main area) N.O., N.C. 28VDC 0.2A max N.O., N.C. 28VDC 0.2A max. Off/15, 30, 60 sec. N.C., 28 VDC 0.2 A max. N.C., 28 VDC 0.1 A max. Alarm output (creep zone) Alarm interval period Trouble output Tamper output Alarm period Approx. 2 sec Approx. 60 sec. -25 to +60°C, -40 to +60°C with optional heating unit (-13 to +140°F, -40 to +140°F with optional heating unit) Warm-up period Operating temperature Main unit: IP65 **I**P rating Chassis:IP55 Dimensions (H x W x D) 271 x 102 x 290 mm (10.7 x 4.0 x 11.4 in.)




### **DETECTION AREAS**


### SIP-5030



The detection angle of the creep zone can be adjusted  $\pm 135^{\circ} horizontally$  as shown in gray.

### SIP-100

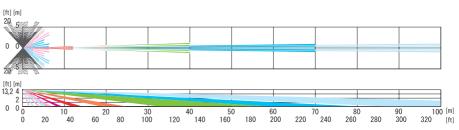


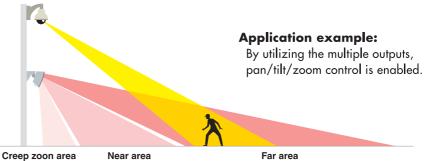


Note: The ambient temperature, installation height and mounting angle may change the detection ranges for each of the areas.

#### **DIMENSIONS**







## OPTEX

OPTEX CO., LTD.
(JAPAN)
(ISO 9001 Certified)
(ISO 14001 Certified)
5-8-12 Ogoto
Otsu,Shiga, 520-0101
Japan
Tel :+81-77-579-8030
Fax:+81-77-579-7190
URL:http://www.optex.co.jp/e

## OPTEX INCORPORATED (USA)

13661 Benson Ave. Bldg. C. Chino CA 91710 U.S.A. Tel: +1-909-993-5770 Fax:+1-909-628-5560 URL:http://www.optexamerica.com

### OPTEX (EUROPE) LTD.

(UK) (ISO 9001 Certified) Clivemont Road, Maidenhead, Berkshire, SL6 7BU

Tel:+44-1628-631000 Fax:+44-1628-636311 URL:http://www.optexeurope.com

## OPTEX SECURITY SAS (FRANCE)

475 Rue Monique et Mario Piani 69480 Ambérieux d'Azergues France Tel :+33 437 55 50 50 Fax:+33 437 55 50 59 URL:http://www.optex-security.com

## OPTEX SECURITY Sp.z o.o. (POLAND)

ul. Bitwy Warszawskiej 1920 r. 7B, 02-366 Warszawa, Poland Tel : +48-22-598-06-60 Fax: +48-22-598-06-61