

# ACA-BU06SS-100

Accesorio cable sensor. Soporte en forma de "U" fabricado en acero inoxidable. 100 ud.

## Channel Bracket

---


The ACA-BU06 series U-bracket (channel bracket) is designed to secure linear heat sensor cable to metal surfaces where there is no return edge available to fix a bracket or clip e.g. fixed roof storage tanks. A silicon protection sleeve is supplied with the unit to protect the linear heat cable when fastened to the bracket.

## Installation

---

The ACA-BU06 should be secured in place using suitable bolts and nuts at one end. The hole in the end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The U-bracket (channel bracket) supports the sensor cable approx. 60mm away from the mounting point.

Recommended spacing: 1m

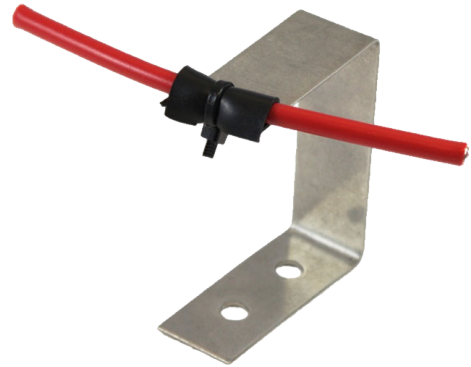

## Detalles

---

- Easy installation of linear heat cable
- For use on metal surfaces e.g. fixed roof storage tanks
- Available in stainless steel
- Available in quantities of 100

# ACA-BU06SS-100

Accesorio cable sensor. Soporte en forma de "U" fabricado en acero inoxidable. 100 ud.

## Especificaciones técnicas

---

### Físico

Dimensiones físicas	20 x 60 x 50 mm (W x H X D)
Peso neto	850 g
Tipo de Montaje	Montaje en Superficie
Material (body)	Acero Inoxidable

### Medioambiental

Entorno	Interior, Exterior
---------	--------------------



Como empresa innovadora, Kidde Global Solutions se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](https://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 4 January 2024 - 14:42