



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Telephone: +86 (0) 21 6191 5666


Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM180200097601

Page: 1 of 121

TEST REPORT

Application No.: SHEM1802000976IT
Applicant: Zhejiang Dahua Vision Technology Co., Ltd.
Address of Applicant: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Manufacturer: Zhejiang Dahua Vision Technology Co., Ltd.
Address of Manufacturer: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Factory: 1, ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
2, ZHEJIANG DAHUA ZHILIAN CO., LTD.
Address of Factory: 1, No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
2, No.28, Dongqiao Road, Dongzhou Street, Fuyang District, Hangzhou, P.R. China.
Equipment Under Test (EUT):
EUT Name: HDCVI CAMERA
Model No.: Refer to page 2
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade mark: 
Standard(s) : EN 55032:2015 (Class B), EN 61000-3-2:2014,
EN 61000-3-3:2013, EN 55024:2010 +A1:2015,
EN 50130-4:2011 +A1:2014
Date of Receipt: 2017-12-08
Date of Test: 2017-12-19 to 2017-12-27
Date of Issue: 2018-02-02

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.



Parlam Zhan
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 2 of 121

Model No.:



DH-HAC-HFW2802TP-Z-A-DP, DH-HAC-HFW2802TN-Z-A-DP, HAC-HFW2802TP-Z-A-DP, HAC-HFW2802TN-Z-A-DP, DH-HAC-HFW2601TP-Z-A-DP, DH-HAC-HFW2601TN-Z-A-DP, HAC-HFW2601TP-Z-A-DP, HAC-HFW2601TN-Z-A-DP, HAC-HFW2802TP-Z-A, HAC-HFW2802TN-Z-A, DH-HAC-HFW2802TP-Z-A, DH-HAC-HFW2802TN-Z-A, A82AF5V, HAC-HFW2601TP-Z-A, HAC-HFW2601TN-Z-A, DH-HAC-HFW2601TP-Z-A, DH-HAC-HFW2601TN-Z-A, HAC-HFW2802TP-A-I8, HAC-HFW2802TN-A-I8, DH-HAC-HFW2802TP-A-I8, DH-HAC-HFW2802TN-A-I8, HAC-HFW2601TP-A-I8, HAC-HFW2601TN-A-I8, DH-HAC-HFW2601TP-A-I8, DH-HAC-HFW2601TN-A-I8, A82AF53



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM180200097601
Page: 3 of 121

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	Add Model Number	2018-02-02	/	Copy Based on SHEM171200839501

Authorized for issue by:				
				
		<hr/>		
		Bruce Tang /Project Engineer		
				
		<hr/>		
		Zenger Zhang /Reviewer		



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Radiated Emissions (30MHz-1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Harmonic Current Emission	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	N/A
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	Pass

N/A: Please refer to Section 6.4 of this report for details.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 5 of 121

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 55024:2010 +A1:2015	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz)	EN 55024:2010 +A1:2015	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m, 80%, 1kHz Amp. Mod.	Pass
Radiated Immunity (80MHz-2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass
Electrical Fast Transients/Burst at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	1kV5/50ns Tr/Td5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	2kV5/50ns Tr/Td100kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	0.5kV5/50ns Tr/Td5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	1kV5/50ns Tr/Td100kHz Repetition Frequency	Pass
Surge at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014	1.2/50µs Tr/Td1kV Line to Line 2kV Line to Ground	Pass
Surge at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td0.5,1kV Line to Line 0.5,1,2kV Line to Ground	Pass
Surge at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014	1.2/50µs Tr/Td1kV Line to Ground	Pass
Surge at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td0.5,1kV Line to Ground	Pass
Conducted Immunity at Power Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 6 of 121

Immunity Part				
Item	Standard	Method	Requirement	Result
Conducted Immunity at Power Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf), 80%, 1kHz sinusoidal Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf), 80%, 1kHz sinusoidal Amp. Mod.	Pass
Voltage Dips and Interruptions	EN 55024:2010 +A1:2015	EN 61000-4-11:2004	0 % UT for 0.5per0 % UT for 250per70 % UT for 25perUT is Supply Voltage	Pass
Voltage Dips and Interruptions	EN 50130-4:2011 +A1:2014	EN 61000-4-11:2004	80 % UT for 250per70 % UT for 25per40 % UT for 10per0 % UT for 250perUT is Supply Voltage	Pass
Mains Supply Voltage Variations-Conditioning	EN 50130-4:2011 +A1:2014	EN 50130-4:2011+A1:2014	Unom+10%Unom-15%	Pass

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less

Declaration of EUT Family Grouping:

Note1: There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-HAC-HFW2802TP-Z-A-DP was tested since their differences are pixels, sales area and power supply mode.

Note2: The report is copied from SHEM171200839501 to add models A82AF53 which are the same as the original tested model DH-HAC-HFW2802TP-Z-A-DP in electrical and electronic characters. So the new models in this report are deemed to fulfill the EMC requirements without testing.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	4
3 CONTENTS.....	7
4 GENERAL INFORMATION.....	10
4.1 DETAILS OF E.U.T.	10
4.2 DESCRIPTION OF SUPPORT UNITS	10
4.3 MEASUREMENT UNCERTAINTY.....	10
4.4 TEST LOCATION.....	11
4.5 TEST FACILITY.....	11
4.6 DEVIATION FROM STANDARDS	11
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	11
4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST.....	11
5 EQUIPMENT LIST	12
6 EMISSION TEST RESULTS.....	17
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	17
6.1.1 E.U.T. Operation.....	17
6.1.2 Test Setup Diagram	17
6.1.3 Measurement Data.....	17
6.2 RADIATED EMISSIONS (30MHz-1GHz)	34
6.2.1 E.U.T. Operation.....	34
6.2.2 Test Setup Diagram	34
6.2.3 Measurement Data.....	34
6.3 RADIATED EMISSIONS (ABOVE 1GHz).....	51
6.3.1 E.U.T. Operation.....	51
6.3.2 Test Setup Diagram	51
6.3.3 Measurement Data.....	51
6.4 HARMONIC CURRENT EMISSION	68
6.5 VOLTAGE FLUCTUATIONS AND FLICKER.....	69
6.5.1 E.U.T. Operation.....	69
6.5.2 Test Setup Diagram	69
6.5.3 Measurement Data.....	69
7 IMMUNITY TEST RESULTS.....	72
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 55024:2010 +A1:2015	72
7.2 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014	72
7.3 ELECTROSTATIC DISCHARGE	73
7.3.1 Test Setup Diagram	73
7.3.2 E.U.T. Operation.....	73
7.3.3 Test Results:.....	73
7.4 ELECTROSTATIC DISCHARGE	75
7.4.1 Test Setup Diagram	75
7.4.2 E.U.T. Operation.....	75
7.4.3 Test Results:.....	75
7.5 RADIATED IMMUNITY (80MHz-1GHz)	77



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 8 of 121

7.5.1	Test Setup Diagram	77
7.5.2	E.U.T. Operation.....	77
7.5.3	Test Results:.....	77
7.6	RADIATED IMMUNITY(80MHz-2.7GHz)	78
7.6.1	Test Setup Diagram	78
7.6.2	E.U.T. Operation.....	78
7.6.3	Test Results:.....	78
7.7	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT.....	80
7.7.1	Test Setup Diagram	80
7.7.2	E.U.T. Operation.....	80
7.7.3	Test Results:.....	80
7.8	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT.....	81
7.8.1	Test Setup Diagram	81
7.8.2	E.U.T. Operation.....	81
7.8.3	Test Results:.....	81
7.9	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	82
7.9.1	Test Setup Diagram	82
7.9.2	E.U.T. Operation.....	82
7.9.3	Test Results:.....	82
7.10	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	83
7.10.1	Test Setup Diagram	83
7.10.2	E.U.T. Operation.....	83
7.10.3	Test Results:.....	83
7.11	SURGE AT POWER PORT	84
7.11.1	Test Setup Diagram	84
7.11.2	E.U.T. Operation.....	84
7.11.3	Test Results:.....	84
7.12	SURGE AT POWER PORT	85
7.12.1	Test Setup Diagram	85
7.12.2	E.U.T. Operation.....	85
7.12.3	Test Results:.....	85
7.13	SURGE AT SIGNAL PORT.....	87
7.13.1	Test Setup Diagram	87
7.13.2	E.U.T. Operation.....	87
7.13.3	Test Results:.....	87
7.14	SURGE AT SIGNAL PORT.....	88
7.14.1	Test Setup Diagram	88
7.14.2	E.U.T. Operation.....	88
7.14.3	Test Results:.....	88
7.15	CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz)	89
7.15.1	Test Setup Diagram	89
7.15.2	E.U.T. Operation.....	89
7.15.3	Test Results:.....	89
7.16	CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-80MHz)	91
7.16.1	Test Setup Diagram	91
7.16.2	E.U.T. Operation.....	91
7.16.3	Test Results:.....	91
7.17	CONDUCTED IMMUNITY AT POWER PORT (150kHz-100MHz)	93
7.17.1	Test Setup Diagram	93
7.17.2	E.U.T. Operation.....	93
7.17.3	Test Results:.....	93
7.18	CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-100MHz).....	95
7.18.1	Test Setup Diagram	95



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 9 of 121

7.18.2	E.U.T. Operation.....	95
7.18.3	Test Results:.....	95
7.19	VOLTAGE DIPS AND INTERRUPTIONS.....	96
7.19.1	Test Setup Diagram	96
7.19.2	E.U.T. Operation.....	96
7.19.3	Test Results:.....	96
7.20	VOLTAGE DIPS AND INTERRUPTIONS.....	97
7.20.1	Test Setup Diagram	97
7.20.2	E.U.T. Operation.....	97
7.20.3	Test Results:.....	97
7.21	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING.....	99
7.21.1	Test Setup Diagram	99
7.21.2	E.U.T. Operation.....	99
7.21.3	Test Results:.....	99
8	PHOTOGRAPHS.....	100
8.1	CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP.....	100
8.2	RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP.....	101
8.3	RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP	102
8.4	VOLTAGE FLUCTUATIONS AND FLICKER TEST SETUP	103
8.5	ELECTROSTATIC DISCHARGE TEST SETUP.....	104
8.6	RADIATED IMMUNITY (80MHz-1GHz) TEST SETUP.....	105
8.7	RADIATED IMMUNITY(80MHz-2.7GHz) TEST SETUP.....	106
8.8	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT TEST SETUP	107
8.9	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT TEST SETUP	108
8.10	SURGE AT POWER PORT TEST SETUP	109
8.11	SURGE AT SIGNAL PORT TEST SETUP	110
8.12	CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz) TEST SETUP	111
8.13	CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-80MHz) TEST SETUP.....	112
8.14	CONDUCTED IMMUNITY AT POWER PORT (150kHz-100MHz) TEST SETUP	113
8.15	CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-100MHz) TEST SETUP	114
8.16	VOLTAGE DIPS AND INTERRUPTIONS TEST SETUP	115
8.17	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING TEST SETUP	116
8.18	EUT CONSTRUCTIONAL DETAILS.....	117-121

4 General Information

4.1 Details of E.U.T.

Power supply:	AC24V or DC12V
Cable:	signal cable : 0.4m

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	3.2dB (9kHz to 150kHz)
		3.0dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	1.9 dB(9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	2.4 dB(150kHz to 30MHz)
4	Radiated Power	3.5dB
5	Radiated emission	4.4dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 Monitoring of EUT for All Immunity Test

Visual: work status and video quality



5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2017-12-26	2018-12-25
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2017-05-17	2018-05-16
Line impedance stabilization network	EMCO	3816/2	SHEM019-1	2017-12-26	2018-12-25
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2017-08-01	2018-07-31
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2016-12-29	2019-12-28
CE test Cable	/	/	CE01	2017-12-26	2018-12-25

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2017-09-26	2018-09-25
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21
Low Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2017-08-22	2018-08-21

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2017-09-26	2018-09-25
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
High-amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2017-01-14	2020-01-13
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

Voltage Fluctuations and Flicker					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2017-08-22	2018-08-21
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2017-08-22	2018-08-21

Electrostatic Discharge



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 13 of 121

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-1	2017-09-26	2018-09-25

Radiated Immunity (80MHz-1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2017-12-26	2018-12-25
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2017-12-26	2018-12-25
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2017-07-22	2018-07-21
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6113	SHEM134-1	2017-09-07	2018-09-06
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

Radiated Immunity(80MHz-2.7GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2017-12-26	2018-12-25
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2017-12-26	2018-12-25
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2017-07-22	2018-07-21
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6113	SHEM134-1	2017-09-07	2018-09-06
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

Electrical Fast Transients/Burst at Power Port

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25

Electrical Fast Transients/Burst at Signal Port

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25
Capacitive coupling clamp	EM test	HFK	SHEM026-2	2017-08-12	2018-08-11
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2017-08-12	2018-08-11

Surge at Power Port

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 14 of 121

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 15 of 121

Surge at Signal Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2017-08-12	2018-08-11

Conducted Immunity at Power Port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2017-12-26	2018-12-25
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2017-12-26	2018-12-25
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2017-12-26	2018-12-25
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28

Conducted Immunity at Signal Port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2017-12-26	2018-12-25
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28

Conducted Immunity at Power Port (150kHz-100MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2017-12-26	2018-12-25
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2017-12-26	2018-12-25
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2017-12-26	2018-12-25
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2019-12-28



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 16 of 121

Conducted Immunity at Signal Port (150kHz-100MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2017-09-26	2018-09-25
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2017-12-26	2018-12-25
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2017-12-26	2018-12-25
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2017-12-26	2018-12-25

Voltage Dips and Interruptions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25

Mains Supply Voltage Variations-Conditioning					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2017-12-26	2018-12-25

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2017-03-03	2018-03-02
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-1~6	2017-09-13	2018-09-12
Digital Multimeter	FLUKE	17B	SHEM043-5	2017-09-13	2018-09-12
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	316	SHEM001-1	2017-01-29	2018-01-28

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)


Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature:	22 °C	Humidity:	50 % RH	Atmospheric Pressure:	1020 mbar
Test mode:	a: CVI previewing by DC12V support . b: AHD previewing by DC12V support . c: CVBS previewing by DC12V support . d: TVI previewing by DC12V support . e: CVI previewing by AC24V support . f: AHD previewing by AC24V support . g: CVBS previewing by AC24V support . h: TVI previewing by AC24V support .				

6.1.2 Test Setup Diagram

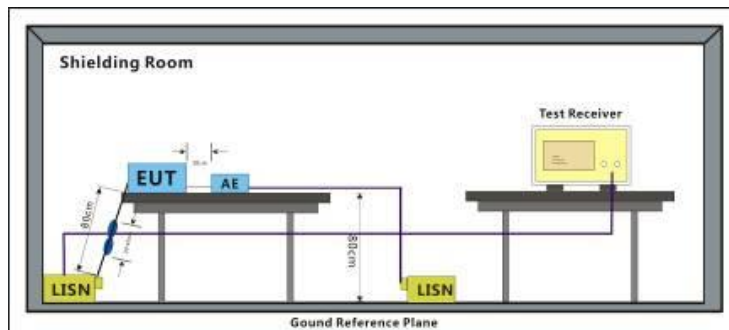


6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes: Emission Level=Read Level + LISN Factor + Cable Loss


Mode:a; Line:Live Line

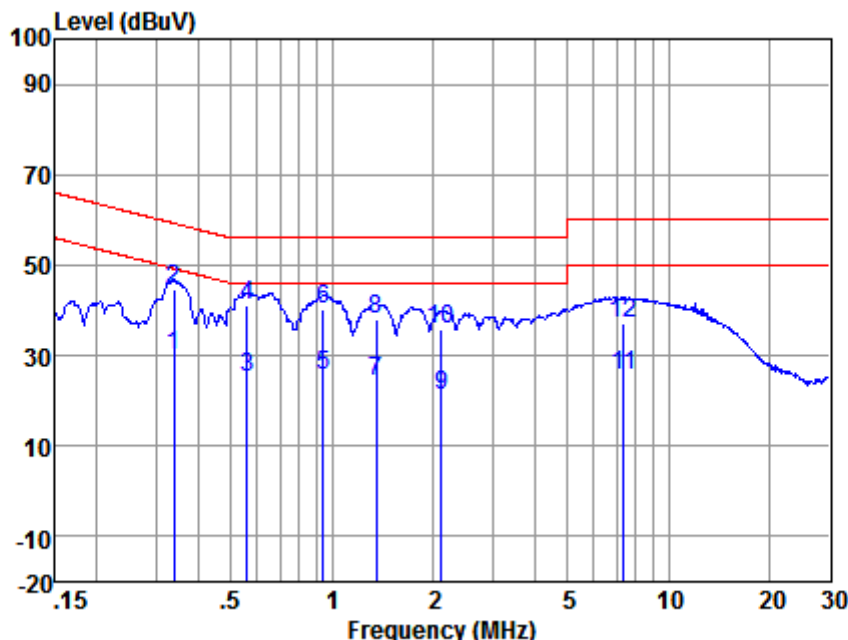

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.339	20.22	0.11	9.81	30.14	49.22	-19.08	Average
2	0.339	34.79	0.11	9.81	44.71	59.22	-14.51	QP
3	0.558	15.28	0.11	9.82	25.21	46.00	-20.79	Average
4	0.558	31.04	0.11	9.82	40.97	56.00	-15.03	QP
5	0.943	15.72	0.11	9.83	25.66	46.00	-20.34	Average
6	0.943	30.12	0.11	9.83	40.06	56.00	-15.94	QP
7	1.352	14.43	0.11	9.84	24.38	46.00	-21.62	Average
8	1.352	27.88	0.11	9.84	37.83	56.00	-18.17	QP
9	2.110	11.40	0.12	9.85	21.37	46.00	-24.63	Average
10	2.110	25.89	0.12	9.85	35.86	56.00	-20.14	QP
11	7.368	15.71	0.11	9.86	25.68	50.00	-24.32	Average
12	7.368	27.08	0.11	9.86	37.05	60.00	-22.95	QP


Mode:a; Line:Neutral Line

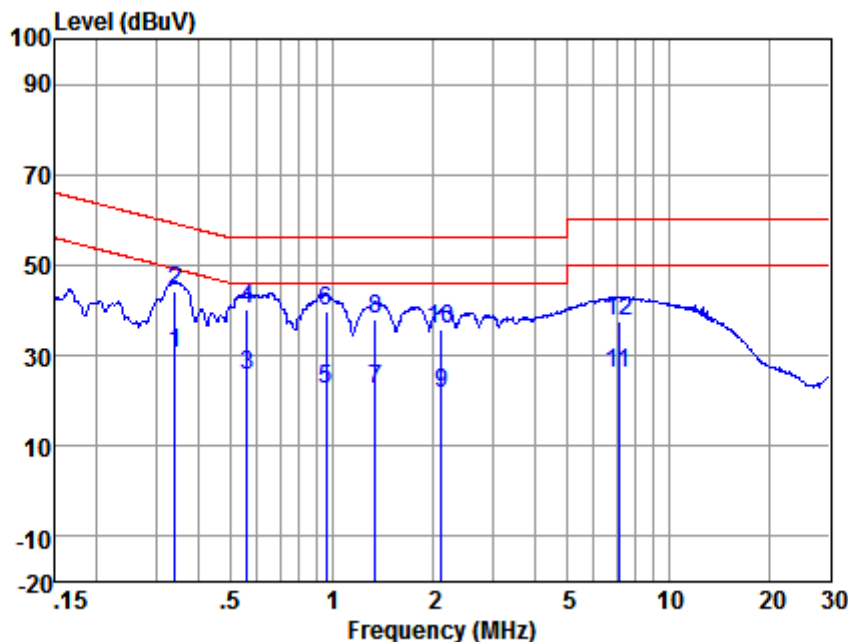

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.341	20.67	0.11	9.81	30.59	49.18	-18.59	Average
2	0.341	34.30	0.11	9.81	44.22	59.18	-14.96	QP
3	0.558	15.49	0.11	9.82	25.42	46.00	-20.58	Average
4	0.558	30.50	0.11	9.82	40.43	56.00	-15.57	QP
5	0.963	12.59	0.11	9.84	22.54	46.00	-23.46	Average
6	0.963	29.92	0.11	9.84	39.87	56.00	-16.13	QP
7	1.345	12.76	0.12	9.84	22.72	46.00	-23.28	Average
8	1.345	28.01	0.12	9.84	37.97	56.00	-18.03	QP
9	2.121	11.73	0.12	9.85	21.70	46.00	-24.30	Average
10	2.121	25.88	0.12	9.85	35.85	56.00	-20.15	QP
11	7.137	16.16	0.13	9.86	26.15	50.00	-23.85	Average
12	7.137	27.75	0.13	9.86	37.74	60.00	-22.26	QP


Mode:b; Line:Live Line

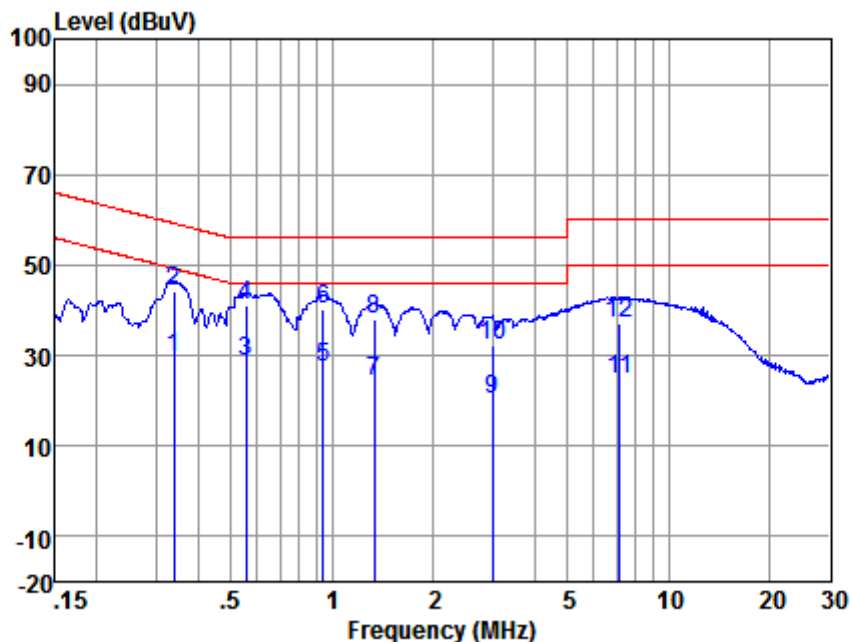

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.339	19.74	0.11	9.81	29.66	49.22	-19.56	Average
2	0.339	34.32	0.11	9.81	44.24	59.22	-14.98	QP
3	0.555	18.62	0.11	9.82	28.55	46.00	-17.45	Average
4	0.555	31.11	0.11	9.82	41.04	56.00	-14.96	QP
5	0.943	17.28	0.11	9.83	27.22	46.00	-18.78	Average
6	0.943	30.10	0.11	9.83	40.04	56.00	-15.96	QP
7	1.331	14.18	0.11	9.84	24.13	46.00	-21.87	Average
8	1.331	28.03	0.11	9.84	37.98	56.00	-18.02	QP
9	2.993	10.23	0.12	9.85	20.20	46.00	-25.80	Average
10	2.993	22.18	0.12	9.85	32.15	56.00	-23.85	QP
11	7.175	14.64	0.11	9.86	24.61	50.00	-25.39	Average
12	7.175	27.22	0.11	9.86	37.19	60.00	-22.81	QP


Mode:b; Line:Neutral Line

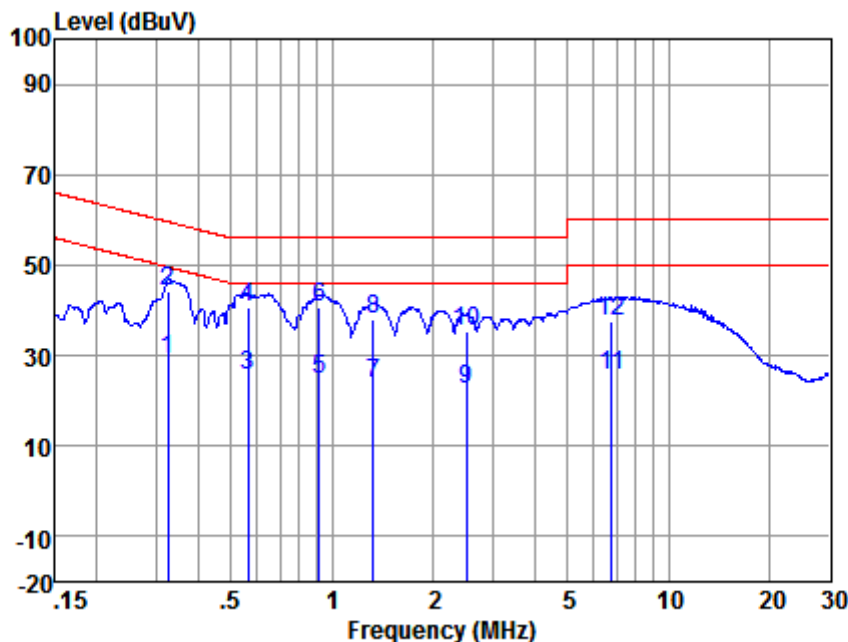

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.325	19.40	0.11	9.81	29.32	49.57	-20.25	Average
2	0.325	34.14	0.11	9.81	44.06	59.57	-15.51	QP
3	0.564	15.77	0.11	9.82	25.70	46.00	-20.30	Average
4	0.564	30.85	0.11	9.82	40.78	56.00	-15.22	QP
5	0.918	15.00	0.11	9.83	24.94	46.00	-21.06	Average
6	0.918	30.69	0.11	9.83	40.63	56.00	-15.37	QP
7	1.324	14.07	0.12	9.84	24.03	46.00	-21.97	Average
8	1.324	28.27	0.12	9.84	38.23	56.00	-17.77	QP
9	2.513	12.44	0.13	9.85	22.42	46.00	-23.58	Average
10	2.513	25.16	0.13	9.85	35.14	56.00	-20.86	QP
11	6.769	15.76	0.13	9.86	25.75	50.00	-24.25	Average
12	6.769	27.68	0.13	9.86	37.67	60.00	-22.33	QP


Mode:c; Line:Live Line

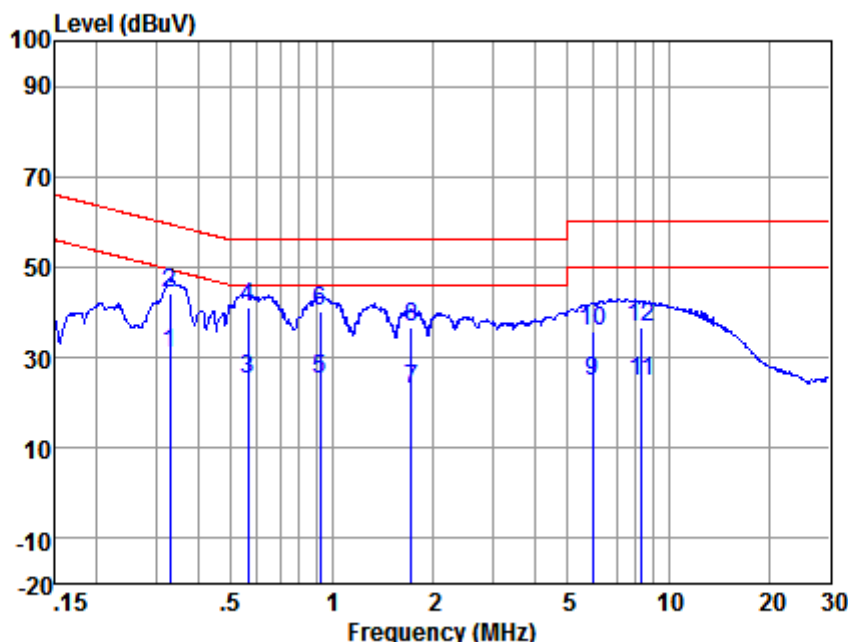

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : c

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.329	20.87	0.11	9.81	30.79	49.49	-18.70	Average
2	0.329	34.14	0.11	9.81	44.06	59.49	-15.43	QP
3	0.564	15.38	0.11	9.82	25.31	46.00	-20.69	Average
4	0.564	31.31	0.11	9.82	41.24	56.00	-14.76	QP
5	0.923	15.02	0.11	9.83	24.96	46.00	-21.04	Average
6	0.923	30.41	0.11	9.83	40.35	56.00	-15.65	QP
7	1.725	13.04	0.11	9.85	23.00	46.00	-23.00	Average
8	1.725	26.87	0.11	9.85	36.83	56.00	-19.17	QP
9	5.961	14.87	0.11	9.86	24.84	50.00	-25.16	Average
10	5.961	25.80	0.11	9.86	35.77	60.00	-24.23	QP
11	8.323	14.67	0.10	9.86	24.63	50.00	-25.37	Average
12	8.323	26.51	0.10	9.86	36.47	60.00	-23.53	QP


Mode:c; Line:Neutral Line

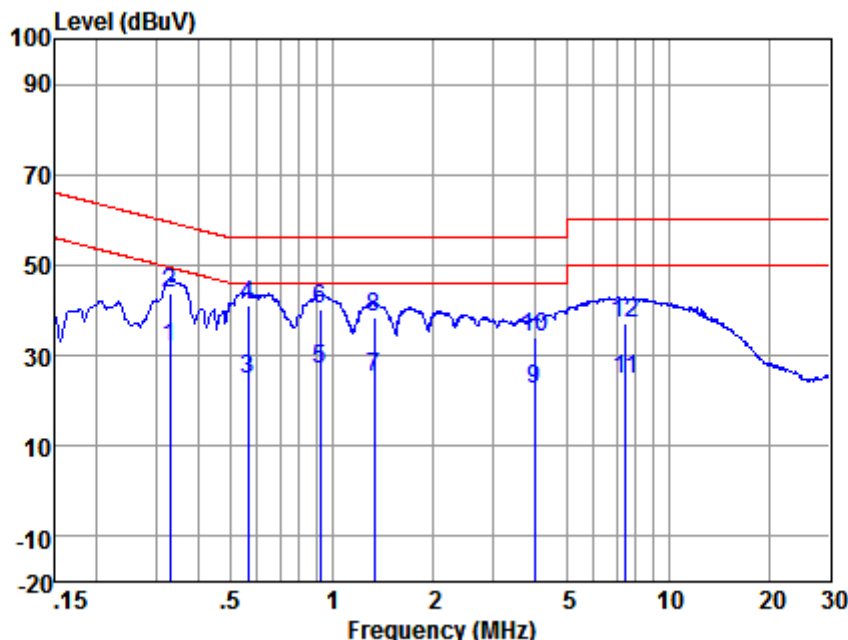

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : c

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.329	22.08	0.11	9.81	32.00	49.49	-17.49	Average
2	0.329	33.67	0.11	9.81	43.59	59.49	-15.90	QP
3	0.564	14.88	0.11	9.82	24.81	46.00	-21.19	Average
4	0.564	31.27	0.11	9.82	41.20	56.00	-14.80	QP
5	0.923	17.06	0.11	9.83	27.00	46.00	-19.00	Average
6	0.923	30.27	0.11	9.83	40.21	56.00	-15.79	QP
7	1.338	15.06	0.12	9.84	25.02	46.00	-20.98	Average
8	1.338	28.29	0.12	9.84	38.25	56.00	-17.75	QP
9	4.006	12.68	0.13	9.85	22.66	46.00	-23.34	Average
10	4.006	24.06	0.13	9.85	34.04	56.00	-21.96	QP
11	7.446	14.83	0.13	9.86	24.82	50.00	-25.18	Average
12	7.446	27.19	0.13	9.86	37.18	60.00	-22.82	QP


Mode:d; Line:Live Line

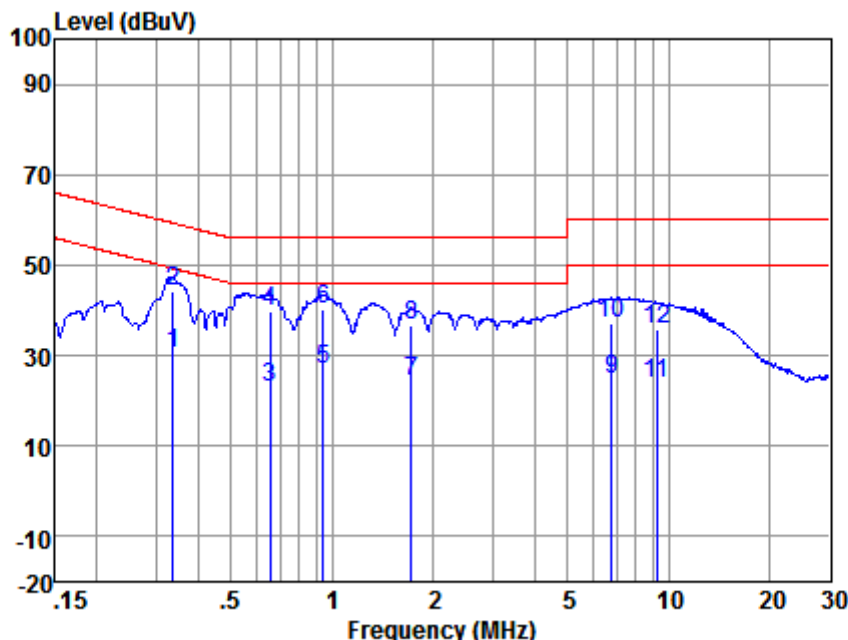

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : d

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.337	20.51	0.11	9.81	30.43	49.27	-18.84	Average
2	0.337	34.45	0.11	9.81	44.37	59.27	-14.90	QP
3	0.654	13.07	0.11	9.82	23.00	46.00	-23.00	Average
4	0.654	29.81	0.11	9.82	39.74	56.00	-16.26	QP
5	0.943	17.03	0.11	9.83	26.97	46.00	-19.03	Average
6	0.943	30.41	0.11	9.83	40.35	56.00	-15.65	QP
7	1.716	14.23	0.11	9.85	24.19	46.00	-21.81	Average
8	1.716	26.61	0.11	9.85	36.57	56.00	-19.43	QP
9	6.769	14.77	0.11	9.86	24.74	50.00	-25.26	Average
10	6.769	27.21	0.11	9.86	37.18	60.00	-22.82	QP
11	9.253	14.08	0.10	9.87	24.05	50.00	-25.95	Average
12	9.253	25.99	0.10	9.87	35.96	60.00	-24.04	QP


Mode:d; Line:Neutral Line

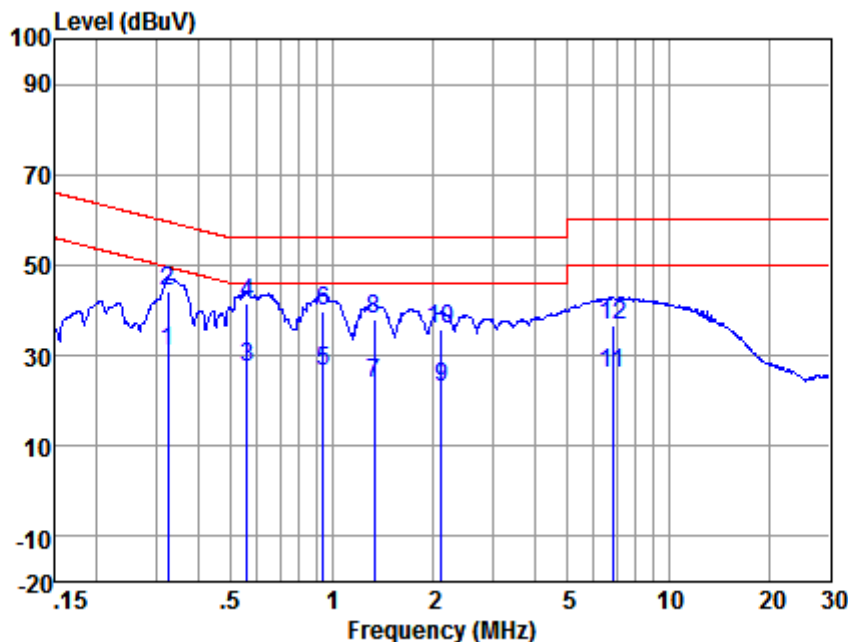

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : d

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.325	21.16	0.11	9.81	31.08	49.57	-18.49	Average
2	0.325	34.20	0.11	9.81	44.12	59.57	-15.45	QP
3	0.558	17.56	0.11	9.82	27.49	46.00	-18.51	Average
4	0.558	31.58	0.11	9.82	41.51	56.00	-14.49	QP
5	0.938	16.66	0.11	9.83	26.60	46.00	-19.40	Average
6	0.938	29.87	0.11	9.83	39.81	56.00	-16.19	QP
7	1.331	13.76	0.12	9.84	23.72	46.00	-22.28	Average
8	1.331	28.17	0.12	9.84	38.13	56.00	-17.87	QP
9	2.110	12.89	0.12	9.85	22.86	46.00	-23.14	Average
10	2.110	25.81	0.12	9.85	35.78	56.00	-20.22	QP
11	6.841	16.25	0.13	9.86	26.24	50.00	-23.76	Average
12	6.841	26.90	0.13	9.86	36.89	60.00	-23.11	QP


Mode:e; Line:Live Line

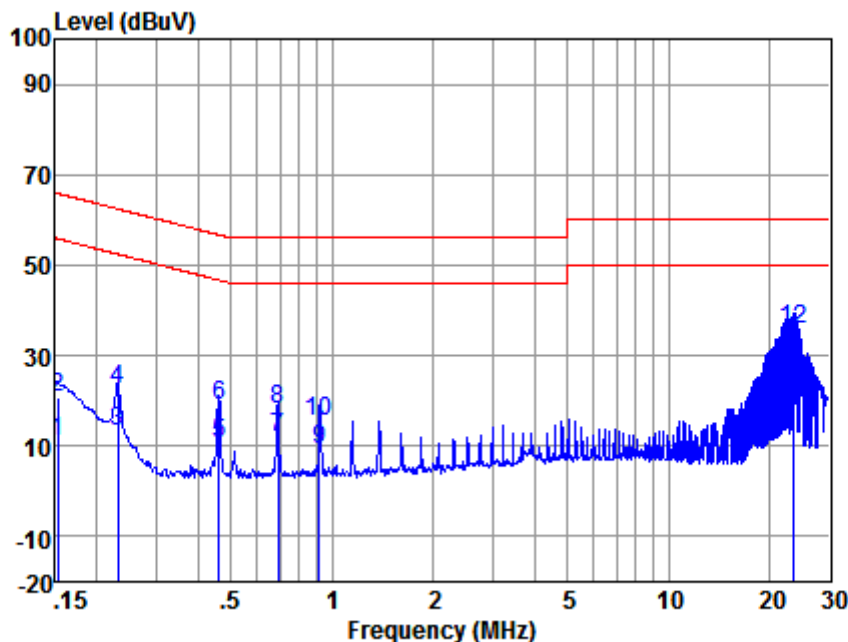

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : e

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.153	1.05	0.11	9.81	10.97	55.82	-44.85	Average
2	0.153	10.60	0.11	9.81	20.52	65.82	-45.30	QP
3	0.230	3.16	0.11	9.81	13.08	52.44	-39.36	Average
4	0.230	12.69	0.11	9.81	22.61	62.44	-39.83	QP
5	0.461	0.84	0.11	9.82	10.77	46.67	-35.90	Average
6	0.461	8.97	0.11	9.82	18.90	56.67	-37.77	QP
7	0.690	1.97	0.11	9.83	11.91	46.00	-34.09	Average
8	0.690	8.03	0.11	9.83	17.97	56.00	-38.03	QP
9	0.918	-0.69	0.11	9.83	9.25	46.00	-36.75	Average
10	0.918	5.58	0.11	9.83	15.52	56.00	-40.48	QP
11	23.511	15.48	0.20	10.04	25.72	50.00	-24.28	Average
12	23.511	25.56	0.20	10.04	35.80	60.00	-24.20	QP


Mode:e; Line:Neutral Line

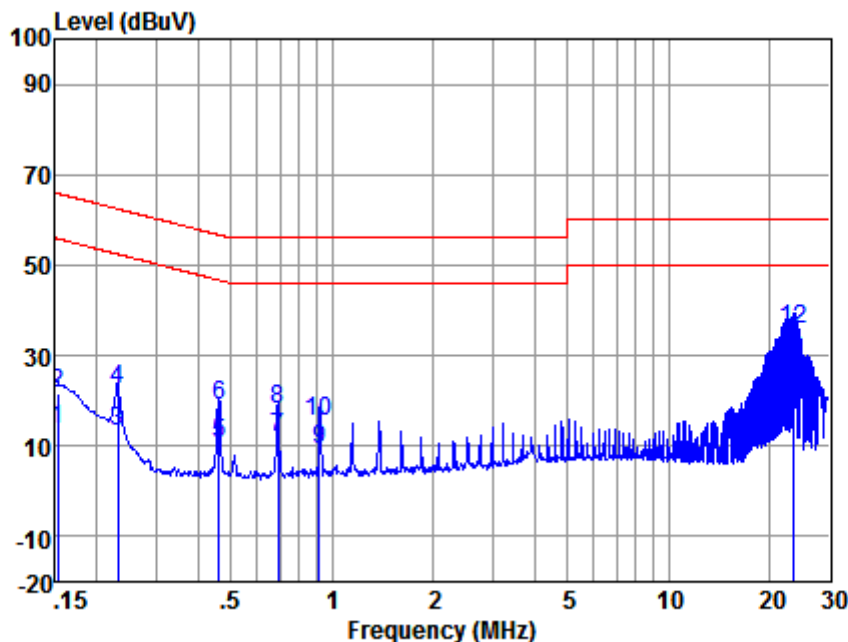

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : e

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	3.69	0.12	9.81	13.62	55.87	-42.25	Average
2	0.152	11.83	0.12	9.81	21.76	65.87	-44.11	QP
3	0.230	3.14	0.11	9.81	13.06	52.44	-39.38	Average
4	0.230	12.65	0.11	9.81	22.57	62.44	-39.87	QP
5	0.461	0.81	0.11	9.82	10.74	46.67	-35.93	Average
6	0.461	8.91	0.11	9.82	18.84	56.67	-37.83	QP
7	0.690	1.98	0.11	9.83	11.92	46.00	-34.08	Average
8	0.690	7.97	0.11	9.83	17.91	56.00	-38.09	QP
9	0.918	-0.66	0.11	9.83	9.28	46.00	-36.72	Average
10	0.918	5.57	0.11	9.83	15.51	56.00	-40.49	QP
11	23.511	18.63	0.22	10.04	28.89	50.00	-21.11	Average
12	23.511	25.36	0.22	10.04	35.62	60.00	-24.38	QP


Mode:f; Line:Live Line

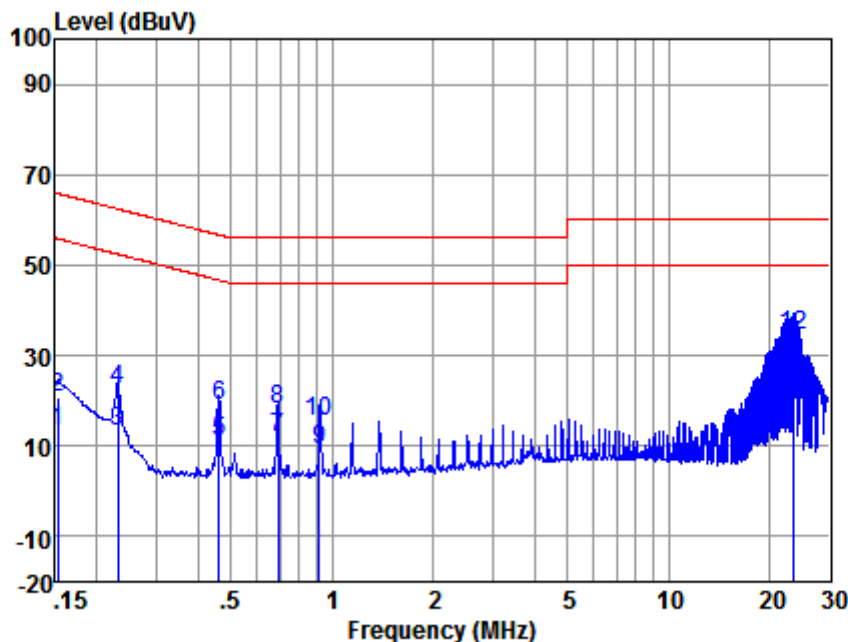

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : f

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	3.51	0.11	9.81	13.43	55.87	-42.44	Average
2	0.152	10.72	0.11	9.81	20.64	65.87	-45.23	QP
3	0.230	3.18	0.11	9.81	13.10	52.44	-39.34	Average
4	0.230	12.71	0.11	9.81	22.63	62.44	-39.81	QP
5	0.461	0.87	0.11	9.82	10.80	46.67	-35.87	Average
6	0.461	8.99	0.11	9.82	18.92	56.67	-37.75	QP
7	0.690	1.96	0.11	9.83	11.90	46.00	-34.10	Average
8	0.690	8.01	0.11	9.83	17.95	56.00	-38.05	QP
9	0.918	-0.65	0.11	9.83	9.29	46.00	-36.71	Average
10	0.918	5.67	0.11	9.83	15.61	56.00	-40.39	QP
11	23.511	17.64	0.20	10.04	27.88	50.00	-22.12	Average
12	23.511	24.41	0.20	10.04	34.65	60.00	-25.35	QP


Mode:f; Line:Neutral Line

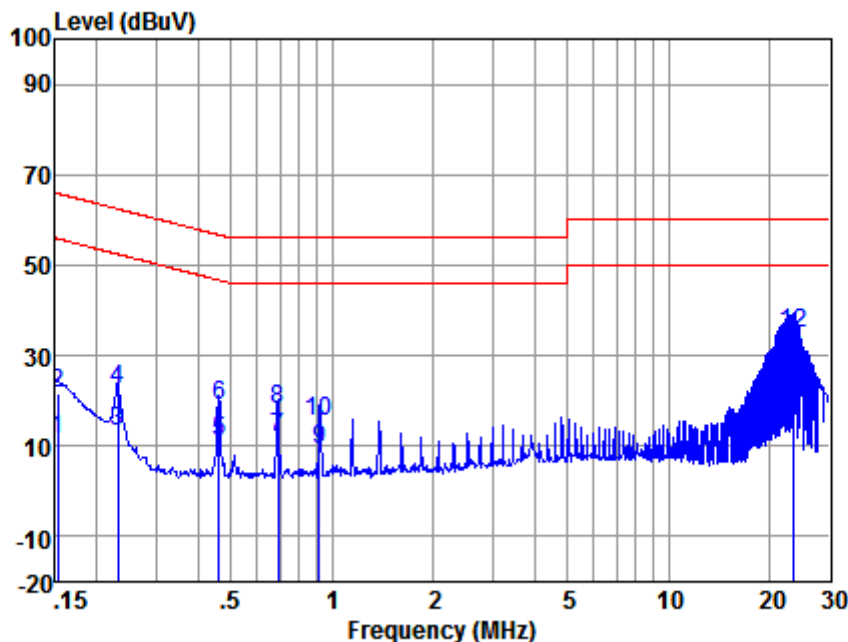

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : f

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	1.71	0.12	9.81	11.64	55.87	-44.23	Average
2	0.152	11.77	0.12	9.81	21.70	65.87	-44.17	QP
3	0.230	3.26	0.11	9.81	13.18	52.44	-39.26	Average
4	0.230	12.70	0.11	9.81	22.62	62.44	-39.82	QP
5	0.461	0.89	0.11	9.82	10.82	46.67	-35.85	Average
6	0.461	8.85	0.11	9.82	18.78	56.67	-37.89	QP
7	0.690	2.03	0.11	9.83	11.97	46.00	-34.03	Average
8	0.690	7.93	0.11	9.83	17.87	56.00	-38.13	QP
9	0.918	-0.54	0.11	9.83	9.40	46.00	-36.60	Average
10	0.918	5.65	0.11	9.83	15.59	56.00	-40.41	QP
11	23.511	18.51	0.22	10.04	28.77	50.00	-21.23	Average
12	23.511	24.60	0.22	10.04	34.86	60.00	-25.14	QP


Mode:g; Line:Live Line

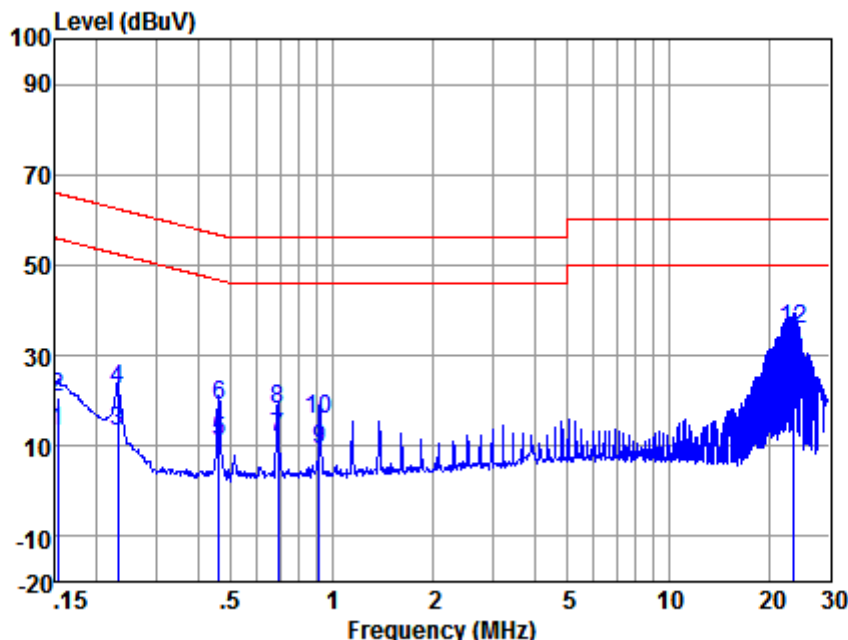

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : g

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	3.38	0.11	9.81	13.30	55.87	-42.57	Average
2	0.152	10.65	0.11	9.81	20.57	65.87	-45.30	QP
3	0.230	3.30	0.11	9.81	13.22	52.44	-39.22	Average
4	0.230	12.78	0.11	9.81	22.70	62.44	-39.74	QP
5	0.461	0.93	0.11	9.82	10.86	46.67	-35.81	Average
6	0.461	9.05	0.11	9.82	18.98	56.67	-37.69	QP
7	0.690	2.05	0.11	9.83	11.99	46.00	-34.01	Average
8	0.690	8.07	0.11	9.83	18.01	56.00	-37.99	QP
9	0.918	-0.53	0.11	9.83	9.41	46.00	-36.59	Average
10	0.918	5.76	0.11	9.83	15.70	56.00	-40.30	QP
11	23.511	18.55	0.20	10.04	28.79	50.00	-21.21	Average
12	23.511	25.34	0.20	10.04	35.58	60.00	-24.42	QP


Mode:g; Line:Neutral Line

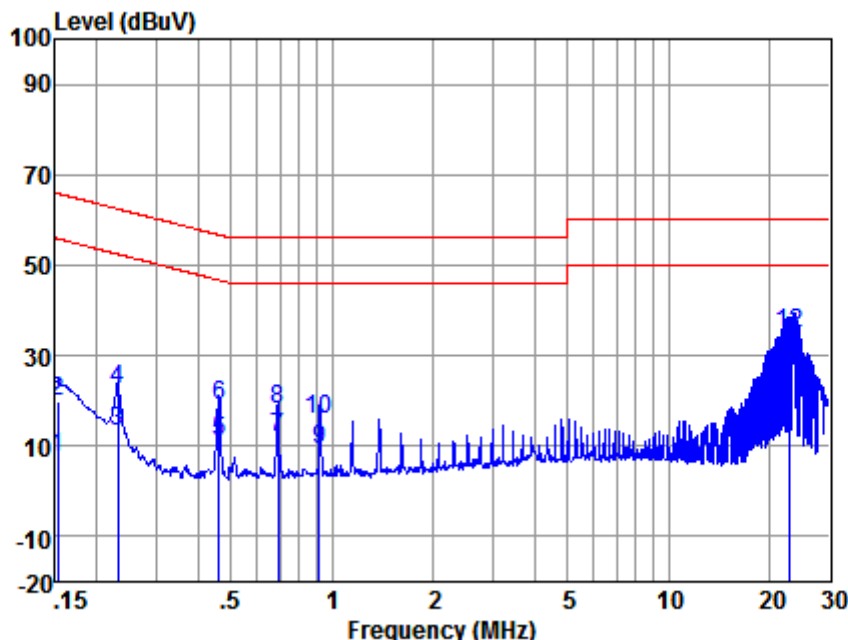

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : g

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	-2.63	0.12	9.81	7.30	55.87	-48.57	Average
2	0.152	9.95	0.12	9.81	19.88	65.87	-45.99	QP
3	0.230	3.34	0.11	9.81	13.26	52.44	-39.18	Average
4	0.230	12.76	0.11	9.81	22.68	62.44	-39.76	QP
5	0.461	0.91	0.11	9.82	10.84	46.67	-35.83	Average
6	0.461	8.99	0.11	9.82	18.92	56.67	-37.75	QP
7	0.690	2.07	0.11	9.83	12.01	46.00	-33.99	Average
8	0.690	8.04	0.11	9.83	17.98	56.00	-38.02	QP
9	0.918	-0.55	0.11	9.83	9.39	46.00	-36.61	Average
10	0.918	5.72	0.11	9.83	15.66	56.00	-40.34	QP
11	22.775	16.92	0.21	10.04	27.17	50.00	-22.83	Average
12	22.775	24.54	0.21	10.04	34.79	60.00	-25.21	QP


Mode:h; Line:Live Line

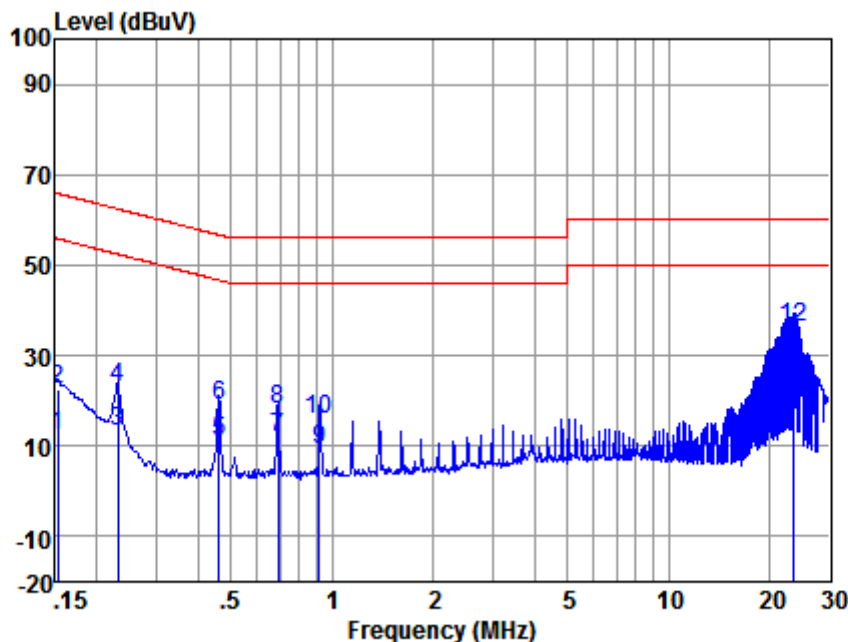

Site : chamber
Condition : LISN-L-2017
EUT/Project No: 8395IT
Test mode : h

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	2.36	0.11	9.81	12.28	55.87	-43.59	Average
2	0.152	12.80	0.11	9.81	22.72	65.87	-43.15	QP
3	0.230	3.35	0.11	9.81	13.27	52.44	-39.17	Average
4	0.230	12.82	0.11	9.81	22.74	62.44	-39.70	QP
5	0.461	1.02	0.11	9.82	10.95	46.67	-35.72	Average
6	0.461	9.06	0.11	9.82	18.99	56.67	-37.68	QP
7	0.690	2.06	0.11	9.83	12.00	46.00	-34.00	Average
8	0.690	8.07	0.11	9.83	18.01	56.00	-37.99	QP
9	0.918	-0.52	0.11	9.83	9.42	46.00	-36.58	Average
10	0.918	5.77	0.11	9.83	15.71	56.00	-40.29	QP
11	23.511	16.78	0.20	10.04	27.02	50.00	-22.98	Average
12	23.511	25.99	0.20	10.04	36.23	60.00	-23.77	QP

Mode:h; Line:Neutral Line

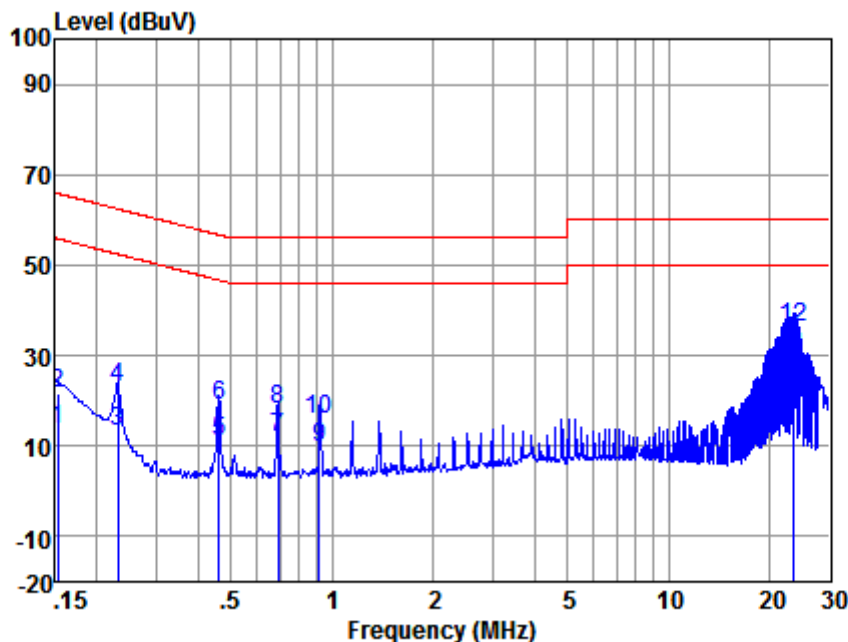

Site : chamber
Condition : LISN-N-2017
EUT/Project No: 8395IT
Test mode : h

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	3.57	0.12	9.81	13.50	55.87	-42.37	Average
2	0.152	11.74	0.12	9.81	21.67	65.87	-44.20	QP
3	0.230	3.39	0.11	9.81	13.31	52.44	-39.13	Average
4	0.230	12.86	0.11	9.81	22.78	62.44	-39.66	QP
5	0.461	1.03	0.11	9.82	10.96	46.67	-35.71	Average
6	0.461	9.10	0.11	9.82	19.03	56.67	-37.64	QP
7	0.690	2.04	0.11	9.83	11.98	46.00	-34.02	Average
8	0.690	8.13	0.11	9.83	18.07	56.00	-37.93	QP
9	0.918	-0.42	0.11	9.83	9.52	46.00	-36.48	Average
10	0.918	5.72	0.11	9.83	15.66	56.00	-40.34	QP
11	23.511	19.49	0.22	10.04	29.75	50.00	-20.25	Average
12	23.511	26.16	0.22	10.04	36.42	60.00	-23.58	QP

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz-230MHz	40 dB(μV/m) quasi-peak
230MHz-1GHz	47 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

6.2.2 Test Setup Diagram

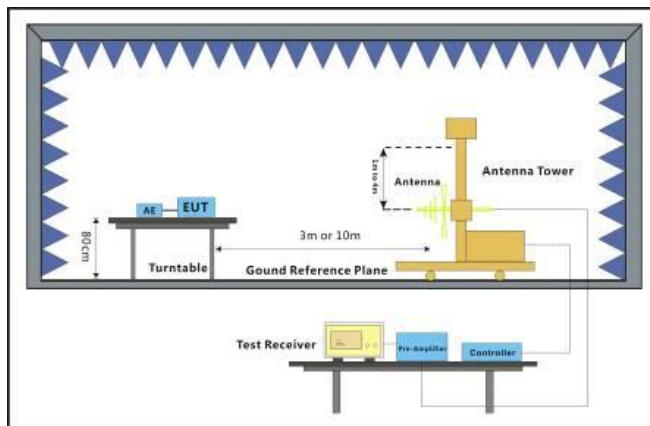

6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.


Notes: Emission Level=Read Level + Antenna Factor + Cable Loss – Preamp Factor



SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 35 of 121


Mode:a; Polarization:Horizontal

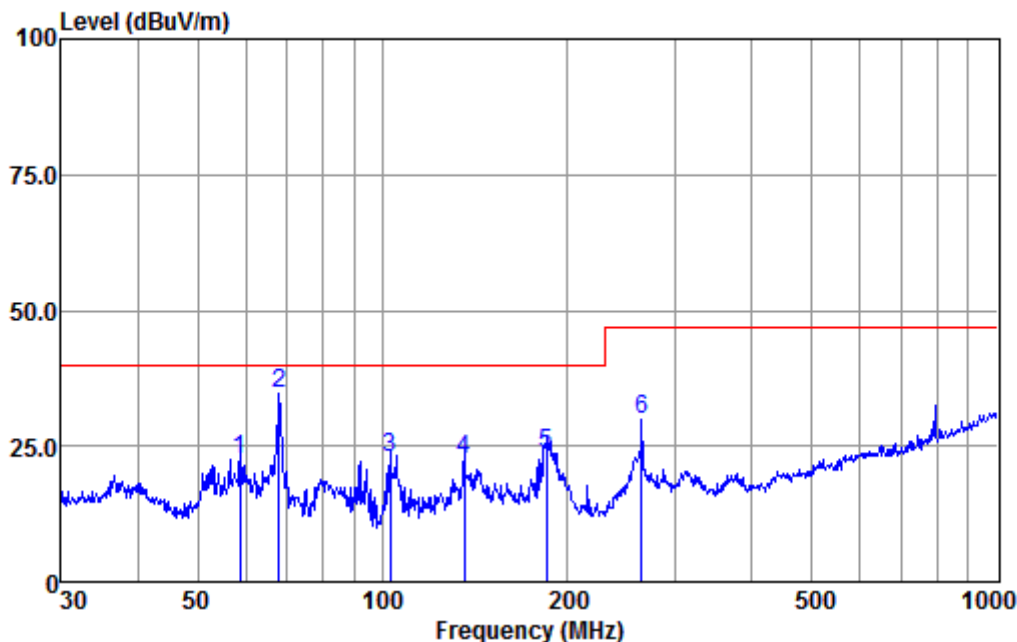

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : a

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	58.61	52.61	12.33	0.29	42.65	22.58	40.00	-17.42
2 q	67.91	65.43	11.65	0.33	42.66	34.75	40.00	-5.25
3	103.08	55.50	9.53	0.47	42.69	22.81	40.00	-17.19
4	135.98	52.82	11.87	0.60	42.64	22.65	40.00	-17.35
5	185.14	54.51	11.05	0.67	42.55	23.68	40.00	-16.32
6	263.82	59.58	11.99	0.79	42.44	29.92	47.00	-17.08


Mode:a; Polarization:Vertical

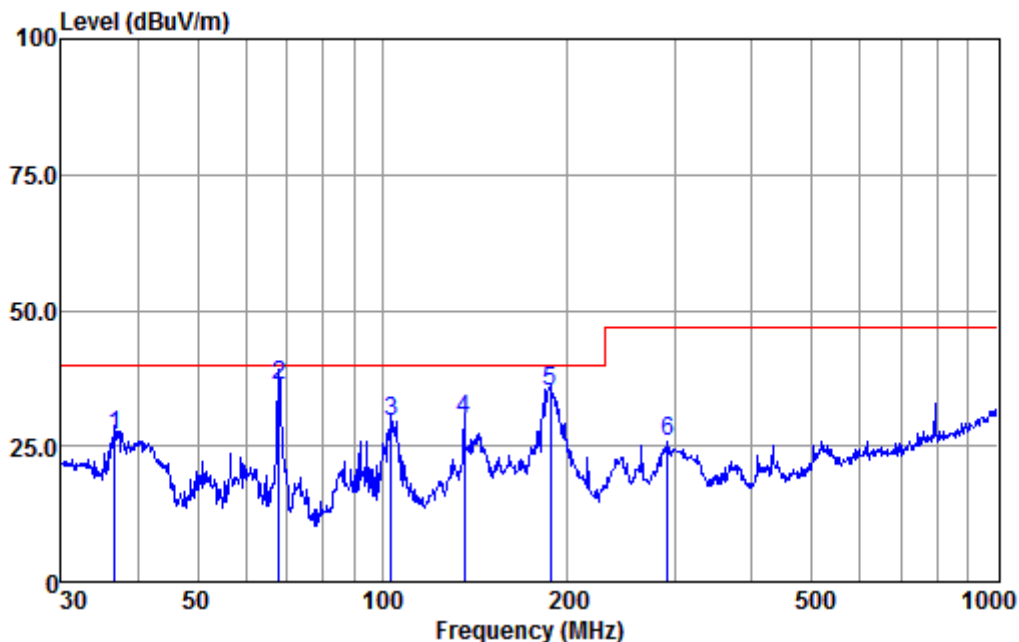

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : a

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	36.64	53.36	16.00	0.21	42.62	26.95	40.00	-13.05 QP
2 q	67.91	66.95	11.65	0.33	42.66	36.27	40.00	-3.73 QP
3	103.44	62.26	9.54	0.47	42.69	29.58	40.00	-10.42 QP
4	135.98	60.02	11.87	0.60	42.64	29.85	40.00	-10.15 QP
5	187.75	66.35	10.62	0.67	42.54	35.10	40.00	-4.90 QP
6	291.04	54.37	12.91	0.83	42.41	25.70	47.00	-21.30 QP


Mode:b; Polarization:Horizontal

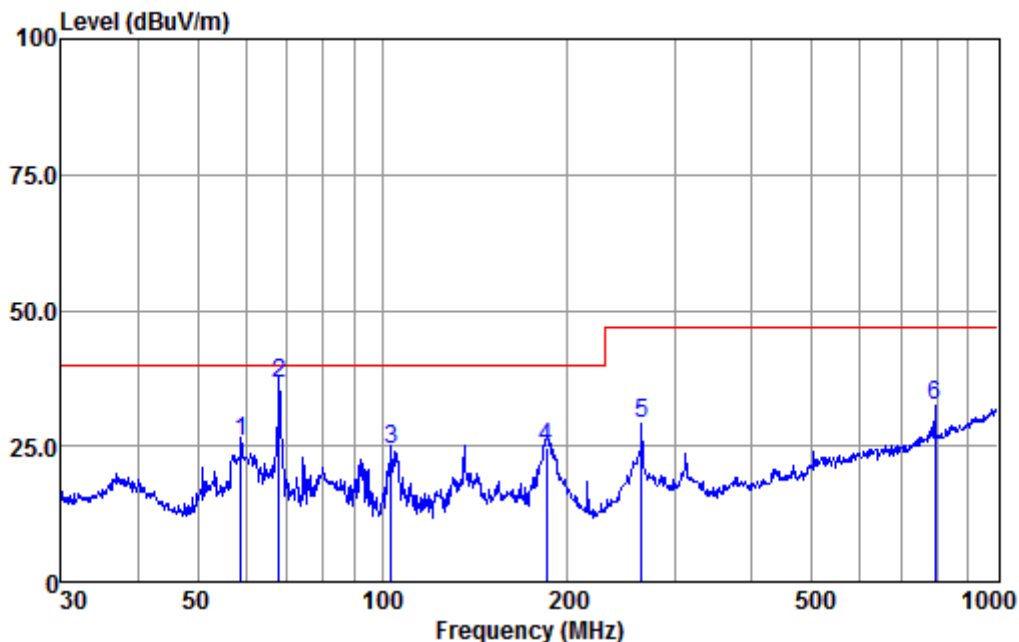

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	58.82	55.74	12.37	0.29	42.65	25.75	40.00	-14.25	QP
2 q	67.91	67.36	11.65	0.33	42.66	36.68	40.00	-3.32	QP
3	103.44	56.89	9.54	0.47	42.69	24.21	40.00	-15.79	QP
4	185.14	55.55	11.05	0.67	42.55	24.72	40.00	-15.28	QP
5	263.82	58.98	11.99	0.79	42.44	29.32	47.00	-17.68	QP
6	793.40	51.01	21.81	2.05	42.45	32.42	47.00	-14.58	QP

Mode:b; Polarization:Vertical

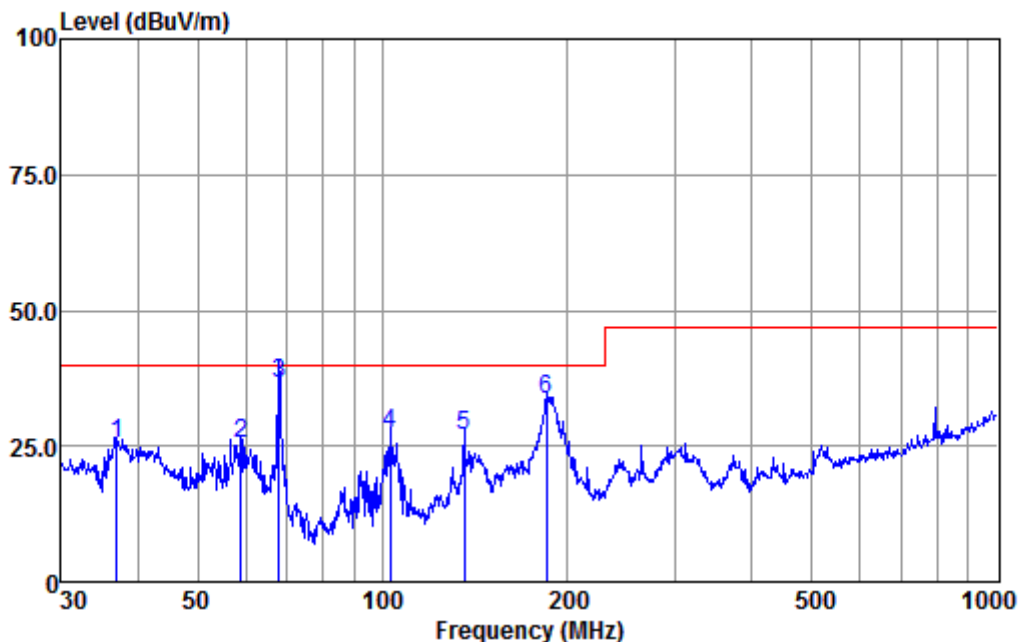

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : b


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	37.02	51.98	16.03	0.21	42.62	25.60	40.00	-14.40	QP
2	58.82	55.38	12.37	0.29	42.65	25.39	40.00	-14.61	QP
3 q	67.91	67.31	11.65	0.33	42.66	36.63	40.00	-3.37	QP
4	103.08	60.13	9.53	0.47	42.69	27.44	40.00	-12.56	QP
5	135.98	57.24	11.87	0.60	42.64	27.07	40.00	-12.93	QP
6	185.14	64.58	11.05	0.67	42.55	33.75	40.00	-6.25	QP



SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 39 of 121


Mode:c; Polarization:Horizontal

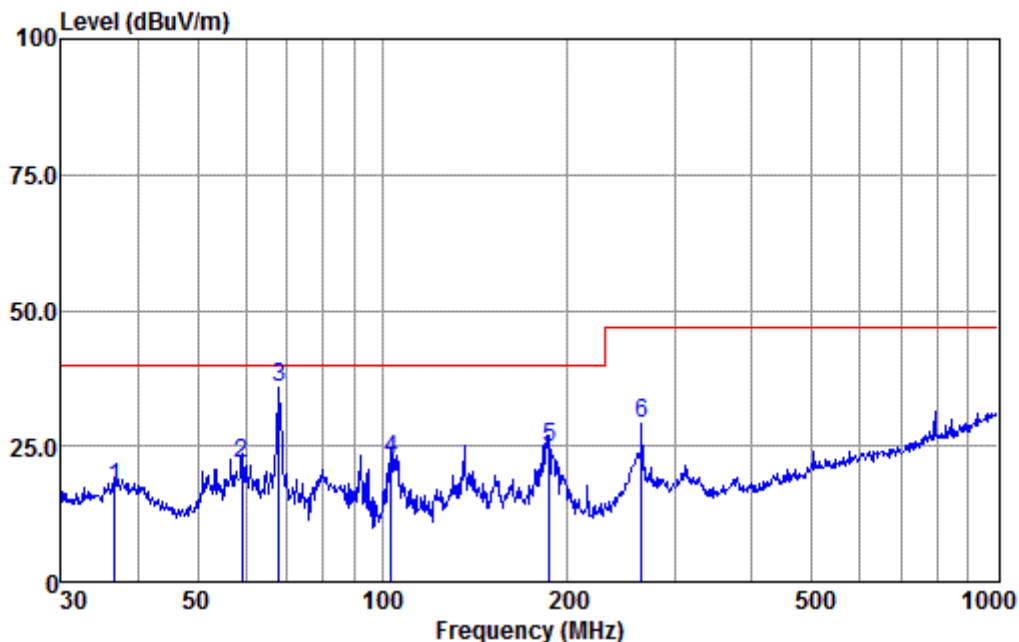

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : c

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	36.64	43.58	16.00	0.21	42.62	17.17	40.00	-22.83 QP
2	59.03	51.73	12.41	0.30	42.65	21.79	40.00	-18.21 QP
3	67.91	66.36	11.65	0.33	42.66	35.68	40.00	-4.32 QP
4	103.44	55.30	9.54	0.47	42.69	22.62	40.00	-17.38 QP
5	187.10	55.98	10.73	0.67	42.55	24.83	40.00	-15.17 QP
6	263.82	58.88	11.99	0.79	42.44	29.22	47.00	-17.78 QP


Mode:c; Polarization:Vertical

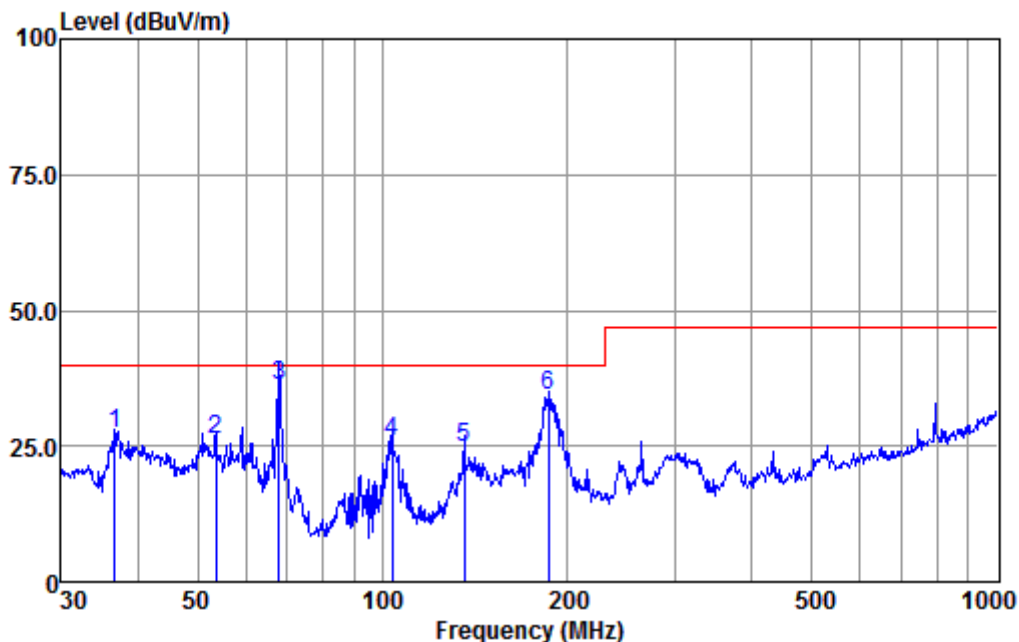

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : c

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	36.64	53.58	16.00	0.21	42.62	27.17	40.00	-12.83 QP
2	53.51	57.38	11.33	0.27	42.64	26.34	40.00	-13.66 QP
3 q	67.91	66.91	11.65	0.33	42.66	36.23	40.00	-3.77 QP
4	103.81	58.42	9.54	0.47	42.69	25.74	40.00	-14.26 QP
5	135.98	55.00	11.87	0.60	42.64	24.83	40.00	-15.17 QP
6	186.44	65.27	10.83	0.67	42.55	34.22	40.00	-5.78 QP


Mode:d; Polarization:Horizontal

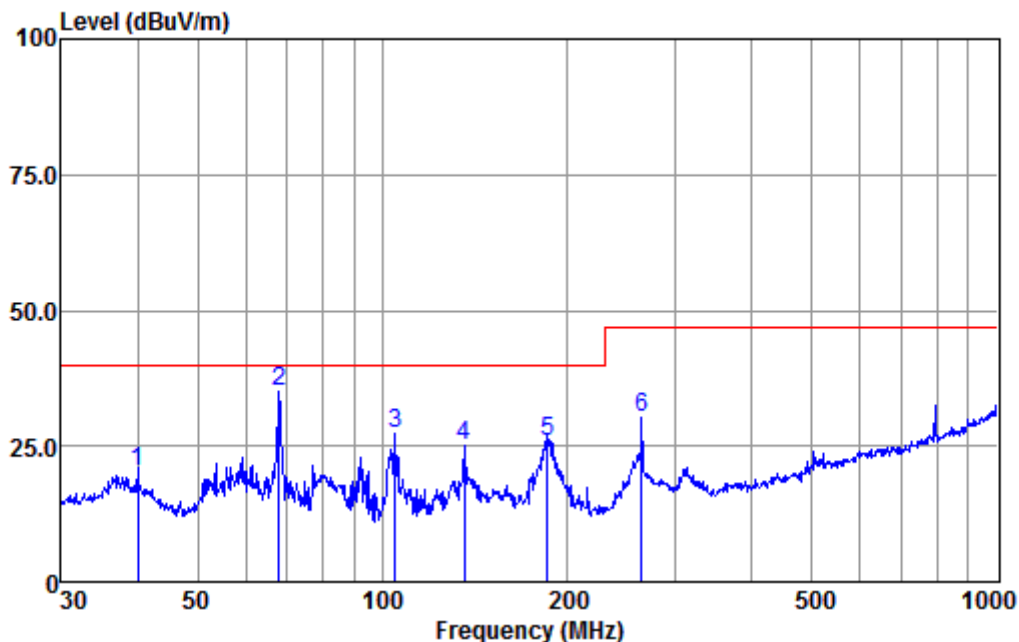

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : d

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	39.99	46.23	16.30	0.22	42.62	20.13	40.00	-19.87	QP
2 q	67.91	65.91	11.65	0.33	42.66	35.23	40.00	-4.77	QP
3	104.90	60.09	9.55	0.47	42.69	27.42	40.00	-12.58	QP
4	135.98	55.45	11.87	0.60	42.64	25.28	40.00	-14.72	QP
5	185.79	56.72	10.94	0.67	42.55	25.78	40.00	-14.22	QP
6	263.82	59.98	11.99	0.79	42.44	30.32	47.00	-16.68	QP


Mode:d; Polarization:Vertical

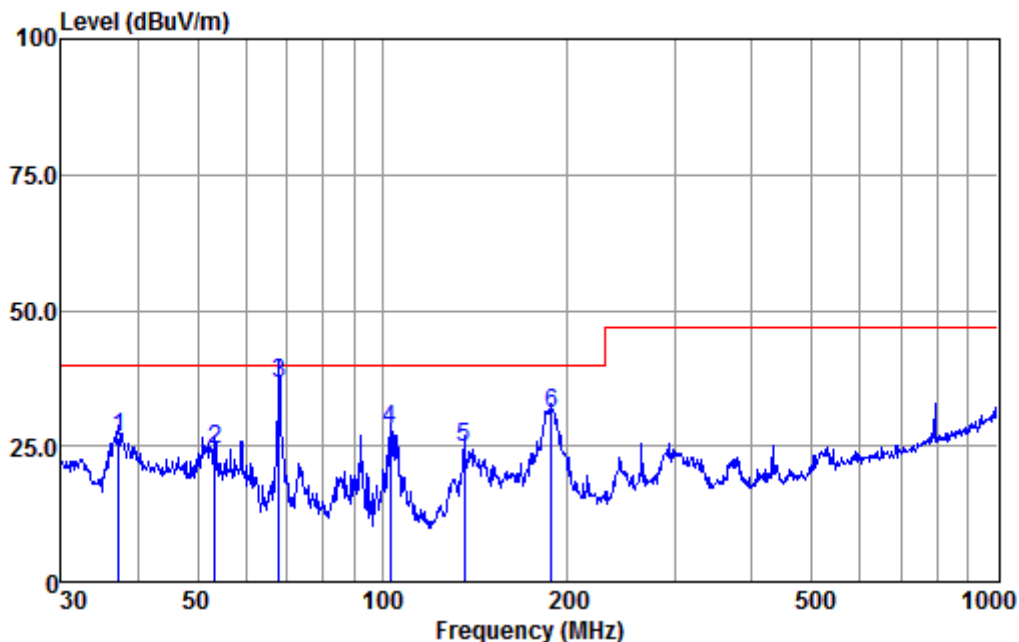

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : d

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	37.29	52.96	16.06	0.21	42.62	26.61	40.00	-13.39	QP
2	53.32	55.57	11.29	0.27	42.64	24.49	40.00	-15.51	QP
3 q	67.91	67.15	11.65	0.33	42.66	36.47	40.00	-3.53	QP
4	103.08	60.91	9.53	0.47	42.69	28.22	40.00	-11.78	QP
5	135.98	55.03	11.87	0.60	42.64	24.86	40.00	-15.14	QP
6	188.41	62.19	10.51	0.68	42.54	30.84	40.00	-9.16	QP


Mode:e; Polarization:Horizontal

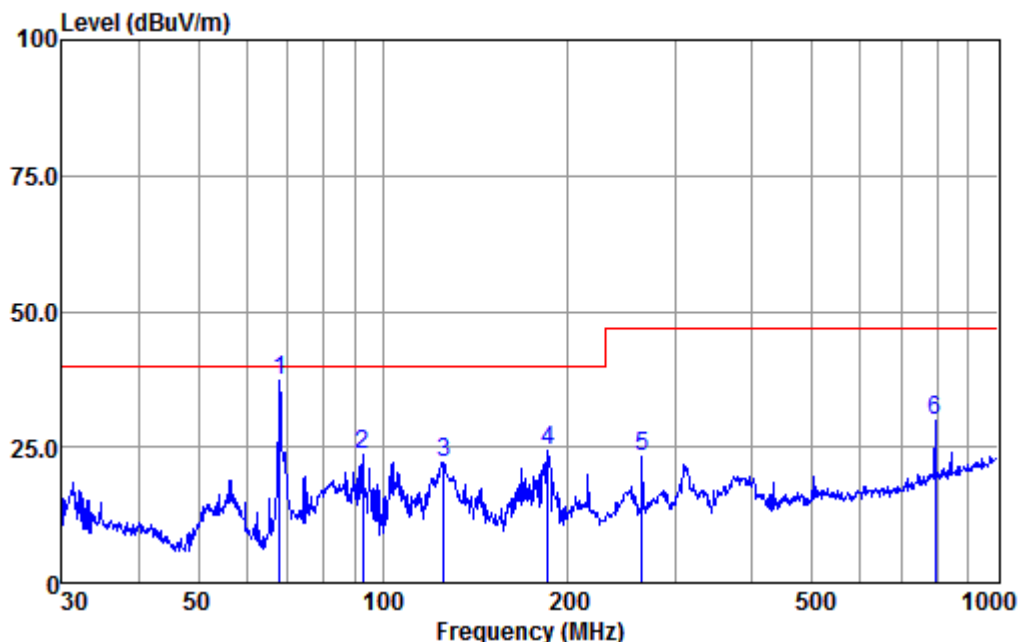

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : e

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 q	67.91	67.87	11.65	0.33	42.66	37.19	40.00	-3.81 QP
2	92.79	57.33	8.52	0.43	42.69	23.59	40.00	-16.41 QP
3	125.89	52.67	11.70	0.56	42.67	22.26	40.00	-17.74 QP
4	185.79	55.35	10.94	0.67	42.55	24.41	40.00	-15.59 QP
5	263.82	52.90	11.99	0.79	42.44	23.24	47.00	-23.76 QP
6	793.40	48.31	21.81	2.05	42.45	29.72	47.00	-17.28 QP


Mode:e; Polarization:Vertical

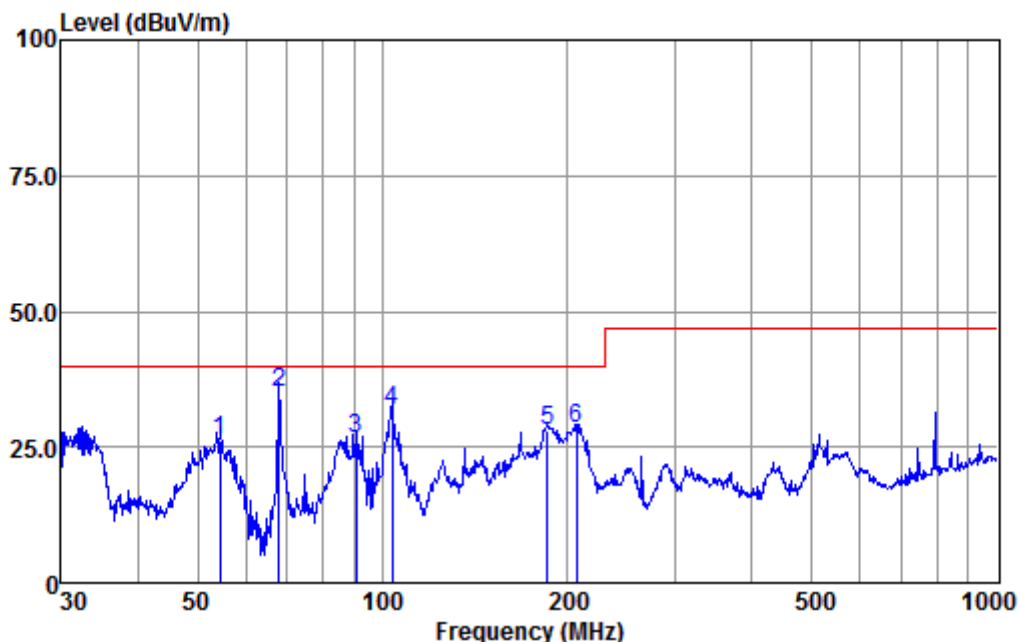

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : e

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	54.45	57.12	11.52	0.28	42.65	26.27	40.00	-13.73 QP
2 q	67.91	65.62	11.65	0.33	42.66	34.94	40.00	-5.06 QP
3	90.54	60.62	8.19	0.42	42.68	26.55	40.00	-13.45 QP
4	103.81	64.34	9.54	0.47	42.69	31.66	40.00	-8.34 QP
5	185.79	59.12	10.94	0.67	42.55	28.18	40.00	-11.82 QP
6	207.12	60.40	9.73	0.70	42.51	28.32	40.00	-11.68 QP


Mode:f; Polarization:Horizontal

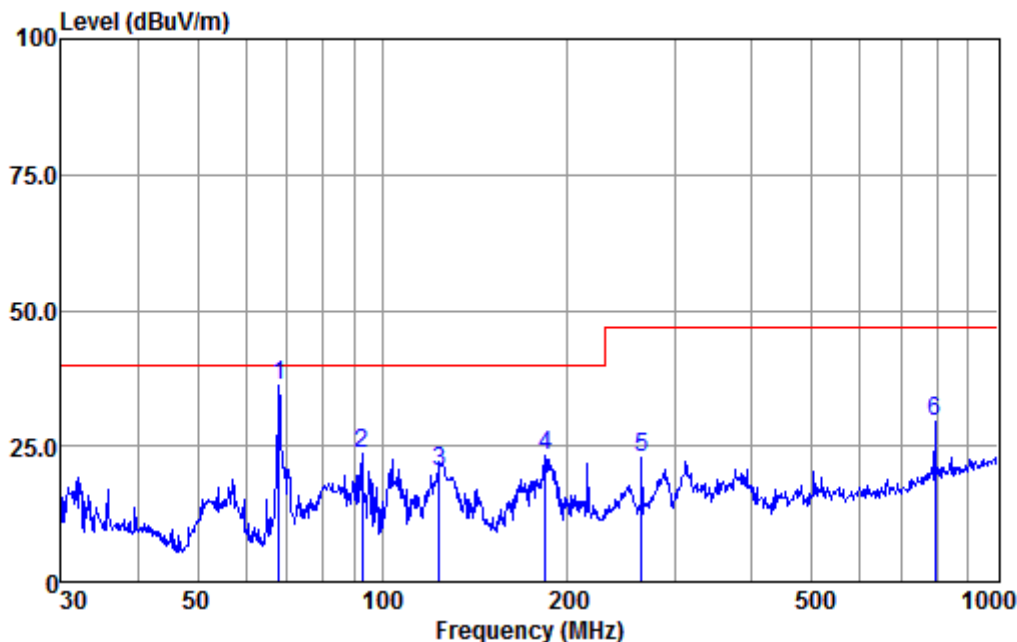

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : f

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 q	67.91	66.77	11.65	0.33	42.66	36.09	40.00	-3.91 QP
2	92.79	57.21	8.52	0.43	42.69	23.47	40.00	-16.53 QP
3	123.70	51.17	11.10	0.55	42.67	20.15	40.00	-19.85 QP
4	184.49	53.87	11.15	0.67	42.55	23.14	40.00	-16.86 QP
5	263.82	52.63	11.99	0.79	42.44	22.97	47.00	-24.03 QP
6	793.40	48.24	21.81	2.05	42.45	29.65	47.00	-17.35 QP

Mode:f; Polarization:Vertical

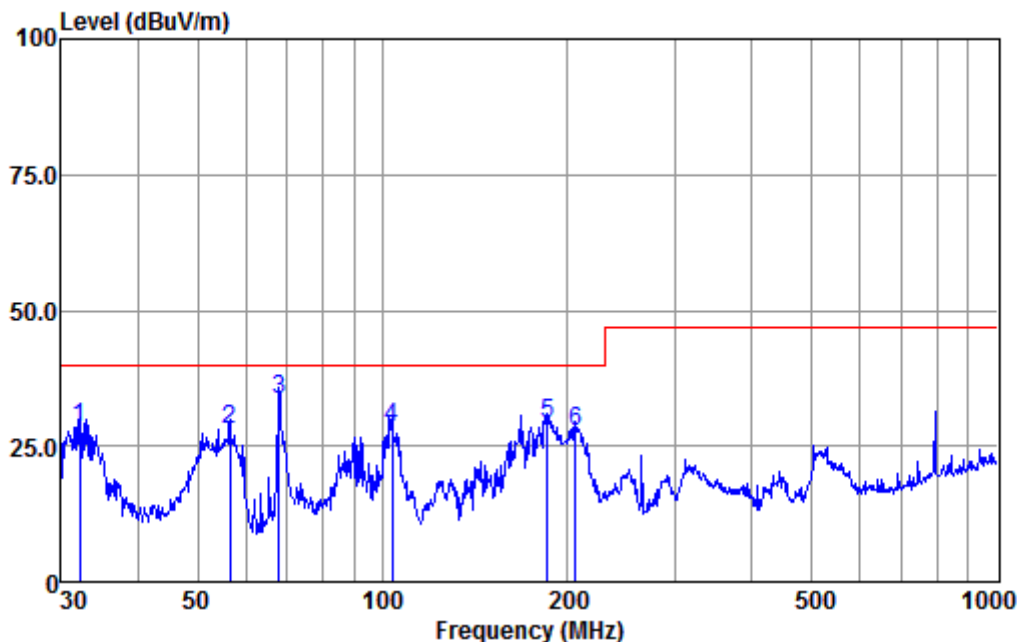

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : f


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.18	55.12	15.54	0.19	42.61	28.24	40.00	-11.76	QP
2	56.39	58.48	11.91	0.29	42.65	28.03	40.00	-11.97	QP
3 q	67.91	64.40	11.65	0.33	42.66	33.72	40.00	-6.28	QP
4	103.81	61.09	9.54	0.47	42.69	28.41	40.00	-11.59	QP
5	185.79	59.99	10.94	0.67	42.55	29.05	40.00	-10.95	QP
6	206.40	59.82	9.69	0.70	42.52	27.69	40.00	-12.31	QP



SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 47 of 121


Mode:g; Polarization:Horizontal

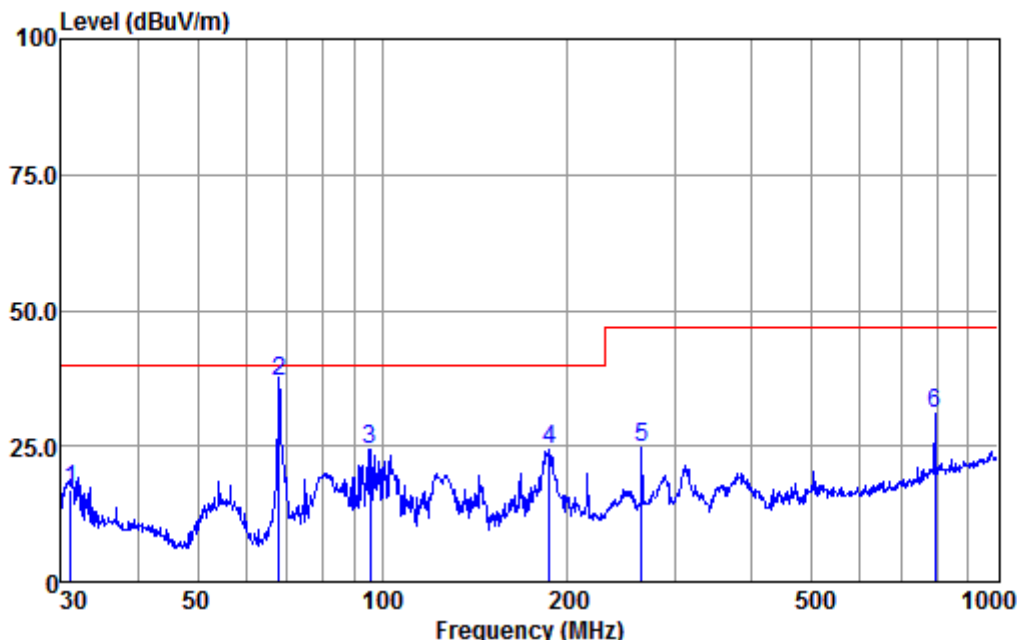

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : g

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.07	43.81	15.42	0.19	42.60	16.82	40.00	-23.18	QP
2 q	67.91	67.43	11.65	0.33	42.66	36.75	40.00	-3.25	QP
3	95.43	57.70	8.89	0.44	42.69	24.34	40.00	-15.66	QP
4	187.10	55.34	10.73	0.67	42.55	24.19	40.00	-15.81	QP
5	263.82	54.42	11.99	0.79	42.44	24.76	47.00	-22.24	QP
6	793.40	49.53	21.81	2.05	42.45	30.94	47.00	-16.06	QP


Mode:g; Polarization:Vertical

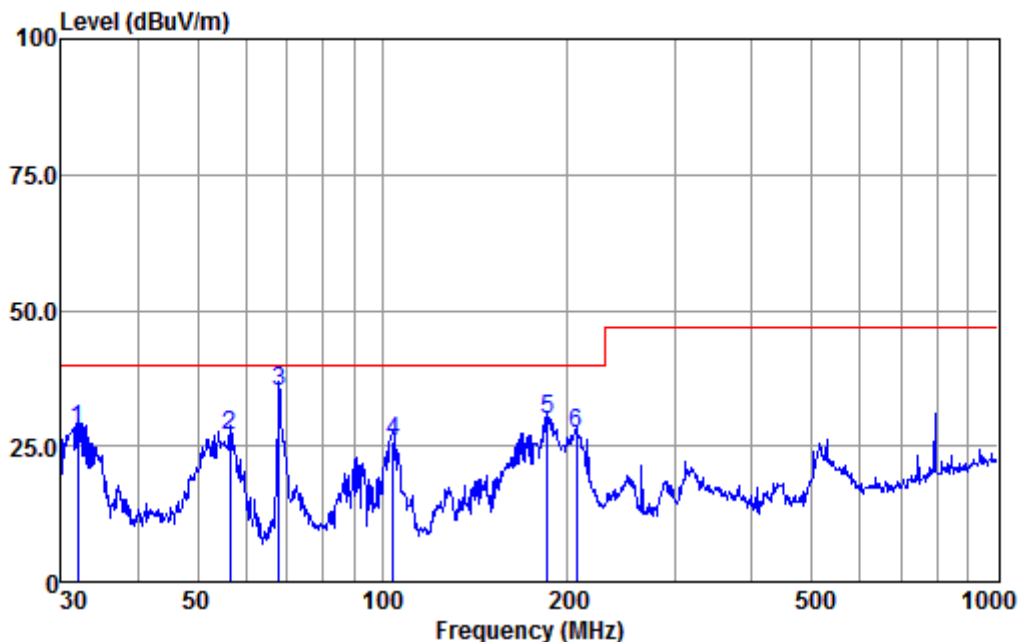

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : g

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	31.95	54.82	15.52	0.19	42.61	27.92	40.00	-12.08 QP
2	56.39	57.36	11.91	0.29	42.65	26.91	40.00	-13.09 QP
3 q	67.91	65.74	11.65	0.33	42.66	35.06	40.00	-4.94 QP
4	104.17	58.62	9.54	0.47	42.69	25.94	40.00	-14.06 QP
5	185.79	60.93	10.94	0.67	42.55	29.99	40.00	-10.01 QP
6	207.12	59.40	9.73	0.70	42.51	27.32	40.00	-12.68 QP


Mode:h; Polarization:Horizontal

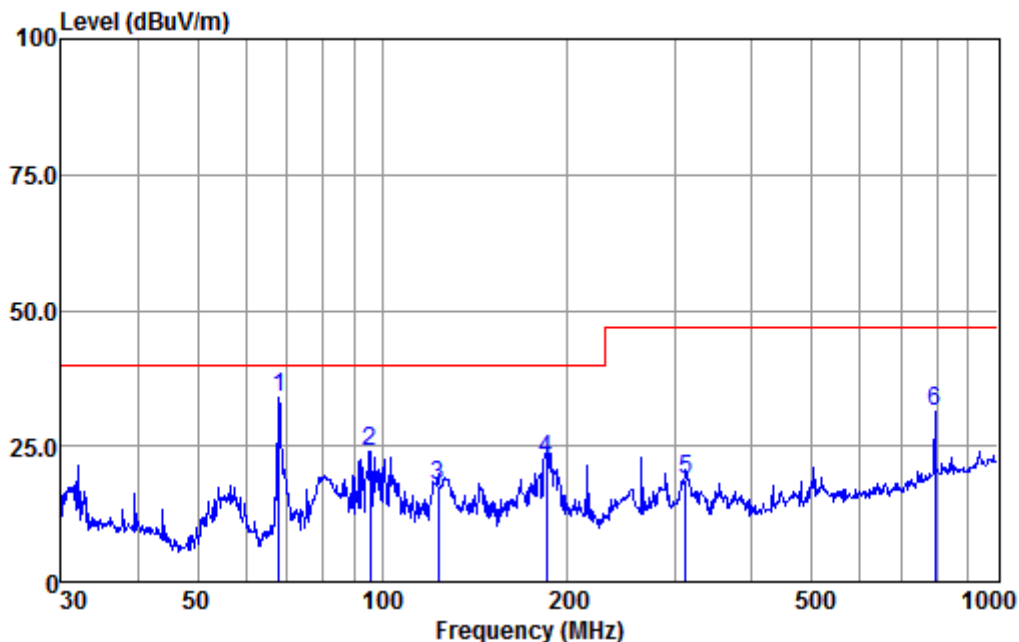

Condition : HORIZONTAL
EUT/Project: 8395IT
Test Mode : h

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 q	67.91	64.77	11.65	0.33	42.66	34.09	40.00	-5.91	QP
2	95.43	57.34	8.89	0.44	42.69	23.98	40.00	-16.02	QP
3	123.27	48.94	10.97	0.55	42.67	17.79	40.00	-22.21	QP
4	185.14	53.16	11.05	0.67	42.55	22.33	40.00	-17.67	QP
5	311.09	46.73	13.43	0.86	42.37	18.65	47.00	-28.35	QP
6	793.40	50.01	21.81	2.05	42.45	31.42	47.00	-15.58	QP

Mode:h; Polarization:Vertical

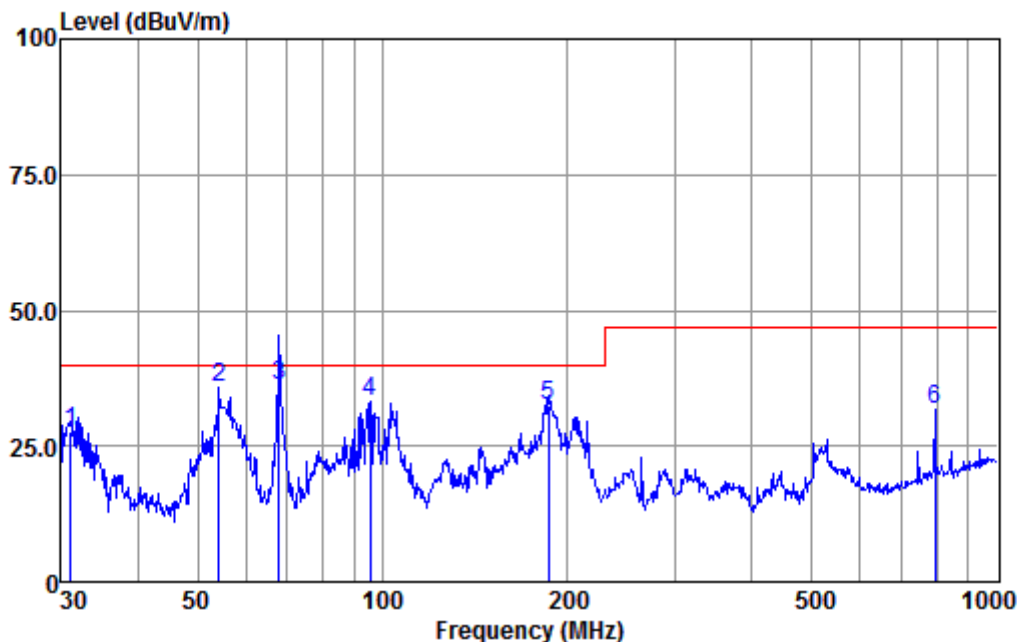

Condition : VERTICAL
EUT/Project: 8395IT
Test Mode : h

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.07	54.63	15.42	0.19	42.60	27.64	40.00	-12.36	QP
2	54.26	66.77	11.48	0.28	42.65	35.88	40.00	-4.12	QP
3 q	67.91	67.01	11.65	0.33	42.66	36.33	40.00	-3.67	QP
4	95.43	66.49	8.89	0.44	42.69	33.13	40.00	-6.87	QP
5	186.44	63.37	10.83	0.67	42.55	32.32	40.00	-7.68	QP
6	793.40	50.29	21.81	2.05	42.45	31.70	47.00	-15.30	QP

6.3 Radiated Emissions (above 1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
1GHz-3GHz	70 dB(μV/m) peak, 50 dB(μV/m) average
3GHz-6GHz	74 dB(μV/m) peak, 54dB(μV/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

6.3.2 Test Setup Diagram

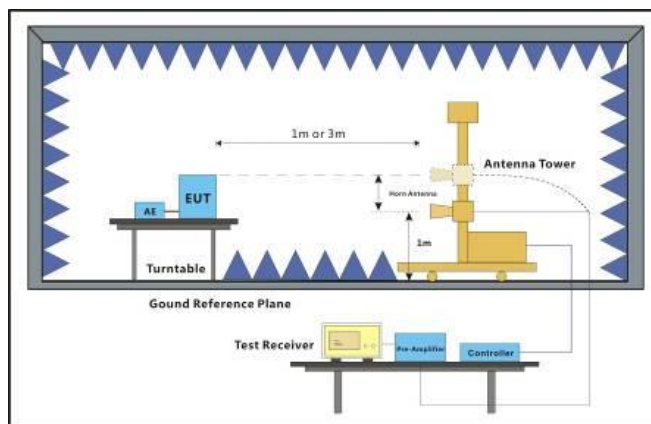


6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Notes: Emission Level=Read Level + Antenna Factor + Cable Loss – Preamp Factor


Mode:a; Polarization:Horizontal

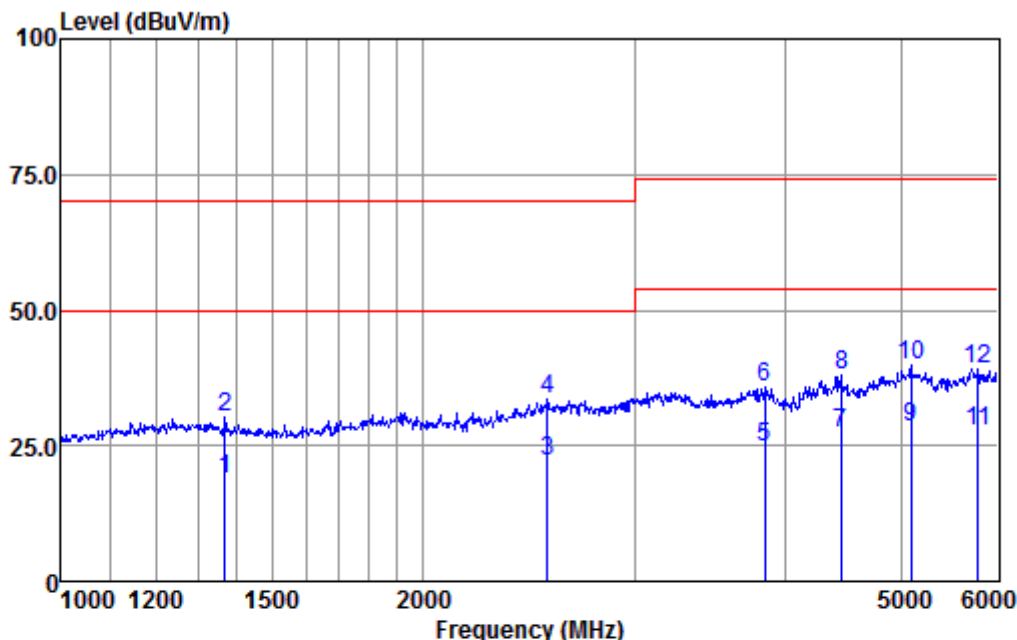

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : a

		ReadAntenna		Cable Preamp		Limit	Over	Remark
	Freq	Level	Factor	Loss	Factor	Level	Line	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1368.29	32.17	24.95	3.66	41.89	18.89	50.00	-31.11 Average
2	1368.29	43.42	24.95	3.66	41.89	30.14	70.00	-39.86 Peak
3	2538.86	31.45	27.49	5.37	42.13	22.18	50.00	-27.82 Average
4	2538.86	42.68	27.49	5.37	42.13	33.41	70.00	-36.59 Peak
5	3847.42	30.27	29.43	6.80	41.93	24.57	54.00	-29.43 Average
6	3847.42	41.43	29.43	6.80	41.93	35.73	74.00	-38.27 Peak
7	4456.34	30.73	30.53	7.70	41.68	27.28	54.00	-26.72 Average
8	4456.34	41.48	30.53	7.70	41.68	38.03	74.00	-35.97 Peak
9	5088.17	30.06	31.65	8.21	41.68	28.24	54.00	-25.76 Average
10 p	5088.17	41.63	31.65	8.21	41.68	39.81	74.00	-34.19 Peak
11	5788.80	28.91	32.32	8.38	41.90	27.71	54.00	-26.29 Average
12	5788.80	40.34	32.32	8.38	41.90	39.14	74.00	-34.86 Peak


Mode:a; Polarization:Vertical

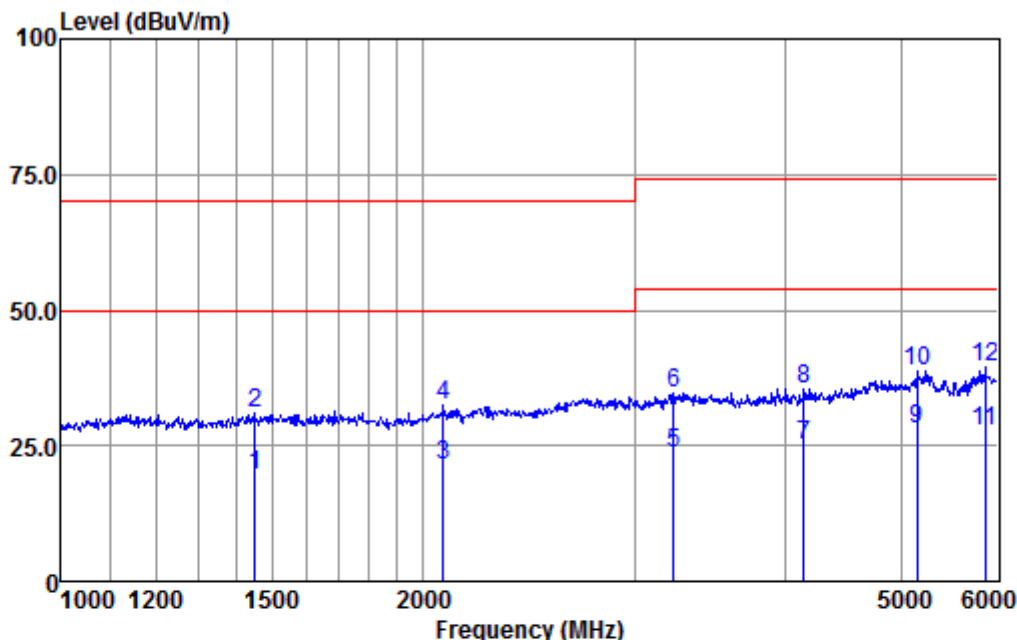

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : a

		ReadAntenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1449.03	32.79	25.11	3.75	41.91	19.74	50.00	-30.26	Average
2	1449.03	43.89	25.11	3.75	41.91	30.84	70.00	-39.16	Peak
3	2080.96	32.83	26.25	4.60	42.21	21.47	50.00	-28.53	Average
4	2080.96	43.77	26.25	4.60	42.21	32.41	70.00	-37.59	Peak
5	3233.62	30.85	28.65	6.02	41.78	23.74	54.00	-30.26	Average
6	3233.62	41.79	28.65	6.02	41.78	34.68	74.00	-39.32	Peak
7	4148.13	29.71	29.97	7.32	41.87	25.13	54.00	-28.87	Average
8	4148.13	40.04	29.97	7.32	41.87	35.46	74.00	-38.54	Peak
9	5152.39	29.75	31.69	8.22	41.73	27.93	54.00	-26.07	Average
10	5152.39	40.72	31.69	8.22	41.73	38.90	74.00	-35.10	Peak
11	5872.37	28.78	32.41	8.40	41.88	27.71	54.00	-26.29	Average
12 p	5872.37	40.67	32.41	8.40	41.88	39.60	74.00	-34.40	Peak


Mode:b; Polarization:Horizontal

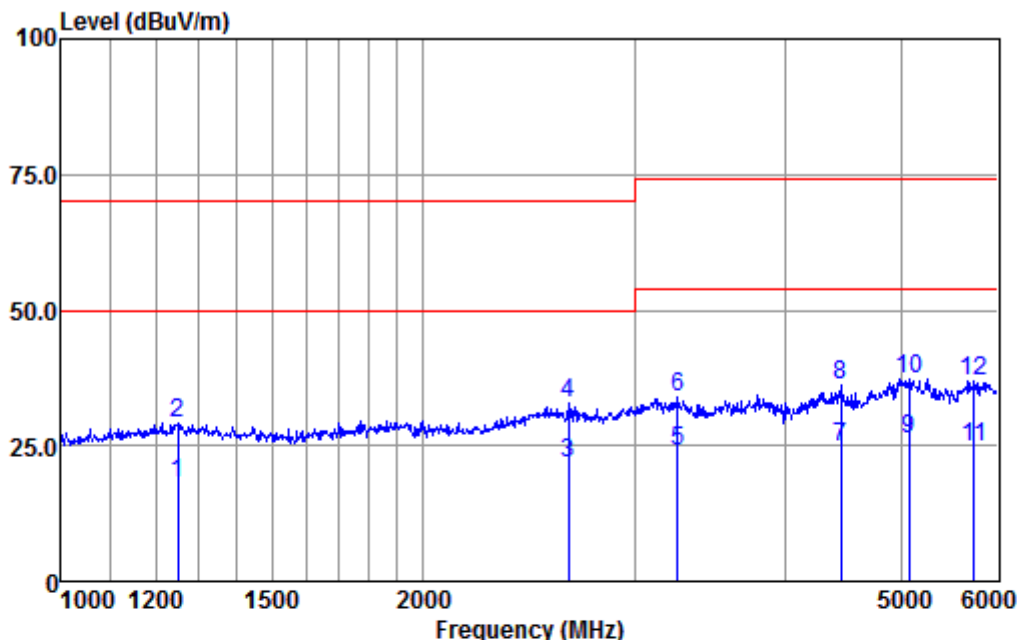

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : b

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1251.03	31.75	24.70	3.45	41.84	18.06	50.00	-31.94
2	1251.03	42.74	24.70	3.45	41.84	29.05	70.00	-40.95
3	2640.94	30.45	27.73	5.52	42.03	21.67	50.00	-28.33
4	2640.94	41.68	27.73	5.52	42.03	32.90	70.00	-37.10
5	3256.88	30.98	28.66	6.02	41.79	23.87	54.00	-30.13
6	3256.88	41.11	28.66	6.02	41.79	34.00	74.00	-40.00
7	4448.36	28.36	30.51	7.70	41.69	24.88	54.00	-29.12
8	4448.36	39.65	30.51	7.70	41.69	36.17	74.00	-37.83
9	5069.97	28.03	31.65	8.21	41.67	26.22	54.00	-27.78
10 p	5069.97	39.15	31.65	8.21	41.67	37.34	74.00	-36.66
11	5747.46	26.18	32.25	8.36	41.92	24.87	54.00	-29.13
12	5747.46	38.39	32.25	8.36	41.92	37.08	74.00	-36.92


Mode:b; Polarization:Vertical

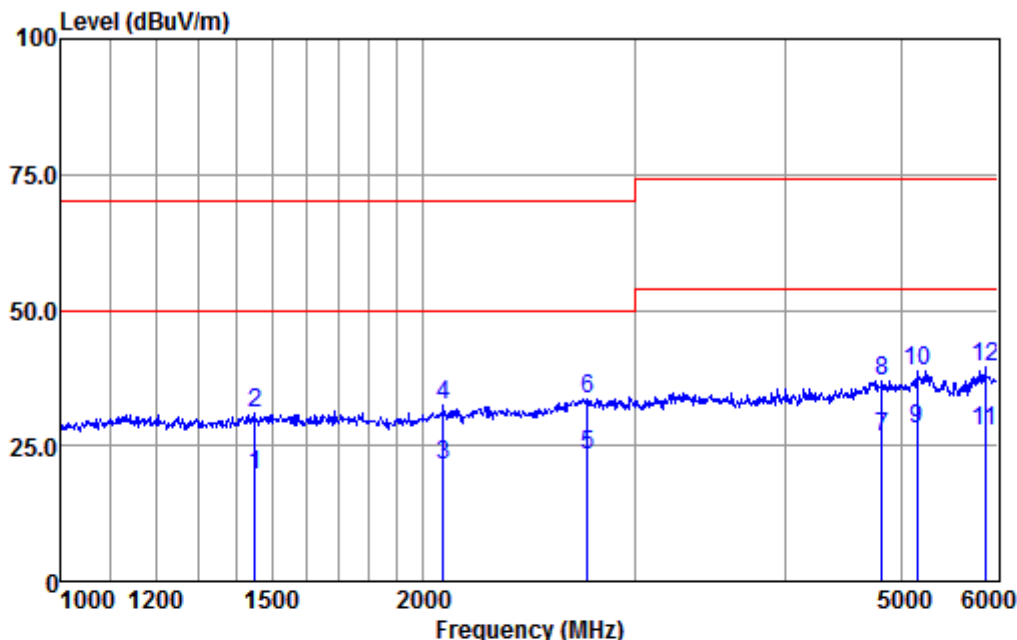

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1449.03	32.79	25.11	3.75	41.91	19.74	50.00	-30.26	Average
2	1449.03	43.89	25.11	3.75	41.91	30.84	70.00	-39.16	Peak
3	2080.96	32.83	26.25	4.60	42.21	21.47	50.00	-28.53	Average
4	2080.96	43.77	26.25	4.60	42.21	32.41	70.00	-37.59	Peak
5	2742.20	31.61	27.96	5.61	41.94	23.24	50.00	-26.76	Average
6	2742.20	42.07	27.96	5.61	41.94	33.70	70.00	-36.30	Peak
7	4813.25	28.75	31.25	8.13	41.63	26.50	54.00	-27.50	Average
8	4813.25	39.27	31.25	8.13	41.63	37.02	74.00	-36.98	Peak
9	5152.39	29.75	31.69	8.22	41.73	27.93	54.00	-26.07	Average
10	5152.39	40.72	31.69	8.22	41.73	38.90	74.00	-35.10	Peak
11	5872.37	28.78	32.41	8.40	41.88	27.71	54.00	-26.29	Average
12 p	5872.37	40.67	32.41	8.40	41.88	39.60	74.00	-34.40	Peak


Mode:c; Polarization:Horizontal

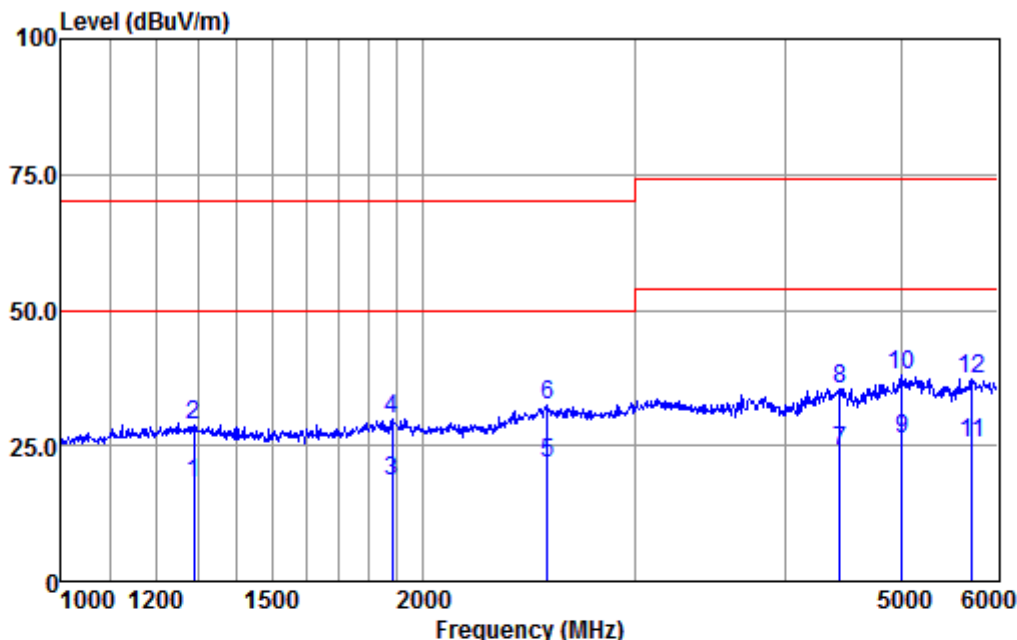

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : c

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1289.73	31.49	24.79	3.51	41.86	17.93	50.00	-32.07	Average
2	1289.73	42.34	24.79	3.51	41.86	28.78	70.00	-41.22	Peak
3	1885.67	30.29	25.83	4.33	42.16	18.29	50.00	-31.71	Average
4	1885.67	41.74	25.83	4.33	42.16	29.74	70.00	-40.26	Peak
5	2538.86	30.87	27.49	5.37	42.13	21.60	50.00	-28.40	Average
6	2538.86	41.73	27.49	5.37	42.13	32.46	70.00	-37.54	Peak
7	4440.40	27.28	30.51	7.70	41.69	23.80	54.00	-30.20	Average
8	4440.40	38.78	30.51	7.70	41.69	35.30	74.00	-38.70	Peak
9	5006.77	28.09	31.60	8.19	41.61	26.27	54.00	-27.73	Average
10 p	5006.77	39.84	31.60	8.19	41.61	38.02	74.00	-35.98	Peak
11	5726.90	26.94	32.23	8.36	41.93	25.60	54.00	-28.40	Average
12	5726.90	38.63	32.23	8.36	41.93	37.29	74.00	-36.71	Peak


Mode:c; Polarization:Vertical

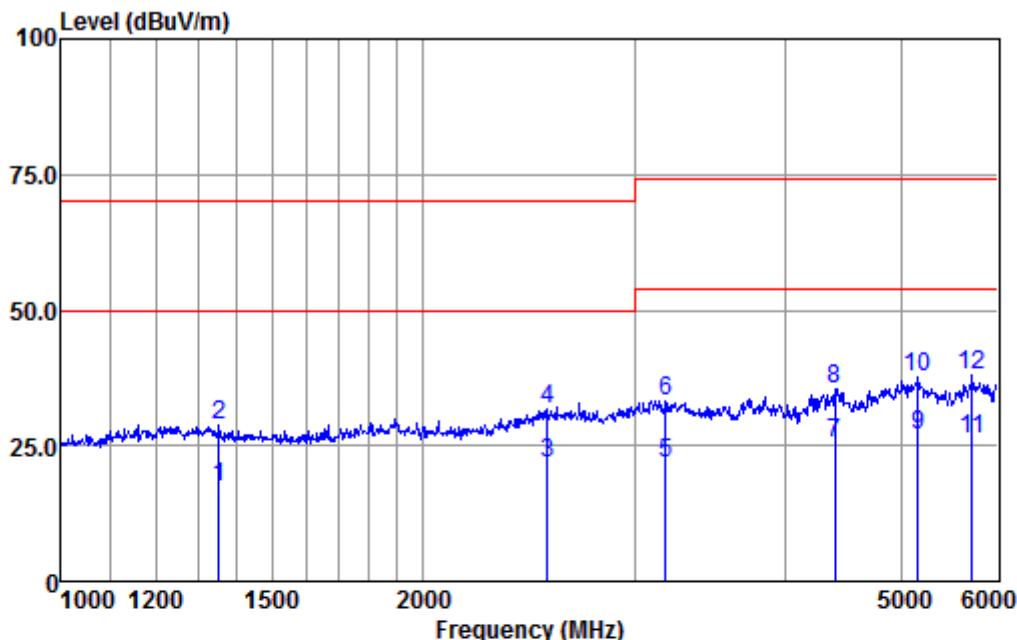

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : c

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1353.65	30.66	24.93	3.66	41.88	17.37	50.00	-32.63	Average
2	1353.65	41.94	24.93	3.66	41.88	28.65	70.00	-41.35	Peak
3	2538.86	30.91	27.49	5.37	42.13	21.64	50.00	-28.36	Average
4	2538.86	41.06	27.49	5.37	42.13	31.79	70.00	-38.21	Peak
5	3181.89	29.13	28.61	5.96	41.77	21.93	54.00	-32.07	Average
6	3181.89	40.57	28.61	5.96	41.77	33.37	74.00	-40.63	Peak
7	4400.79	28.99	30.44	7.64	41.71	25.36	54.00	-28.64	Average
8	4400.79	39.12	30.44	7.64	41.71	35.49	74.00	-38.51	Peak
9	5161.63	28.67	31.70	8.22	41.74	26.85	54.00	-27.15	Average
10	5161.63	39.31	31.70	8.22	41.74	37.49	74.00	-36.51	Peak
11	5726.90	27.51	32.23	8.36	41.93	26.17	54.00	-27.83	Average
12 p	5726.90	39.32	32.23	8.36	41.93	37.98	74.00	-36.02	Peak


Mode:d; Polarization:Horizontal

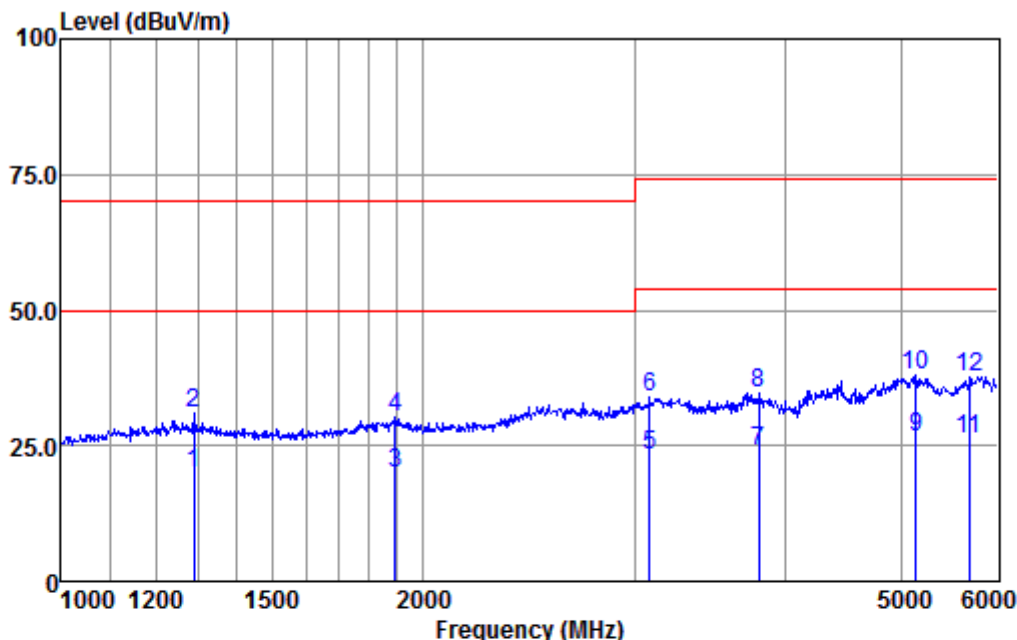

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : d

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1289.73	33.32	24.79	3.51	41.86	19.76	50.00	-30.24	Average
2	1289.73	44.39	24.79	3.51	41.86	30.83	70.00	-39.17	Peak
3	1895.83	31.97	25.85	4.33	42.16	19.99	50.00	-30.01	Average
4	1895.83	42.29	25.85	4.33	42.16	30.31	70.00	-39.69	Peak
5	3086.44	30.64	28.56	5.85	41.74	23.31	54.00	-30.69	Average
6	3086.44	41.35	28.56	5.85	41.74	34.02	74.00	-39.98	Peak
7	3806.28	29.77	29.36	6.70	41.92	23.91	54.00	-30.09	Average
8	3806.28	40.44	29.36	6.70	41.92	34.58	74.00	-39.42	Peak
9	5143.16	28.32	31.69	8.22	41.73	26.50	54.00	-27.50	Average
10 p	5143.16	39.83	31.69	8.22	41.73	38.01	74.00	-35.99	Peak
11	5696.20	27.62	32.18	8.36	41.94	26.22	54.00	-27.78	Average
12	5696.20	39.15	32.18	8.36	41.94	37.75	74.00	-36.25	Peak


Mode:d; Polarization:Vertical

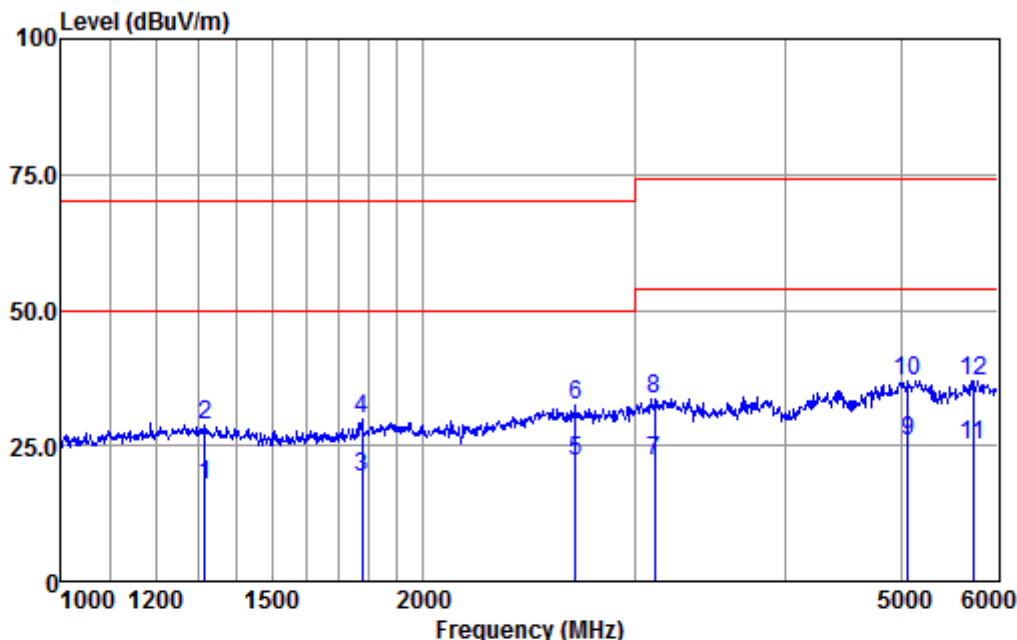

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : d

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1317.76	31.12	24.85	3.57	41.87	17.67	50.00	-32.33
2	1317.76	42.39	24.85	3.57	41.87	28.94	70.00	-41.06
3	1780.59	31.40	25.68	4.21	42.10	19.19	50.00	-30.81
4	1780.59	42.12	25.68	4.21	42.10	29.91	70.00	-40.09
5	2679.07	30.69	27.82	5.57	41.99	22.09	50.00	-27.91
6	2679.07	41.02	27.82	5.57	41.99	32.42	70.00	-37.58
7	3114.21	29.40	28.57	5.89	41.75	22.11	54.00	-31.89
8	3114.21	40.99	28.57	5.89	41.75	33.70	74.00	-40.30
9	5060.89	27.75	31.64	8.21	41.66	25.94	54.00	-28.06
10	5060.89	38.85	31.64	8.21	41.66	37.04	74.00	-36.96
11	5737.17	26.26	32.23	8.36	41.93	24.92	54.00	-29.08
12 p	5737.17	38.40	32.23	8.36	41.93	37.06	74.00	-36.94


Mode:e; Polarization:Horizontal

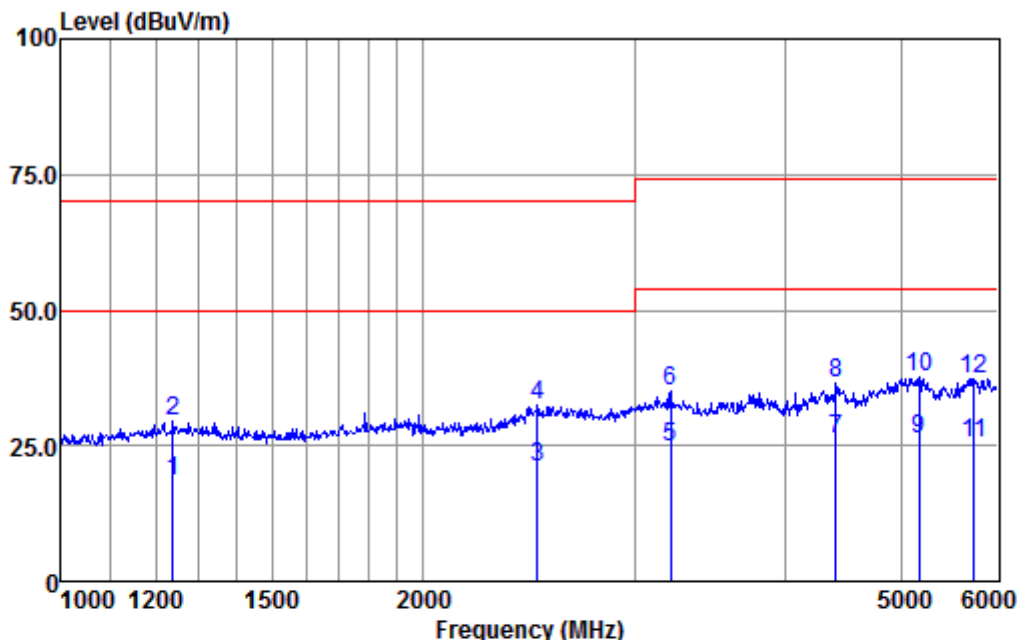

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : e

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1237.66	32.18	24.68	3.43	41.84	18.45	50.00	-31.55	Average
2	1237.66	43.24	24.68	3.43	41.84	29.51	70.00	-40.49	Peak
3	2489.31	30.41	27.38	5.32	42.17	20.94	50.00	-29.06	Average
4	2489.31	41.86	27.38	5.32	42.17	32.39	70.00	-37.61	Peak
5	3210.53	31.76	28.64	5.96	41.78	24.58	54.00	-29.42	Average
6	3210.53	42.38	28.64	5.96	41.78	35.20	74.00	-38.80	Peak
7	4408.69	29.75	30.44	7.64	41.71	26.12	54.00	-27.88	Average
8	4408.69	40.22	30.44	7.64	41.71	36.59	74.00	-37.41	Peak
9	5170.88	28.05	31.70	8.22	41.74	26.23	54.00	-27.77	Average
10 p	5170.88	39.64	31.70	8.22	41.74	37.82	74.00	-36.18	Peak
11	5747.46	26.66	32.25	8.36	41.92	25.35	54.00	-28.65	Average
12	5747.46	38.60	32.25	8.36	41.92	37.29	74.00	-36.71	Peak


Mode:e; Polarization:Vertical

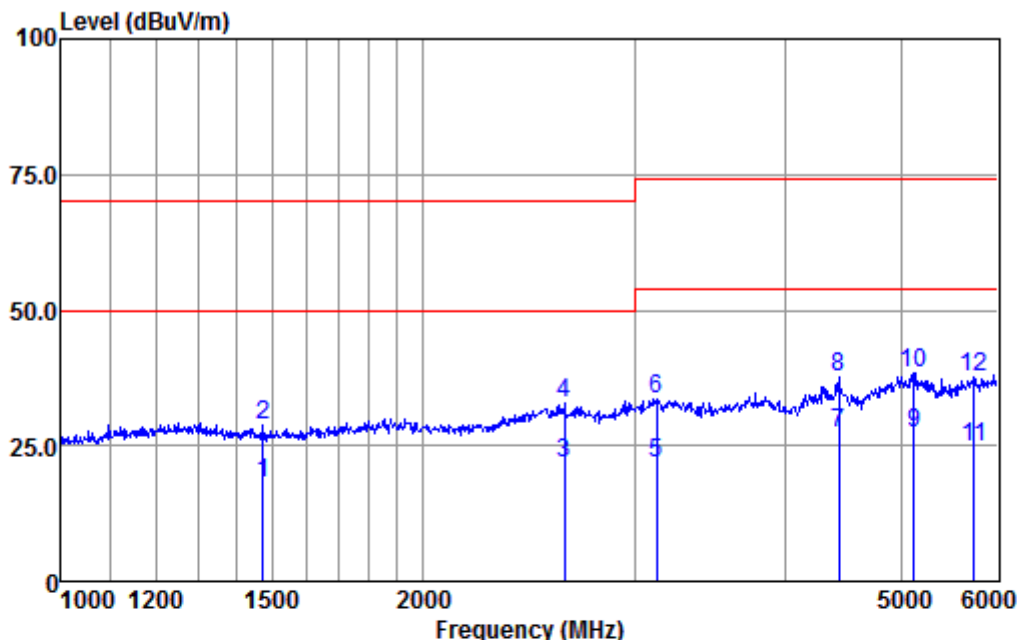

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : e

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1472.59	30.91	25.15	3.78	41.92	17.92	50.00	-32.08 Average
2	1472.59	41.82	25.15	3.78	41.92	28.83	70.00	-41.17 Peak
3	2622.08	30.57	27.70	5.47	42.05	21.69	50.00	-28.31 Average
4	2622.08	41.87	27.70	5.47	42.05	32.99	70.00	-37.01 Peak
5	3131.00	29.02	28.58	5.89	41.75	21.74	54.00	-32.26 Average
6	3131.00	40.87	28.58	5.89	41.75	33.59	74.00	-40.41 Peak
7	4432.45	30.84	30.49	7.64	41.70	27.27	54.00	-26.73 Average
8	4432.45	41.15	30.49	7.64	41.70	37.58	74.00	-36.42 Peak
9	5124.77	29.08	31.67	8.21	41.71	27.25	54.00	-26.75 Average
10 p	5124.77	40.29	31.67	8.21	41.71	38.46	74.00	-35.54 Peak
11	5747.46	26.08	32.25	8.36	41.92	24.77	54.00	-29.23 Average
12	5747.46	38.79	32.25	8.36	41.92	37.48	74.00	-36.52 Peak


Mode:f; Polarization:Horizontal

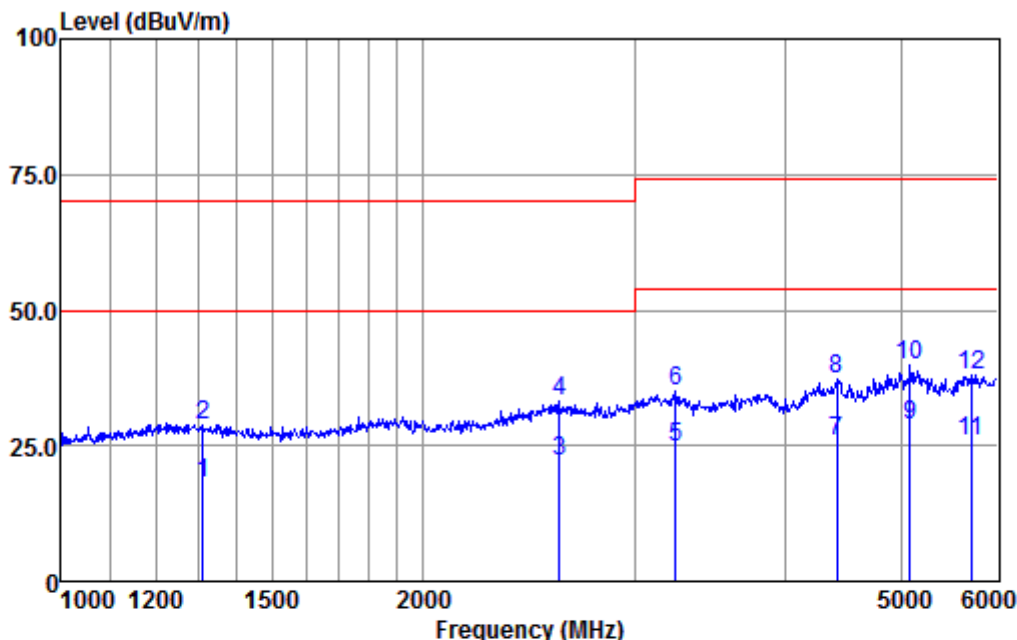

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : f

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1313.04	31.55	24.84	3.57	41.87	18.09	50.00	-31.91
2	1313.04	42.27	24.84	3.57	41.87	28.81	70.00	-41.19
3	2598.69	31.04	27.63	5.47	42.08	22.06	50.00	-27.94
4	2598.69	42.10	27.63	5.47	42.08	33.12	70.00	-36.88
5	3245.23	31.90	28.65	6.02	41.79	24.78	54.00	-29.22
6	3245.23	42.19	28.65	6.02	41.79	35.07	74.00	-38.93
7	4416.59	29.30	30.47	7.64	41.70	25.71	54.00	-28.29
8	4416.59	40.95	30.47	7.64	41.70	37.36	74.00	-36.64
9	5079.06	30.47	31.65	8.21	41.67	28.66	54.00	-25.34
10 p	5079.06	41.65	31.65	8.21	41.67	39.84	74.00	-34.16
11	5716.64	27.32	32.20	8.36	41.93	25.95	54.00	-28.05
12	5716.64	39.44	32.20	8.36	41.93	38.07	74.00	-35.93

Mode:f; Polarization:Vertical

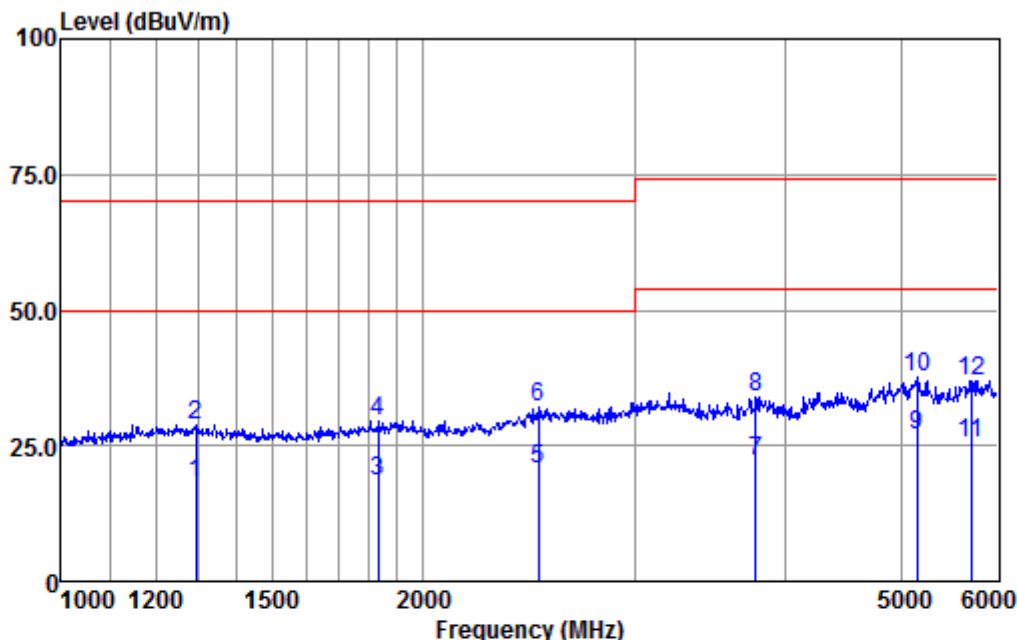

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : f


		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1294.36	31.62	24.80	3.54	41.86	18.10	50.00	-31.90
2	1294.36	42.46	24.80	3.54	41.86	28.94	70.00	-41.06
3	1835.66	30.66	25.76	4.27	42.13	18.56	50.00	-31.44
4	1835.66	41.71	25.76	4.27	42.13	29.61	70.00	-40.39
5	2493.77	30.24	27.38	5.32	42.17	20.77	50.00	-29.23
6	2493.77	41.62	27.38	5.32	42.17	32.15	70.00	-37.85
7	3779.10	28.03	29.32	6.60	41.92	22.03	54.00	-31.97
8	3779.10	39.89	29.32	6.60	41.92	33.89	74.00	-40.11
9	5152.39	28.91	31.69	8.22	41.73	27.09	54.00	-26.91
10 p	5152.39	39.33	31.69	8.22	41.73	37.51	74.00	-36.49
11	5716.64	26.74	32.20	8.36	41.93	25.37	54.00	-28.63
12	5716.64	38.31	32.20	8.36	41.93	36.94	74.00	-37.06



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 64 of 121


Mode:g; Polarization:Horizontal

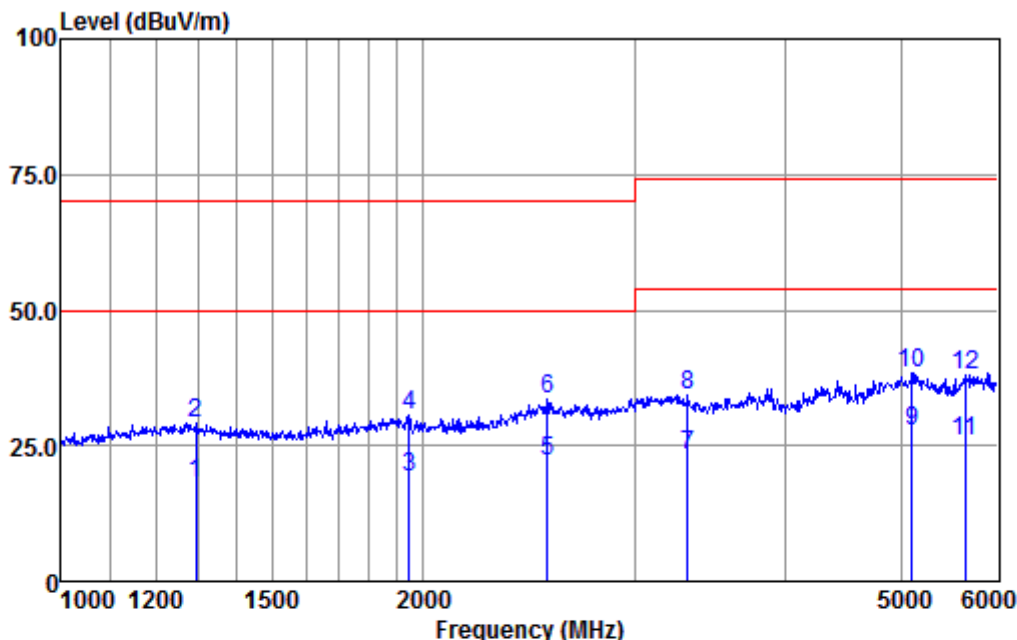

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : g

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1294.36	31.77	24.80	3.54	41.86	18.25	50.00	-31.75	Average
2	1294.36	42.62	24.80	3.54	41.86	29.10	70.00	-40.90	Peak
3	1947.48	31.21	25.93	4.39	42.19	19.34	50.00	-30.66	Average
4	1947.48	42.57	25.93	4.39	42.19	30.70	70.00	-39.30	Peak
5	2538.86	31.56	27.49	5.37	42.13	22.29	50.00	-27.71	Average
6	2538.86	42.87	27.49	5.37	42.13	33.60	70.00	-36.40	Peak
7	3321.71	30.14	28.70	6.12	41.81	23.15	54.00	-30.85	Average
8	3321.71	41.46	28.70	6.12	41.81	34.47	74.00	-39.53	Peak
9	5106.43	29.47	31.66	8.21	41.69	27.65	54.00	-26.35	Average
10 p	5106.43	40.31	31.66	8.21	41.69	38.49	74.00	-35.51	Peak
11	5645.39	27.48	32.11	8.34	41.96	25.97	54.00	-28.03	Average
12	5645.39	39.37	32.11	8.34	41.96	37.86	74.00	-36.14	Peak


Mode:g; Polarization:Vertical

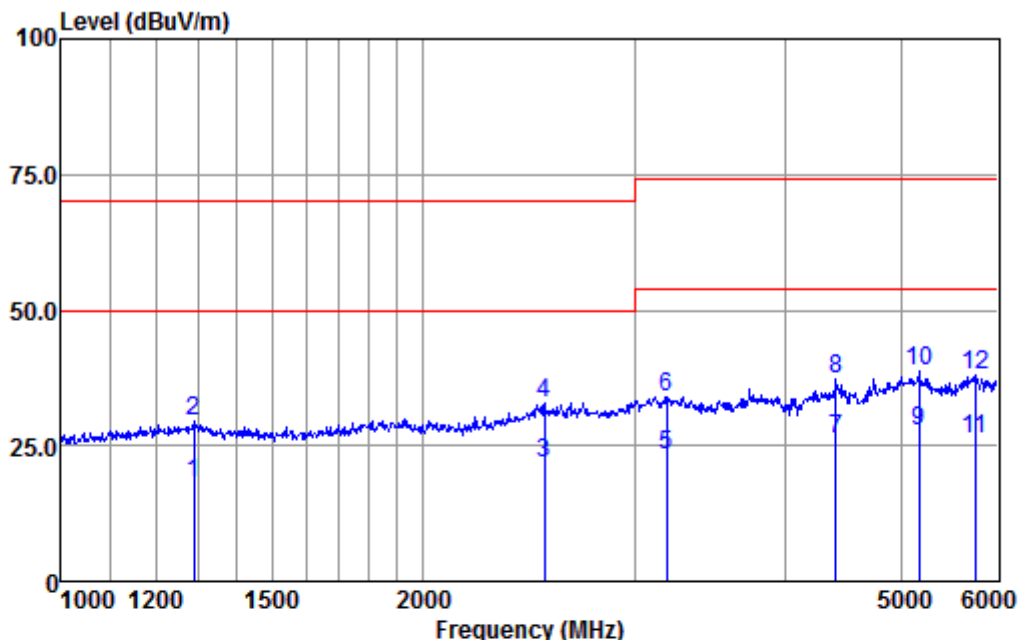

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : g

		ReadAntenna		Cable Preamp		Limit	Over	Remark
	Freq	Level	Factor	Loss	Factor	Level	Line	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1289.73	31.74	24.79	3.51	41.86	18.18	50.00	-31.82 Average
2	1289.73	43.08	24.79	3.51	41.86	29.52	70.00	-40.48 Peak
3	2525.25	31.03	27.45	5.37	42.15	21.70	50.00	-28.30 Average
4	2525.25	42.00	27.45	5.37	42.15	32.67	70.00	-37.33 Peak
5	3187.60	30.56	28.62	5.96	41.77	23.37	54.00	-30.63 Average
6	3187.60	41.18	28.62	5.96	41.77	33.99	74.00	-40.01 Peak
7	4408.69	29.86	30.44	7.64	41.71	26.23	54.00	-27.77 Average
8	4408.69	40.92	30.44	7.64	41.71	37.29	74.00	-36.71 Peak
9	5170.88	29.53	31.70	8.22	41.74	27.71	54.00	-26.29 Average
10 p	5170.88	40.42	31.70	8.22	41.74	38.60	74.00	-35.40 Peak
11	5757.76	27.61	32.27	8.36	41.91	26.33	54.00	-27.67 Average
12	5757.76	39.17	32.27	8.36	41.91	37.89	74.00	-36.11 Peak


Mode:h; Polarization:Horizontal

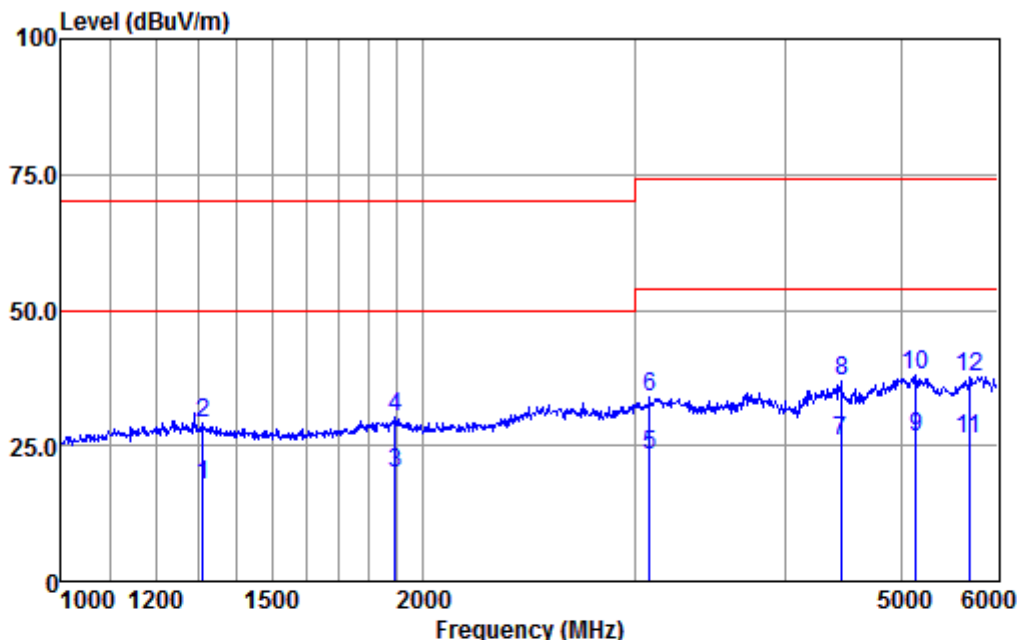

Condition : HORIZONTAL
EUT/Project: 8395IT
Test mode : h

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1313.04	31.25	24.84	3.57	41.87	17.79	50.00	-32.21	Average
2	1313.04	42.43	24.84	3.57	41.87	28.97	70.00	-41.03	Peak
3	1895.83	31.97	25.85	4.33	42.16	19.99	50.00	-30.01	Average
4	1895.83	42.29	25.85	4.33	42.16	30.31	70.00	-39.69	Peak
5	3086.44	30.64	28.56	5.85	41.74	23.31	54.00	-30.69	Average
6	3086.44	41.35	28.56	5.85	41.74	34.02	74.00	-39.98	Peak
7	4456.34	29.38	30.53	7.70	41.68	25.93	54.00	-28.07	Average
8	4456.34	40.33	30.53	7.70	41.68	36.88	74.00	-37.12	Peak
9	5143.16	28.32	31.69	8.22	41.73	26.50	54.00	-27.50	Average
10 p	5143.16	39.83	31.69	8.22	41.73	38.01	74.00	-35.99	Peak
11	5696.20	27.62	32.18	8.36	41.94	26.22	54.00	-27.78	Average
12	5696.20	39.15	32.18	8.36	41.94	37.75	74.00	-36.25	Peak

Mode:h; Polarization:Vertical

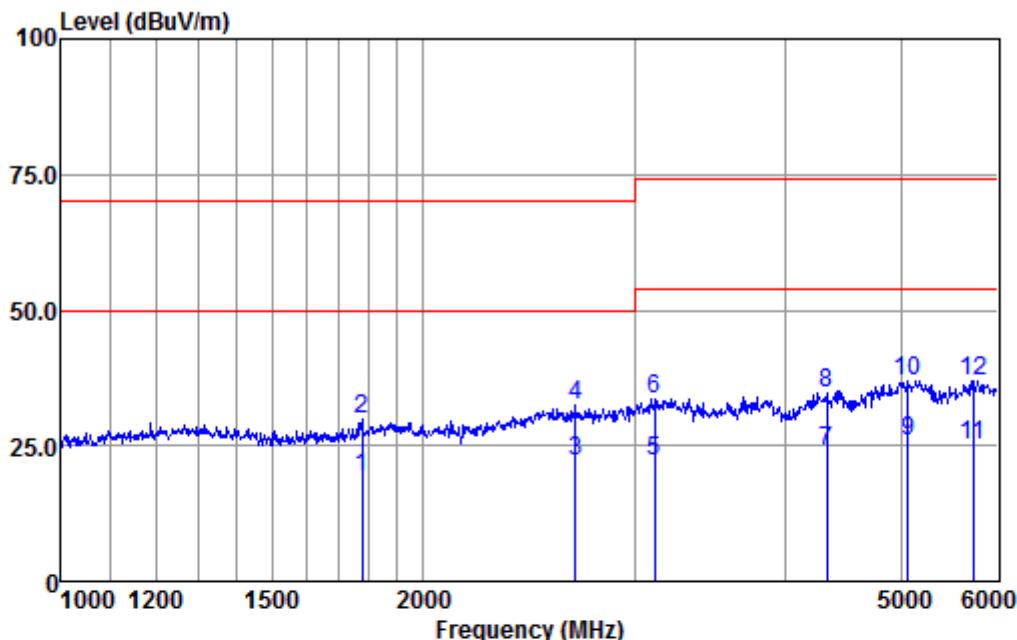

Condition : VERTICAL
EUT/Project: 8395IT
Test mode : h

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1780.59	31.40	25.68	4.21	42.10	19.19	50.00	-30.81
2	1780.59	42.12	25.68	4.21	42.10	29.91	70.00	-40.09
3	2679.07	30.69	27.82	5.57	41.99	22.09	50.00	-27.91
4	2679.07	41.02	27.82	5.57	41.99	32.42	70.00	-37.58
5	3114.21	29.40	28.57	5.89	41.75	22.11	54.00	-31.89
6	3114.21	40.99	28.57	5.89	41.75	33.70	74.00	-40.30
7	4338.16	27.83	30.33	7.55	41.75	23.96	54.00	-30.04
8	4338.16	38.69	30.33	7.55	41.75	34.82	74.00	-39.18
9	5060.89	27.75	31.64	8.21	41.66	25.94	54.00	-28.06
10	5060.89	38.85	31.64	8.21	41.66	37.04	74.00	-36.96
11	5737.17	26.26	32.23	8.36	41.93	24.92	54.00	-29.08
12 p	5737.17	38.40	32.23	8.36	41.93	37.06	74.00	-36.94



6.4 Harmonic Current Emission

Test Requirement: EN 61000-3-2:2014

Test Method: EN 61000-3-2:2014

Frequency Range: 100Hz to 2kHz

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2:2014.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

"For the following categories of equipment, limits are not specified in this standard.- equipment with a rated power of 75W or less, other than lighting equipment."

6.5 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013
Test Method: EN 61000-3-3:2013


6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1003 mbar
Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

6.5.2 Test Setup Diagram

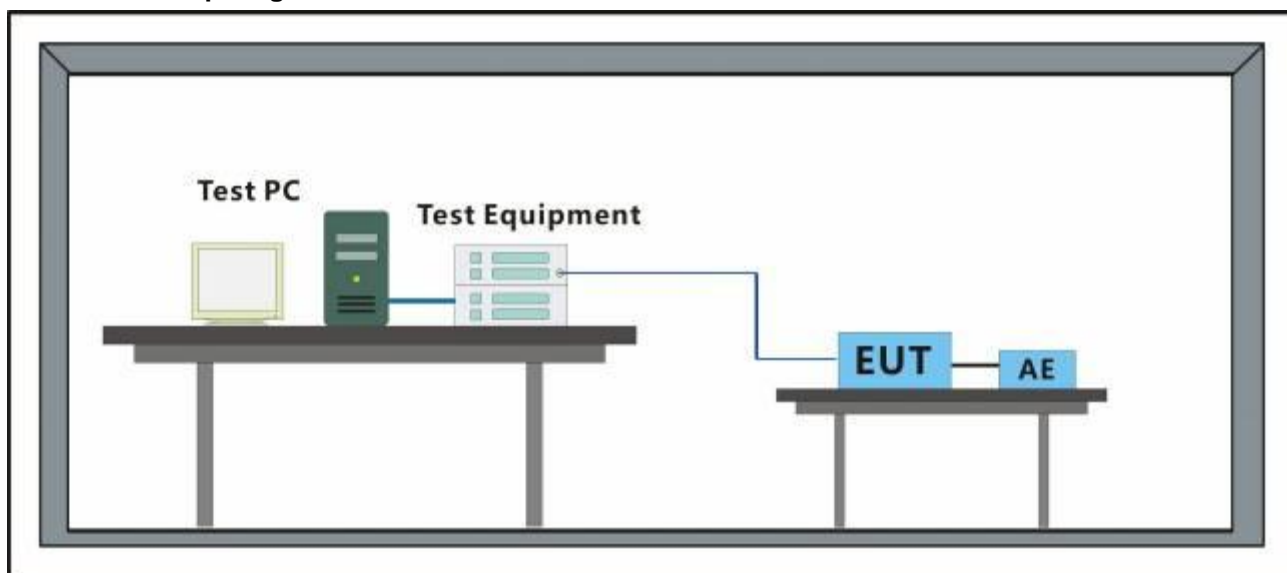

6.5.3 Measurement Data



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 70 of 121

Mode:a

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.52			
Highest dc (%):	0.48	Test limit (%):	3.30	Pass
Highest dmax (%):	0.78	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.347	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.231	Test limit:	0.650	Pass

Mode:b

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.58			
Highest dc (%):	0.57	Test limit (%):	3.30	Pass
Highest dmax (%):	0.77	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.301	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.210	Test limit:	0.650	Pass

Mode:c

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.69			
Highest dc (%):	1.04	Test limit (%):	3.30	Pass
Highest dmax (%):	1.58	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.471	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.336	Test limit:	0.650	Pass

Mode:d

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.58			
Highest dc (%):	0.33	Test limit (%):	3.30	Pass
Highest dmax (%):	0.97	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.247	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.234	Test limit:	0.650	Pass

Mode:e

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.77			
Highest dc (%):	0.77	Test limit (%):	3.30	Pass
Highest dmax (%):	0.75	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.147	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.104	Test limit:	0.650	Pass



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 71 of 121

Mode:f

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.66			
Highest dc (%):	0.34	Test limit (%):	3.30	Pass
Highest dmax (%):	0.87	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.107	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.227	Test limit:	0.650	Pass

Mode:g

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.67			
Highest dc (%):	0.77	Test limit (%):	3.30	Pass
Highest dmax (%):	0.37	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.125	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.106	Test limit:	0.650	Pass

Mode:h

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.77			
Highest dc (%):	0.97	Test limit (%):	3.30	Pass
Highest dmax (%):	0.38	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.171	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.131	Test limit:	0.650	Pass

7 Immunity Test Results

7.1 Performance Criteria Description in EN 55024:2010 +A1:2015

Criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

7.2 Performance Criteria Description in EN 50130-4:2011 +A1:2014


There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.

7.3 Electrostatic Discharge

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-2:2009
Performance Criterion: B
Discharge Impedance: 330Ω/150pF
Number of Discharge: Minimum of four test points (a minimum of 50 discharges at each point)
Discharge Mode: Single Discharge
Discharge Period: 1 second minimum

7.3.1 Test Setup Diagram

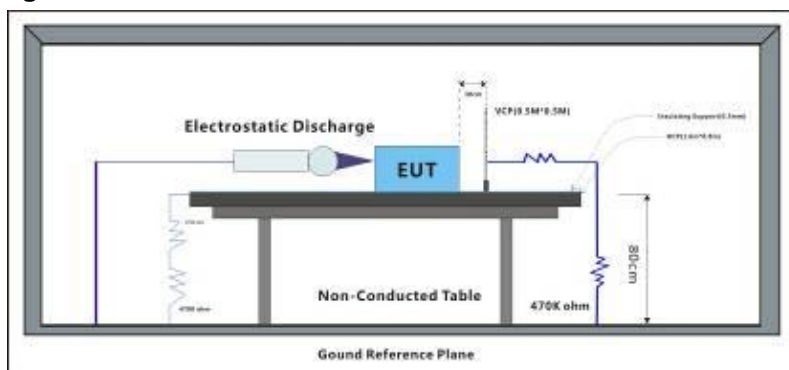

7.3.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.3.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 74 of 121


Results:

A: No degradation in the performance of the EUT was observed.

7.4 Electrostatic Discharge

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-2:2009
Number of Discharge:	Minimum 10 times at each test point for Air Discharge Minimum 50 times at each test point for Contact or VCP & HCP Discharge
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residu

7.4.1 Test Setup Diagram

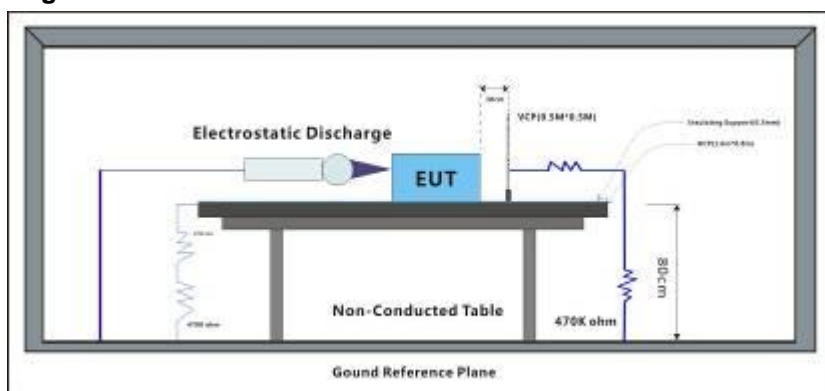

7.4.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

- Test mode:
- a: CVI previewing by DC12V support .
 - b: AHD previewing by DC12V support .
 - c: CVBS previewing by DC12V support .
 - d: TVI previewing by DC12V support .
 - e: CVI previewing by AC24V support .
 - f: AHD previewing by AC24V support .
 - g: CVBS previewing by AC24V support .
 - h: TVI previewing by AC24V support .

7.4.3 Test Results:

Observations: Test Point:

- 1. All insulated enclosure and seams.
- 2. All accessible metal parts of the enclosure.
- 3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601

Page: 76 of 121

Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A


Results:

A: No degradation in the performance of the EUT was observed.

7.5 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
Performance Criterion: A
Frequency Range: 80MHz to 1GHz
Antenna Polarisation: Vertical and Horizontal
Modulation: 1kHz, 80% Amp. Mod, 1% increment

7.5.1 Test Setup Diagram

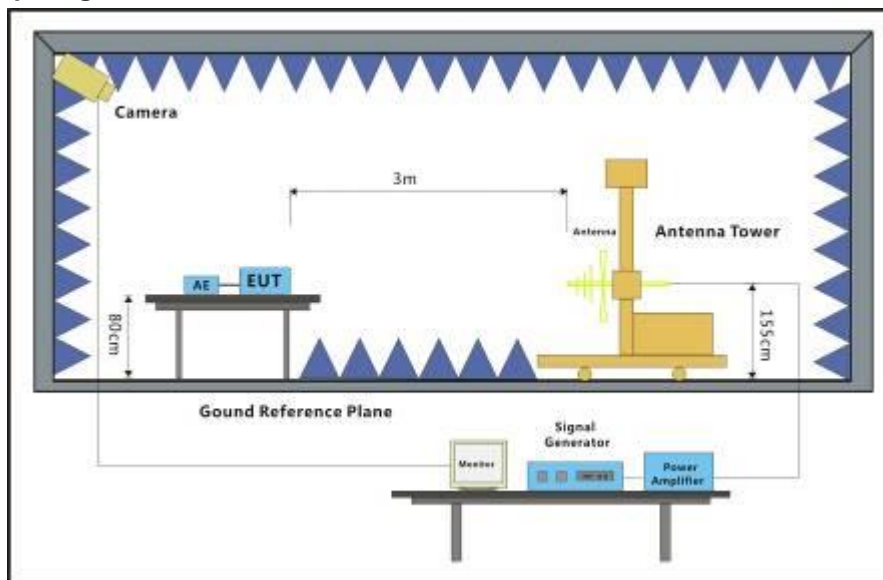

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.5.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A
80MHz-1GHz	3	Top	3s	A
80MHz-1GHz	3	Underside	3s	A

Results:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

A: No degradation in the performance of the EUT was observed.

7.6 Radiated Immunity(80MHz-2.7GHz)


Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010

Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

7.6.1 Test Setup Diagram

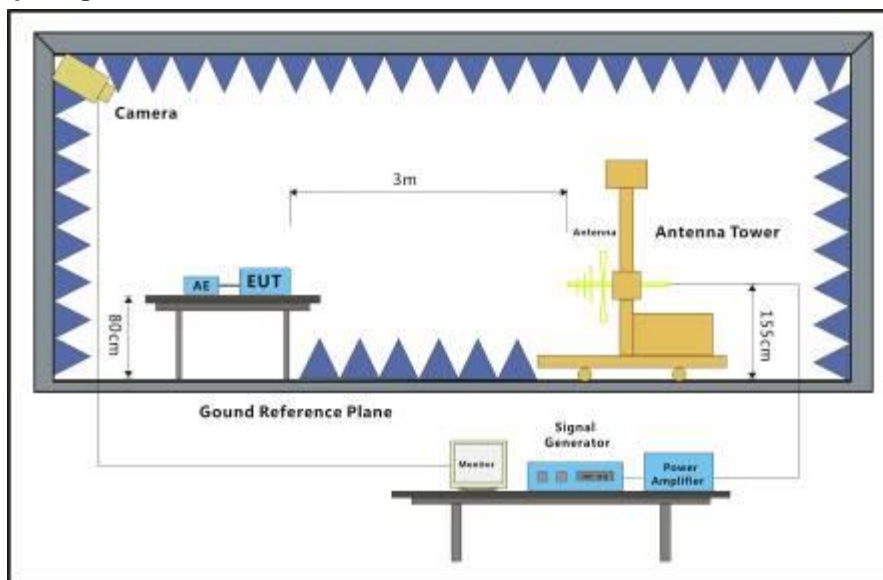

7.6.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.6.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	10	Front	3s	A
80MHz-2.7GHz	10	Back	3s	A
80MHz-2.7GHz	10	Left	3s	A
80MHz-2.7GHz	10	Right	3s	A
80MHz-2.7GHz	10	Top	3s	A
80MHz-2.7GHz	10	Underside	3s	A

Results:



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**


Report No.: SHEM180200097601
Page: 79 of 121

A: No degradation in the performance of the EUT was observed.

7.7 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-4:2012
Performance Criterion: B
Repetition Frequency: 5kHz
Burst Period: 300ms
Test Duration: 2 minute per level & polarity

7.7.1 Test Setup Diagram

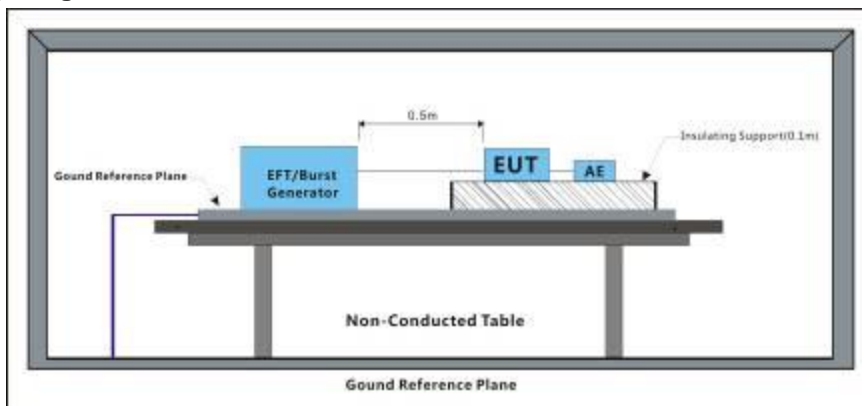

7.7.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.7.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A


Results:

A: No degradation in the performance of the EUT was observed.

7.8 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-4:2012
Repetition Frequency: 100kHz
Burst Period: 300ms
Test Duration: 1 minute per level & polarity

7.8.1 Test Setup Diagram

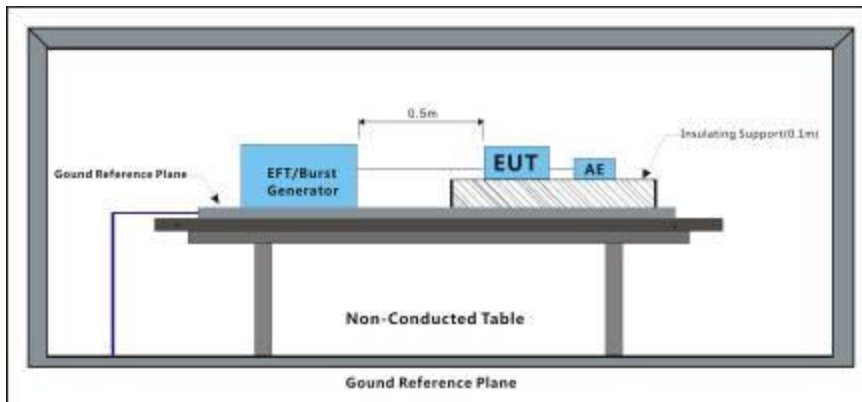

7.8.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.8.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A


Results:

A: No degradation in the performance of the EUT was observed.

7.9 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-4:2012
Performance Criterion: B
Repetition Frequency: 5kHz
Burst Period: 300ms
Test Duration: 2 minute per level & polarity

7.9.1 Test Setup Diagram

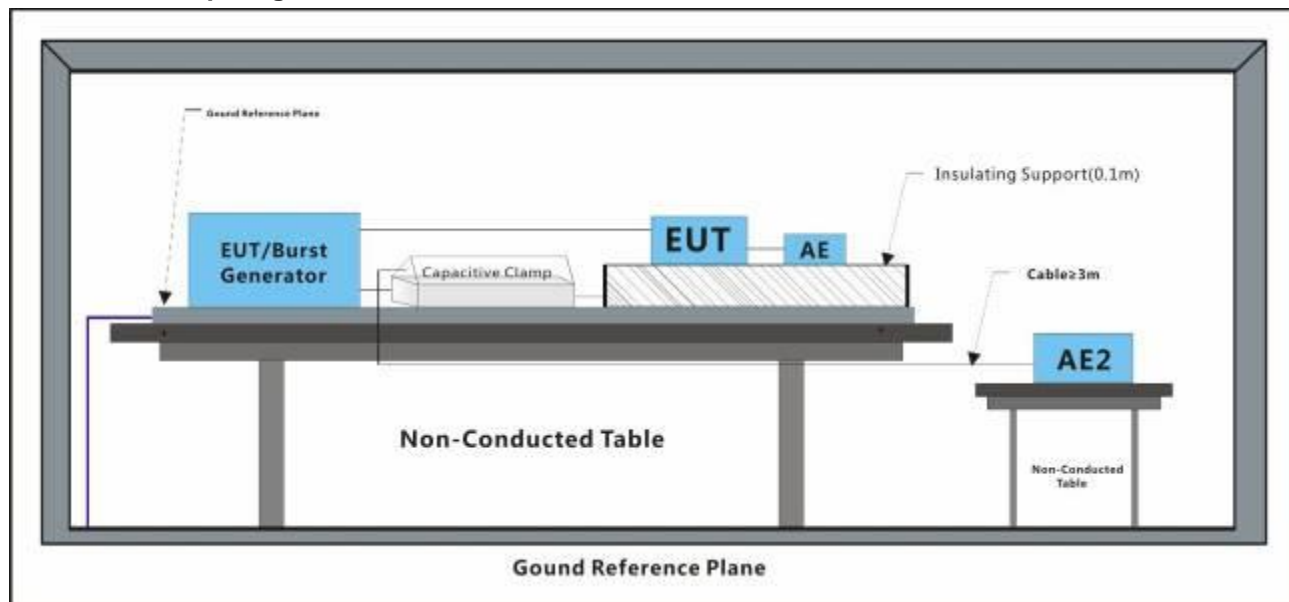

7.9.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.9.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	0.5	+	Clamp	A
Signal port	0.5	-	Clamp	A


Results:

A: No degradation in the performance of the EUT was observed.

7.10 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-4:2012
Repetition Frequency: 100kHz
Burst Period: 300ms
Test Duration: 1 minute per level & polarity

7.10.1 Test Setup Diagram

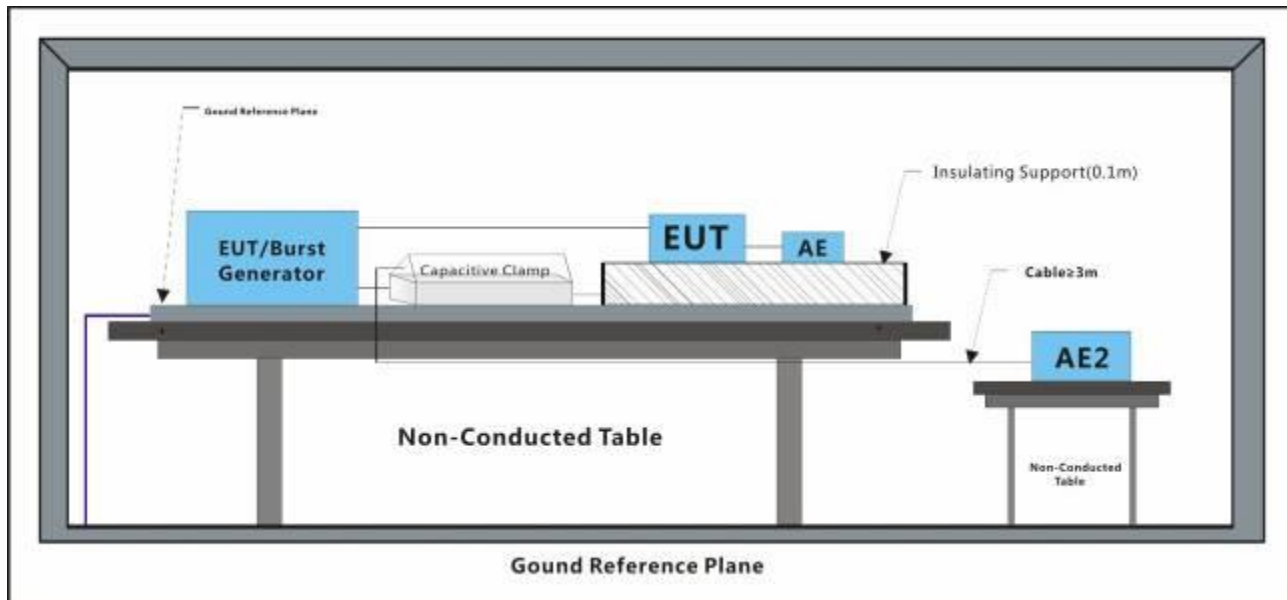

7.10.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.10.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	1	+	Clamp	A
Signal port	1	-	Clamp	A


Results:

A: No degradation in the performance of the EUT was observed.

7.11 Surge at Power Port

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-5:2014
Performance Criterion: B
Interval: 60s between each surge
No. of surges: 5 positive, 5 negative at 0°, 90°, 180°, 270°.

7.11.1 Test Setup Diagram

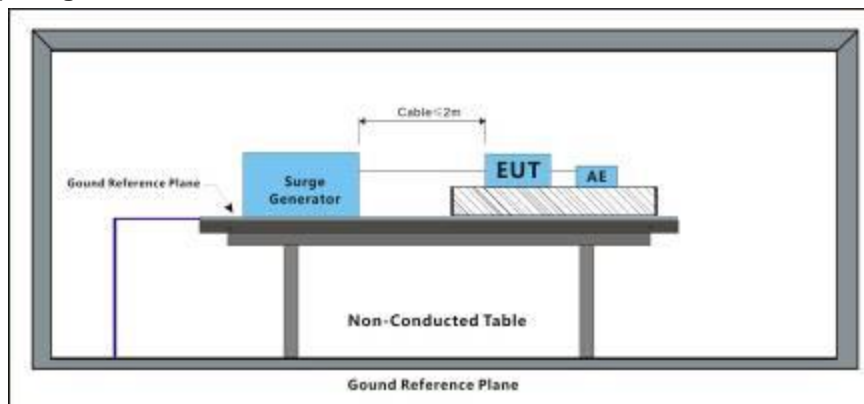

7.11.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar
Test mode:
a: CVI previewing by DC12V support .
b: AHD previewing by DC12V support .
c: CVBS previewing by DC12V support .
d: TVI previewing by DC12V support .
e: CVI previewing by AC24V support .
f: AHD previewing by AC24V support .
g: CVBS previewing by AC24V support .
h: TVI previewing by AC24V support .

7.11.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A


Results:

A: No degradation in the performance of the EUT was observed.

7.12 Surge at Power Port

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-5:2014
Interval:	60s between each surge
No. of surges:	5 positive, 5 negative
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residu

7.12.1 Test Setup Diagram

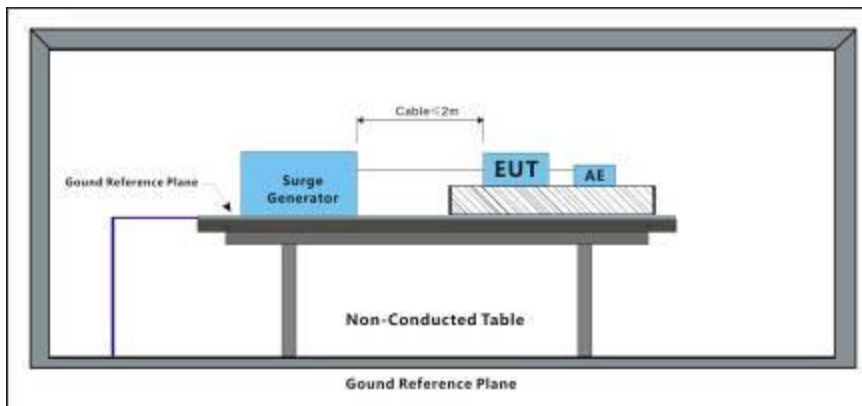

7.12.2 E.U.T. Operation

Operating Environment:			
Temperature:	22 °C	Humidity:	50 % RH
		Atmospheric Pressure:	1020 mbar
Test mode:	a: CVI previewing by DC12V support . b: AHD previewing by DC12V support . c: CVBS previewing by DC12V support . d: TVI previewing by DC12V support . e: CVI previewing by AC24V support . f: AHD previewing by AC24V support . g: CVBS previewing by AC24V support . h: TVI previewing by AC24V support .		

7.12.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	0.5,1	+	0°	A
L-N	0.5,1	-	0°	A
L-N	0.5,1	+	90°	A
L-N	0.5,1	-	90°	A
L-N	0.5,1	+	180°	A
L-N	0.5,1	-	180°	A
L-N	0.5,1	+	270°	A
L-N	0.5,1	-	270°	A

Results:

A: No degradation in the performance of the EUT was observed.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


Report No.: SHEM180200097601

Page: 86 of 121

7.13 Surge at Signal Port

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-5:2014
Performance Criterion: B
Interval: 60s between each surge

7.13.1 Test Setup Diagram

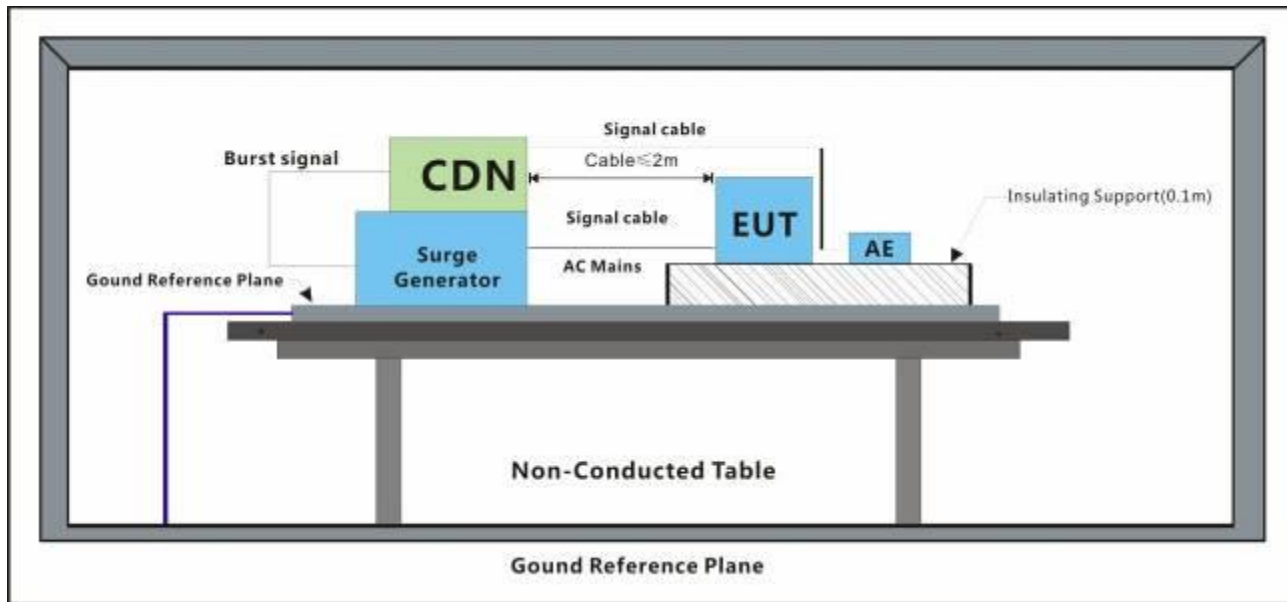

7.13.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.13.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal port	Line-Ground	1	+	A
Signal port	Line-Ground	1	-	A


Results:

A: No degradation in the performance of the EUT was observed.

7.14 Surge at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-5:2014

7.14.1 Test Setup Diagram

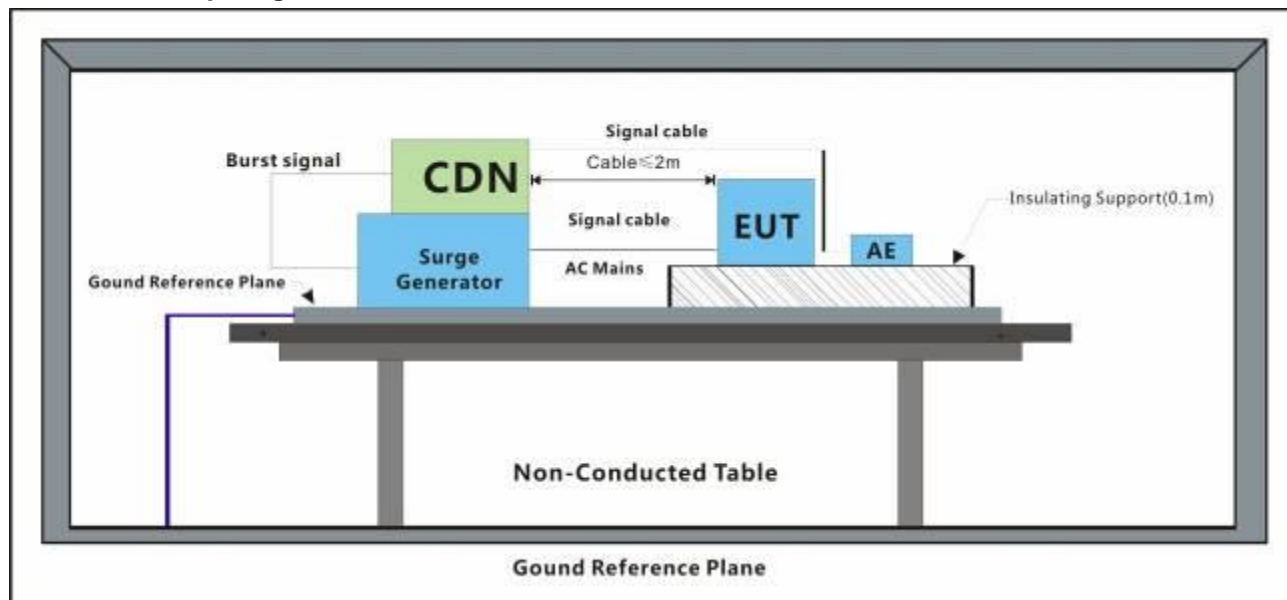

7.14.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.14.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal port	Line-Ground	0.5	+	A
Signal port	Line-Ground	0.5	-	A
Signal port	Line-Ground	1	+	A
Signal port	Line-Ground	1	-	A


Results:

A: No degradation in the performance of the EUT was observed.

7.15 Conducted Immunity at Power Port (150kHz-80MHz)

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-6:2014
Performance Criterion: A
Frequency Range: 0.15MHz to 80MHz
Modulation: 80%, 1kHz Amplitude Modulation
Step Size: 1%

7.15.1 Test Setup Diagram

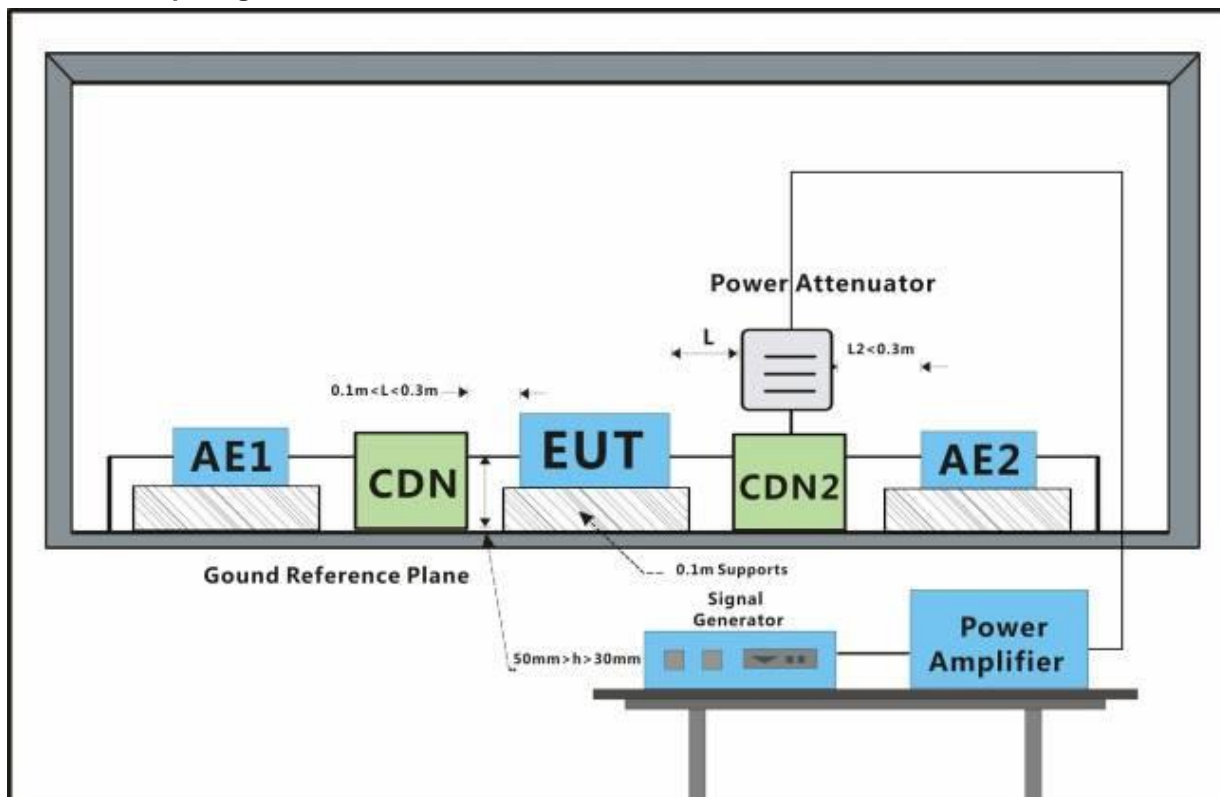

7.15.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.15.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	3s	A

Results:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601


Page: 90 of 121

A: No degradation in the performance of the EUT was observed.

7.16 Conducted Immunity at Signal Port (150kHz-80MHz)

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-6:2014
Performance Criterion: A
Frequency Range: 0.15MHz to 80MHz
Modulation: 80%, 1kHz Amplitude Modulation
Step Size: 1%

7.16.1 Test Setup Diagram

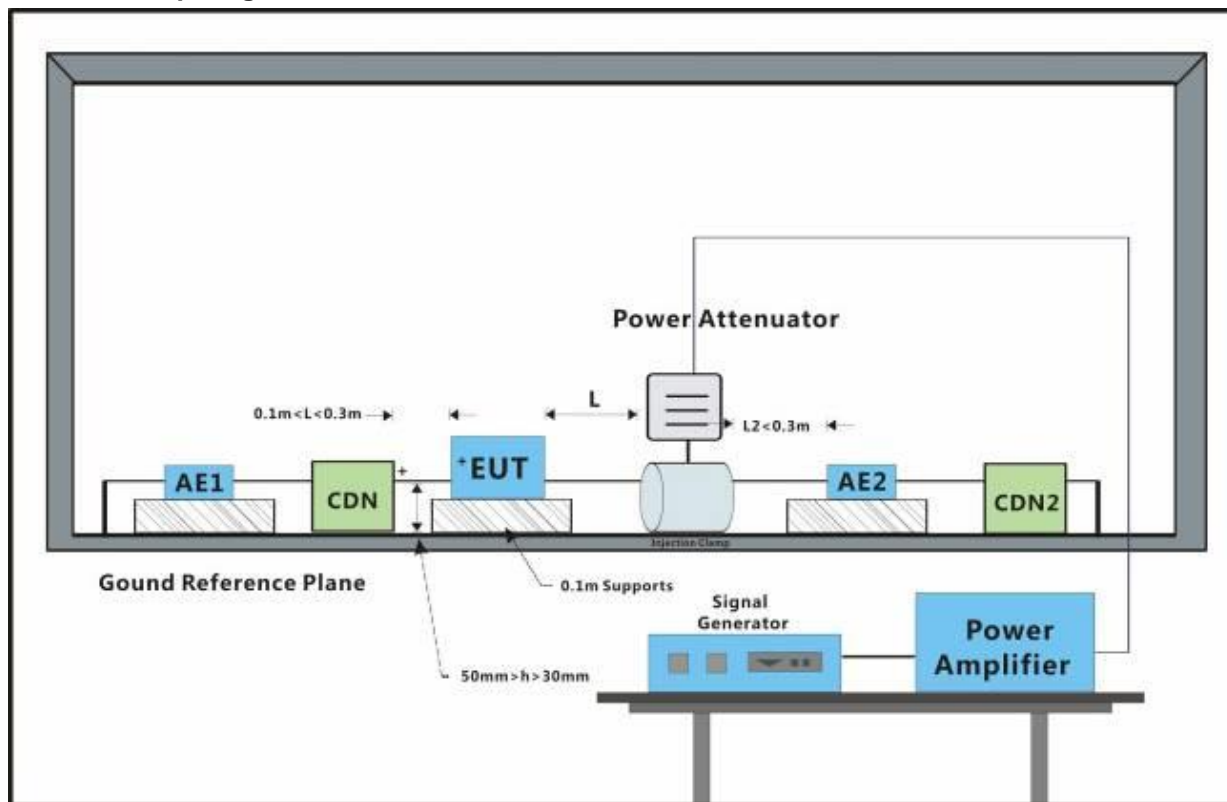

7.16.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.16.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	3	Coupling	3s	A

Results:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601


Page: 92 of 121

A: No degradation in the performance of the EUT was observed.

7.17 Conducted Immunity at Power Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-6:2014
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation
Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

7.17.1 Test Setup Diagram

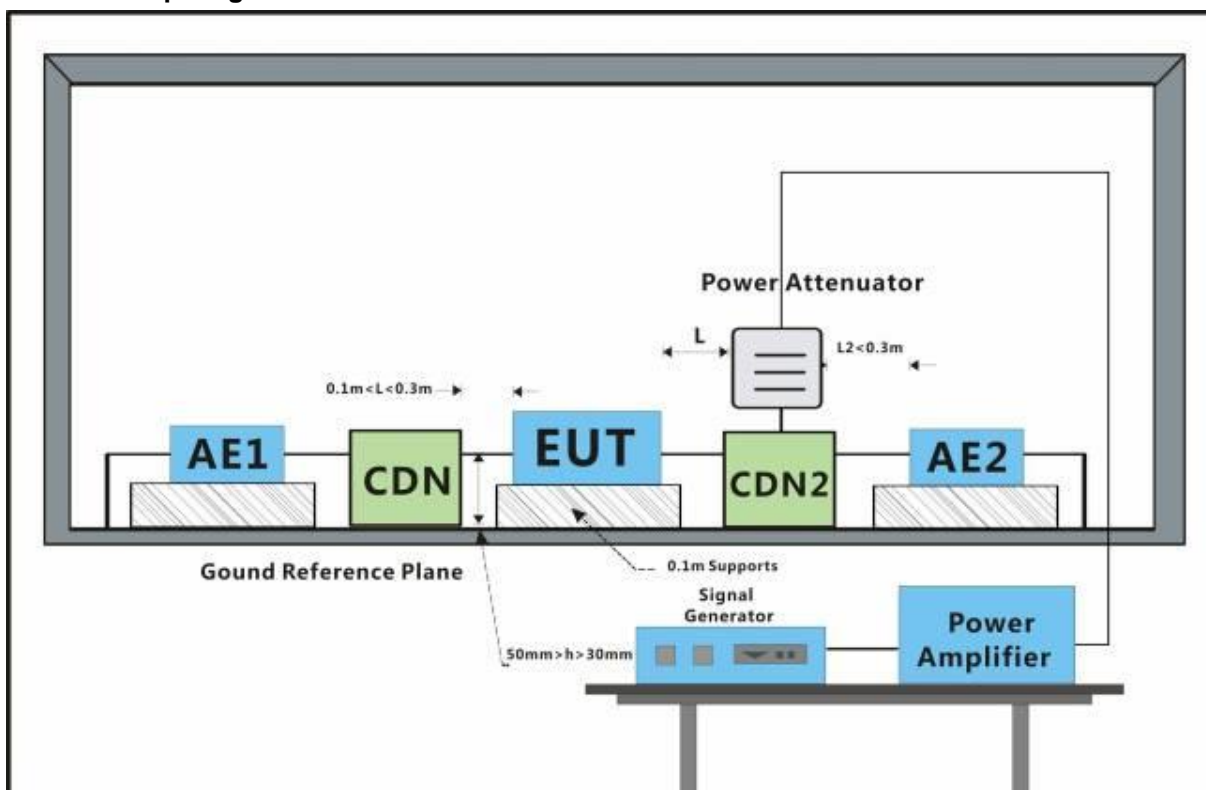

7.17.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar
Test mode:
a: CVI previewing by DC12V support .
b: AHD previewing by DC12V support .
c: CVBS previewing by DC12V support .
d: TVI previewing by DC12V support .
e: CVI previewing by AC24V support .
f: AHD previewing by AC24V support .
g: CVBS previewing by AC24V support .
h: TVI previewing by AC24V support .

7.17.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	A

Results:



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


Report No.: SHEM180200097601
Page: 94 of 121

A: No degradation in the performance of the EUT was observed.

7.18 Conducted Immunity at Signal Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-6:2014
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation
Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

7.18.1 Test Setup Diagram

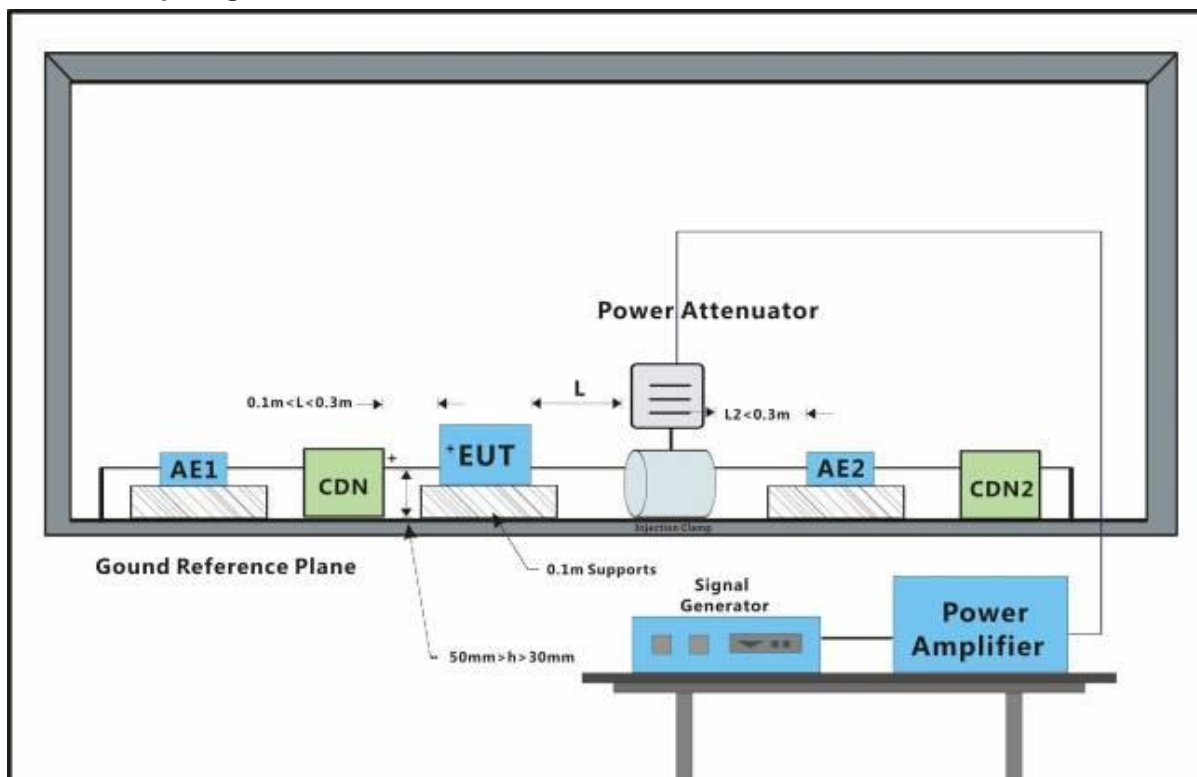

7.18.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar
Test mode:
a: CVI previewing by DC12V support .
b: AHD previewing by DC12V support .
c: CVBS previewing by DC12V support .
d: TVI previewing by DC12V support .
e: CVI previewing by AC24V support .
f: AHD previewing by AC24V support .
g: CVBS previewing by AC24V support .
h: TVI previewing by AC24V support .

7.18.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	10	Coupling	3s	A

Results:


A: No degradation in the performance of the EUT was observed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.19 Voltage Dips and Interruptions

Test Requirement: EN 55024:2010 +A1:2015
Test Method: EN 61000-4-11:2004
Performance Criterion: 0% of UT (Supply Voltage) for 0.5 Periods:B; 0% of UT for 250 Periods:C; 70 % of UT for 25 Periods:C
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.19.1 Test Setup Diagram

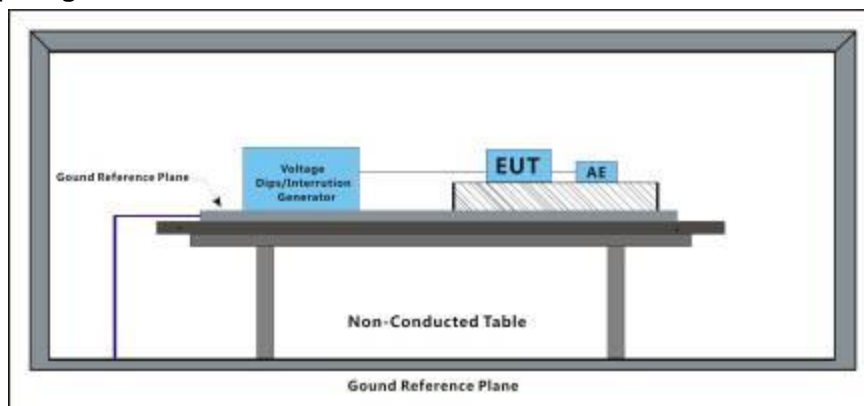

7.19.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar
Test mode:
a: CVI previewing by DC12V support .
b: AHD previewing by DC12V support .
c: CVBS previewing by DC12V support .
d: TVI previewing by DC12V support .
e: CVI previewing by AC24V support .
f: AHD previewing by AC24V support .
g: CVBS previewing by AC24V support .
h: TVI previewing by AC24V support .

7.19.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycles	3	A
0	180°	0.5 Cycles	3	A
0	0°	250 Cycles	3	B
0	180°	250 Cycles	3	B
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A


Results:

A: No degradation in the performance of the EUT was observed.
B: During test, EUT stop work, After test, which the equipment under test recovers its normal Performance.

7.20 Voltage Dips and Interruptions

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-11:2004
Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods; 40% of UT for 10 Periods; 70% of UT for 25 Periods; 80% of UT for 250 Periods;
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.20.1 Test Setup Diagram

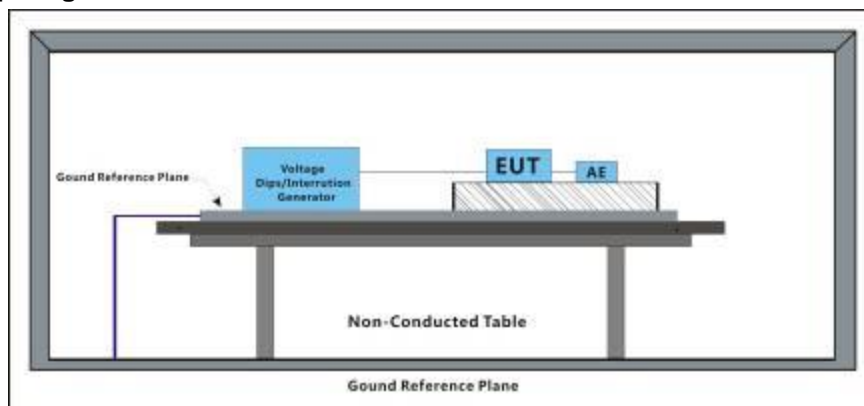

7.20.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a: CVI previewing by DC12V support .
- b: AHD previewing by DC12V support .
- c: CVBS previewing by DC12V support .
- d: TVI previewing by DC12V support .
- e: CVI previewing by AC24V support .
- f: AHD previewing by AC24V support .
- g: CVBS previewing by AC24V support .
- h: TVI previewing by AC24V support .

7.20.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
80	0°	250 Cycles	3	A
80	180°	250 Cycles	3	A
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A
40	0°	10 Cycles	3	A
40	180°	10 Cycles	3	A
0	0°	250 Cycles	3	B
0	180°	250 Cycles	3	B

Results:

A: No degradation in the performance of the EUT was observed.

B: During test, EUT stop work, After test, which the equipment under test recovers its normal Performance.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180200097601
Page: 98 of 121

7.21 Mains Supply Voltage Variations-Conditioning

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 50130-4:2011+A1:2014
Voltage max.:	AC 253V (U_{max} : $U_{nom} + 10\%$)
Voltage min.:	AC 195.55V (U_{min} : $U_{nom} - 15\%$)
Unom Voltage:	AC 230V
Criteria:	There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test (see Clause 6 of EN 50130-4

7.21.1 Test Setup Diagram

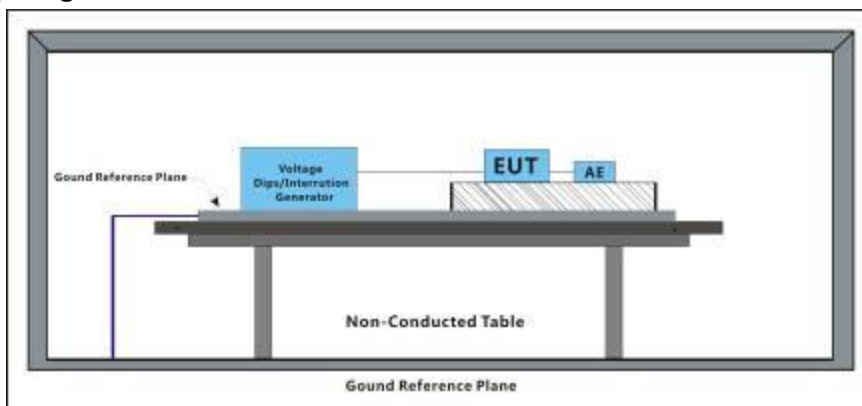

7.21.2 E.U.T. Operation

Operating Environment:			
Temperature:	22 °C	Humidity:	50 % RH
		Atmospheric Pressure:	1020 mbar
Test mode:	a: CVI previewing by DC12V support . b: AHD previewing by DC12V support . c: CVBS previewing by DC12V support . d: TVI previewing by DC12V support . e: CVI previewing by AC24V support . f: AHD previewing by AC24V support . g: CVBS previewing by AC24V support . h: TVI previewing by AC24V support .		

7.21.3 Test Results:

Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

8 Photographs

8.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



8.2 Radiated Emissions (30MHz-1GHz) Test Setup




8.3 Radiated Emissions (above 1GHz) Test Setup



8.4 Voltage Fluctuations and Flicker Test Setup



8.5 Electrostatic Discharge Test Setup

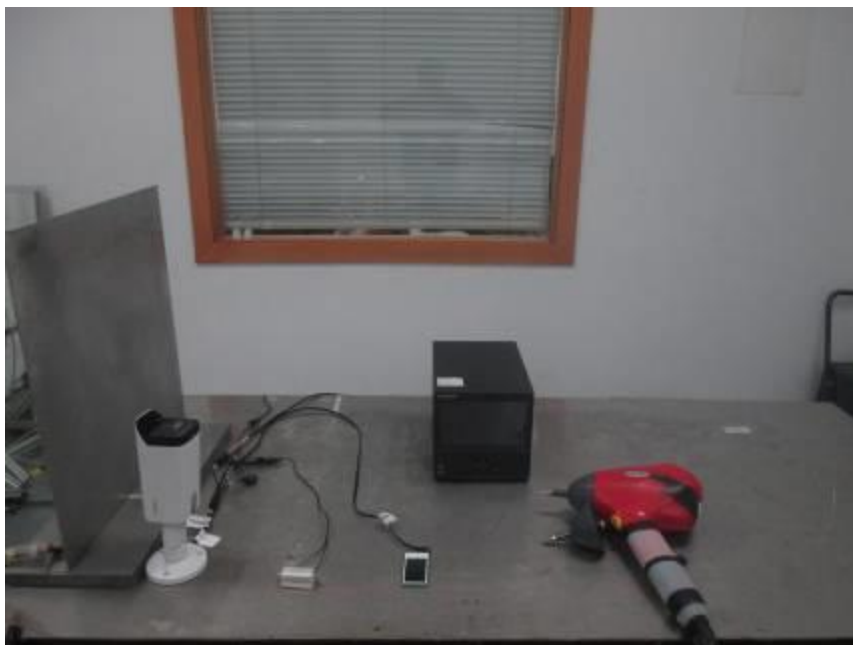


8.6 Radiated Immunity (80MHz-1GHz) Test Setup



8.7 Radiated Immunity(80MHz-2.7GHz) Test Setup



8.8 Electrical Fast Transients/Burst at Power Port Test Setup

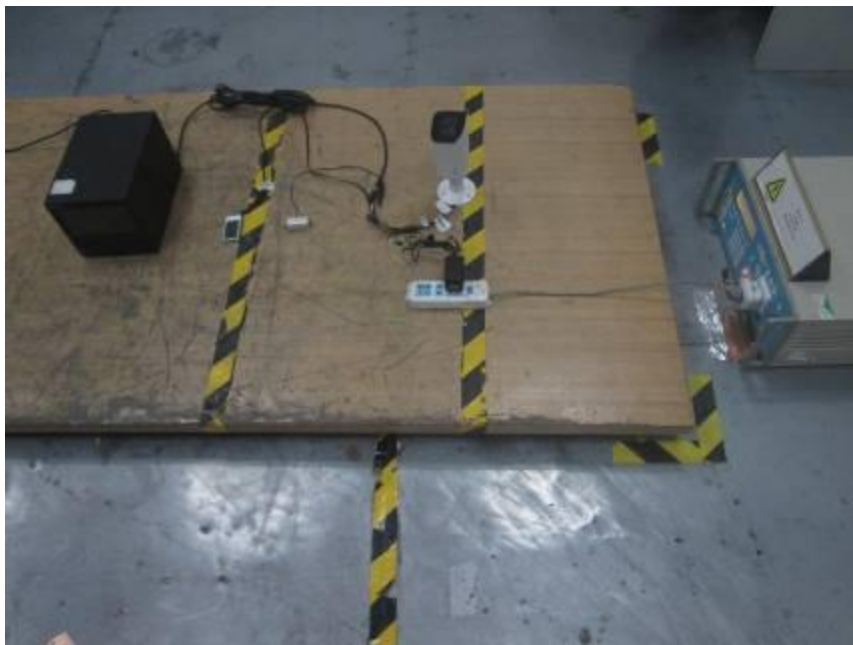

8.9 Electrical Fast Transients/Burst at Signal Port Test Setup




8.10 Surge at Power Port Test Setup




8.11 Surge at Signal Port Test Setup




8.12 Conducted Immunity at Power Port (150kHz-80MHz) Test Setup

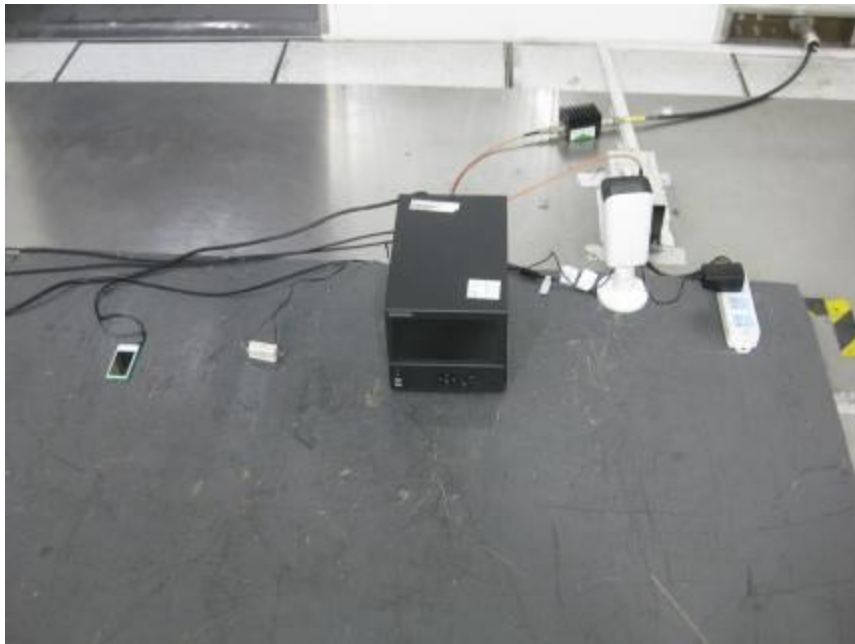


8.13 Conducted Immunity at Signal Port (150kHz-80MHz) Test Setup

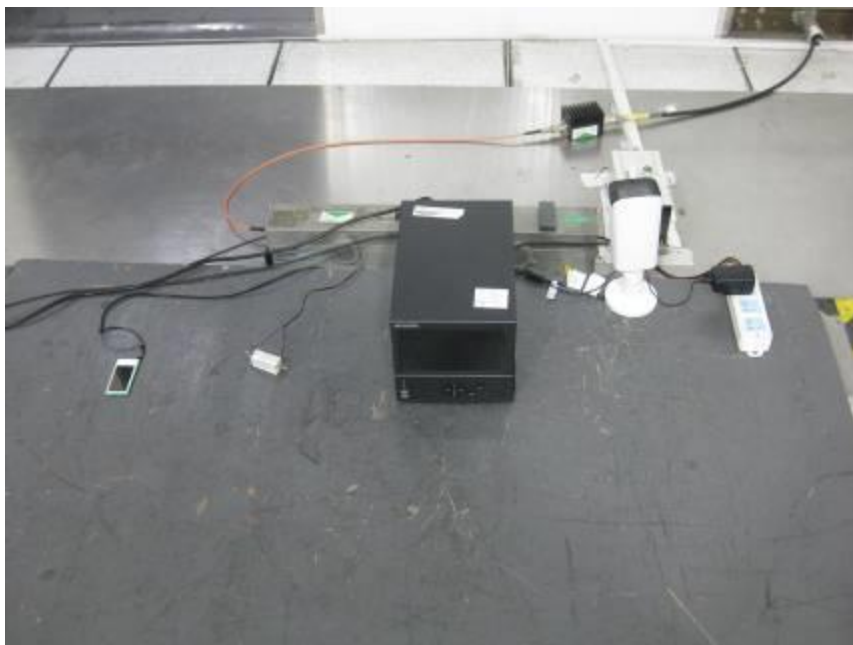

8.14 Conducted Immunity at Power Port (150kHz-100MHz) Test Setup

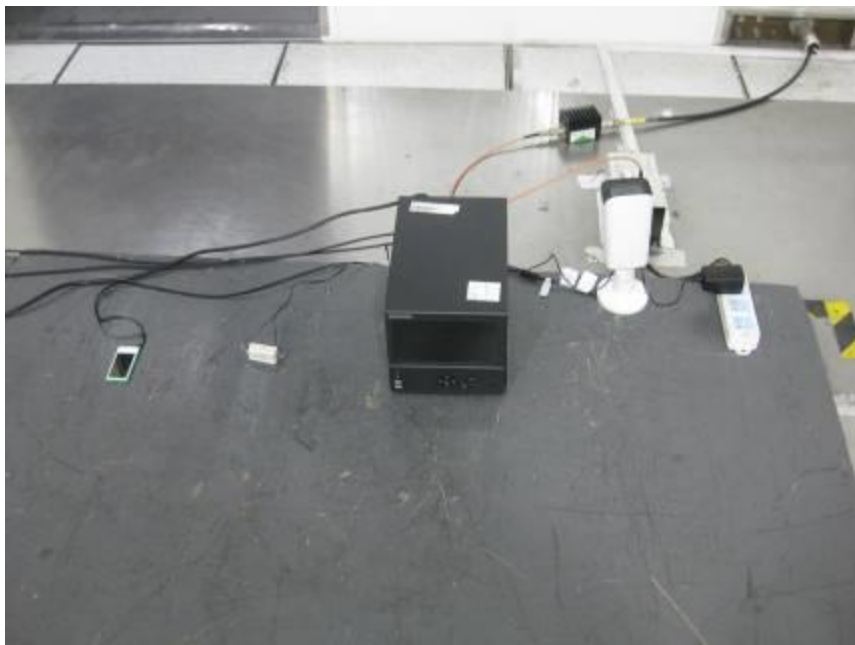


8.15 Conducted Immunity at Signal Port (150kHz-100MHz) Test Setup

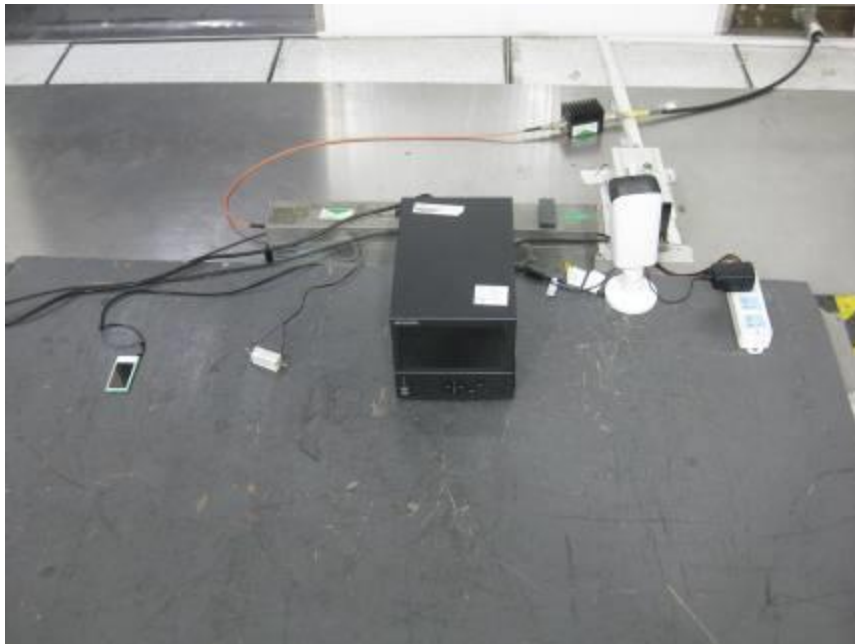

8.16 Voltage Dips and Interruptions Test Setup



8.17 Mains Supply Voltage Variations-Conditioning Test Setup


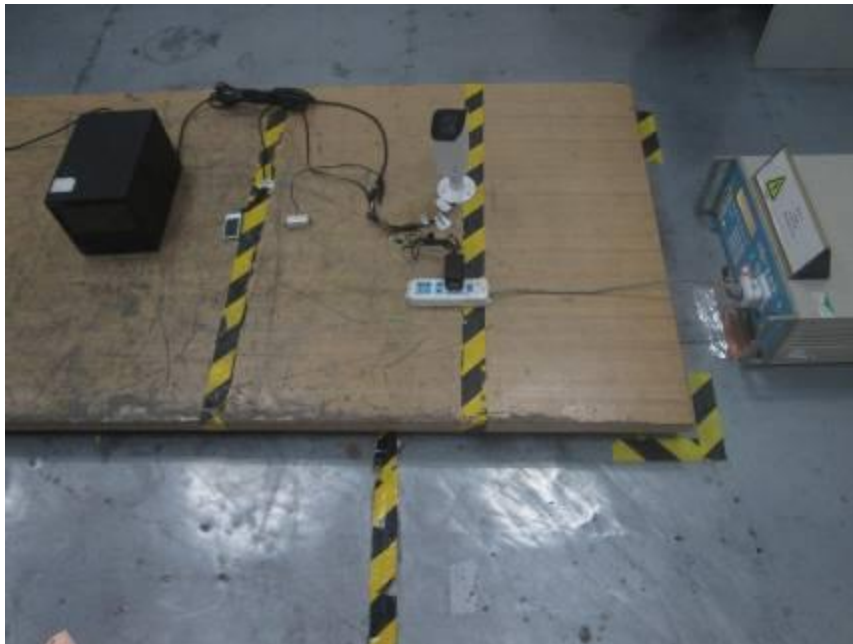




8.18 EUT Constructional Details







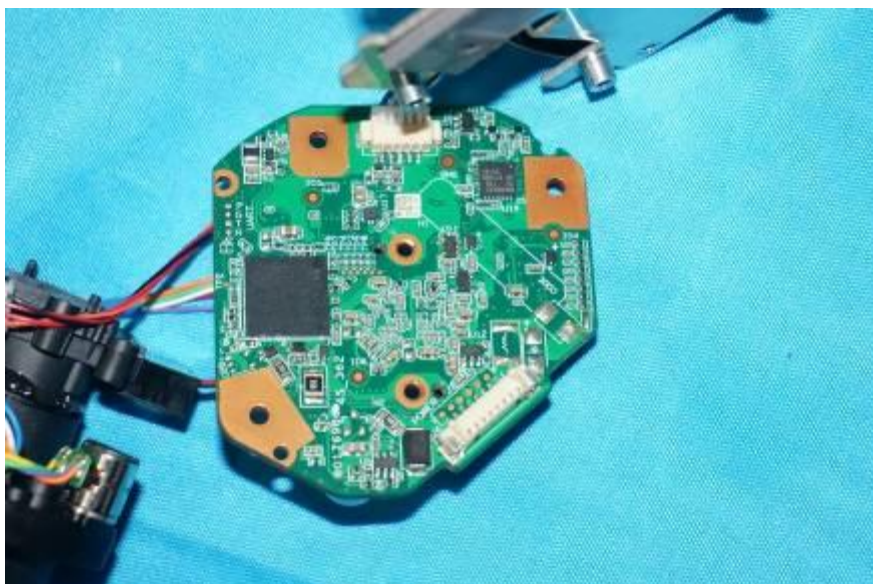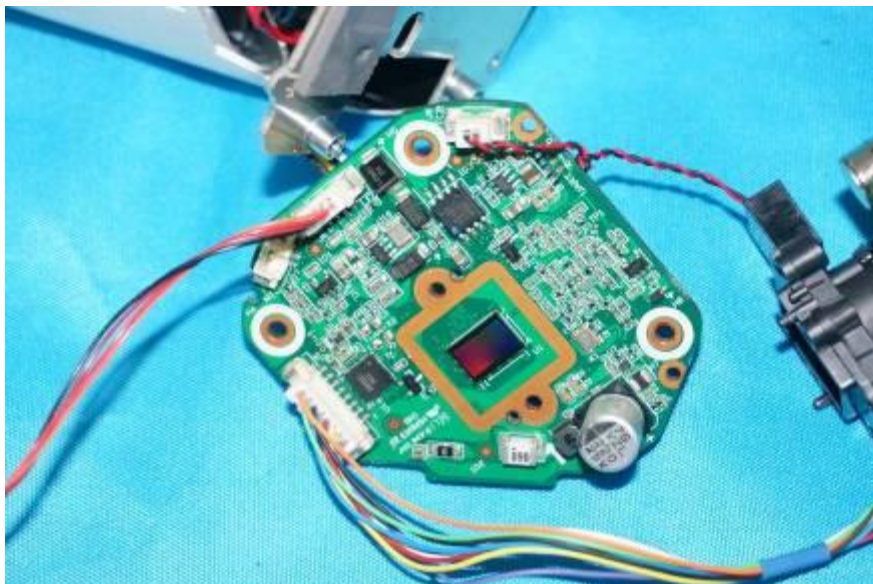

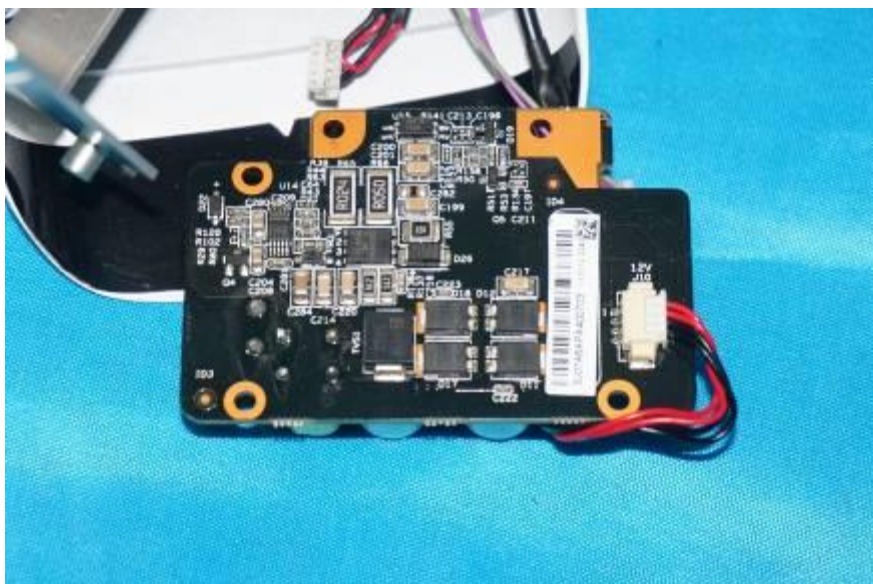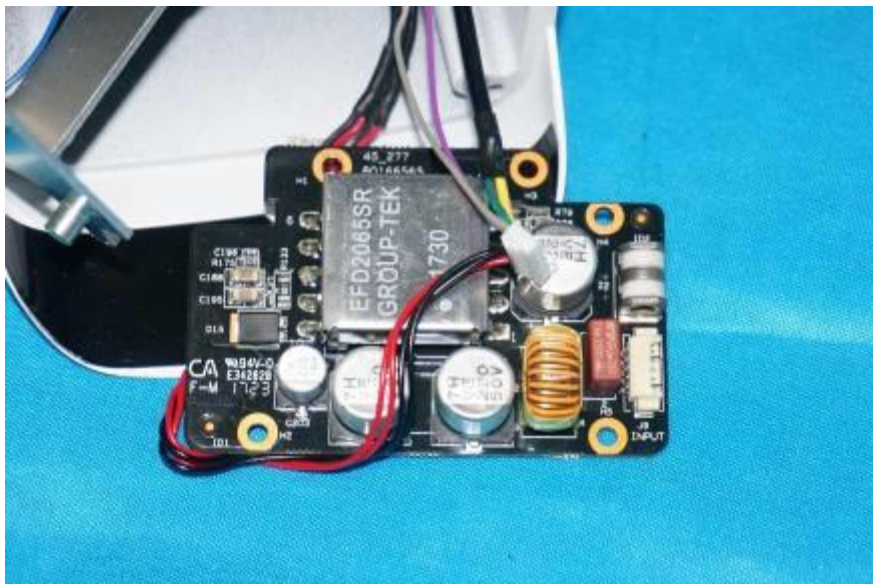

--End of the Report--