

DH-XVR4232AN-I/T

32CH Penta-brid 1080N/720P 1U 2HDDs WizSense Digital Video Recorder



WizSense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

The XVR4000-I/T Series provides cost-effective, high-performance recorders that are ideal for those with budget constraints seeking quality and functionality. It offers advanced AI functions and features two-way talk supported by all the channels. In addition, this XVR comes with a user-friendly analog system that has a low overall system cost, making it suitable for a wide range of applications.

Functions

Two-way talk

Allows for seamless communication between the camera, client and recorder over coaxial cable, and offers instant voice intercom and timely audio alerts.

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Smart Dual Light

With Smart Dual Light technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual light technology can meet the requirements of a wide variety of scenes.

* *Dolynk cloud version: DMSS 2.0.30 and above, Dolynk Care 2.50.20 and above.*

- 32-channel two-way talk over coaxial cable allows for seamless communication between the camera, client and recorder.
- 32-channel SMD Plus for analog channels or 36-channel SMD by camera which allows the device to trigger accurate alarms for humans and vehicles.
- 8-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 20-channel IP camera input and each channel can be up to 6 MP. The incoming bandwidth reaches 128 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- Smart H.265+ and H.265 dual-stream video compression.



One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

AI Coding-ABR

Compared with H.265, AI coding-ABR can save 50% on storage costs, and save bit rate for complex scenes, which can prioritize image quality in dynamic scenes.

Technical Specification

System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

SMD

SMD Plus by Recorder	32 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD by Camera	36 channels

Irregular Black Block Masking

Irregular Black Block Masking by Recorder	1 channel
---	-----------

Audio and Video

Analog Camera Input	32 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	1. CVI: 1080p@25/30 fps; 720p@25/30 fps. 2. TVI: 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 1080p@25/30 fps; 720p@25/30 fps.
IP Camera Input	Up to 20 channels of IPC access 4 IP channel by default + 16 channels (analog channels are converted to IP channels) Incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps
Encoding Capacity	Main stream: the 1st channel 1080N/720p@(1 fps–25/30 fps), others 1080N/720p@(1 fps–15 fps); 960H/D1/CIF@(1 fps–25/30 fps) Sub stream: CIF@(1 fps–7 fps)
Dual-stream	Yes
Video Bit Rate	32 kbps–4096 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA, 1 CVBS HDMI: 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
Multi-screen Display	1/4/8/9/16/25/36
Third-party Camera Access	Panasonic; Sony; Hanwha; Axis; Arecont; ONVIF

Compression Standard

Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 2.12 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox

Recording Playback

Record Mode	General; alarm; motion detection
Recording Playback	1/4/9/16
Backup Method	USB device and network
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback

Storage

Disk Group	Yes
------------	-----

Alarm

General Alarm	Motion detection; alarm box; HDCVI alarm; camera external alarm; network alarm; PIR alarm
Anomaly Alarm	Error (no disk, disk error, low space, low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline
Intelligent Alarm	SMD Plus
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; audio; buzzer; log; preset; email

Ports

CVBS Output	1 channel
Audio Input	1-channel RCA 32-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Coaxial two-way talk: 32-channel BNC Local and network user two-way talk: Shares the same audio input with the first channel
Disk Interface	2 SATA ports. Each disk can contain up to 16 TB. This limit varies depending on the environment temperature.
RS-485	1
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)


General

Power Supply	12 VDC, 4 A
Power Consumption	<12 W (without HDD)
Net Weight	1.91 kg (4.21 lb)
Gross Weight	3.01 kg (6.64 lb)
Product Dimensions	375.0 mm × 289.6 mm × 53.0 mm (14.76" × 11.40" × 2.09") (W × D × H)
Packaging Dimensions	427.0 mm × 137.0 mm × 356.0 mm (16.81" × 5.39" × 14.01") (W × D × H)
Operating Temperature	−10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	−20 °C to +60 °C (−4 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Installation	Desktop

Certifications

CE-LVD: IEC 62368-1:2014
 CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014

Dimensions (mm[inch])

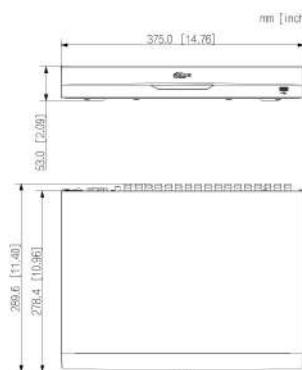


Ordering Information


Type	Model	Description
DIGITAL VIDEO RECORDER	DH-XVR4232AN-I/T	32CH Penta-brid 1080N/720P 1U 2HDDs WizSense Digital Video Recorder
	DHI-SSD-V800S1TB	SSD
	DH-NC650	802.11AC 650M WIRELESS ADAPTER
Accessories (Optional)	DHI-SSD-V800S512G	SSD
	DH-NC300	802.11AX 300M WIRELESS ADAPTER
	DHI-SSD-V800S256G	SSD

Accessories

Optional:

DHI-SSD-V800S256G
SSDDHI-SSD-V800S512G
SSDDHI-SSD-V800S1TB
SSDDH-NC300
802.11AX 300M
WIRELESS ADAPTERDH-NC650
802.11AC 650M
WIRELESS ADAPTER

Panels

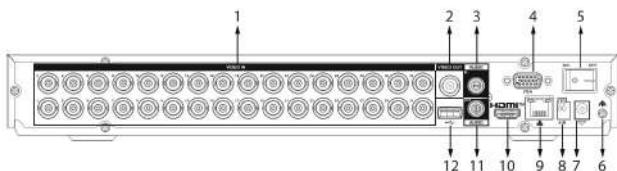

1 VIDEO IN	2 VIDEO OUT
3 AUDIO IN, RCA Connector	4 VGA Port
5 Power Switch	6 Ground
7 Power Input	8 RS-485 Port
9 Network Port	10 HDMI Port
11 AUDIO OUT, RCA Connector	12 USB Port