



CE EMC TEST REPORT

Report No.: RPA-16JY0025VNTY-49
MODEL NO.: HAC-HDW2120RP-VF, HAC-HDW2120RN-VF,
DH-HAC-HDW2120RN-VF, DH-HAC-HDW2120RP-VF,
HAC-HDW2220RP-VF, HAC-HDW2220RN-VF,
DH-HAC-HDW2220RP-VF, DH-HAC-HDW2220RN-VF,
DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF,
HAC-HDW1200RN-VF, HAC-HDW1200RP-VF,
DH-HAC-HDW1100RP-VF, DH-HAC-HDW1100RN-VF,
HAC-HDW1100RP-VF, HAC-HDW1100RN-VF,

Received: Apr 06, 2016

ISSUED: Apr 24, 2016

Applicant: Zhejiang Dahua Vision Technology Co., Ltd.

Address: No.1199, Bin'an Road, Binjiang District, Hangzhou,
P.R. China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Location: 2F, Building C, No.1618, Yishan Rd., 201103,
Shanghai, China

This test report consists of 188 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.



Contents

1. TEST PROGRAM	4
2. Summary of Test Procedure and Test Results	5
3. Immunity Testing Performance Criteria Definition	7
4. Test Configuration of Equipment under Test	8
4.1. Manufacturer	8
4.2. Feature of Equipment under Test	8
4.3. Test Software and Test Mode	11
4.4. Description of Support Unit	12
4.5. Measurement Uncertainty	13
5. Test of Conducted Emission	15
5.1. Test Limit	15
5.2. Test Procedures	18
5.3. Typical Test Setup	18
5.4. Measurement equipment	19
5.5. Test Data and Result	20
5.6. Test Photographs	32
6. Test of Radiated Emission	38
6.1. Test Limit	38
6.2. Test Procedures	41
6.3. Typical test Setup	42
6.4. Measurement equipment	42
6.5. Test Result and Data (30MHz ~ 1000MHz)	43
6.6. Test Result and Data (1000MHz ~ 6000MHz)	51
6.7. Test Photographs (30MHz ~ 1000MHz)	59
6.8. Test Photographs (1000MHz ~ 6000MHz)	62
7. Harmonics Test	65
7.1. Limits of Harmonics Current Measurement	65
7.2. Measurement equipment	66
7.3. Test Result and Data	67
7.1. Test Photographs	75
8. Voltage Fluctuations Test	78
8.1. Test Procedure	78
8.2. Measurement equipment	78
8.3. Test Result and Data	78
8.4. Test Photographs	87
9. Electrostatic Discharge Immunity Test	90
9.1. Test Procedure	90
9.2. Test Setup for Tests Performed in Laboratory	91
9.3. Test Severity Levels	92
9.4. Measurement equipment	92
9.5. Test Result and Data	93
9.6. Test Photographs	100
10. Radio Frequency electromagnetic field immunity test	116
10.1. Test Procedure	116



10.2. Test Severity Levels	117
10.3. Measurement equipment	117
10.4. Test Result and Data	118
10.5. Test Photographs	124
11. Electrical Fast Transient/ Burst Immunity Test	127
11.1. Test Procedure	127
11.2. Test Severity Levels	128
11.3. Measurement equipment	128
11.4. Test Result and Data	129
11.5. Test Photographs	136
12. Surge Immunity Test	142
12.1. Test Procedure	142
12.2. Test Severity Level	143
12.3. Measurement equipment	143
12.4. Test Result and Data	144
12.5. Test Photographs	154
13. Conduction Disturbances induced by Radio-Frequency Fields	157
13.1. Test Procedure	157
13.2. Test Severity Levels	158
13.3. Measurement equipment	158
13.4. Test Result and Data	159
13.5. Test Photographs	165
14. Power Frequency Magnetic Field Immunity Tests	168
14.1. Test Setup	168
14.2. Test Severity Levels	168
14.1. Measurement equipment	168
14.1. Test Result and Data	169
14.2. Test Photographs	172
15. Voltage Dips and Voltage Interruptions Immunity Test Setup	175
15.1. Test Conditions	175
15.2. Measurement equipment	175
15.3. Test Result and Data	176
16. EUT Photographs	177
17. APPENDIX - INFORMATION ON THE TESTING LABORATORIES	188



1. TEST PROGRAM

PRODUCT: HDCVI CAMERA

MODEL NO.: HAC-HDW2120RP-VF, HAC-HDW2120RN-VF,
DH-HAC-HDW2120RN-VF, DH-HAC-HDW2120RP-VF,
HAC-HDW2220RP-VF, HAC-HDW2220RN-VF,
DH-HAC-HDW2220RP-VF, DH-HAC-HDW2220RN-VF,
DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF,
HAC-HDW1200RN-VF, HAC-HDW1200RP-VF,
DH-HAC-HDW1100RP-VF, DH-HAC-HDW1100RN-VF,
HAC-HDW1100RP-VF, HAC-HDW1100RN-VF,

APPLICANT: Zhejiang Dahua Vision Technology Co., Ltd.

TESTED: Apr 01, 2016 to Apr 23, 2016

STANDARDS: EN 55032: 2012+AC:2013 (Class B)

EN 61000-6-3: 2007/A1:2011

EN 50130-4: 2011

EN 61000-3-2: 2014

EN 61000-3-3 : 2013

EN 55024: 2010

IEC 61000-4-2: 2008

IEC 61000-4-3 : 2006+A1:2007+A2:2010

IEC 61000-4-4 : 2012

IEC 61000-4-5: 2014

IEC 61000-4-6: 2013

IEC 61000-4-8: 2009

IEC 61000-4-11: 2004

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested in Cerpess Technology Corp., and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

PREPARED BY : Sally Wan, **DATE:** Apr 24, 2016
Sally Wan
Report Engineer

TECHNICAL ACCEPTANCE : Joy ZHU, **DATE:** Apr 24, 2016
Joy ZHU
Testing Manager

APPROVED BY : Zhaoqian YU, **DATE:** Apr 24, 2016
Zhaoqian YU
Lab Manager

2. Summary of Test Procedure and Test Results

Second edition:

EMISSION(EN 55032: 2012+AC:2013/ EN 61000-6-3: 2007/A1:2011)		
Test Item	Normative References	Test Result
Conducted Emission	EN 55032: 2012+AC:2013 EN 61000-6-3: 2007/A1:2011	PASS
Radiated Emission	EN 55032: 2012+AC:2013 EN 61000-6-3: 2007/A1:2011	PASS
Harmonics	EN61000-3-2:2014	PASS
Voltage Fluctuations	EN 61000-3-3: 2013	PASS

First edition:

EMISSION(EN 55032: 2012+AC:2013/ EN 61000-6-3: 2007/A1:2011)		
Test Item	Normative References	Test Result
Conducted Emission	EN 55032: 2012+AC:2013 EN 61000-6-3: 2007/A1:2011	PASS
Radiated Emission	EN 55032: 2012+AC:2013 EN 61000-6-3: 2007/A1:2011	PASS
Harmonics	EN61000-3-2:2014	PASS
Voltage Fluctuations	EN 61000-3-3: 2013	PASS

IMMUNITY[EN 55024:2010]			
Standard	Item	Result	Remarks
IEC 61000-4-2: 2008	ESD	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 2006+A1:2007+A2:2010	RS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2012	EFT	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-5:2005	Surge	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-6:2013	CS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-8:2009	PFMF	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11:2004	Voltage dips & voltage variations	N/A	N/A

IMMUNITY[EN 50130-4: 2011]			
Standard	Item	Result	Remarks
IEC 61000-4-2: 2008	ESD	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 2006+A1:2007+A2:2010	RS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2012	EFT	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-5:2005	Surge	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-6:2013	CS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11:2004	Voltage dips & voltage variations	N/A	N/A



History of this test report

☐ ORIGINAL.

■ Additional attachment as following record:

Report No	Version	Date	Description
SECE1412139	Rev 01	Jan 15, 2015	Initial Issue
SECE1412139-B	Rev 02	Apr 16, 2015	First edition (Add model names)
SECE1503109-B	Rev 03	Sep 01, 2015	Second edition (Add model names)
RPA-16JY0025VNTY-49	Rev 04	Apr 24, 2016	Third Issue (update instruction)

3. Immunity Testing Performance Criteria Definition

- A. Normal performance within limits specified by the manufacture, requestor or purchaser;
- B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- C. Temporary loss of function or degradation of performance, the correction of which requires operation intervention;
- D. Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

4. Test Configuration of Equipment under Test

4.1. Manufacturer

Zhejiang Dahua Vision Technology Co., Ltd.

No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

4.2. Feature of Equipment under Test

Second edition:

HDCVI CAMERA	Model No.:	HAC-HDW2120RP-VF, HAC-HDW2120RN-VF, DH-HAC-HDW2120RN-VF, DH-HAC-HDW2120RP-VF, HAC-HDW2220RP-VF, HAC-HDW2220RN-VF, DH-HAC-HDW2220RP-VF, DH-HAC-HDW2220RN-VF, DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF, HAC-HDW1200RN-VF, HAC-HDW1200RP-VF DH-HAC-HDW1100RP-VF, DH-HAC-HDW1100RN-VF, HAC-HDW1100RP-VF, HAC-HDW1100RN-VF
Remark	DH-HAC-HDW1100RP-VF was selected as the test model and its data have been recorded in this report.	
Adapter	Model No.:	ADS-12B-12 12012Gz
	Input:	100-240V~50/60Hz 0.3A Max.
	Output:	12V,1.0A

Models' Differences:

Model No	Differences
HAC-HDW2120RP-VF	These models are similar to DH-HAC-HDW2120RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2120RN-VF	
DH-HAC-HDW2120RN-VF	
DH-HAC-HDW2120RP-VF	different pixel (different motherboard)
HAC-HDW2220RP-VF	These models are similar to DH-HAC-HDW2220RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2220RN-VF	
DH-HAC-HDW2220RN-VF	
DH-HAC-HDW2220RP-VF	The main model
DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF, HAC-HDW1200RN-VF, HAC-HDW1200RP-VF	Appearance and specifications are the same, only internal motherboard is different.
DH-HAC-HDW1100RP-VF , DH-HAC-HDW1100RN-VF , HAC-HDW1100RP-VF , HAC-HDW1100RN-VF	original model difference is that the mainboard and sales area and model name is different,

First edition:

HDCVI CAMERA	Model No.:	HAC-HDW2120RP-VF, HAC-HDW2120RN-VF, DH-HAC-HDW2120RN-VF, DH-HAC-HDW2120RP-VF, HAC-HDW2220RP-VF, HAC-HDW2220RN-VF, DH-HAC-HDW2220RP-VF, DH-HAC-HDW2220RN-VF, DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF, HAC-HDW1200RN-VF, HAC-HDW1200RP-VF
Remark	DH-HAC-HDW1200RP-VF was selected as the test model and its data have been recorded in this report.	
Adapter	Model No.:	ADS-12B-12 12012Gz
	Input:	100-240V~50/60Hz 0.3A Max.
	Output:	12V,1.0A

Models' Differences:

Model No	Differences
HAC-HDW2120RP-VF	These models are similar to DH-HAC-HDW2120RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2120RN-VF	
DH-HAC-HDW2120RN-VF	
DH-HAC-HDW2120RP-VF	different pixel (different motherboard)
HAC-HDW2220RP-VF	These models are similar to DH-HAC-HDW2220RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2220RN-VF	
DH-HAC-HDW2220RN-VF	
DH-HAC-HDW2220RP-VF	The main model
DH-HAC-HDW1200RN-VF, DH-HAC-HDW1200RP-VF, HAC-HDW1200RN-VF, HAC-HDW1200RP-VF	Appearance and specifications are the same, only internal motherboard is different.

Original:

HDCVI CAMERA	Model No.:	HAC-HDW2120RP-VF, HAC-HDW2120RN-VF, DH-HAC-HDW2120RN-VF, DH-HAC-HDW2120RP-VF, HAC-HDW2220RP-VF, HAC-HDW2220RN-VF, DH-HAC-HDW2220RP-VF, DH-HAC-HDW2220RN-VF
Remark	DH-HAC-HDW2120RP-VF and DH-HAC-HDW2220RP-VF were selected as the test model and their data have been recorded in this report.	
Adapter	Model No.:	ADS-12B-12 12012Gz
	Input:	100-240V~50/60Hz 0.3A Max.
	Output:	12V,1.0A

Models' Differences:

Model No	Differences
HAC-HDW2120RP-VF	These models are similar to DH-HAC-HDW2120RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2120RN-VF	
DH-HAC-HDW2120RN-VF	
DH-HAC-HDW2120RP-VF	different pixel (different motherboard)
HAC-HDW2220RP-VF	These models are similar to DH-HAC-HDW2220RP-VF except for video standard, with or without DAHUA logo.
HAC-HDW2220RN-VF	
DH-HAC-HDW2220RN-VF	
DH-HAC-HDW2220RP-VF	The main model



4.3. Test Software and Test Mode

Second edition:

Test Manner

- a During testing, the interface cables and equipment positions were varied according to Europe Standard.
- b Turn on the power of all equipment.
- c The complete test system included LCD Monitor, DVR and EUT for EMC test.

The pre-test modes

Test Mode 1: Normal Operation

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Normal Operation

First edition:

Test Manner

- a During testing, the interface cables and equipment positions were varied according to Europe Standard.
- b Turn on the power of all equipment.
- c The complete test system included LCD Monitor, DVR and EUT for EMC test.

The pre-test modes

Test Mode 1: Normal Operation

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Normal Operation

Original:

Test Manner

- a During testing, the interface cables and equipment positions were varied according to Europe Standard.
- b Turn on the power of all equipment.
- c The complete test system included Monitor, DVR and EUT for EMC test.

The pre-test modes

Test Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF

Test Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF

Test Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF

4.4. Description of Support Unit

Second edition:

No.	Device	Manufacturer	Model No.	Description
1	LCD Monitor	DELL	SE198WFPT	Non-Shielded,1.8m(R43346)
2	DVR	DAHUA	HCVR5208A	Non-Shielded,1.5m

No.	Cable	Quantity	Description
A	VGA Cable	1	Non-Shielded, 1.8m, with two ferrite core bonded
B	BNC Cable	1	Shielded, >3.0m

First edition:

No.	Device	Manufacturer	Model No.	Description
1	LCD Monitor	DELL	SE198WFPT	Non-Shielded,1.8m(R43346)
2	DVR	DAHUA	DVR5208	Non-Shielded,1.5m

No.	Cable	Quantity	Description
A	VGA Cable	1	Non-Shielded, 1.5m
B	BNC Cable	1	Shielded, >3.0m

Original:

No.	Device	Manufacturer	Model No.	Description
1	Monitor	PINEER-TIMES	PNT-14A	Non-Shielded,1.8m
2	DVR	DAHUA	DVR5208	Non-Shielded,1.5m

No.	Cable	Quantity	Description
A	BNC Cable	1	Shielded, >3.0m
B	BNC Cable	1	Shielded, >3.0m

4.5. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions(LINE)	9KHz-30MHz	+/- 0.6888 dB
Conducted emissions(NEUTRAL)	9KHz-30MHz	+/- 0.7002 dB

Measurement	Polarity	Frequency	Uncertainty
Radiated emissions (below 1GHz)	H	30MHz ~ 200MHz	+/- 4.0677 dB
		200MHz ~1000MHz	+/- 3.9131 dB
	V	30MHz ~ 200MHz	+/- 4.0678dB
		200MHz ~1000MHz	+/- 3.9142dB
Radiated emissions (above 1GHz)	H	1000MHz ~18000MHz	+/- 3.8904 dB
		18000MHz ~40000MHz	+/-3.9356dB
	V	1000MHz ~18000MHz	+/- 3.8896dB
		18000MHz ~40000MHz	+/- 3.8766dB

Measurement	Uncertainty
ESD—Rise time tr	6.4%
ESD—Peak current Ip	6%
ESD—Current at 30 ns	6%
ESD—Current at 60 ns	6%
ESD- Charging voltage	1%
RS above 1GHz	±2.28dB
RS under 1GHz	±3.62dB
EFT—Rise time tr	4%
EFT—Peak current Ip	4%
EFT—Current	4%
Surge—Rise time tr	4%
Surge—Peak current Ip	4%
Surge—Current	4%
CS-CND	±0.80dB
CS-Clamp	±1.06dB



This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22: 2008, clause 11, Measurement Uncertainty) determining compliance with the limits shall be based on the results of the compliance measurement. Consequently the measured emissions being less than the maximum allowed emission result in this being a compliant test or passing test.

5. Test of Conducted Emission

5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 55032.

Table A.8 – Requirements for conducted emissions from the AC mains power ports of Class A equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A limits dB(μV)
A8.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	79
	0,5 – 30			73
A8.2	0,15 – 0,5	AMN	Average / 9 kHz	66
	0,5 – 30			60
NOTE Apply A8.1 and A8.2 across the entire frequency range.				

Table A.9 – Requirements for conducted emissions from the AC mains power ports of Class B equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B limits dB(μV)
A9.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	66 – 56
	0,5 – 5			56
	5 – 30			60
A9.2	0,15 – 0,5	AMN	Average / 9 kHz	56 – 46
	0,5 – 5			46
	5 – 30			50
NOTE Apply A9.1 and A9.2 across the entire frequency range.				

**Table A.10 – Requirements for asymmetric mode conducted emissions
from Class A equipment**

Applicable to					
1. wired network ports (3.1.30) 2. optical fibre ports (3.1.24) with metallic shield or tension members 3. antenna ports (3.1.3)					
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A voltage limits dB(μV)	Class A current limits dB(μA)
A10.1	0,15 – 0,5	AAN	Quasi Peak / 9 kHz	97 – 87	n/a
	0,5 – 30			87	
	0,15 – 0,5	AAN	Average / 9 kHz	84 – 74	
	0,5 – 30			74	
A10.2	0,15 – 0,5	CVP and current probe	Quasi Peak / 9 kHz	97 – 87	53 – 43
	0,5 – 30			87	43
	0,15 – 0,5	CVP and current probe	Average / 9 kHz	84 – 74	40 – 30
	0,5 – 30			74	30
A10.3	0,15 – 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	53 – 43
	0,5 – 30				43
	0,15 – 0,5	Current Probe	Average / 9 kHz		40 – 30
	0,5 – 30				30
NOTE 1 The choice of coupling device and measurement procedure is defined in Annex C.					
NOTE 2 AC mains power ports shall meet the limits given in Table A.8.					
NOTE 3 The test shall cover the entire frequency range.					
NOTE 4 The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.					
NOTE 5 Testing is required at only one EUT supply voltage and frequency.					
NOTE 6 Applicable to ports listed above and intended to connect to cables longer than 3 m.					

**Table A.11 – Requirements for asymmetric mode conducted emissions
from Class B equipment**

Applicable to					
1. wired network ports (3.1.30) 2. optical fibre ports (3.1.24) with metallic shield or tension members 3. broadcast receiver tuner ports (3.1.8) 4. antenna ports (3.1.3)					
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B voltage limits dB(μV)	Class B current limits dB(μA)
A11.1	0,15 – 0,5	AAN	Quasi Peak / 9 kHz	84 – 74	n/a
	0,5 – 30			74	
	0,15 – 0,5	AAN	Average / 9 kHz	74 – 64	
	0,5 – 30			64	
A11.2	0,15 – 0,5	CVP and current probe	Quasi Peak / 9 kHz	84 – 74	40 – 30
	0,5 – 30			74	30
	0,15 – 0,5	CVP and current probe	Average / 9 kHz	74 – 64	30 – 20
	0,5 – 30			64	20
A11.3	0,15 – 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	40 – 30
	0,5 – 30				30
	0,15 – 0,5	Current Probe	Average / 9 kHz		30 – 20
	0,5 – 30				20
NOTE 1 The choice of coupling device and measurement procedure is defined in Annex C.					
NOTE 2 Screened ports including TV broadcast receiver tuner ports are tested with a common-mode impedance of 150 Ω. This is typically accomplished with the screen terminated by 150 Ω to earth.					
NOTE 3 AC mains power ports shall meet the limits given in Table A.9.					
NOTE 4 The test shall cover the entire frequency range.					
NOTE 5 The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.					
NOTE 6 Testing is required at only one EUT supply voltage and frequency.					
NOTE 7 Applicable to ports listed above and intended to connect to cables longer than 3 m.					



5.4. Measurement equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2016.07.07	2017.07.06
AMN	R&S	ESH2-Z5	100182	2015.09.06	2016.09.05
Two-Line V-Network	R&S	ENV216	100325	/	/
ISN	FCC	FCC-TLISN-T2-02	20379	2016.03.26	2017.03.25
ISN	FCC	FCC-TLISN-T4-02	20380	2016.06.24	2017.06.24
ISN	FCC	FCC-TLISN-T8-02	20381	2016.03.26	2017.03.25
ISN	TESEQ	ISN ST08	30175	2016.03.26	2017.03.25
Current Probe	R&S	EZ-17	100303	2016.03.26	2017.03.25
Passive Voltage Probe	R&S	ESH2-Z3	100026	2016.03.26	2017.03.25
Pulse Limiter	R&S	ESH3-Z2	100529	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2016.03.29	2017.03.28
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A

5.5. Test Data and Result

5.5.1 Conducted Emission for Power Port Test Data

Second edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temperature :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/04/01

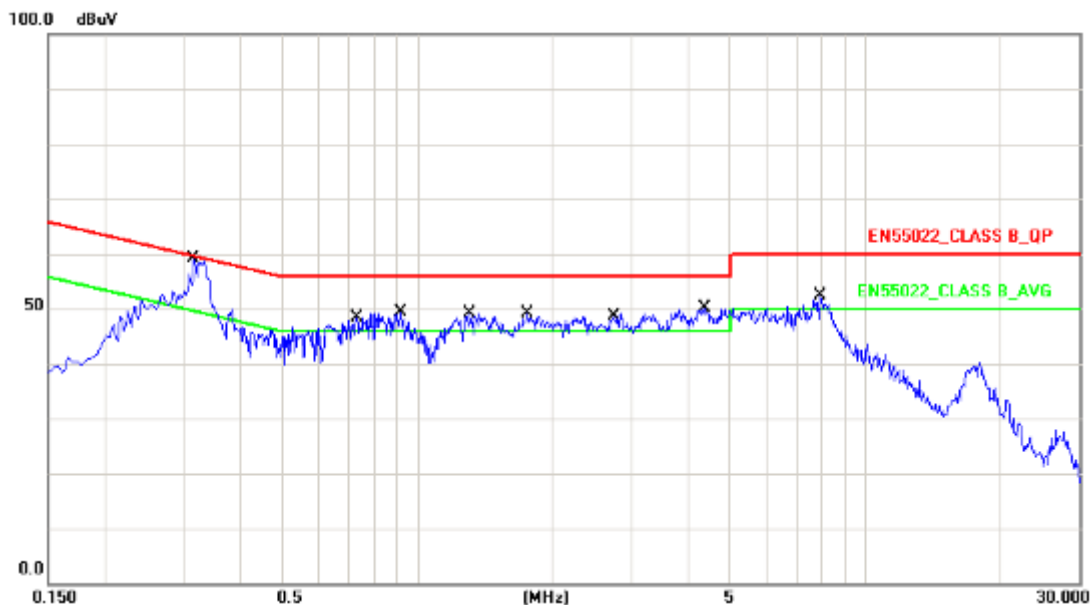


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	10.27	43.59	53.86	59.76	-5.90	QP
2	0.3180	10.27	33.06	43.33	49.76	-6.43	AVG
3	0.7340	10.32	33.14	43.46	56.00	-12.54	QP
4	0.7340	10.32	22.07	32.39	46.00	-13.61	AVG
5	0.9220	10.31	33.04	43.35	56.00	-12.65	QP
6	0.9220	10.31	22.10	32.41	46.00	-13.59	AVG
7	1.3140	10.30	33.21	43.51	56.00	-12.49	QP
8	1.3140	10.30	22.02	32.32	46.00	-13.68	AVG
9	1.7660	10.29	32.70	42.99	56.00	-13.01	QP
10	1.7660	10.29	21.06	31.35	46.00	-14.65	AVG
11	2.7460	10.30	33.72	44.02	56.00	-11.98	QP
12	2.7460	10.30	22.78	33.08	46.00	-12.92	AVG
13	4.3780	10.29	34.04	44.33	56.00	-11.67	QP
14	4.3780	10.29	21.25	31.54	46.00	-14.46	AVG
15	7.9060	10.31	34.47	44.78	60.00	-15.22	QP
16	7.9060	10.31	23.48	33.79	50.00	-16.21	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temperature :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/04/01

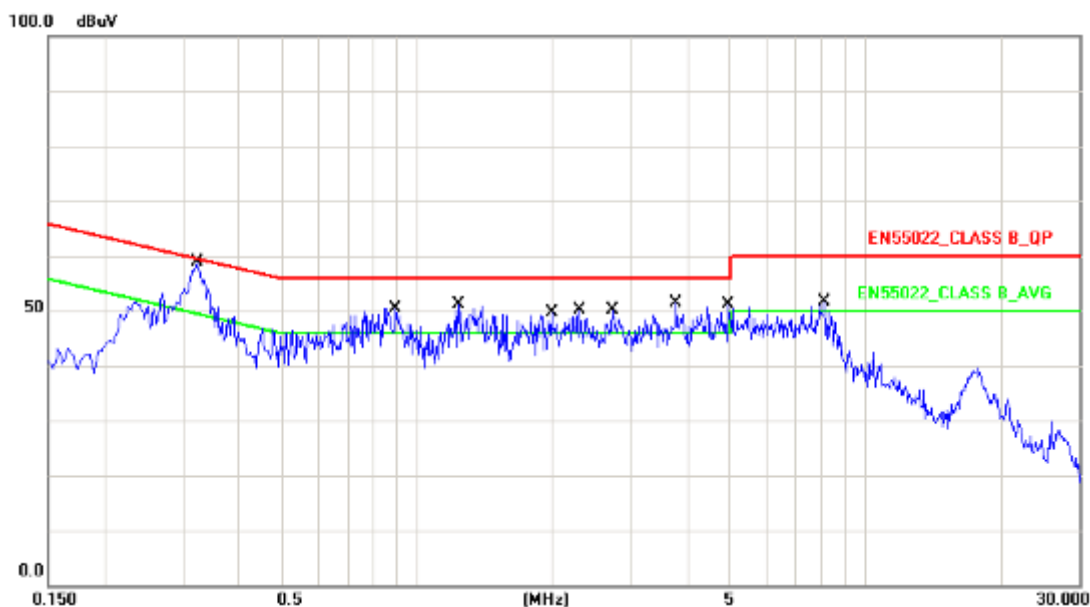


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3220	10.24	41.75	51.99	59.65	-7.66	QP
2	0.3220	10.24	32.00	42.24	49.65	-7.41	AVG
3	0.8980	10.31	31.73	42.04	56.00	-13.96	QP
4	0.8980	10.31	21.56	31.87	46.00	-14.13	AVG
5	1.2380	10.39	31.27	41.66	56.00	-14.34	QP
6	1.2380	10.39	19.71	30.10	46.00	-15.90	AVG
7	1.9980	10.48	29.95	40.43	56.00	-15.57	QP
8	1.9980	10.48	18.29	28.77	46.00	-17.23	AVG
9	2.3020	10.50	31.06	41.56	56.00	-14.44	QP
10	2.3020	10.50	19.83	30.33	46.00	-15.67	AVG
11	2.7260	10.51	31.31	41.82	56.00	-14.18	QP
12	2.7260	10.51	20.72	31.23	46.00	-14.77	AVG
13	3.7900	10.53	30.97	41.50	56.00	-14.50	QP
14	3.7900	10.53	19.55	30.08	46.00	-15.92	AVG
15	4.9460	10.55	30.94	41.49	56.00	-14.51	QP
16	4.9460	10.55	18.24	28.79	46.00	-17.21	AVG
17	8.1260	10.58	30.02	40.60	60.00	-19.40	QP
18	8.1260	10.58	19.68	30.26	50.00	-19.74	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

First edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/14

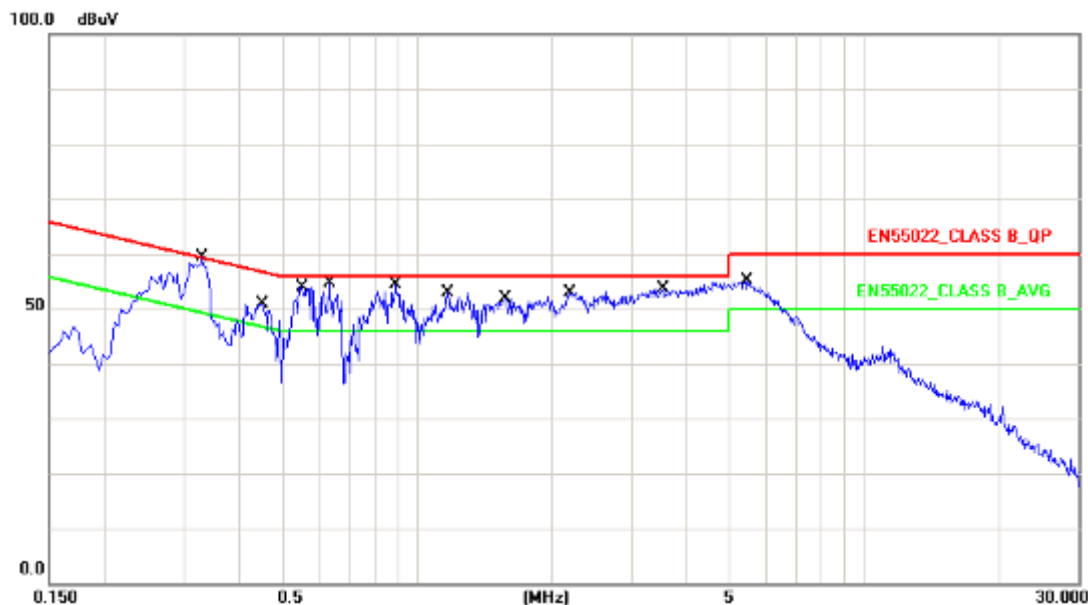


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	10.27	45.84	56.11	59.45	-3.34	QP
2	0.3300	10.27	36.77	47.04	49.45	-2.41	AVG
3	0.4500	10.28	41.23	51.51	56.87	-5.36	QP
4	0.4500	10.28	31.30	41.58	46.87	-5.29	AVG
5	0.5540	10.30	43.05	53.35	56.00	-2.65	QP
6	0.5540	10.30	33.45	43.75	46.00	-2.25	AVG
7	0.6340	10.31	41.01	51.32	56.00	-4.68	QP
8	0.6340	10.31	30.24	40.55	46.00	-5.45	AVG
9	0.8940	10.31	41.88	52.19	56.00	-3.81	QP
10	0.8940	10.31	31.46	41.77	46.00	-4.23	AVG
11	1.1700	10.31	40.27	50.58	56.00	-5.42	QP
12	1.1700	10.31	31.59	41.90	46.00	-4.10	AVG
13	1.5740	10.30	39.03	49.33	56.00	-6.67	QP
14	1.5740	10.30	30.93	41.23	46.00	-4.77	AVG
15	2.1940	10.30	39.25	49.55	56.00	-6.45	QP
16	2.1940	10.30	31.65	41.95	46.00	-4.05	AVG
17	3.5340	10.29	40.16	50.45	56.00	-5.55	QP
18	3.5340	10.29	31.59	41.88	46.00	-4.12	AVG
19	5.4500	10.29	42.12	52.41	60.00	-7.59	QP
20	5.4500	10.29	32.98	43.27	50.00	-6.73	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/14

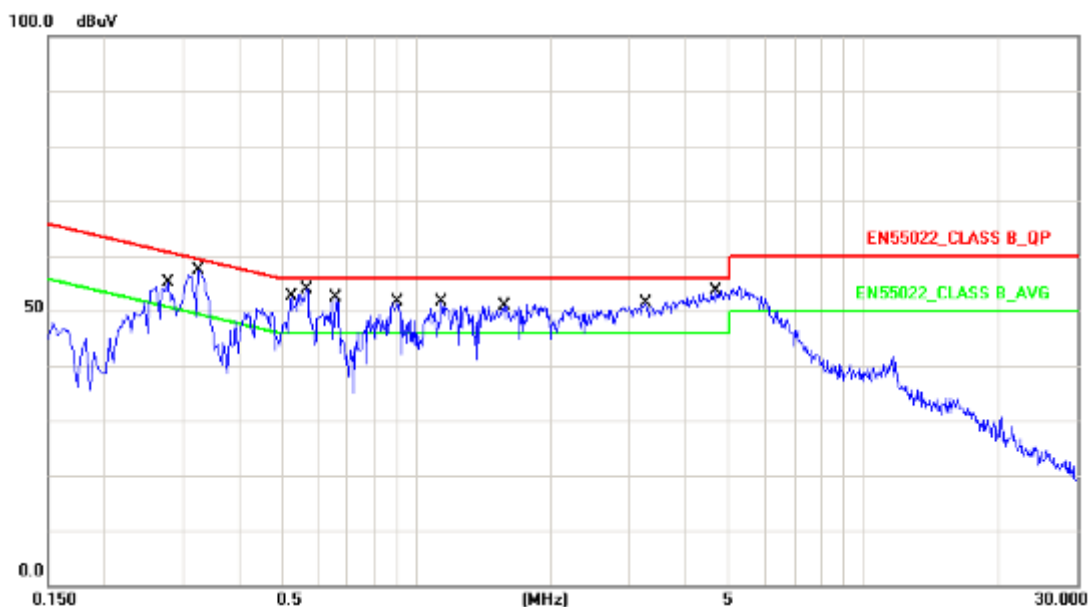


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2779	10.24	45.02	55.26	60.88	-5.62	QP
2	0.2779	10.24	32.74	42.98	50.88	-7.90	AVG
3	0.3260	10.24	46.75	56.99	59.55	-2.56	QP
4	0.3260	10.24	36.72	46.96	49.55	-2.59	AVG
5	0.5260	10.25	39.02	49.27	56.00	-6.73	QP
6	0.5260	10.25	28.38	38.63	46.00	-7.37	AVG
7	0.5700	10.26	41.65	51.91	56.00	-4.09	QP
8	0.5700	10.26	30.82	41.08	46.00	-4.92	AVG
9	0.6580	10.27	36.70	46.97	56.00	-9.03	QP
10	0.6580	10.27	21.74	32.01	46.00	-13.99	AVG
11	0.9060	10.31	39.59	49.90	56.00	-6.10	QP
12	0.9060	10.31	29.25	39.56	46.00	-6.44	AVG
13	1.1380	10.35	35.61	45.96	56.00	-10.04	QP
14	1.1380	10.35	25.19	35.54	46.00	-10.46	AVG
15	1.5700	10.46	36.51	46.97	56.00	-9.03	QP
16	1.5700	10.46	27.16	37.62	46.00	-8.38	AVG
17	3.2580	10.52	37.42	47.94	56.00	-8.06	QP
18	3.2580	10.52	26.80	37.32	46.00	-8.68	AVG
19	4.6740	10.55	39.73	50.28	56.00	-5.72	QP
20	4.6740	10.55	27.70	38.25	46.00	-7.75	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Original:

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

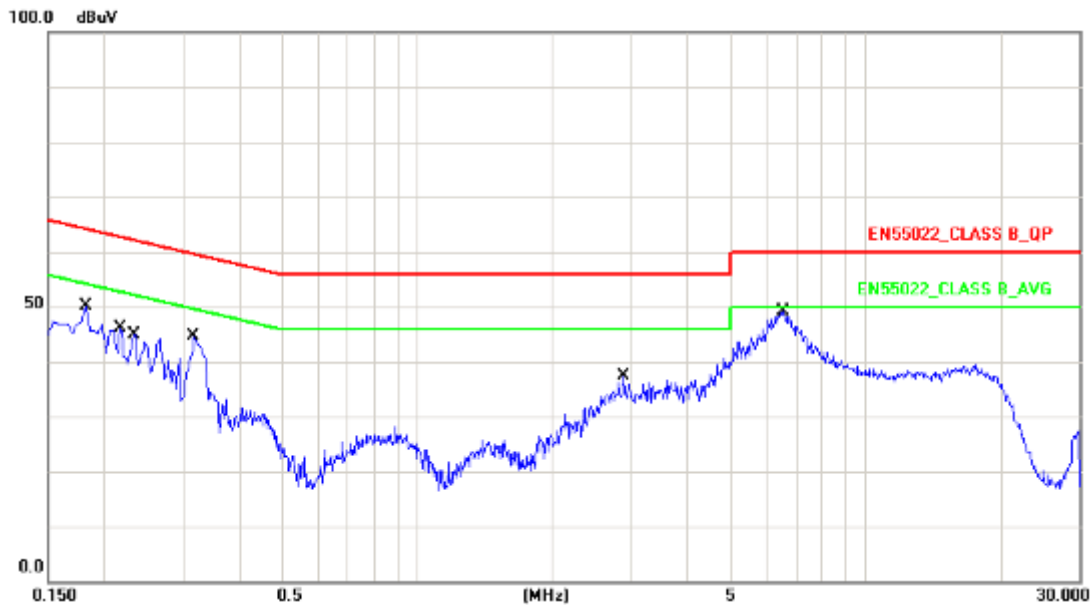


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1819	10.25	32.52	42.77	64.39	-21.62	QP
2	0.1819	10.25	17.85	28.10	54.39	-26.29	AVG
3	0.2180	10.25	30.76	41.01	62.89	-21.88	QP
4	0.2180	10.25	19.21	29.46	52.89	-23.43	AVG
5	0.2340	10.26	28.85	39.11	62.30	-23.19	QP
6	0.2340	10.26	18.64	28.90	52.30	-23.40	AVG
7	0.3180	10.27	31.51	41.78	59.76	-17.98	QP
8	0.3180	10.27	23.02	33.29	49.76	-16.47	AVG
9	2.8900	10.30	20.96	31.26	56.00	-24.74	QP
10	2.8900	10.30	11.32	21.62	46.00	-24.38	AVG
11	6.5500	10.30	33.70	44.00	60.00	-16.00	QP
12	6.5500	10.30	24.70	35.00	50.00	-15.00	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Phase :	NEUTRAL
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

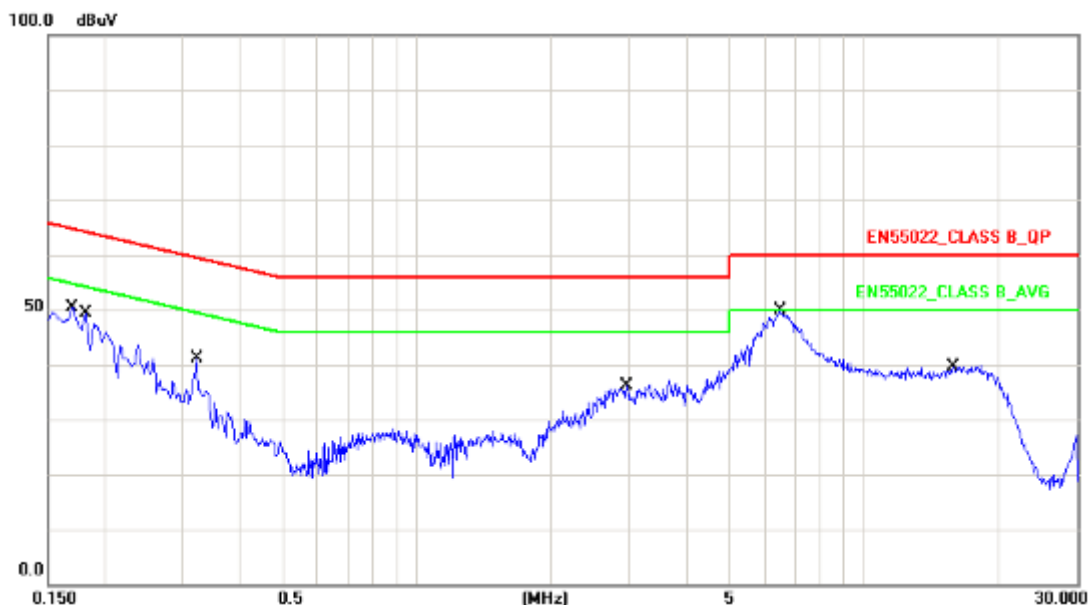


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	10.20	32.84	43.04	64.96	-21.92	QP
2	0.1700	10.20	13.06	23.26	54.96	-31.70	AVG
3	0.1819	10.20	32.37	42.57	64.39	-21.82	QP
4	0.1819	10.20	14.50	24.70	54.39	-29.69	AVG
5	0.3220	10.24	25.43	35.67	59.65	-23.98	QP
6	0.3220	10.24	16.21	26.45	49.65	-23.20	AVG
7	2.9500	10.51	20.29	30.80	56.00	-25.20	QP
8	2.9500	10.51	11.61	22.12	46.00	-23.88	AVG
9	6.5180	10.56	34.34	44.90	60.00	-15.10	QP
10	6.5180	10.56	25.70	36.26	50.00	-13.74	AVG
11	15.8180	10.72	23.75	34.47	60.00	-25.53	QP
12	15.8180	10.72	17.83	28.55	50.00	-21.45	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Phase :	LINE
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

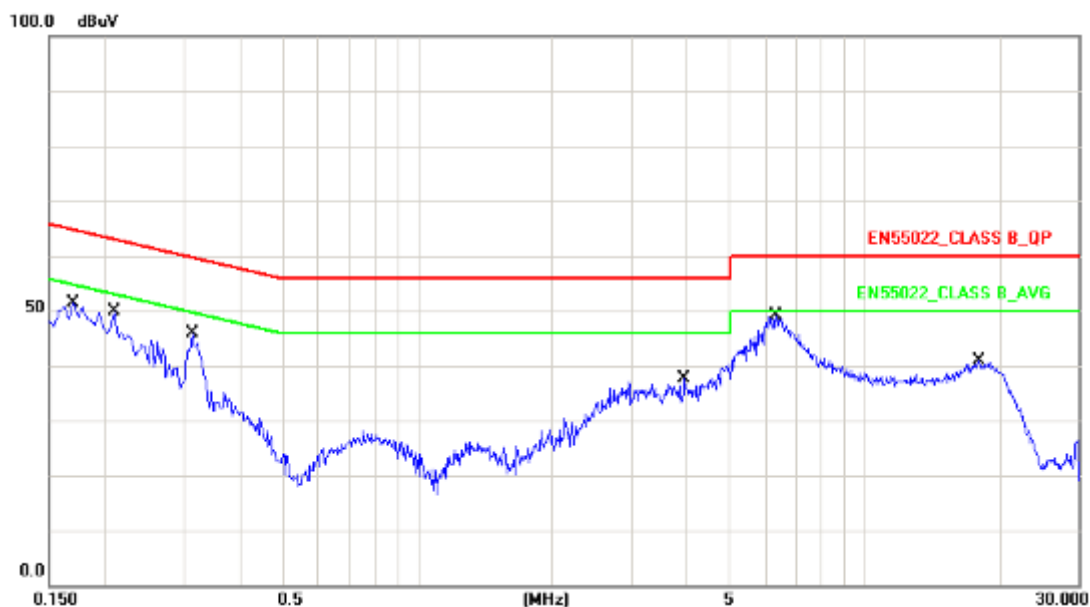


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	10.24	33.25	43.49	64.96	-21.47	QP
2	0.1700	10.24	15.55	25.79	54.96	-29.17	AVG
3	0.2100	10.25	32.22	42.47	63.20	-20.73	QP
4	0.2100	10.25	19.71	29.96	53.20	-23.24	AVG
5	0.3140	10.27	32.15	42.42	59.86	-17.44	QP
6	0.3140	10.27	24.45	34.72	49.86	-15.14	AVG
7	3.9580	10.29	20.61	30.90	56.00	-25.10	QP
8	3.9580	10.29	11.89	22.18	46.00	-23.82	AVG
9	6.3300	10.29	33.45	43.74	60.00	-16.26	QP
10	6.3300	10.29	23.47	33.76	50.00	-16.24	AVG
11	17.9660	10.43	25.10	35.53	60.00	-24.47	QP
12	17.9660	10.43	19.98	30.41	50.00	-19.59	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode : Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF
 AC Power : AC 230V/50Hz Phase : NEUTRAL
 Equipment : HDCVI CAMERA Model No : DH-HAC-HDW2220RP-VF
 Temperature : 22°C Humidity : 48%
 Pressure(mbar) : 1002 Date : 2015/01/12

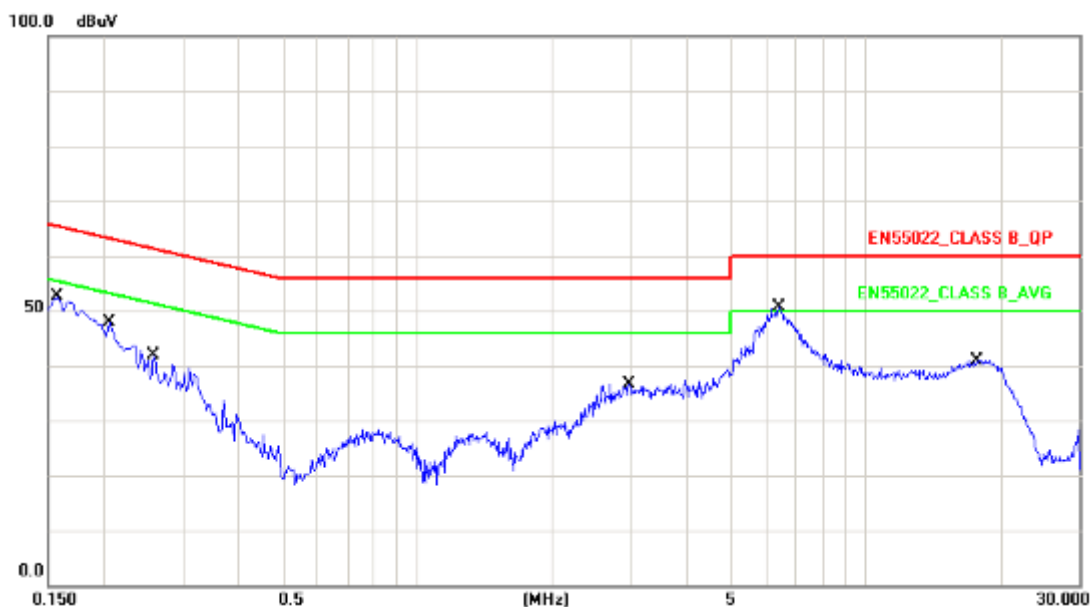

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	10.20	36.36	46.56	65.56	-19.00	QP
2	0.1580	10.20	17.53	27.73	55.56	-27.83	AVG
3	0.2060	10.21	30.14	40.35	63.36	-23.01	QP
4	0.2060	10.21	14.48	24.69	53.36	-28.67	AVG
5	0.2580	10.23	23.64	33.87	61.49	-27.62	QP
6	0.2580	10.23	9.96	20.19	51.49	-31.30	AVG
7	2.9660	10.51	22.24	32.75	56.00	-23.25	QP
8	2.9660	10.51	12.83	23.34	46.00	-22.66	AVG
9	6.3900	10.56	34.75	45.31	60.00	-14.69	QP
10	6.3900	10.56	24.84	35.40	50.00	-14.60	AVG
11	17.7780	10.76	25.46	36.22	60.00	-23.78	QP
12	17.7780	10.76	20.10	30.86	50.00	-19.14	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test engineer: Leber

5.5.1 Conducted Emission for Telecommunication Port Test Data

Second edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temperature :	25°C	Humidity :	53%
Pressure(mbar) :	1002	Date :	2016/04/01




No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.9860	8.22	-13.72	-5.50	30.00	-35.50	QP
2	0.9860	8.22	-19.26	-11.04	20.00	-31.04	AVG
3	1.2620	8.59	-11.67	-3.08	30.00	-33.08	QP
4	1.2620	8.59	-18.15	-9.56	20.00	-29.56	AVG
5	4.6940	9.36	-5.06	4.30	30.00	-25.70	QP
6	4.6940	9.36	-13.90	-4.54	20.00	-24.54	AVG
7	6.6380	9.50	-12.69	-3.19	30.00	-33.19	QP
8	6.6380	9.50	-20.02	-10.52	20.00	-30.52	AVG
9	17.4260	9.91	-5.43	4.48	30.00	-25.52	QP
10	17.4260	9.91	-11.86	-1.95	20.00	-21.95	AVG
11	27.6660	9.82	3.64	13.46	30.00	-16.54	QP
12	27.6660	9.82	-0.87	8.95	20.00	-11.05	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

First edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/04/14

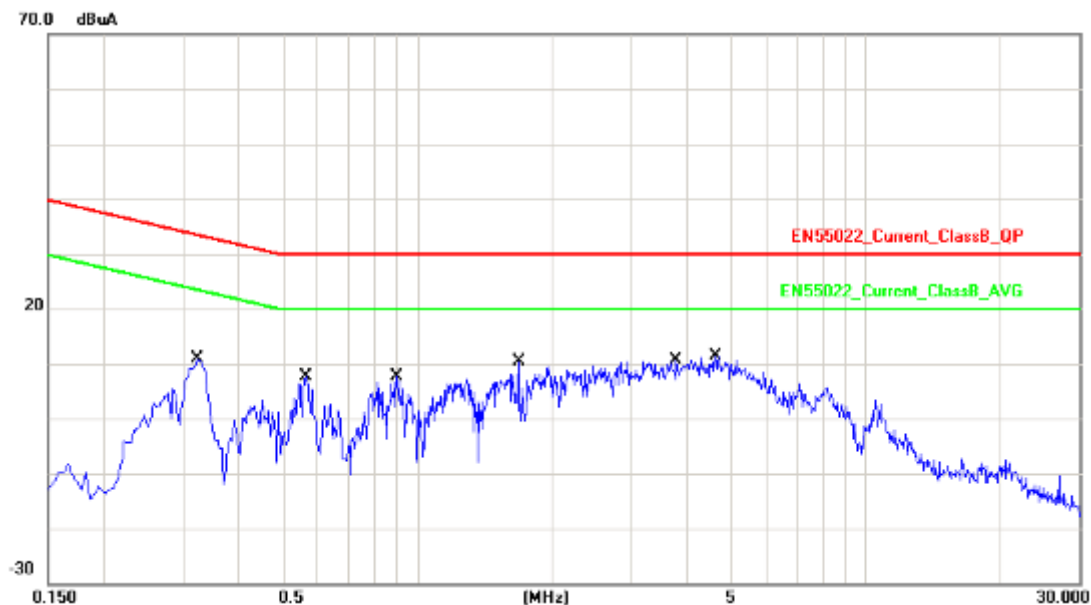


No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.3220	5.96	1.73	7.69	33.65	-25.96	QP
2	0.3220	5.96	-8.83	-2.87	23.65	-26.52	AVG
3	0.5660	7.46	-3.14	4.32	30.00	-25.68	QP
4	0.5660	7.46	-11.81	-4.35	20.00	-24.35	AVG
5	0.9020	8.25	-3.48	4.77	30.00	-25.23	QP
6	0.9020	8.25	-11.62	-3.37	20.00	-23.37	AVG
7	1.6860	9.18	-7.68	1.50	30.00	-28.50	QP
8	1.6860	9.18	-16.27	-7.09	20.00	-27.09	AVG
9	3.7940	9.44	-5.12	4.32	30.00	-25.68	QP
10	3.7940	9.44	-13.63	-4.19	20.00	-24.19	AVG
11	4.6420	9.37	-4.71	4.66	30.00	-25.34	QP
12	4.6420	9.37	-12.82	-3.45	20.00	-23.45	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Original:

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

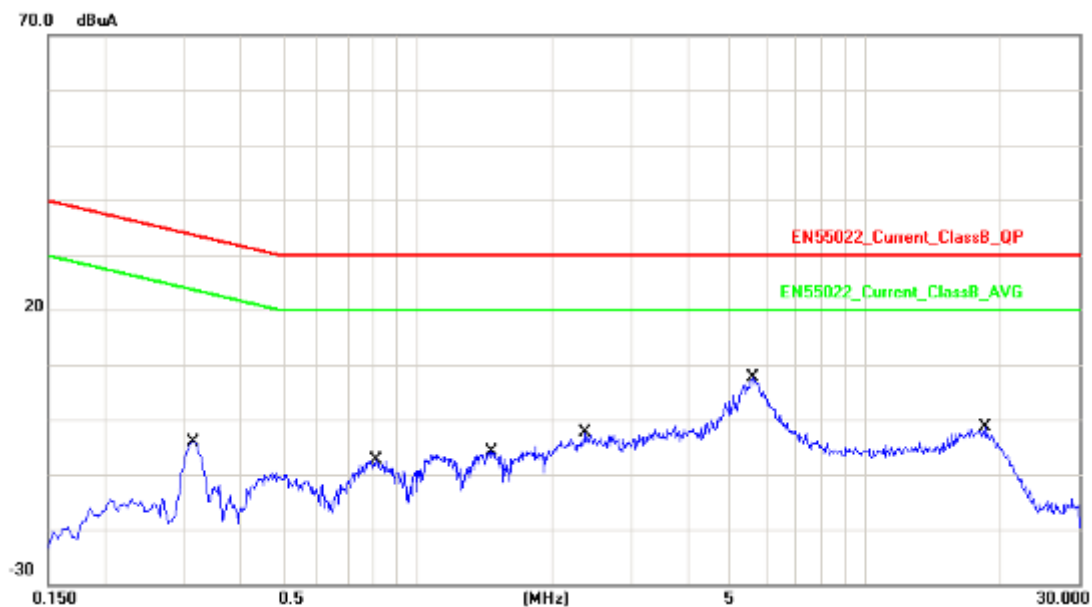

No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.3180	5.94	-11.69	-5.75	33.76	-39.51	QP
2	0.3180	5.94	-19.15	-13.21	23.76	-36.97	AVG
3	0.8100	8.28	-18.10	-9.82	30.00	-39.82	QP
4	0.8100	8.28	-25.06	-16.78	20.00	-36.78	AVG
5	1.4660	8.87	-17.24	-8.37	30.00	-38.37	QP
6	1.4660	8.87	-23.11	-14.24	20.00	-34.24	AVG
7	2.3820	9.58	-15.84	-6.26	30.00	-36.26	QP
8	2.3820	9.58	-21.93	-12.35	20.00	-32.35	AVG
9	5.6060	9.40	-7.64	1.76	30.00	-28.24	QP
10	5.6060	9.40	-15.92	-6.52	20.00	-26.52	AVG
11	18.5140	9.91	-17.38	-7.47	30.00	-37.47	QP
12	18.5140	9.91	-22.65	-12.74	20.00	-32.74	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Phase :	BNC
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temperature :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12



No.	Frequency (MHz)	Factor (dB)	Reading (dBuA)	Level (dBuA)	Limit (dBuA)	Margin (dB)	Detector
1	0.3140	5.91	-11.49	-5.58	33.86	-39.44	QP
2	0.3140	5.91	-17.95	-12.04	23.86	-35.90	AVG
3	1.0500	8.29	-16.67	-8.38	30.00	-38.38	QP
4	1.0500	8.29	-24.18	-15.89	20.00	-35.89	AVG
5	2.6460	9.56	-17.17	-7.61	30.00	-37.61	QP
6	2.6460	9.56	-24.36	-14.80	20.00	-34.80	AVG
7	4.0580	9.41	-15.15	-5.74	30.00	-35.74	QP
8	4.0580	9.41	-22.67	-13.26	20.00	-33.26	AVG
9	5.6579	9.41	-7.50	1.91	30.00	-28.09	QP
10	5.6579	9.41	-15.38	-5.97	20.00	-25.97	AVG
11	17.4460	9.91	-17.10	-7.19	30.00	-37.19	QP
12	17.4460	9.91	-22.34	-12.43	20.00	-32.43	AVG

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test engineer: Selen

5.6. Test Photographs


Second
edition:

Main

Front View



Rear View

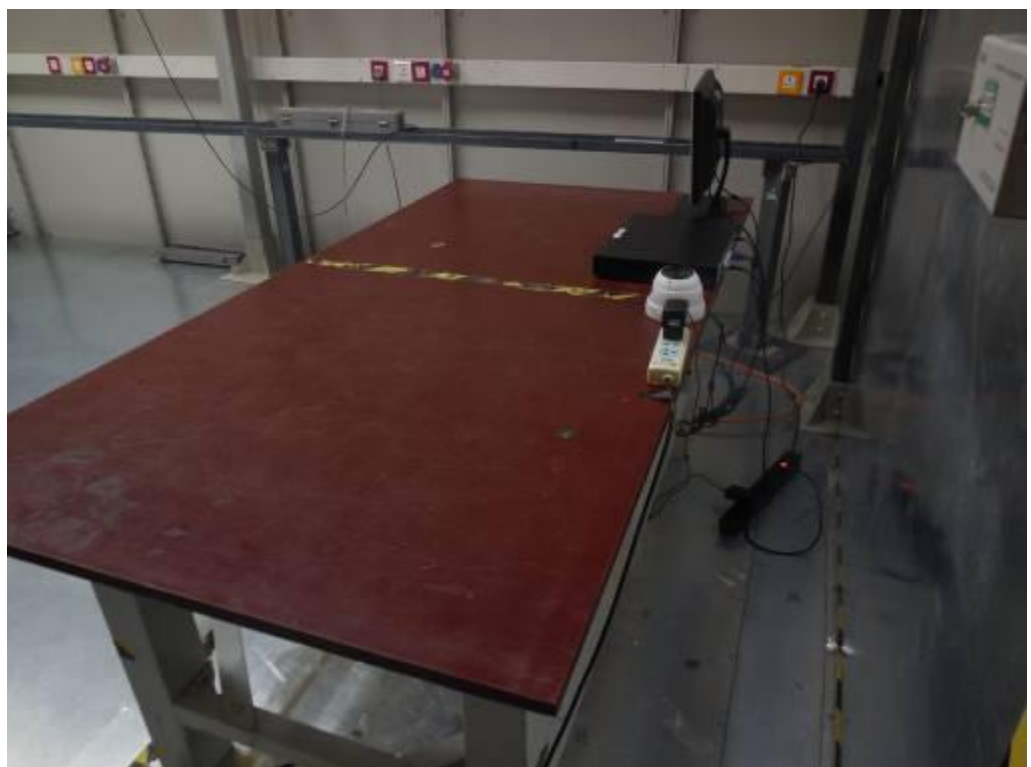

First edition:

Main

Front View



Rear View




Original:

Main

Front View




Rear View

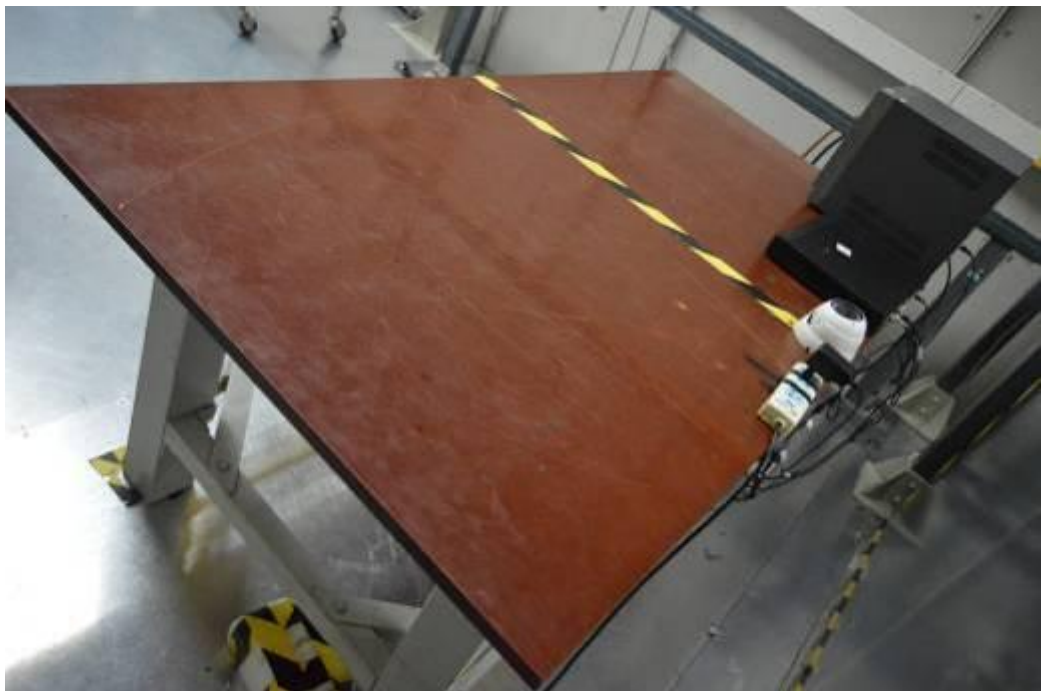

Second
edition:

BNC

Front View

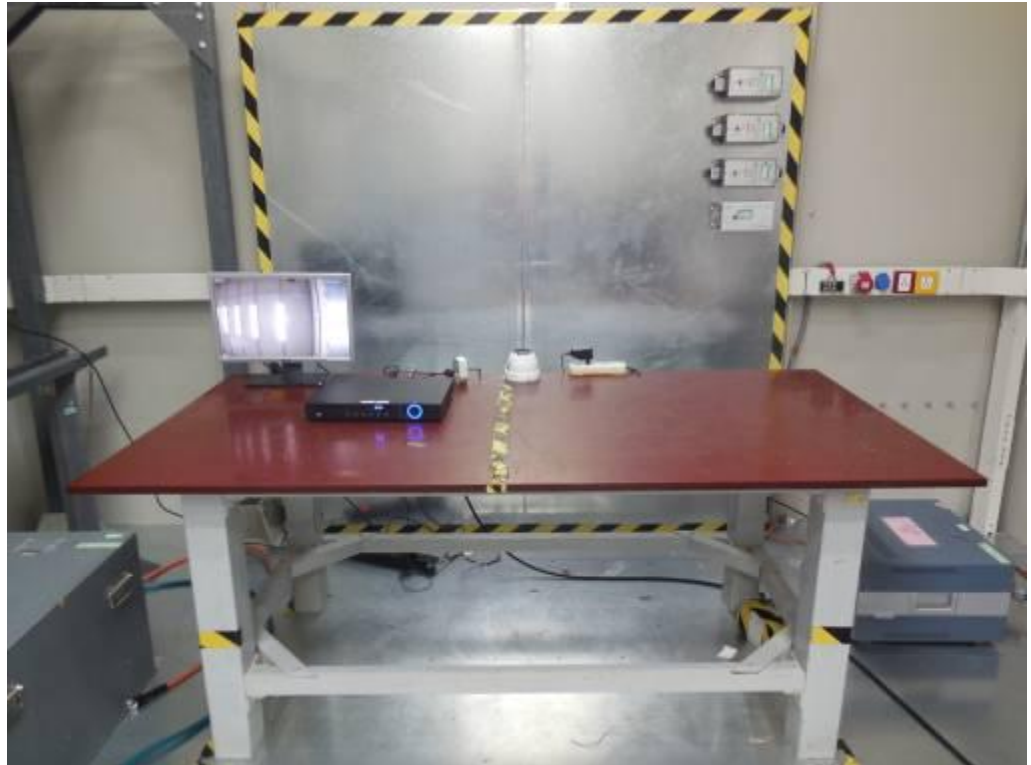

Rear View



First edition:

BNC

Front View



Rear View



Original:

BNC

Front View



Rear View



6. Test of Radiated Emission

6.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 55032. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table 1 – Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 \text{ MHz} < F_x \leq 500$ MHz	2 GHz
$500 \text{ MHz} < F_x \leq 1$ GHz	5 GHz
$F_x > 1$ GHz	$5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.	
NOTE 2 F_x is defined in 3.1.19.	

Where the F_x is unknown, the radiated emission measurements shall be performed up to 6 GHz.

Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB(μV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A2.1	30 – 230	10	Quasi Peak / 120 kHz	40
	230 – 1 000			47
A2.2	30 – 230	3		50
	230 – 1 000			57
NOTE Apply only A2.1 or A2.2 across the entire frequency range.				

Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A3.1	1 000 – 3 000	3	Average / 1 MHz	56
	3 000 – 6 000			60
A3.2	1 000 – 3 000		Peak / 1 MHz	76
	3 000 – 6 000			80
NOTE Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.				

Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A4.1	30 – 230	10	Quasi Peak / 120 kHz	30
	230 – 1 000			37
A4.2	30 – 230	3		40
	230 – 1 000			47
NOTE Apply only table clause A4.1 or A4.2 across the entire frequency range.				

NOTE Apply only table clause A4.1 or A4.2 across the entire frequency range.

Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A5.1	1 000 – 3 000	3	Average/ 1 MHz	50
	3 000 – 6 000			54
A5.2	1 000 – 3 000		Peak/ 1 MHz	70
	3 000 – 6 000			74

NOTE Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Table A.6 – Requirements for radiated emissions from FM receivers

Table clause	Frequency range MHz	Measurement		Class B limit dB(μV/m)	
		Distance m	Detector type/ bandwidth	Fundamental	Harmonics
				OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)
A6.1	30 – 230	10	Quasi peak/ 120 kHz	50	42
	230 – 300				42
	300 – 1 000				46
A6.2	30 – 230	3		60	52
	230 – 300				52
	300 – 1 000				56

NOTE 1 Apply only A.6.1 or A.6.2 across the entire frequency range.

NOTE 2 These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in Table A.4.

**Table A.12 – Requirements for conducted differential voltage emissions
from Class B equipment**

Applicable to

1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector

2. RF modulator output ports (3.1.27)

3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector

Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz	46	46	46	See NOTE 1
	950 – 2 150		46	54	54	
A12.2	950 – 2 150	Quasi Peak/ 120 kHz	46	54	54	See NOTE 2
A12.3	30 – 300		46	54	50	See NOTE 3
	300 – 1 000			52		
A12.4	30 – 300	For frequencies ≥1 GHz	46	66	59	See NOTE 4
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See NOTE 5
	950 – 2 150			n/a	54	

NOTE 1 Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

NOTE 2 Tuner units (not the LNB) for satellite signal reception.

NOTE 3 Frequency modulation audio receivers and PC tuner cards.

NOTE 4 Frequency modulation car radios.

NOTE 5 Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

NOTE 6 Testing is required at only one EUT supply voltage and frequency.

NOTE 7 The term ‘other’ refers to all emissions other than the fundamental and the harmonics of the local oscillator.


NOTE 8 The test shall be performed with the device operating at each reception channel.

NOTE 9 The test shall cover the entire frequency range.

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical test Setup

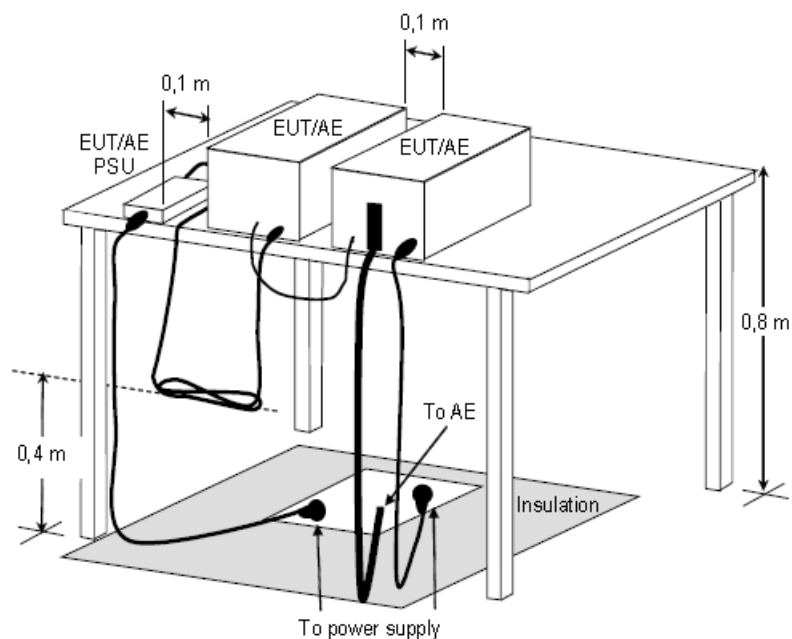

**Figure D.8 – Example measurement arrangement for table-top EUT
(Radiated emission measurement)**


6.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESC17	100968	2016.03.26	2017.03.25
Preamplifier	Agilent	87405B	My39500554	2016.03.26	2017.03.25
Preamplifier	Agilent	8449B	3008A02342	2016.03.26	2017.03.25
Bilog Antenna	Sunol Science	JB1	A072414-1	2016.04.16	2017.04.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2016.04.16	2017.04.15
Spectrum Analyzer	R&S	FSP40	100324	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2016.03.29	2017.03.28
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A

6.5. Test Result and Data (30MHz ~ 1000MHz)

Second edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temp :	23°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/04/03

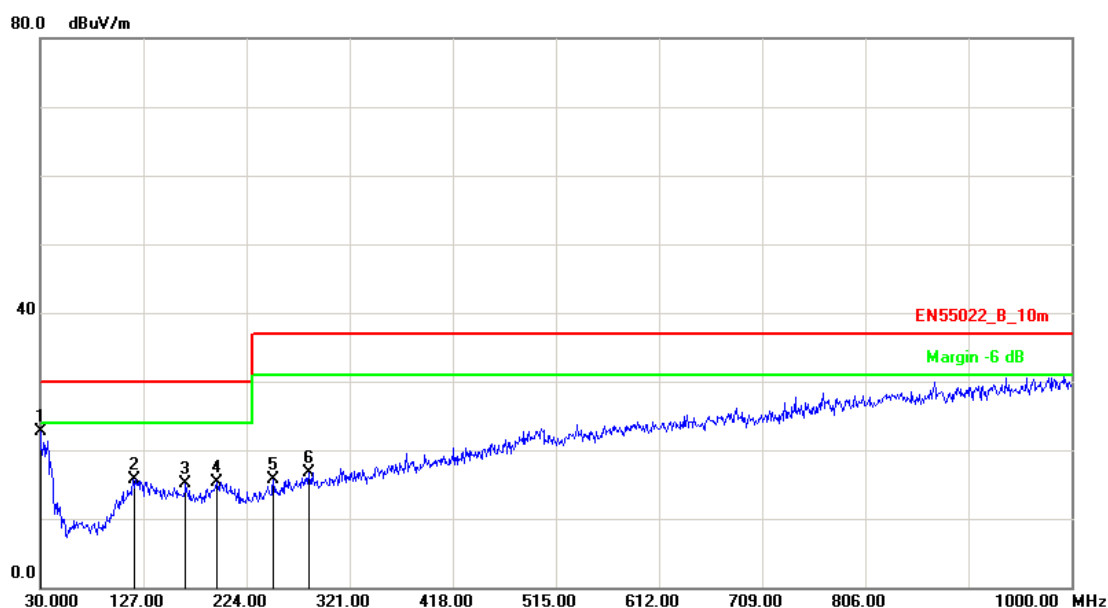


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-3.26	25.94	22.68	30.00	-7.32	QP	100	0
2	119.2399	-9.71	25.43	15.72	30.00	-14.28	QP	100	7
3	166.7700	-11.07	26.14	15.07	30.00	-14.93	QP	100	249
4	195.8700	-10.24	25.55	15.31	30.00	-14.69	QP	100	0
5	249.2199	-10.48	26.18	15.70	37.00	-21.30	QP	100	300
6	283.1700	-8.82	25.57	16.75	37.00	-20.25	QP	100	335

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temp :	23°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/04/03

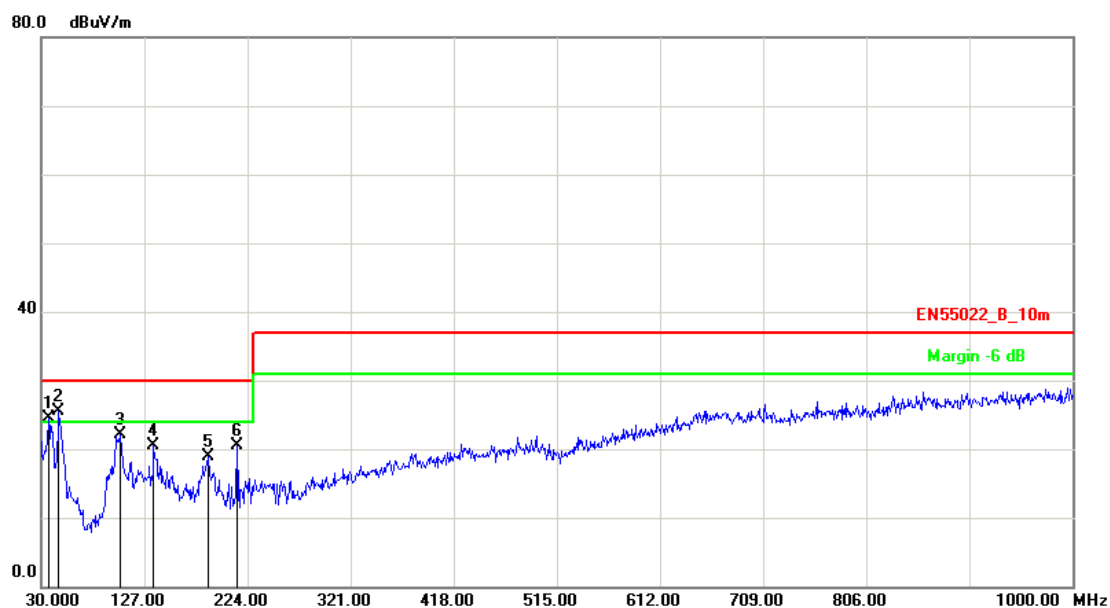


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	36.7900	-7.36	31.93	24.57	30.00	-5.43	QP	100	333
2	46.4900	-10.02	35.46	25.44	30.00	-4.56	QP	100	200
3	103.7200	-12.24	34.40	22.16	30.00	-7.84	QP	100	104
4	135.7300	-9.83	30.24	20.41	30.00	-9.59	QP	100	104
5	187.1400	-12.58	31.50	18.92	30.00	-11.08	QP	100	164
6	214.3000	-12.26	32.75	20.49	30.00	-9.51	QP	100	284

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

First edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temp :	21 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/03/20

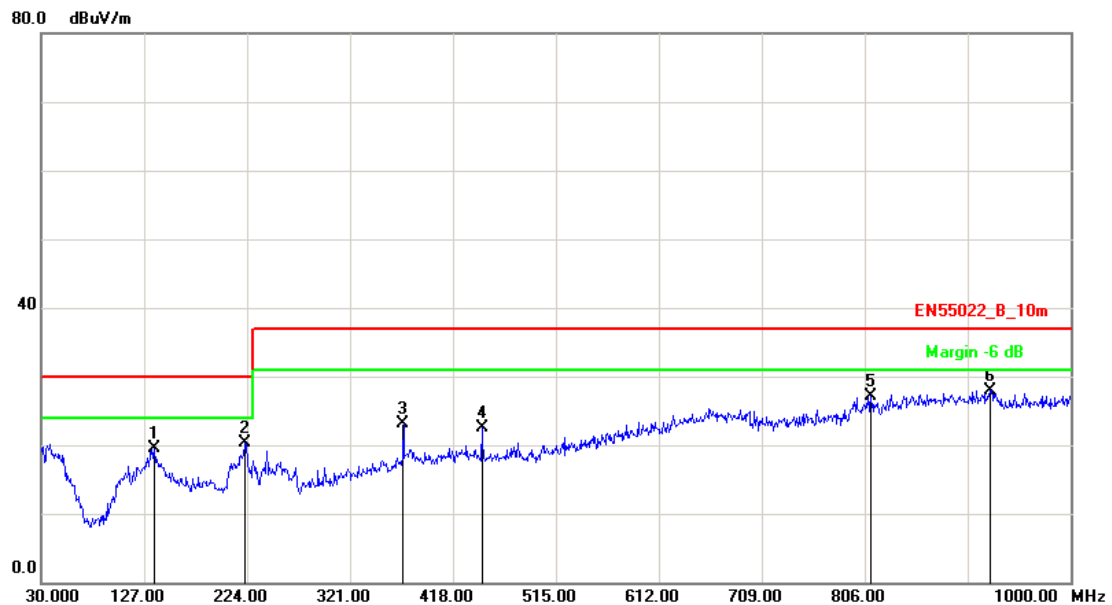


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	136.6999	-9.83	29.39	19.56	30.00	-10.44	QP	200	87
2	222.0600	-12.16	32.54	20.38	30.00	-9.62	QP	200	211
3	371.4399	-6.37	29.45	23.08	37.00	-13.92	QP	114	360
4	445.1600	-5.44	27.95	22.51	37.00	-14.49	QP	200	226
5	811.8200	0.90	26.21	27.11	37.00	-9.89	QP	100	8
6	924.3400	2.41	25.49	27.90	37.00	-9.10	QP	400	157

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temp :	21 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2015/03/20

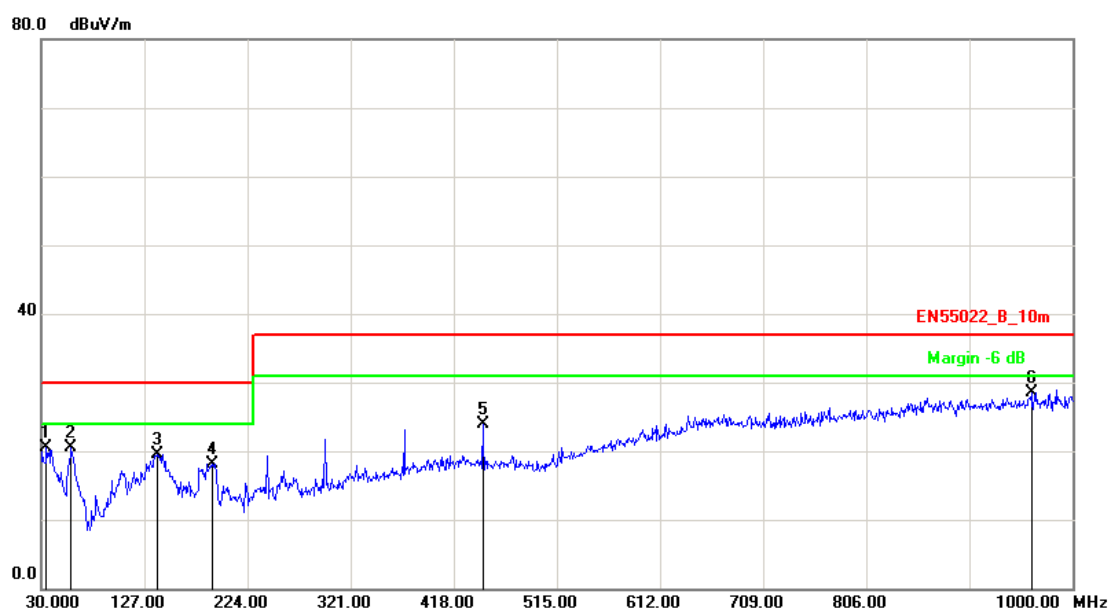


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	34.8500	-6.82	27.30	20.48	30.00	-9.52	QP	100	147
2	58.1300	-12.35	32.77	20.42	30.00	-9.58	QP	200	1
3	139.6100	-9.83	29.38	19.55	30.00	-10.45	QP	200	336
4	191.0200	-12.53	30.55	18.02	30.00	-11.98	QP	100	89
5	445.1600	-5.44	29.33	23.89	37.00	-13.11	QP	114	263
6	961.2000	2.55	26.03	28.58	37.00	-8.42	QP	400	158

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Original:

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temp :	22 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/12/17

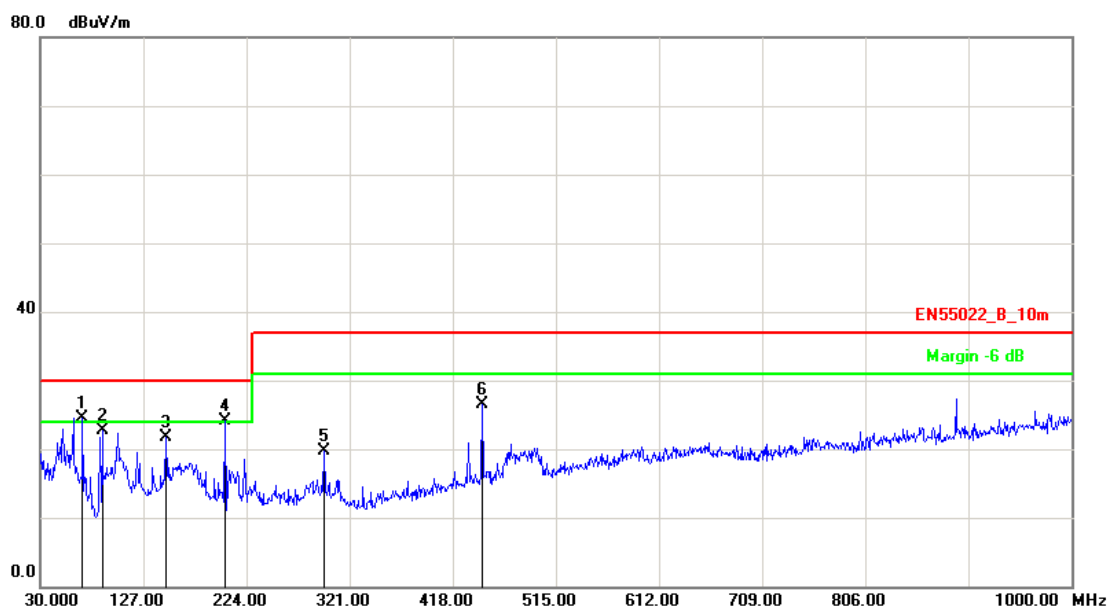


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	69.7699	-13.64	38.12	24.48	30.00	-5.52	QP	225	360
2	88.2000	-16.35	39.06	22.71	30.00	-7.29	peak	314	360
3	148.3400	-13.64	35.35	21.71	30.00	-8.29	peak	400	234
4	203.6299	-13.75	37.89	24.14	30.00	-5.86	QP	235	360
5	296.7500	-12.23	31.92	19.69	37.00	-17.31	peak	342	360
6	445.1600	-8.50	35.08	26.58	37.00	-10.42	peak	100	102

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temp :	22 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/12/17

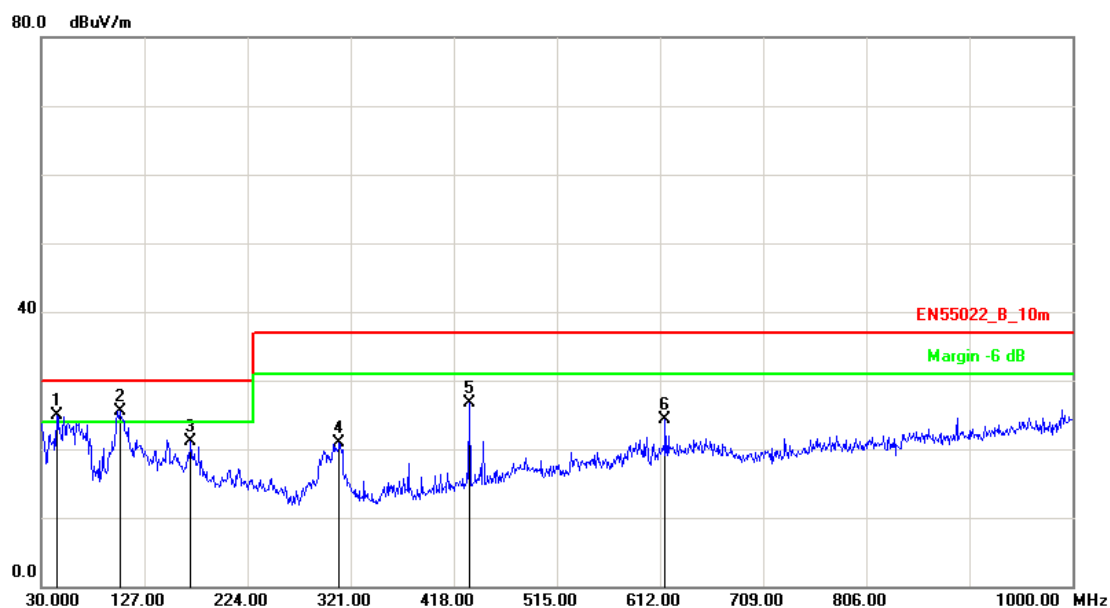


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	44.5500	-9.30	34.18	24.88	30.00	-5.12	QP	400	101
2	103.7200	-14.08	39.52	25.44	30.00	-4.56	QP	100	300
3	170.6500	-14.62	35.67	21.05	30.00	-8.95	peak	100	17
4	310.3299	-12.20	33.04	20.84	37.00	-16.16	peak	400	360
5	432.5500	-8.80	35.50	26.70	37.00	-10.30	peak	100	321
6	616.8500	-5.52	29.82	24.30	37.00	-12.70	peak	400	0

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temp :	22 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/12/17

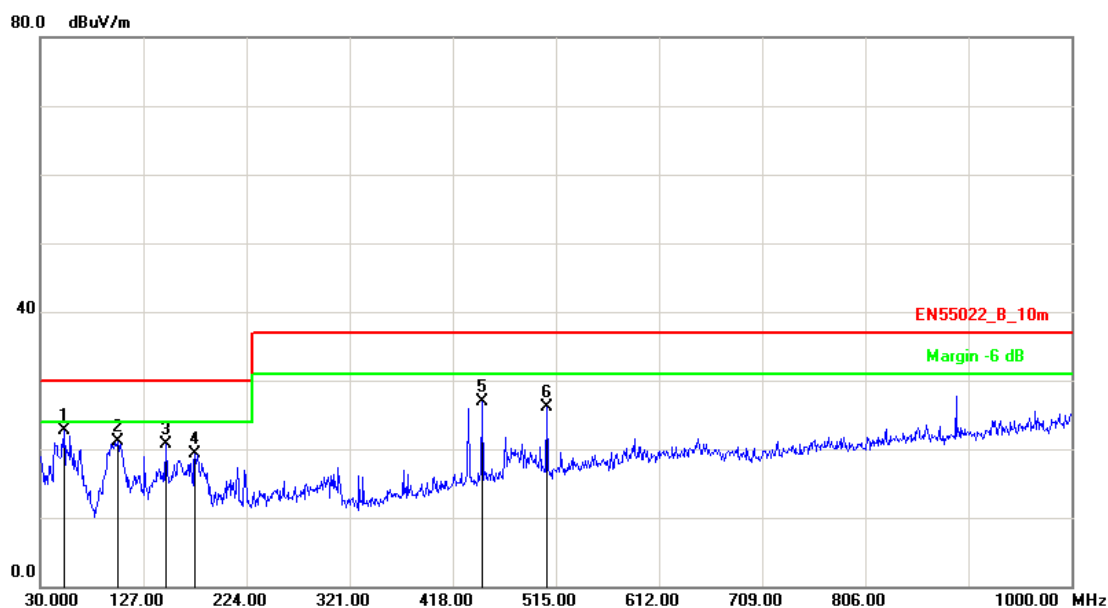


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	52.3100	-9.92	32.68	22.76	30.00	-7.24	peak	399	0
2	102.7500	-14.19	35.37	21.18	30.00	-8.82	peak	400	354
3	148.3400	-13.64	34.41	20.77	30.00	-9.23	peak	400	235
4	175.5000	-14.75	34.00	19.25	30.00	-10.75	peak	400	202
5	445.1600	-8.50	35.50	27.00	37.00	-10.00	peak	100	118
6	506.2699	-7.48	33.51	26.03	37.00	-10.97	peak	330	0

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temp :	22 °C	Humidity :	50%
Pressure(mbar) :	1002	Date :	2014/12/17

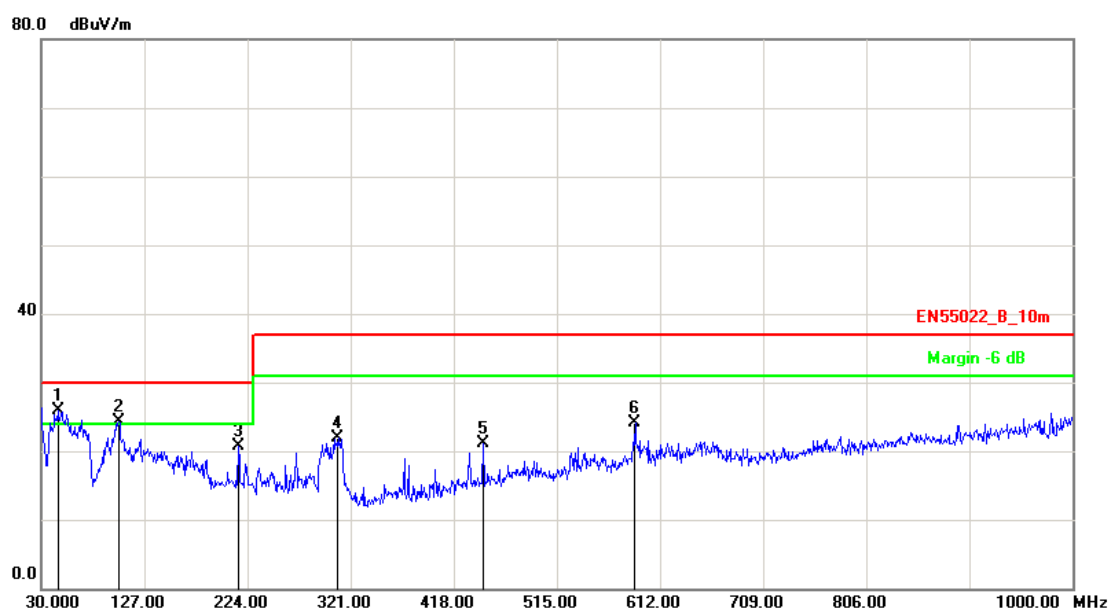

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	45.5200	-9.41	35.23	25.82	30.00	-4.18	QP	100	136
2	102.7500	-14.19	38.49	24.30	30.00	-5.70	QP	100	342
3	215.2700	-14.56	35.24	20.68	30.00	-9.32	peak	100	358
4	309.3599	-12.22	34.19	21.97	37.00	-15.03	peak	400	168
5	446.1300	-8.47	29.51	21.04	37.00	-15.96	peak	100	218
6	588.7199	-5.93	29.94	24.01	37.00	-12.99	peak	400	355

Note: 1. Measurement Level = Reading Level + Correct Factor


2. EN55032 Limit=EN55022 Limit

Test engineer: Seben

6.6. Test Result and Data (1000MHz ~ 6000MHz)

Second edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temp :	23°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/04/04

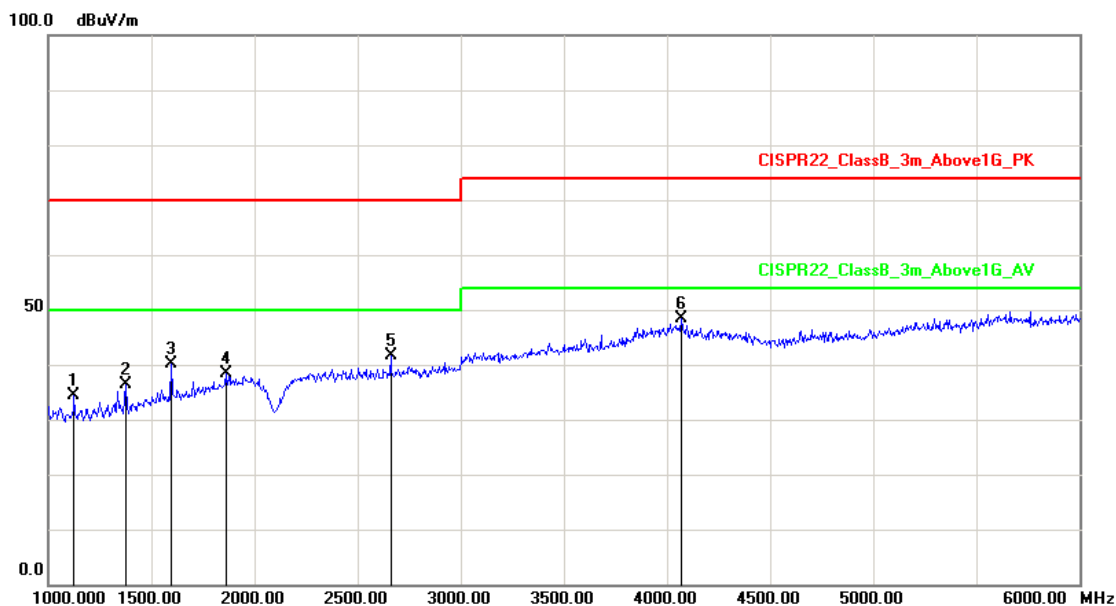


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1125.000	-10.60	44.94	34.34	70.00	-35.66	peak	100	306
2	1375.000	-8.49	44.97	36.48	70.00	-33.52	peak	100	217
3	1595.000	-6.32	46.47	40.15	70.00	-29.85	peak	100	59
4	1860.000	-3.19	41.67	38.48	70.00	-31.52	peak	100	1
5	2660.000	0.25	41.35	41.60	70.00	-28.40	peak	100	38
6	4070.000	7.30	41.03	48.33	74.00	-25.67	peak	100	243

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1100RP-VF
Temp :	23°C	Humidity :	54%
Pressure(mbar) :	1002	Date :	2016/04/04

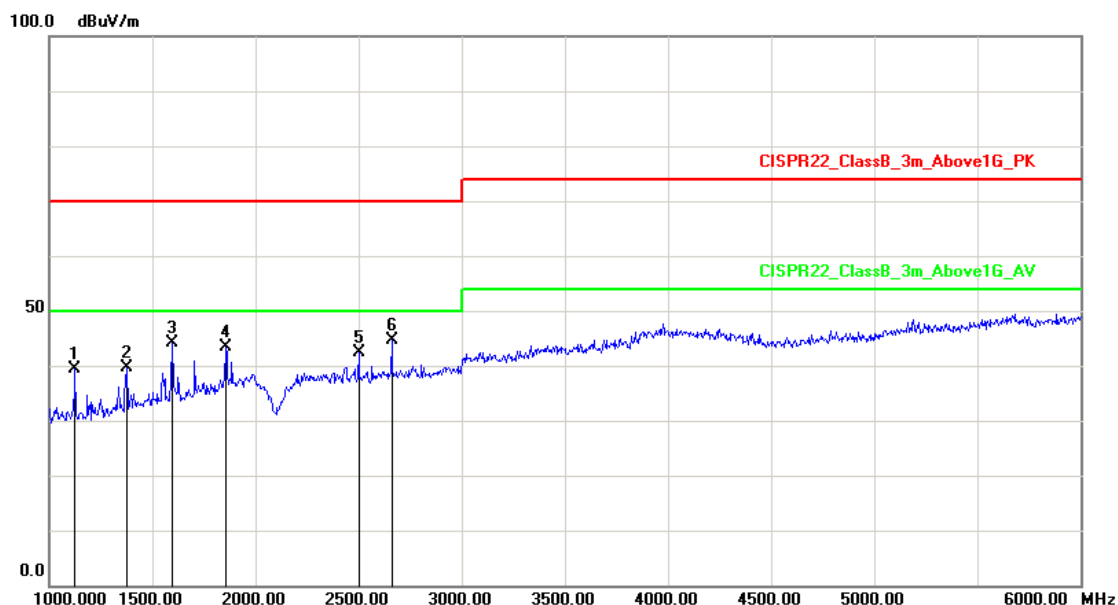


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1125.000	-10.60	49.92	39.32	70.00	-30.68	peak	100	336
2	1375.000	-8.49	48.14	39.65	70.00	-30.35	peak	100	328
3	1595.000	-6.32	50.46	44.14	70.00	-25.86	peak	100	21
4	1855.000	-3.25	46.61	43.36	70.00	-26.64	peak	100	359
5	2500.000	-0.09	42.57	42.48	70.00	-27.52	peak	100	207
6	2660.000	0.25	44.30	44.55	70.00	-25.45	peak	100	35

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

First edition:

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/15

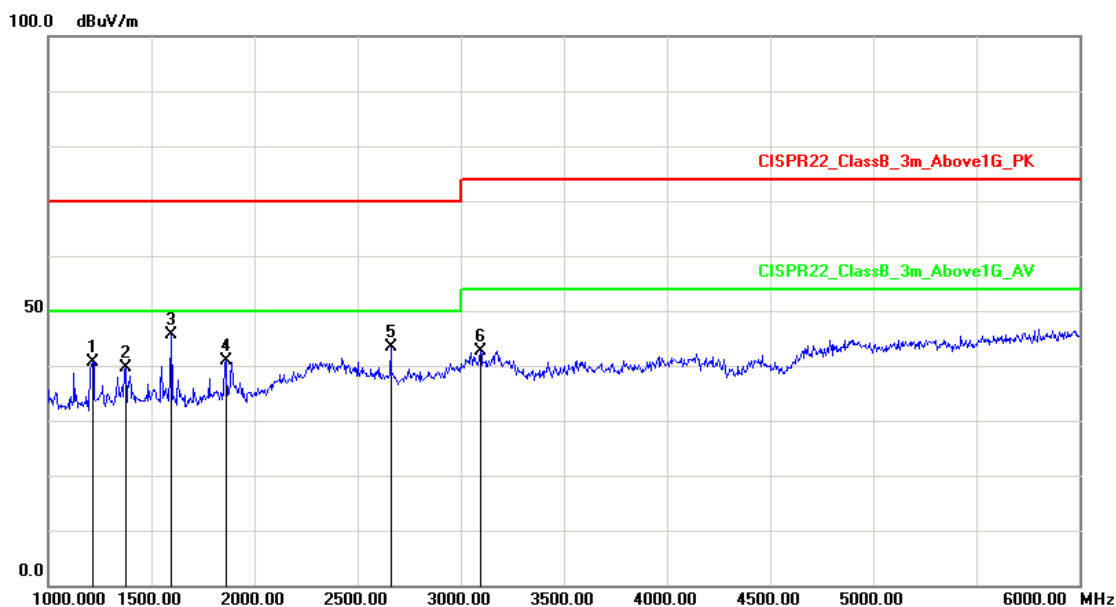


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1215.000	-14.34	55.03	40.69	70.00	-29.31	peak	100	56
2	1375.000	-12.83	52.51	39.68	70.00	-30.32	peak	100	258
3	1595.000	-12.02	57.76	45.74	70.00	-24.26	peak	100	13
4	1860.000	-10.13	50.97	40.84	70.00	-29.16	peak	100	0
5	2660.000	-4.68	48.05	43.37	70.00	-26.63	peak	100	14
6	3095.000	-2.38	44.98	42.60	74.00	-31.40	peak	100	239

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW1200RP-VF
Temp :	23°C	Humidity :	47%
Pressure(mbar) :	1002	Date :	2015/04/15

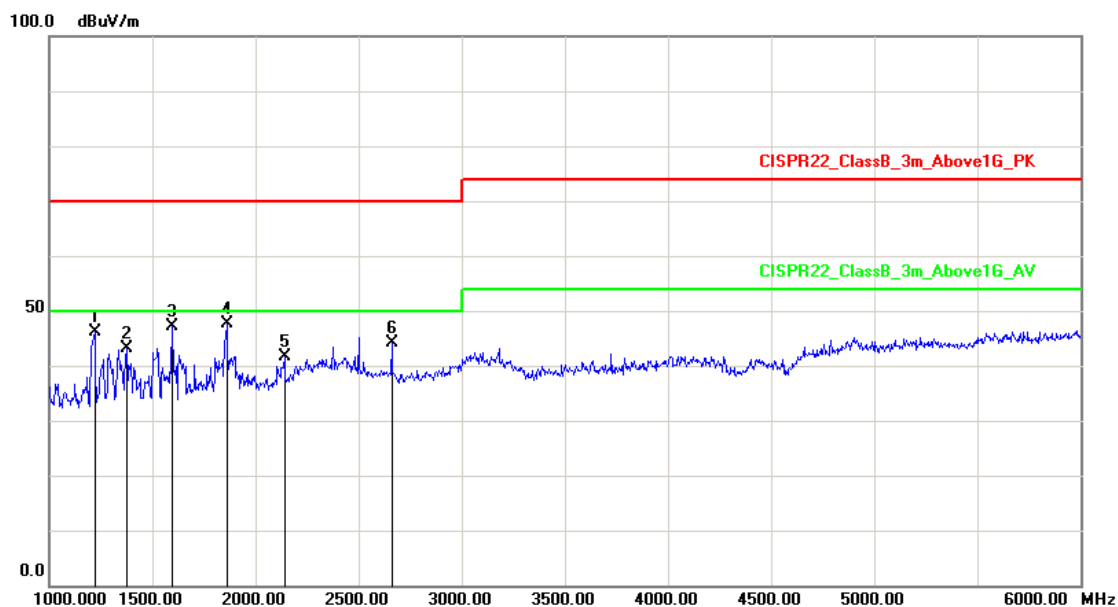


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1220.000	-14.29	60.48	46.19	70.00	-23.81	peak	100	29
2	1375.000	-12.83	56.03	43.20	70.00	-26.80	peak	100	359
3	1595.000	-12.02	59.06	47.04	70.00	-22.96	peak	100	36
4	1860.000	-10.13	57.66	47.53	70.00	-22.47	peak	100	200
5	2140.000	-6.37	47.88	41.51	70.00	-28.49	peak	100	12
6	2660.000	-4.68	48.90	44.22	70.00	-25.78	peak	100	5

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Original:

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temp :	22 °C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

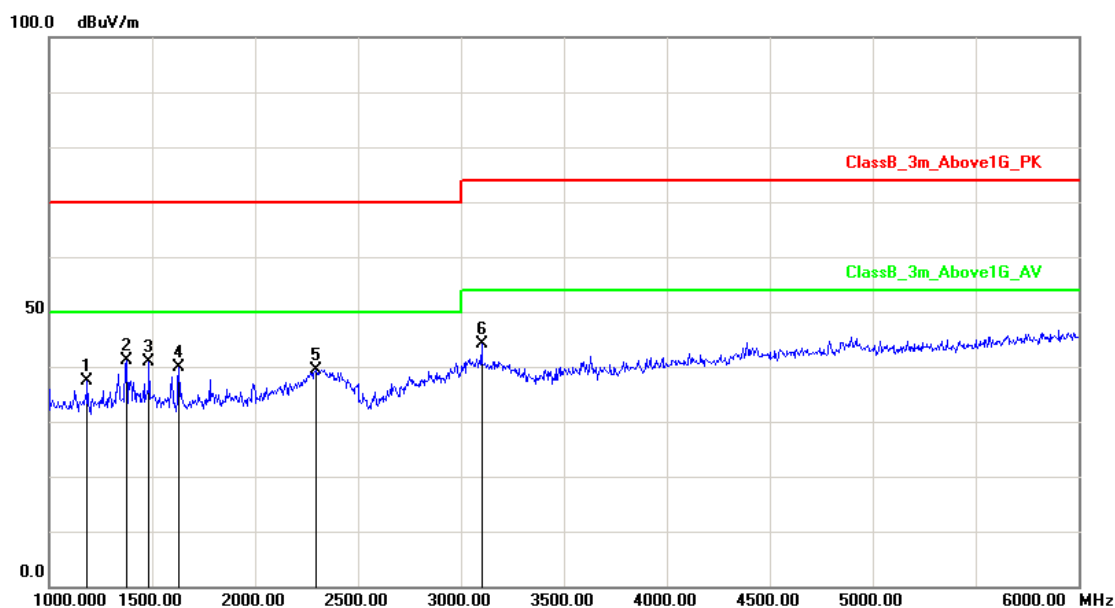


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1185.000	-14.60	51.95	37.35	70.00	-32.65	peak	100	182
2	1375.000	-12.83	53.98	41.15	70.00	-28.85	peak	100	235
3	1485.000	-12.41	53.39	40.98	70.00	-29.02	peak	100	220
4	1630.000	-11.85	51.76	39.91	70.00	-30.09	peak	100	212
5	2295.000	-3.07	42.50	39.43	70.00	-30.57	peak	100	266
6	3100.000	-2.37	46.49	44.12	74.00	-29.88	peak	100	230

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 1: Normal Operation With DH-HAC-HDW2120RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2120RP-VF
Temp :	22 °C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

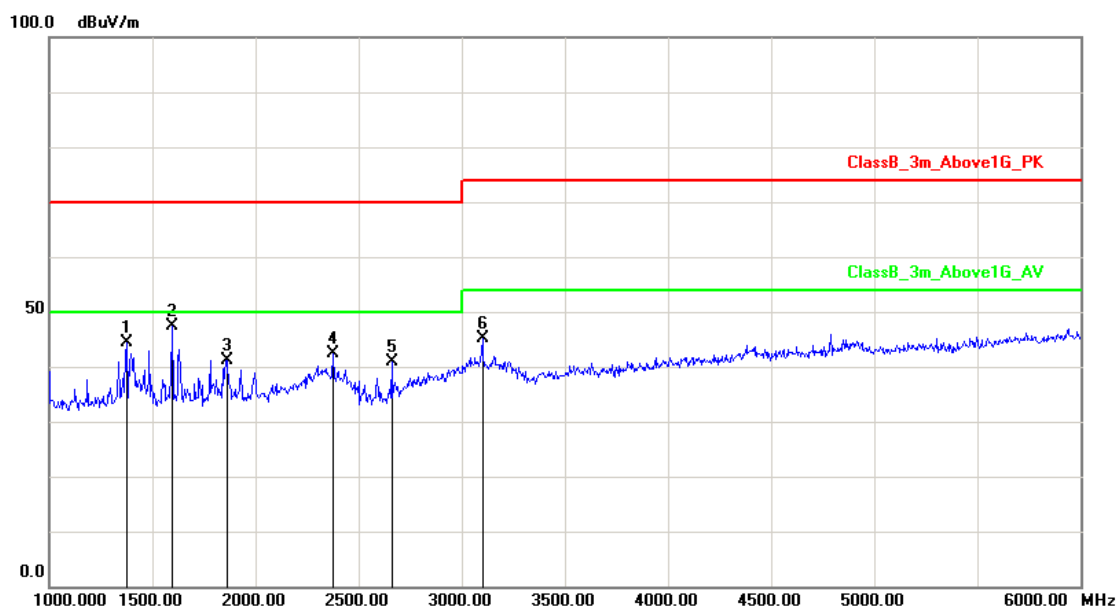


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1375.000	-12.83	57.14	44.31	70.00	-25.69	peak	100	160
2	1595.000	-12.02	59.47	47.45	70.00	-22.55	peak	100	220
3	1860.000	-10.13	51.36	41.23	70.00	-28.77	peak	100	359
4	2375.000	-3.18	45.54	42.36	70.00	-27.64	peak	100	181
5	2660.000	-4.68	45.65	40.97	70.00	-29.03	peak	100	220
6	3100.000	-2.37	47.53	45.16	74.00	-28.84	peak	100	315

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Horizontal
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temp :	22 °C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

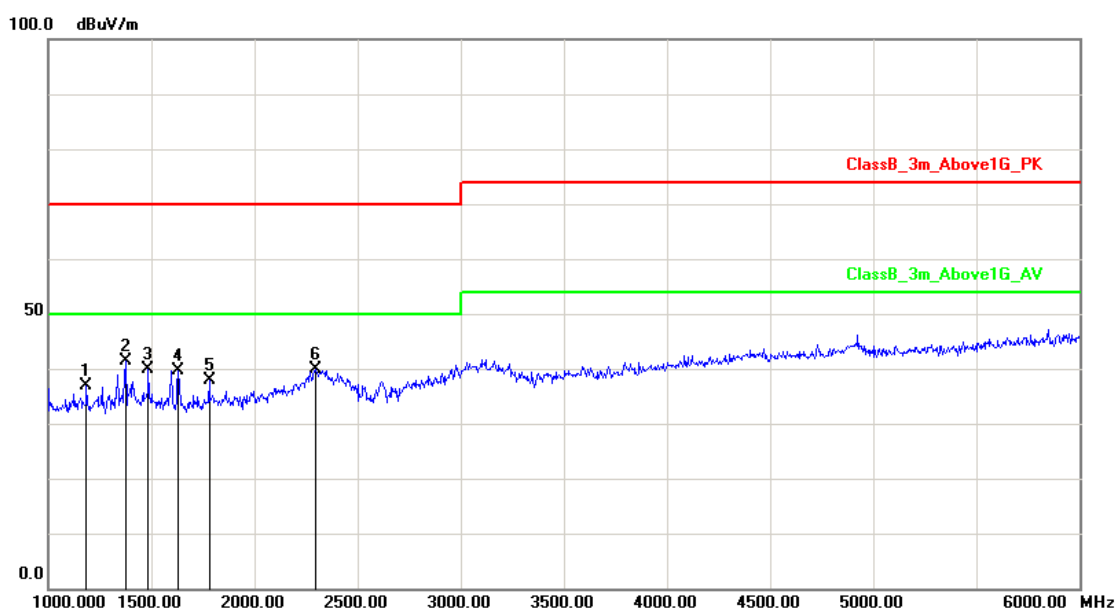


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1185.000	-14.60	51.42	36.82	70.00	-33.18	peak	100	185
2	1375.000	-12.83	54.17	41.34	70.00	-28.66	peak	100	238
3	1485.000	-12.41	52.28	39.87	70.00	-30.13	peak	100	223
4	1630.000	-11.85	51.53	39.68	70.00	-30.32	peak	100	216
5	1780.000	-10.77	48.58	37.81	70.00	-32.19	peak	100	171
6	2295.000	-3.07	43.01	39.94	70.00	-30.06	peak	100	171

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit

Test Mode :	Mode 2: Normal Operation With DH-HAC-HDW2220RP-VF		
AC Power :	AC 230V/50Hz	Ant. Polarization:	Vertical
Equipment :	HDCVI CAMERA	Model No :	DH-HAC-HDW2220RP-VF
Temp :	22°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2015/01/12

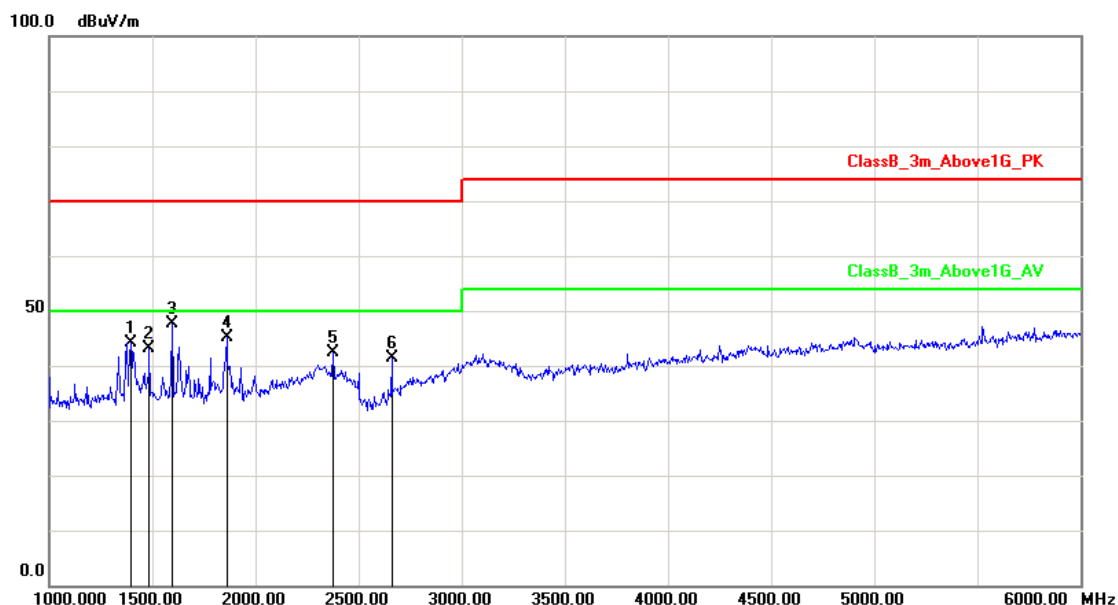

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1395.000	-12.69	56.88	44.19	70.00	-25.81	peak	100	359
2	1485.000	-12.41	55.48	43.07	70.00	-26.93	peak	100	359
3	1595.000	-12.02	59.70	47.68	70.00	-22.32	peak	100	220
4	1860.000	-10.13	55.22	45.09	70.00	-24.91	peak	100	198
5	2375.000	-3.18	45.66	42.48	70.00	-27.52	peak	100	182
6	2660.000	-4.68	45.97	41.29	70.00	-28.71	peak	100	219

Note: 1. Measurement Level = Reading Level + Correct Factor

2. EN55032 Limit=EN55022 Limit


Test engineer: _____

Seben

6.7. Test Photographs (30MHz ~ 1000MHz)

Second
edition:

Front View

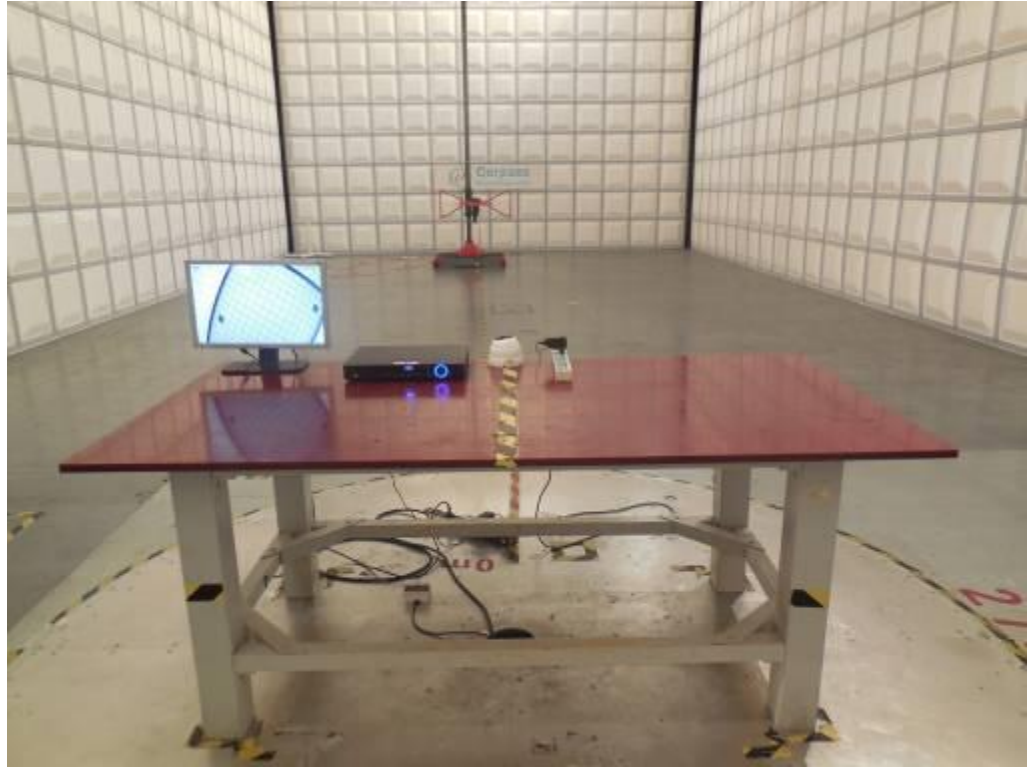


Rear View



First edition:

Front View

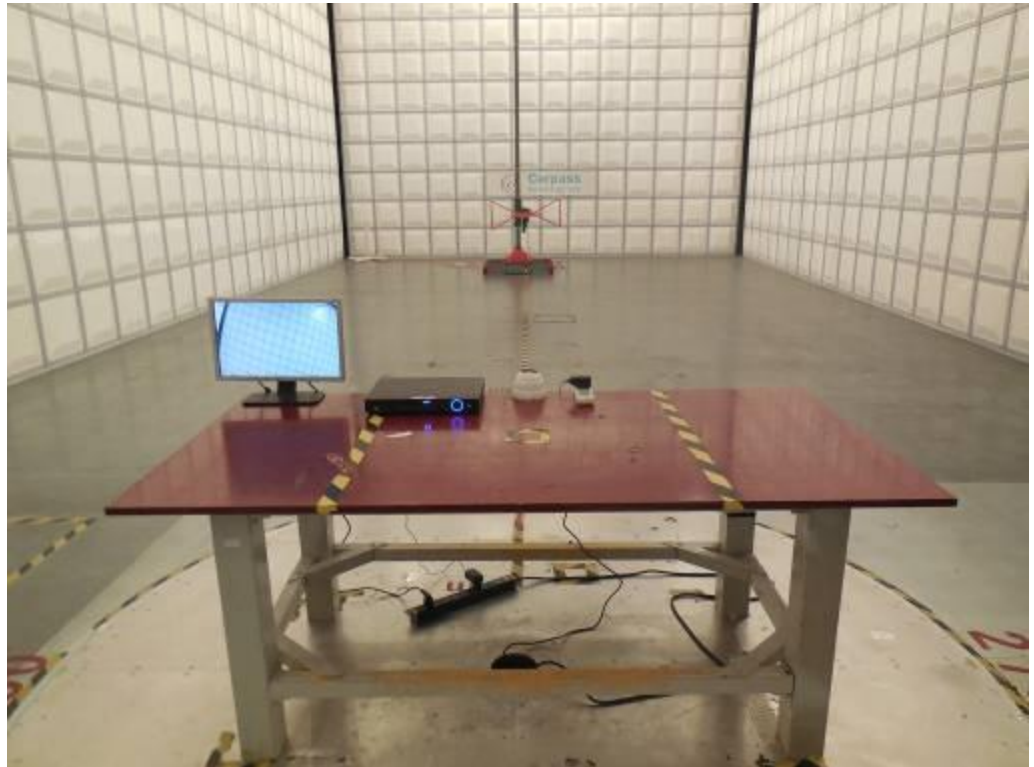


Rear View




Original:

Front View

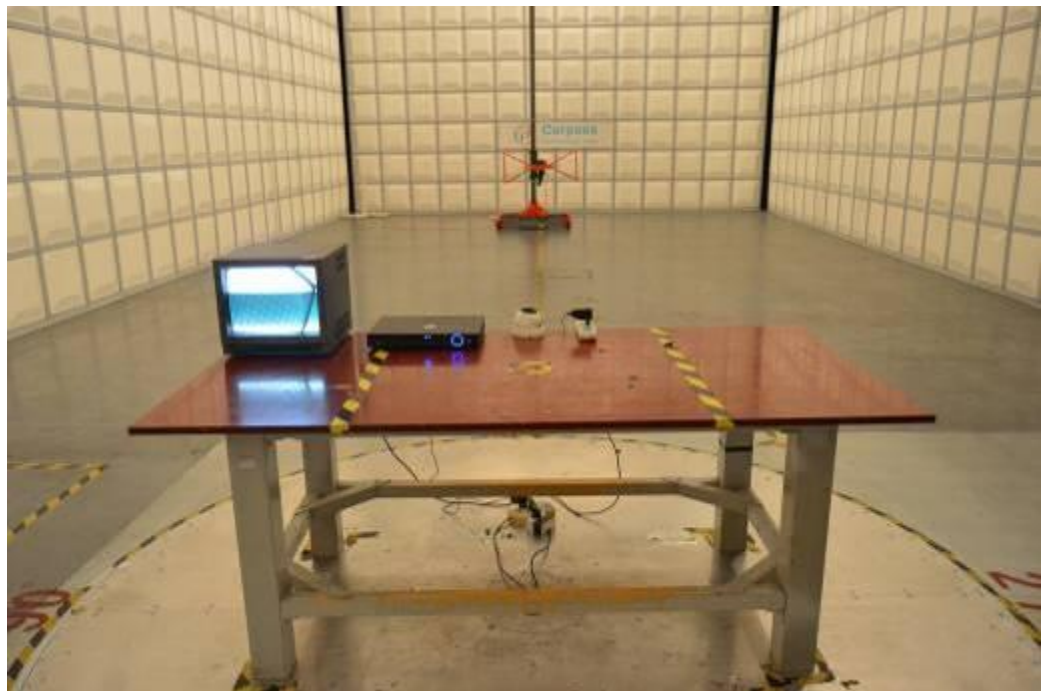


Rear View

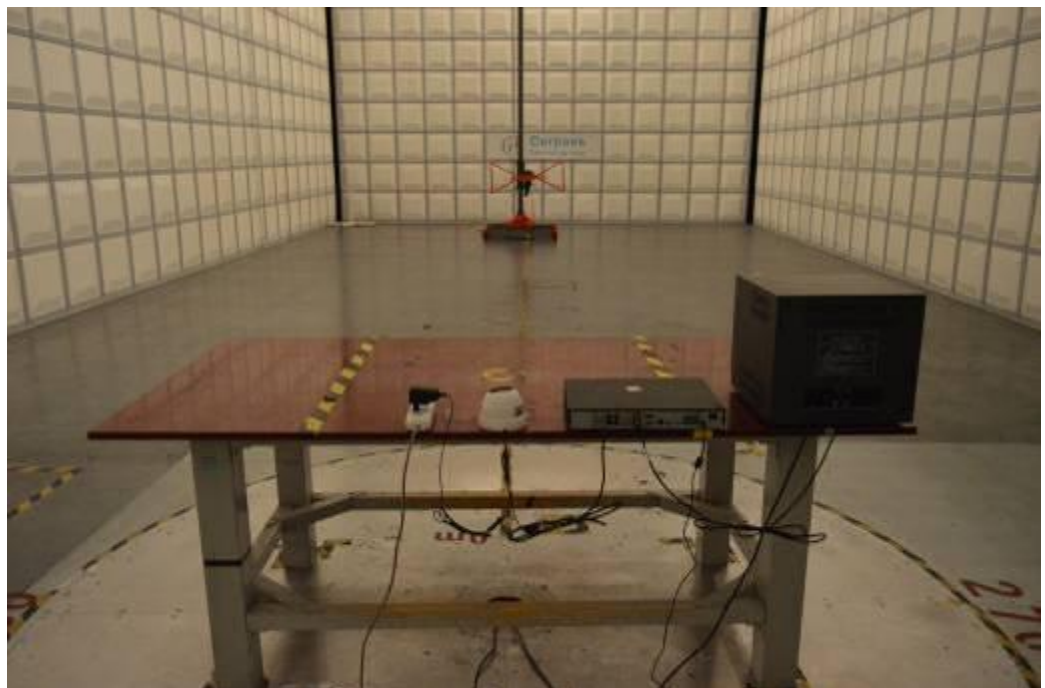


6.8. Test Photographs (1000MHz ~ 6000MHz)

Second
edition:

Front View

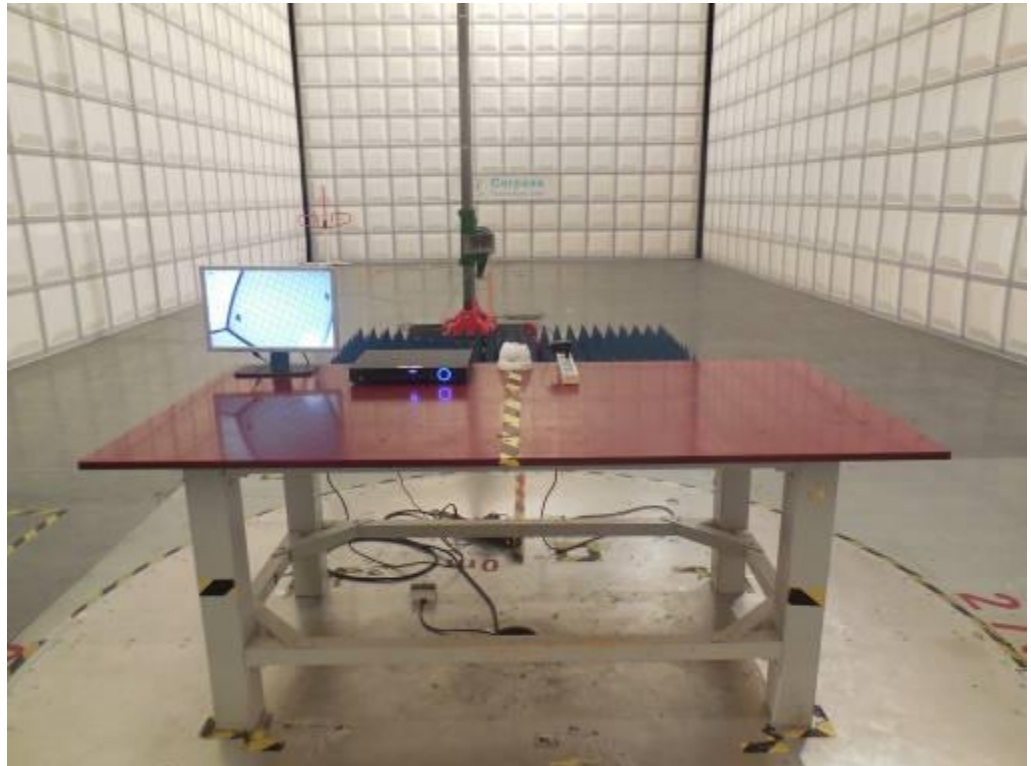


Rear View

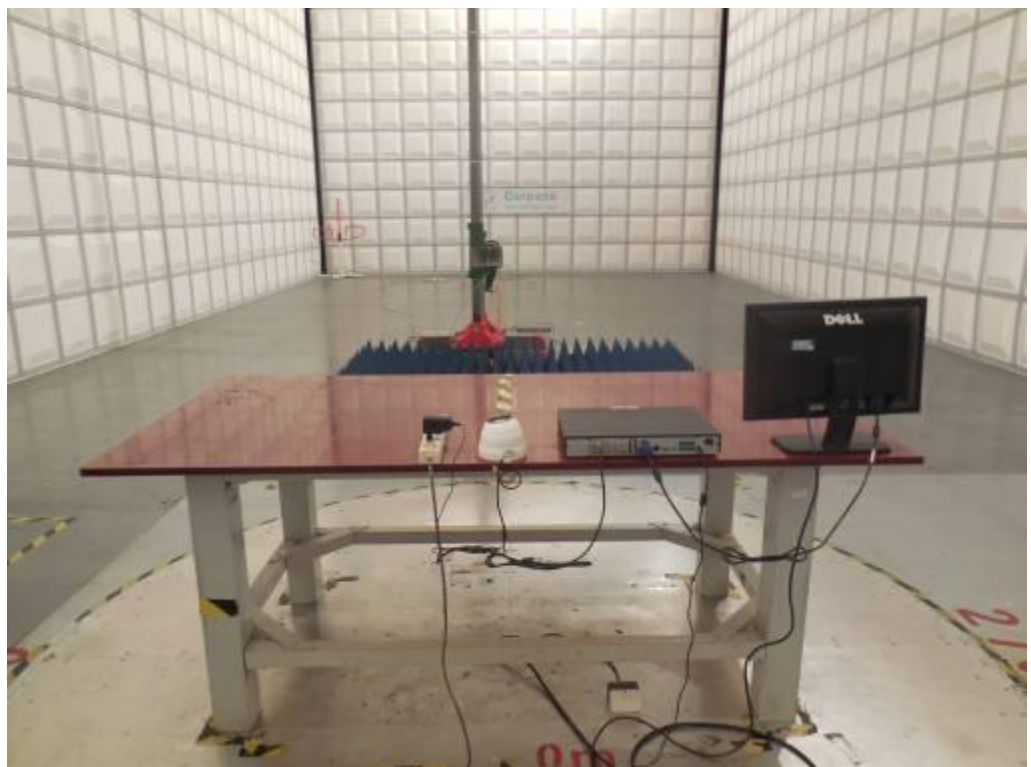


First edition:

Front View

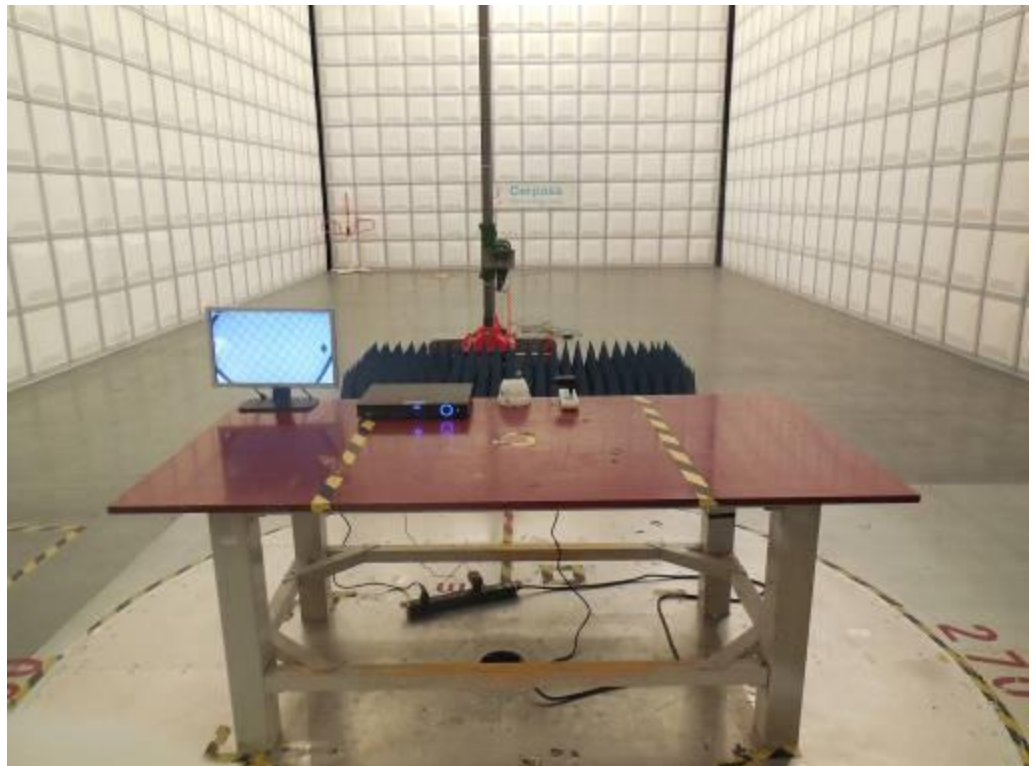


Rear View

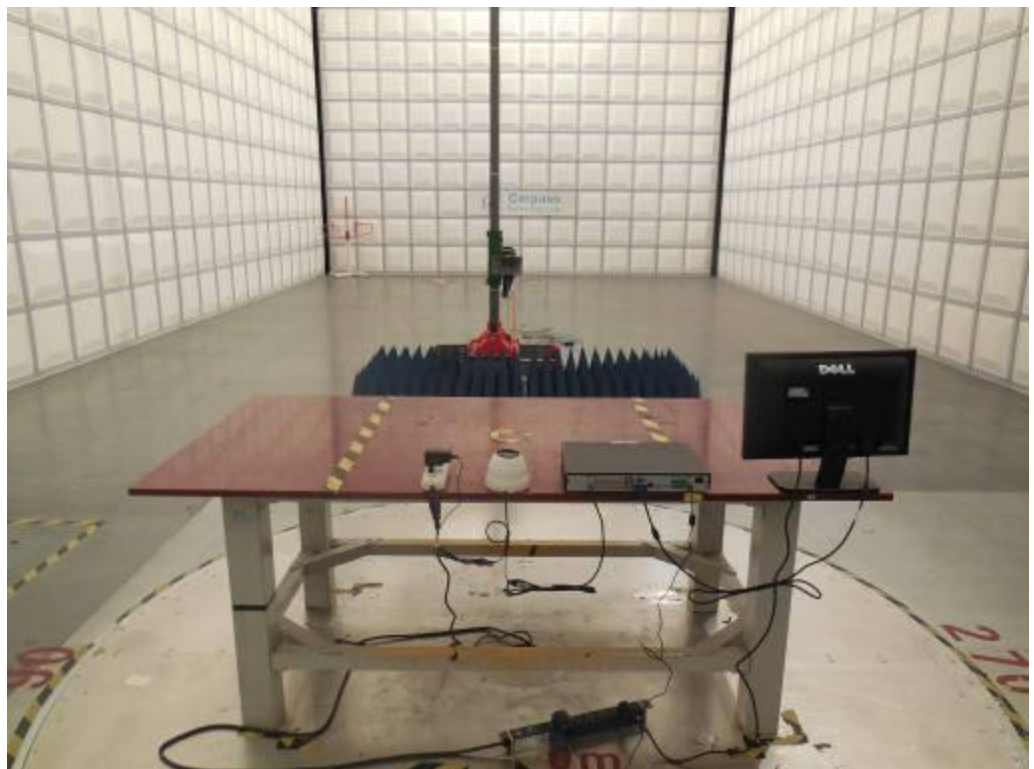


Original:

Front View

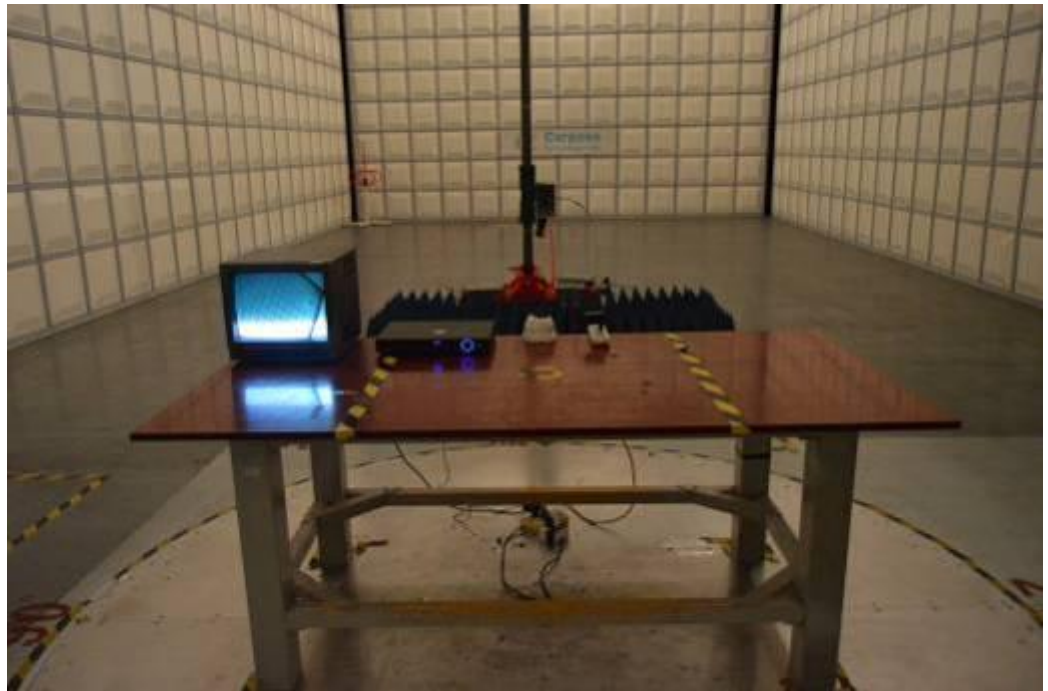

Rear View

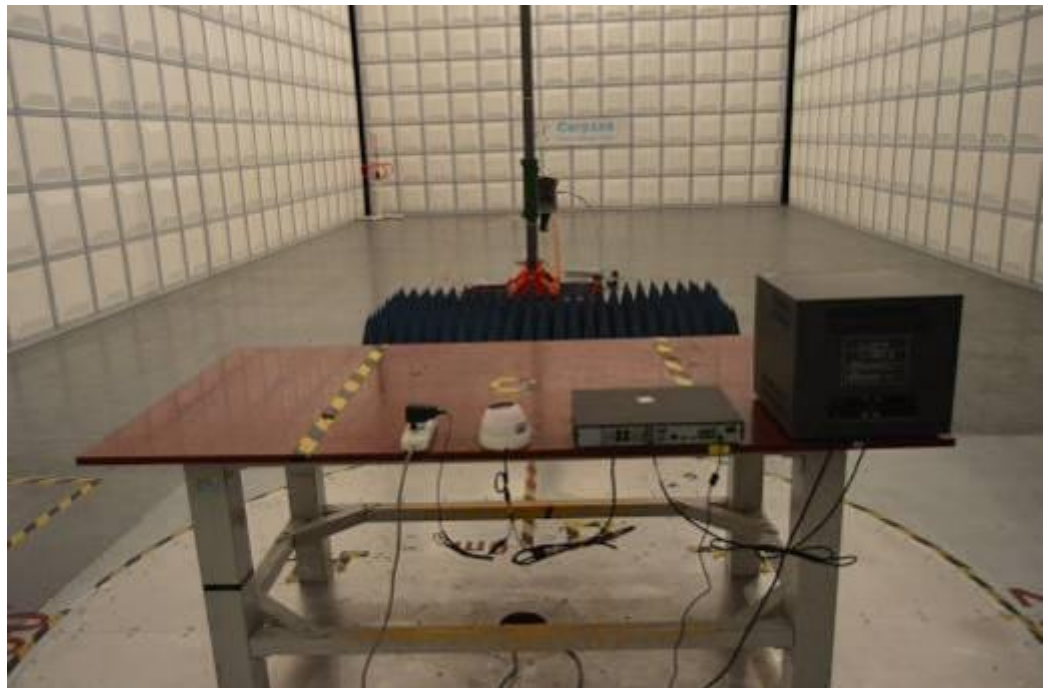

7. Harmonics Test

7.1. Limits of Harmonics Current Measurement

(a) Limits for Class A equipment

Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8 ≤ n ≤ 40	0.23x8/n
11	0.33		
13	0.21		
15 ≤ n ≤ 39	0.15x15/n		

(b) Limits for Class B equipment

For Class B equipment, the harmonics of the input current shall not exceed the values given in Table that is the limit of Class A multiplied by a factor of 1,5.

(c) Limits for Class C equipment

Harmonics Order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
11 < n < 39 (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits for Class D equipment

Harmonics Order n	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
11 < n < 39 (odd harmonics only)	3.85/n	See limit of Class A

NOTE: According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.


7.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2016.03.29	2017.03.28
HARCS	EMC Partner AG	Ver 4.18	N/A	N/A	N/A

7.3. Test Result and Data

Second edition:

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW1100RP-VF
Temperature	:	22°C
Humidity	:	48 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Apr 06, 2016

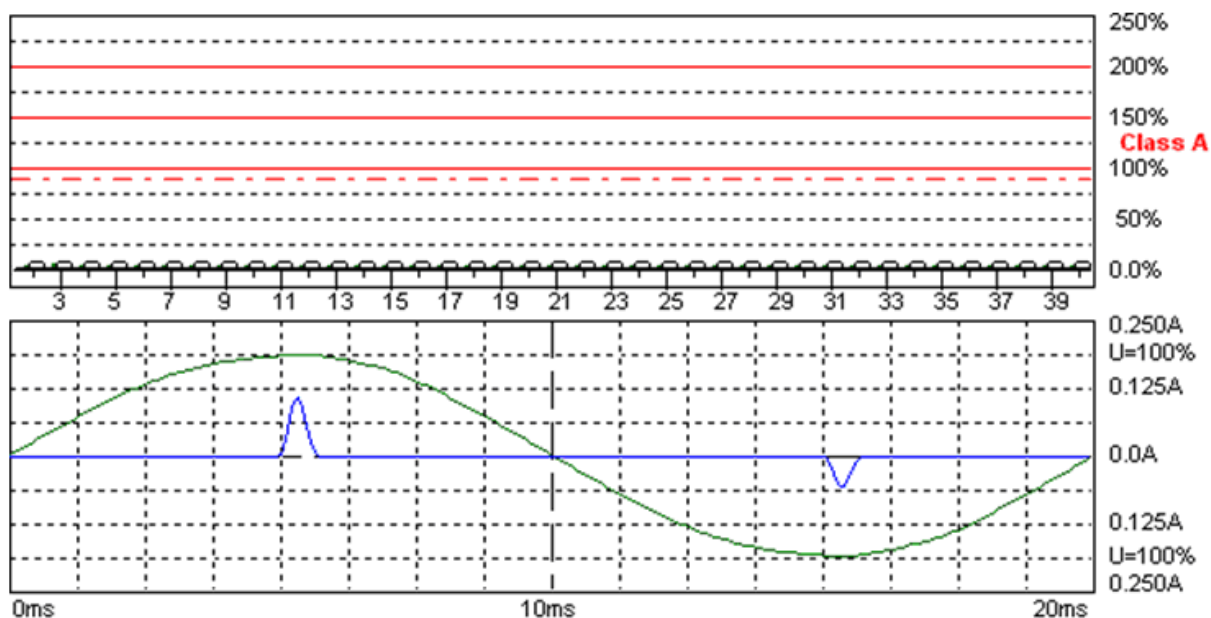

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2016-4-6 18:14:37 harmonic.hsu

Urms = 230.7 V P = 1.019 W THC = 0.016 A
Irms = 0.015 A pf = 0.289

Range: 0.25 A
V-nom: 230 V
TestTime: 15 min (100%)

DH-HAC-HDW1100RP-VF

Test completed, Result: PASSED

HAR-1000 EMC-Parier

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.7V Freq = 50.000 Range: 0.25 A

Irms = 0.015A Ipk = 0.121A cf = 7.960

P = 1.019W S = 3.520VA pf = 0.289

THDi = 96.2 % THDu = 1.70 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.0045		0.0047		
2	100	0.0014	0.1257	0.0014	0.1300	1.0800
3	150	0.0045	0.1937	0.0047	0.2037	2.3000
4	200	0.0014	0.3158	0.0014	0.3265	0.4300
5	250	0.0044	0.3882	0.0047	0.4082	1.1400
6	300	0.0014	0.4527	0.0014	0.4679	0.3000
7	350	0.0044	0.5687	0.0046	0.5965	0.7700
8	400	0.0013	0.5772	0.0014	0.5971	0.2300
9	450	0.0043	1.0757	0.0045	1.1292	0.4000
10	500	0.0013	0.7049	0.0013	0.7298	0.1840
11	550	0.0042	1.2716	0.0044	1.3317	0.3300
12	600	0.0013	0.8260	0.0013	0.8558	0.1533
13	650	0.0041	1.9400	0.0043	2.0272	0.2100
14	700	0.0012	0.9288	0.0013	0.9636	0.1314
15	750	0.0039	2.6245	0.0041	2.7364	0.1500
16	800	0.0012	1.0084	0.0012	1.0615	0.1150
17	850	0.0038	2.8707	0.0039	2.9744	0.1324
18	900	0.0011	1.0897	0.0012	1.1345	0.1022
19	950	0.0036	3.0667	0.0038	3.1698	0.1184
20	1000	0.0011	1.1444	0.0011	1.1942	0.0920
21	1050	0.0034	3.2186	0.0036	3.3325	0.1071
22	1100	0.0010	1.1859	0.0011	1.2589	0.0836
23	1150	0.0033	3.3379	0.0034	3.4315	0.0978
24	1200	0.0009	1.2141	0.0010	1.2937	0.0767
25	1250	0.0031	3.4078	0.0031	3.4926	0.0900
26	1300	0.0009	1.2290	0.0009	1.3152	0.0708
27	1350	0.0029	3.4424	0.0029	3.5156	0.0833
28	1400	0.0008	1.2539	0.0009	1.3235	0.0657
29	1450	0.0027	3.4417	0.0027	3.5007	0.0776
30	1500	0.0007	1.2190	0.0008	1.3186	0.0613
31	1550	0.0025	3.3847	0.0025	3.4478	0.0726
32	1600	0.0007	1.1942	0.0007	1.3003	0.0575
33	1650	0.0023	3.3122	0.0023	3.3793	0.0682
34	1700	0.0006	1.1842	0.0007	1.2688	0.0541
35	1750	0.0020	3.1806	0.0021	3.2518	0.0643
36	1800	0.0006	1.1345	0.0006	1.2240	0.0511
37	1850	0.0018	3.0362	0.0019	3.1114	0.0608
38	1900	0.0005	1.1029	0.0006	1.1975	0.0484
39	1950	0.0017	2.8829	0.0017	2.9622	0.0577
40	2000	0.0005	1.0615	0.0005	1.1610	0.0460


EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg)
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (Imax)
are below 150% of the Individual Limits.

Test engineer: 

First edition:

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW1200RP-VF
Temperature	:	22°C
Humidity	:	48 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Apr 14, 2015

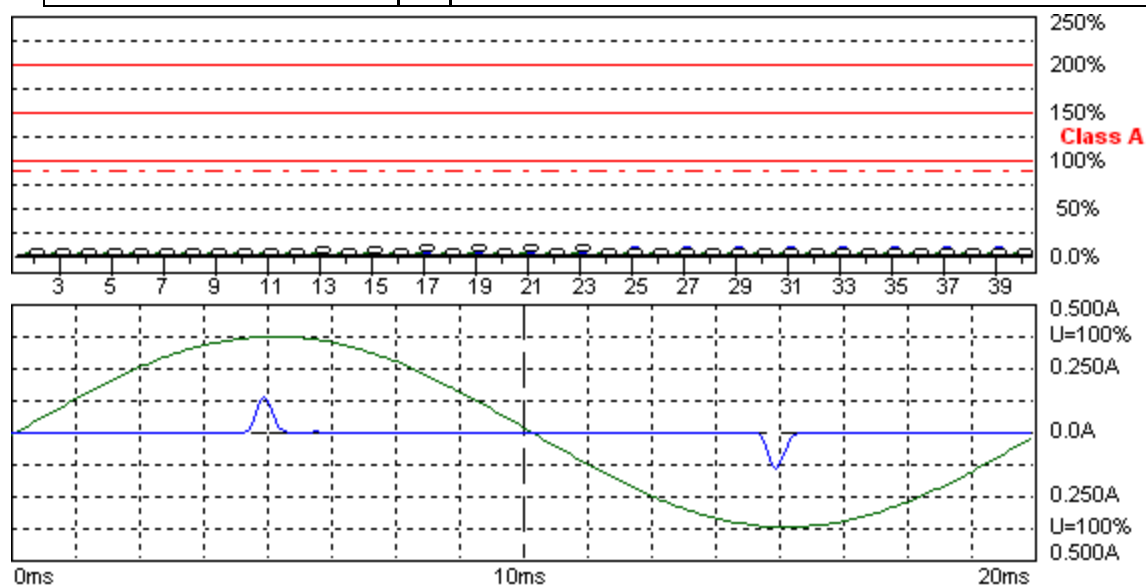

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2015-4-14 10:48:24 harmonic.hsu

Urms = 229.7 V P = 1.902 W THC = 0.024 A
Irms = 0.023 A pf = 0.357

Range: 0.5 A
V-nom: 230 V
TestTime: 15 min (100%)

DH-HAC-HDW1200RP-VF

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.5 A

Irms = 0.023A Ipk = 0.146A cf = 6.305

P = 1.902W S = 5.328VA pf = 0.357

THDi = 94.3 % THDu = 0.20 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0084		0.0109		
2	100	0.0001	0.0057	0.0002	0.0226	1.0800
3	150	0.0071	0.3105	0.0095	0.4113	2.3000
4	200	0.0001	0.0213	0.0002	0.0568	0.4300
5	250	0.0071	0.6211	0.0092	0.8084	1.1400
6	300	0.0002	0.0814	0.0003	0.1119	0.3000
7	350	0.0070	0.9116	0.0092	1.1969	0.7700
8	400	0.0002	0.0663	0.0003	0.1194	0.2300
9	450	0.0069	1.7166	0.0090	2.2430	0.4000
10	500	0.0002	0.0829	0.0002	0.1327	0.1840
11	550	0.0067	2.0345	0.0088	2.6726	0.3300
12	600	0.0002	0.0995	0.0002	0.1592	0.1533
13	650	0.0065	3.0954	0.0085	4.0690	0.2100
14	700	0.0002	0.1161	0.0002	0.1858	0.1314
15	750	0.0063	4.1707	0.0082	5.4932	0.1500
16	800	0.0002	0.1327	0.0002	0.2123	0.1150
17	850	0.0060	4.5424	0.0079	5.9950	0.1324
18	900	0.0002	0.1493	0.0002	0.2388	0.1022
19	950	0.0057	4.8448	0.0076	6.3911	0.1184
20	1000	0.0002	0.1659	0.0002	0.2654	0.0920
21	1050	0.0054	5.0700	0.0072	6.7220	0.1071
22	1100	0.0002	0.1824	0.0003	0.3284	0.0836
23	1150	0.0051	5.2409	0.0068	6.9567	0.0978
24	1200	0.0002	0.1990	0.0002	0.3184	0.0767
25	1250	0.0048	5.2897	0.0063	7.0530	0.0900
26	1300	0.0002	0.2156	0.0002	0.3450	0.0708
27	1350	0.0045	5.3467	0.0060	7.1411	0.0833
28	1400	0.0002	0.2322	0.0002	0.3251	0.0657
29	1450	0.0041	5.2707	0.0055	7.1194	0.0776
30	1500	0.0001	0.1990	0.0002	0.3483	0.0613
31	1550	0.0037	5.1297	0.0051	7.0218	0.0726
32	1600	0.0002	0.2654	0.0002	0.3715	0.0575
33	1650	0.0034	4.9683	0.0046	6.8034	0.0682
34	1700	0.0001	0.2256	0.0002	0.3947	0.0541
35	1750	0.0031	4.7472	0.0042	6.5511	0.0643
36	1800	0.0001	0.2388	0.0002	0.3582	0.0511
37	1850	0.0027	4.5166	0.0038	6.2731	0.0608
38	1900	0.0001	0.2521	0.0002	0.3782	0.0484
39	1950	0.0024	4.1789	0.0034	5.8716	0.0577
40	2000	0.0001	0.2654	0.0002	0.3981	0.0460


EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg}) are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max}) are below 150% of the Individual Limits.

Test engineer: Seben

Original:

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW2120RP-VF
Temperature	:	22°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 09, 2015

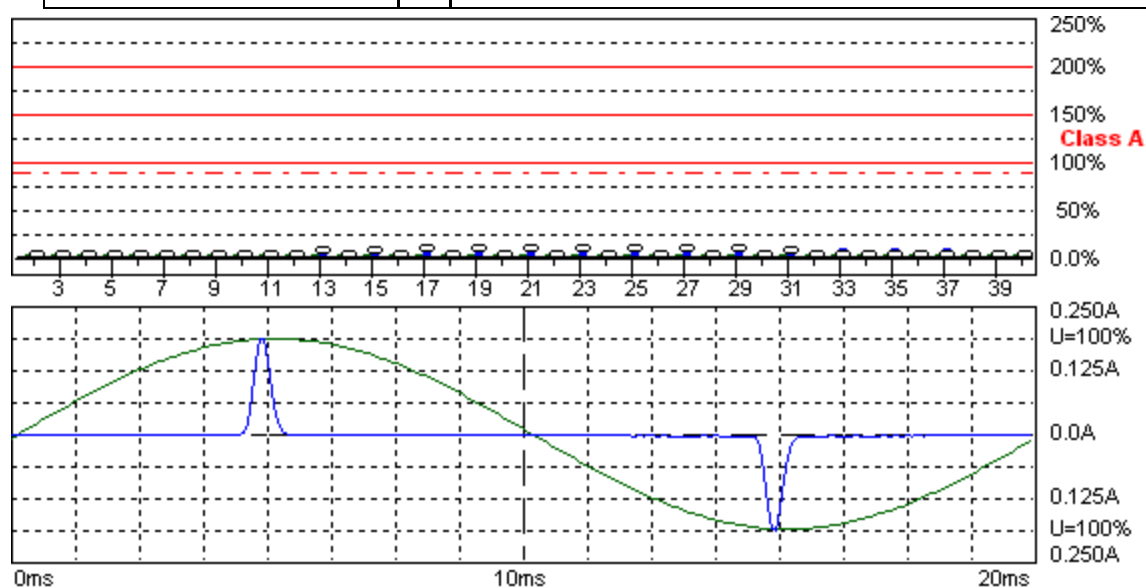

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2015-1-9 14:47:16 harmonic.hsu

Urms = 229.7 V P = 2.503 W THC = 0.032 A
Irms = 0.031 A pf = 0.346

Range: 0.25 A
V-nom: 230 V
TestTime: 15 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values


Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.013 Range: 0.25 A
Irms = 0.031A Ipk = 0.193A cf = 6.132
P = 2.503W S = 7.235VA pf = 0.346
THDi = 94.6 % THDu = 0.20 % Class A
Test - Time : 15min (100 %)
Test completed, Result: PASSED

Order	Freq. [Hz]	Irms [A]	Irms%L [%]	I _{max} [A]	I _{max} %L [%]	Limit [A]
1	50	0.0110		0.0110		
2	100	0.0000	0.0042	0.0001	0.0113	1.0800
3	150	0.0098	0.4253	0.0098	0.4266	2.3000
4	200	0.0001	0.0142	0.0002	0.0355	0.4300
5	250	0.0097	0.8526	0.0098	0.8553	1.1400
6	300	0.0001	0.0254	0.0002	0.0559	0.3000
7	350	0.0096	1.2484	0.0096	1.2504	0.7700
8	400	0.0001	0.0398	0.0002	0.0796	0.2300
9	450	0.0094	2.3460	0.0094	2.3537	0.4000
10	500	0.0001	0.0498	0.0002	0.0912	0.1840
11	550	0.0092	2.7743	0.0092	2.7789	0.3300
12	600	0.0001	0.0697	0.0002	0.1294	0.1533
13	650	0.0089	4.2216	0.0089	4.2361	0.2100
14	700	0.0001	0.0813	0.0002	0.1625	0.1314
15	750	0.0085	5.6763	0.0085	5.6864	0.1500
16	800	0.0001	0.1061	0.0002	0.1858	0.1150
17	850	0.0081	6.1564	0.0082	6.1795	0.1324
18	900	0.0001	0.1194	0.0002	0.2239	0.1022
19	950	0.0077	6.5328	0.0078	6.5586	0.1184
20	1000	0.0001	0.1493	0.0002	0.2488	0.0920
21	1050	0.0073	6.8217	0.0073	6.8502	0.1071
22	1100	0.0001	0.1642	0.0002	0.2919	0.0836
23	1150	0.0069	7.0190	0.0069	7.0502	0.0978
24	1200	0.0001	0.1791	0.0002	0.3184	0.0767
25	1250	0.0064	7.1208	0.0064	7.1547	0.0900
26	1300	0.0001	0.1941	0.0002	0.3450	0.0708
27	1350	0.0059	7.1228	0.0060	7.1777	0.0833
28	1400	0.0001	0.2090	0.0002	0.3483	0.0657
29	1450	0.0055	7.0407	0.0055	7.0997	0.0776
30	1500	0.0001	0.2239	0.0002	0.3732	0.0613
31	1550	0.0050	6.8746	0.0050	6.9377	0.0726
32	1600	0.0001	0.2388	0.0002	0.3981	0.0575
33	1650	0.0045	6.6467	0.0046	6.7362	0.0682
34	1700	0.0001	0.2538	0.0002	0.3947	0.0541
35	1750	0.0041	6.3375	0.0041	6.4324	0.0643
36	1800	0.0001	0.2388	0.0002	0.3881	0.0511
37	1850	0.0036	5.9970	0.0037	6.0974	0.0608
38	1900	0.0001	0.2521	0.0002	0.4097	0.0484
39	1950	0.0032	5.5806	0.0033	5.7129	0.0577
40	2000	0.0001	0.2654	0.0002	0.3649	0.0460

Basic Standard	:	EN 61000-3-2
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW2220RP-VF
Temperature	:	22°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 09, 2015

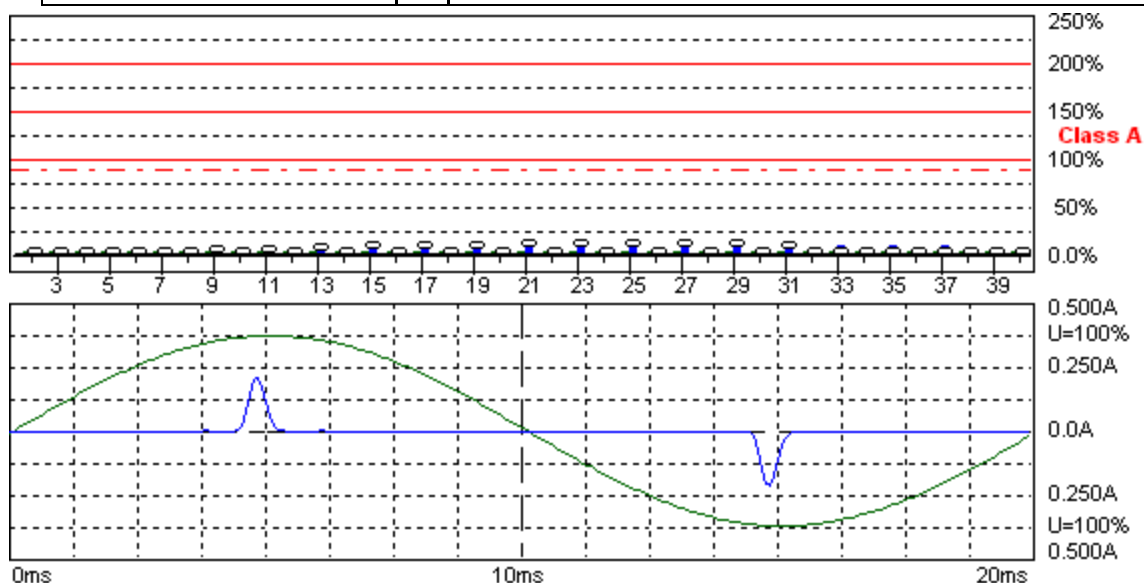

Full Bar : Actual Values

Empty Bar : Maximum Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.5 A

Irms = 0.035A Ipk = 0.216A cf = 6.110

P = 2.859W S = 8.132VA pf = 0.352

THDi = 94.5 % THDu = 0.20 % Class A

Test - Time : 15min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.0125		0.0125		

2	100	0.0001	0.0057	0.0002	0.0141	1.0800
3	150	0.0113	0.4909	0.0113	0.4923	2.3000
4	200	0.0001	0.0142	0.0002	0.0355	0.4300
5	250	0.0110	0.9691	0.0111	0.9744	1.1400
6	300	0.0001	0.0407	0.0002	0.0814	0.3000
7	350	0.0109	1.4189	0.0110	1.4228	0.7700
8	400	0.0001	0.0398	0.0002	0.0796	0.2300
9	450	0.0107	2.6779	0.0107	2.6855	0.4000
10	500	0.0001	0.0663	0.0002	0.1161	0.1840
11	550	0.0104	3.1535	0.0104	3.1627	0.3300
12	600	0.0001	0.0796	0.0002	0.1393	0.1533
13	650	0.0100	4.7811	0.0101	4.7956	0.2100
14	700	0.0001	0.0929	0.0002	0.1858	0.1314
15	750	0.0096	6.4087	0.0096	6.4290	0.1500
16	800	0.0002	0.1327	0.0002	0.2123	0.1150
17	850	0.0092	6.9173	0.0092	6.9404	0.1324
18	900	0.0002	0.1493	0.0003	0.2687	0.1022
19	950	0.0087	7.3188	0.0087	7.3446	0.1184
20	1000	0.0002	0.1659	0.0003	0.2985	0.0920
21	1050	0.0081	7.6050	0.0082	7.6335	0.1071
22	1100	0.0002	0.1824	0.0003	0.3284	0.0836
23	1150	0.0076	7.7677	0.0076	7.7989	0.0978
24	1200	0.0002	0.1990	0.0003	0.3582	0.0767
25	1250	0.0070	7.8328	0.0070	7.8328	0.0900
26	1300	0.0002	0.2156	0.0003	0.3881	0.0708
27	1350	0.0065	7.7637	0.0065	7.8003	0.0833
28	1400	0.0002	0.2322	0.0003	0.4180	0.0657
29	1450	0.0059	7.6308	0.0060	7.6701	0.0776
30	1500	0.0002	0.2488	0.0003	0.4478	0.0613
31	1550	0.0054	7.4002	0.0054	7.4002	0.0726
32	1600	0.0002	0.2654	0.0002	0.4246	0.0575
33	1650	0.0048	7.0719	0.0049	7.1167	0.0682
34	1700	0.0002	0.2820	0.0002	0.4511	0.0541
35	1750	0.0043	6.6935	0.0043	6.6935	0.0643
36	1800	0.0002	0.2985	0.0002	0.4777	0.0511
37	1850	0.0038	6.2229	0.0038	6.2731	0.0608
38	1900	0.0002	0.3151	0.0002	0.4412	0.0484
39	1950	0.0033	5.7658	0.0033	5.7658	0.0577
40	2000	0.0002	0.3317	0.0002	0.4644	0.0460

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg)
are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max})
are below 150% of the Individual Limits.

Test engineer: Seben

7.1. Test Photographs

Second edition:



First edition:



Original:



8. Voltage Fluctuations Test

8.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

8.2. Measurement equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2016.03.29	2017.03.28
HARCS	EMC Partner AG	Ver 4.18	N/A	N/A	N/A

8.3. Test Result and Data

Second edition:

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW1100RP-VF
Temperature	:	22°C
Humidity	:	48 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Apr 10, 2016

Flickermeter 1000-4-15 for 230V/50Hz

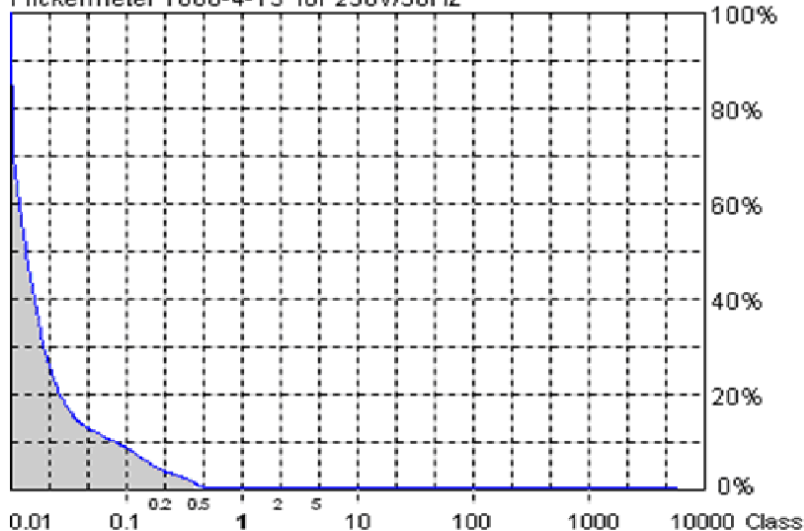

Actual Flicker (Fli):	0.02
Short-term Flicker (Pst):	0.26
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.27
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.20%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

2016-4-10 17:57:10 harmonic.hsu

Urms = 230.7 V P = 1.025 W
Irms = 0.015 A pf = 0.291

Range: 0.25 A
V-nom: 230 V
TestTime: 10 min (100%)

DH-HAC-HDW1100RP-VF

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 230.7V Freq = 50.013 Range: 0.25 A
Irms = 0.015A Ipk = 0.117A cf = 7.648




P = 1.025W S = 3.520VA pf = 0.291

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms


Test completed, Result: PASSED

Test engineer: 

First edition:

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW1200RP-VF
Temperature	:	22°C
Humidity	:	48 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Apr 14, 2015

Flickermeter 1000-4-15 for 230V/50Hz

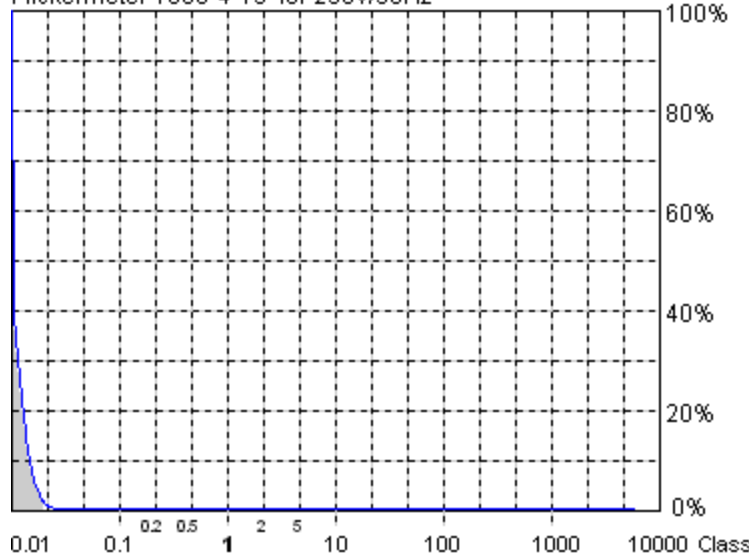

Actual Flicker (Fli):	0.01
Short-term Flicker (Pst):	0.09
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.09
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.04%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

Urms = 229.7 V P = 1.927 W
Irms = 0.023 A pf = 0.358

DH-HAC-HDW1200RP-VF

Test completed, Result: PASSED

2015-4-14 14:06:49 harmonic.hsu

Range: 0.25 A
V-nom: 230 V
TestTime: 10 min (100%)

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed

Urms = 229.7V Freq = 50.000 Range: 0.25 A

Irms = 0.023A Ipk = 0.144A cf = 6.156



P = 1.927W S = 5.384VA pf = 0.358

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms


Test completed, Result: PASSED

Test engineer: Seben

Original:

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 1
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW2120RP-VF
Temperature	:	22°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 09, 2015

Flickermeter 1000-4-15 for 230V/50Hz

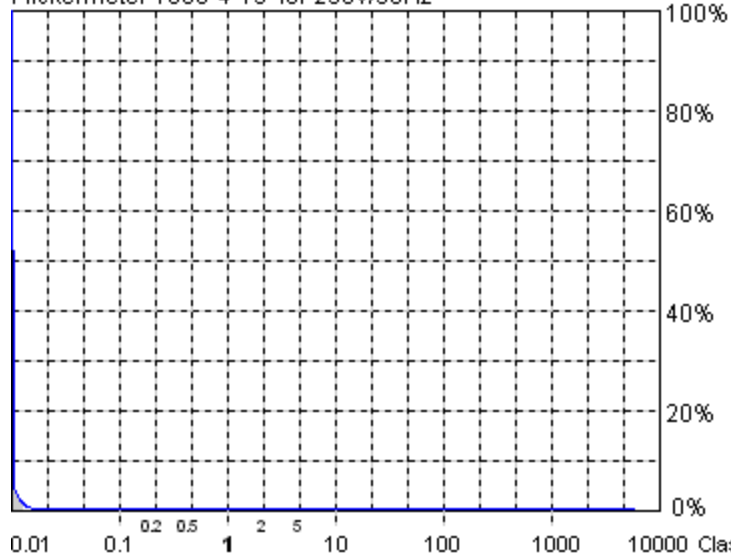

Actual Flicker (Fli): 0.01

Short-term Flicker (Pst): 0.07

Limit (Pst): 1.00

Long-term Flicker (Plt): 0.07

Limit (Plt): 0.65

Maximum Relative Volt. Change (dmax): 0.00%

Limit (dmax): 4.00%

Relative Steady-state Voltage Change (dc): 0.03%

Limit (dc): 3.30%

Maximum Interval exceeding 3.30% (dt): 0.00ms

Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

2015-1-9 15:01:37 harmonic.hsu

Urms = 229.7 V P = 2.497 W

Range: 0.25 A

Irms = 0.031 A pf = 0.345

V-nom: 230 V

TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed



Urms = 229.7V Freq = 50.000 Range: 0.25 A
Irms = 0.031A Ipk = 0.192A cf = 6.109
P = 2.497W S = 7.235VA pf = 0.345

Test - Time : 1 x 10min = 10min (100 %)


LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Basic Standard	:	EN 61000-3-3
Final Test Result	:	PASS
Test Mode	:	Mode 2
Equipment	:	HDCVI CAMERA
Model No.	:	DH-HAC-HDW2220RP-VF
Temperature	:	22°C
Humidity	:	50 %
Atmospheric Pressure	:	100 kPa
Test Date	:	Jan 09, 2015

Flickermeter 1000-4-15 for 230V/50Hz

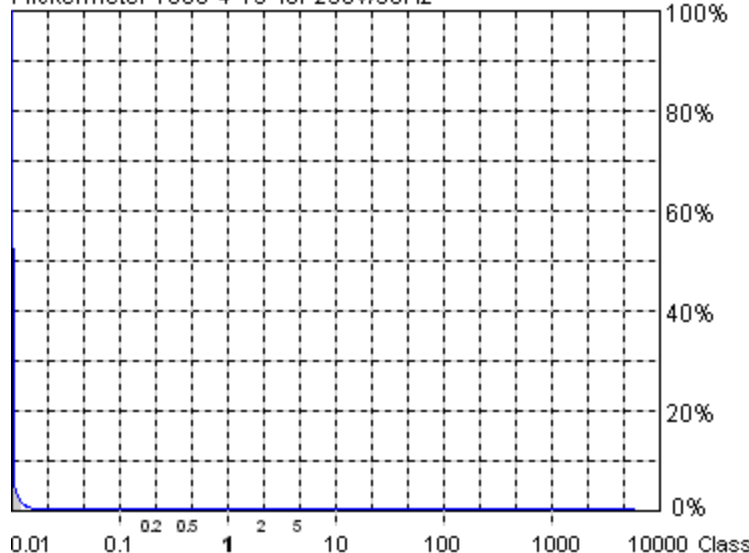

Actual Flicker (Fli):	0.01
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.07
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.04%
Limit (dc):	3.30%
Maximum Interval exceeding 3.30% (dt):	0.00ms
Limit (dt>Lim):	500ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)

Urms = 229.7 V P = 2.859 W
Irms = 0.035 A pf = 0.352

2015-1-9 14:21:44 harmonic.hsu

Range: 0.5 A
V-nom: 230 V
TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Partner

Full Bar : Actual Values

Empty Bar : Maximum Values

Circles : Average Values

Blue : Current , Green : Voltage , Red : Failed




Urms = 229.7V Freq = 50.000 Range: 0.5 A
Irms = 0.035A Ipk = 0.215A cf = 6.076
P = 2.859W S = 8.132VA pf = 0.352

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : No LIN

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Test engineer: 

8.4. Test Photographs

Second edition:



First edition:



Original:




9. Electrostatic Discharge Immunity Test

9.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 hPa) to 106 KPa (1060 hPa).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - ✧ If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - ✧ Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - ✧ The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

9.2. Test Setup for Tests Performed in Laboratory

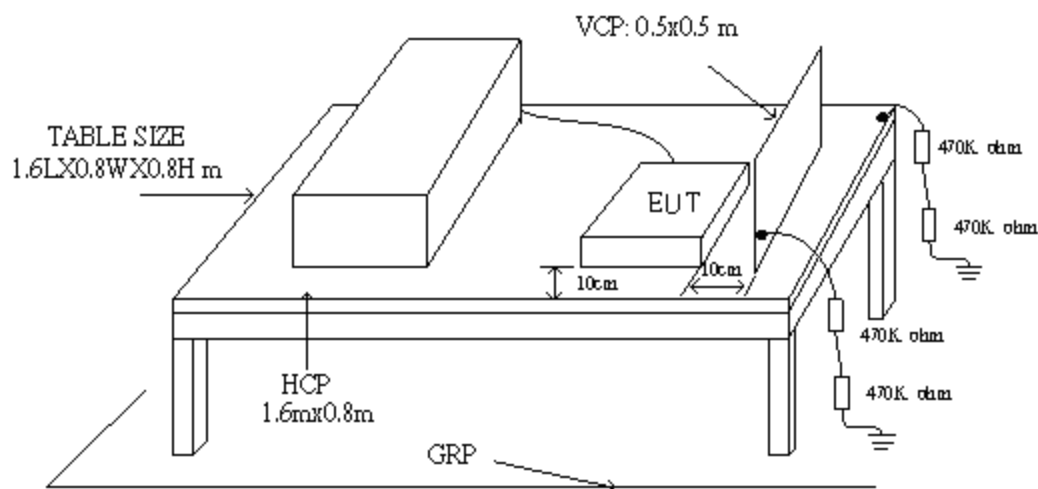

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner :

- h. Contact Discharge to the conductive surfaces and to coupling plane;
- i. Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the Exclusive Certification Corp., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.

9.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (KV) of Contact discharge	Level	Test Voltage (KV) of Air Discharge
1	±2	1	±2
2	±4	2	±4
3	±6	3	±8
4	±8	4	±15
X	Specified	X	Specified
Remark: "X" is an open level.			

9.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESD Simulator	EM Test	ditto	V0714102399	2016.04.21	2017.04.20
Tonometer	shanghaifengyun	DYM3	3251	2015.12.21	2016.12.20
Dehumidifier	ZEDO	ZD-220LB	CEP-TH-01	N/A	N/A
Humidifier	YADU	YZ-DS251C	CEP-TH-02	N/A	N/A
Temperature/ Humidity Meter	feiyan	N/A	102	2016.03.29	2017.03.28

9.5. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-2
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 21 °C
 Relative Humidity : 46 %
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 12, 2016

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-31	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-31	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
32	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



First edition:

Basic Standard : IEC 61000-4-2
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 21 °C
 Relative Humidity : 46 %
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 12, 2015

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1-5	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
6,7,8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-52	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
53	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-5	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
6,7,8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-52	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
53	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-5	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
6,7,8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-52	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
53	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1-5	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
6,7,8	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
9-52	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
53	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Original:

Basic Standard : IEC 61000-4-2
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
 Final Test Result : PASS
 Temperature : 21 °C
 Relative Humidity : 48 %
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 12, 2015

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Mode 2:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Test Voltage: 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	—	+	—	+	—	+	—	+	—	+	—	+	—	+	—
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---


Test Voltage: AC 195.5V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test Voltage: AC 253V/50Hz																
	Contact Discharge								Air Discharge							
	25 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
1,2,3	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---
4-42	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
43	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

Test engineer: Seben



9.6. Test Photographs

Second edition:

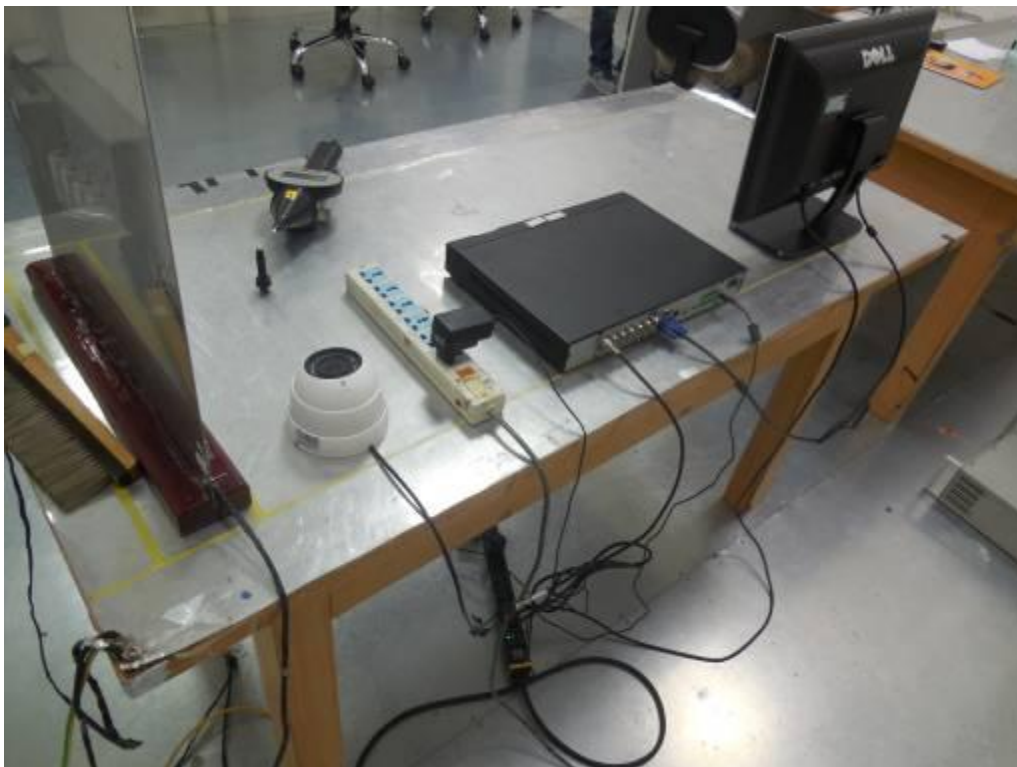





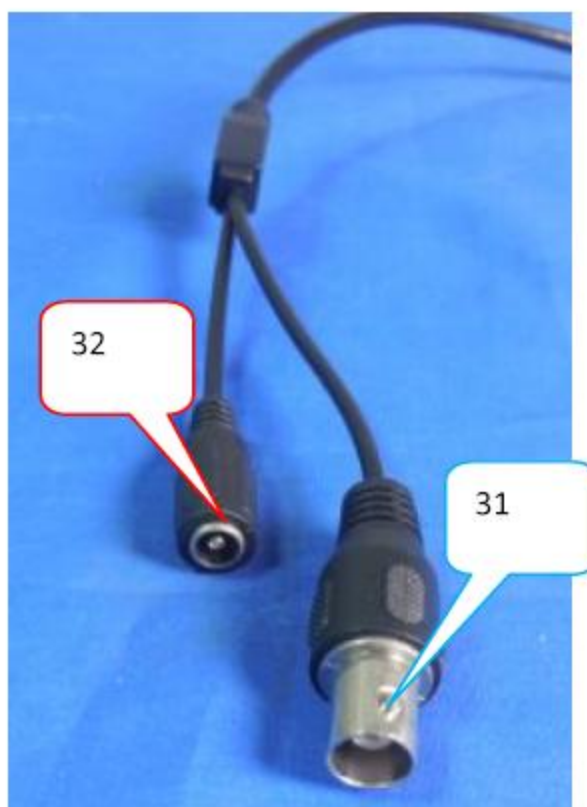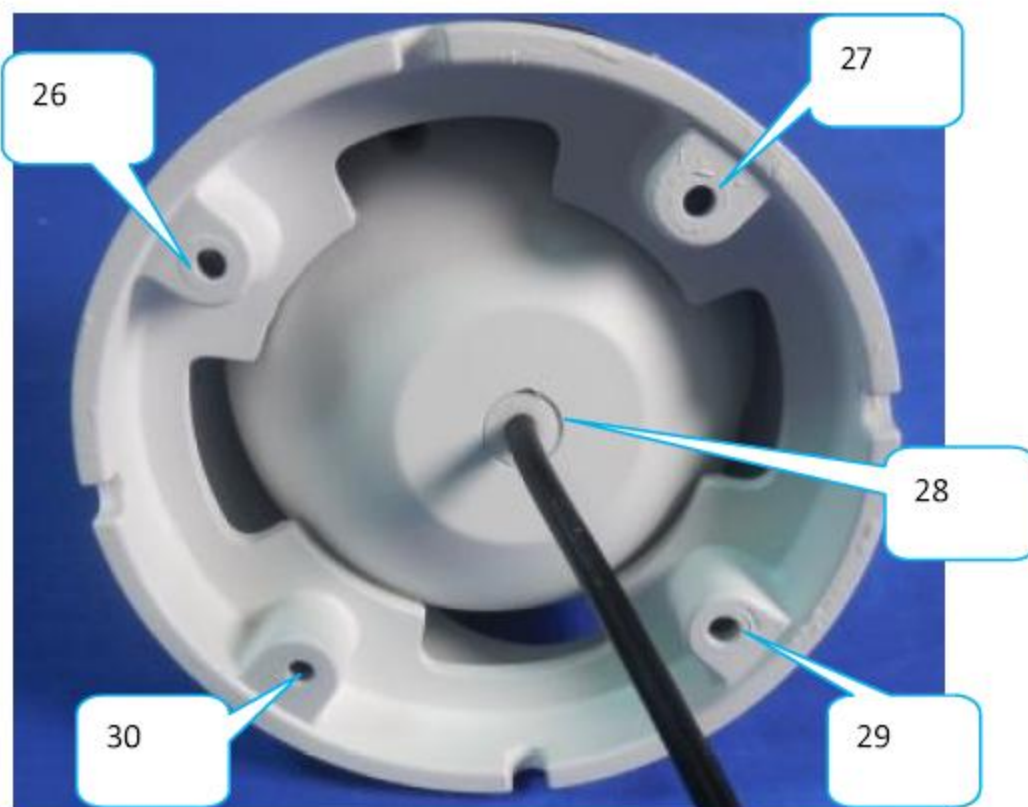



First edition:





Original:



First edition:

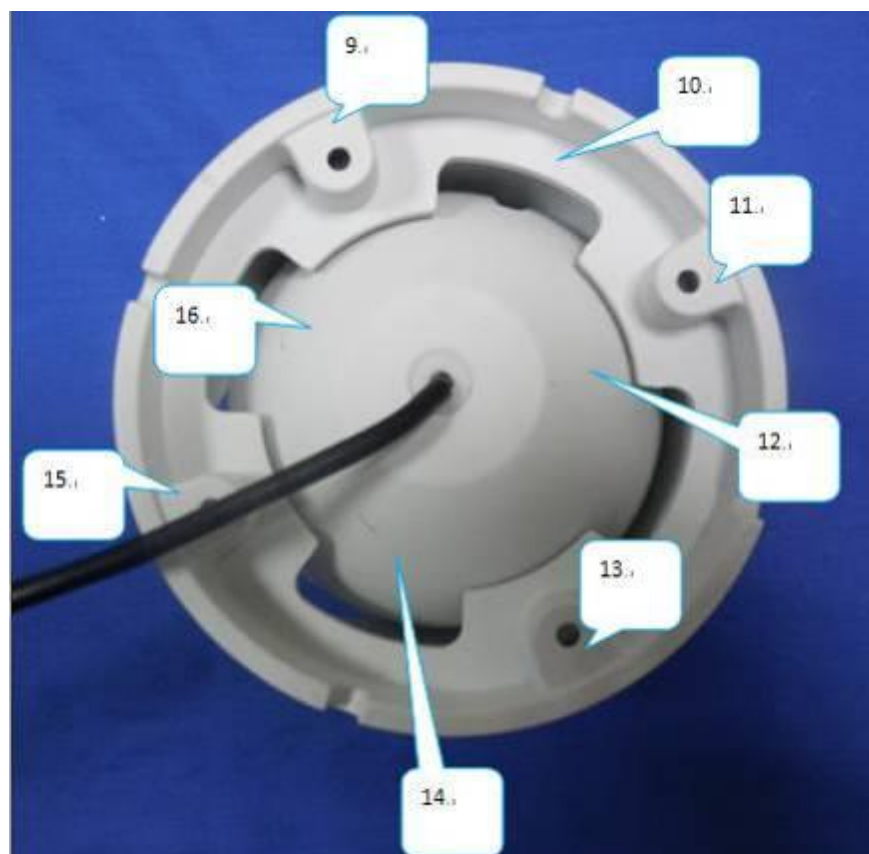
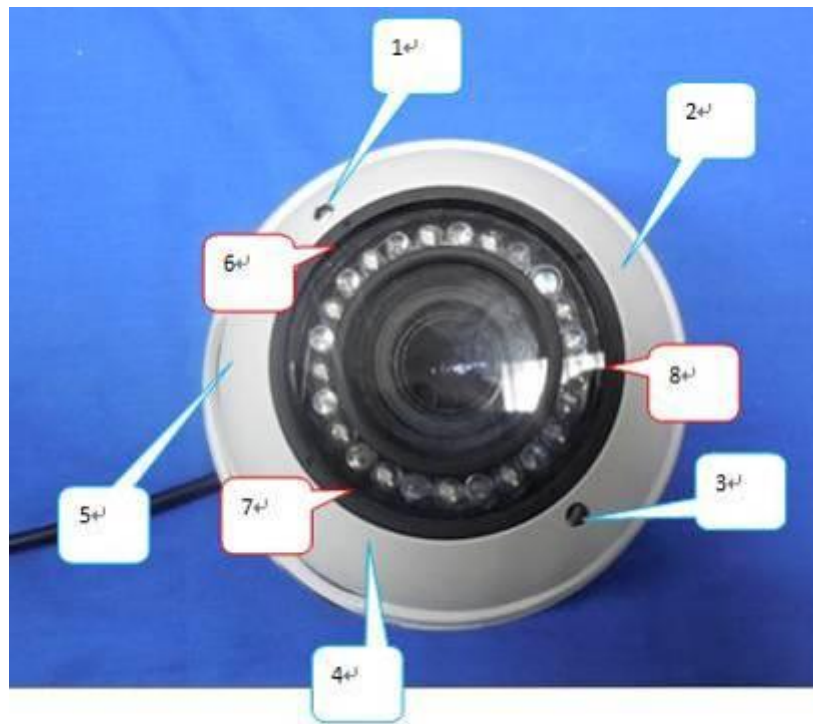


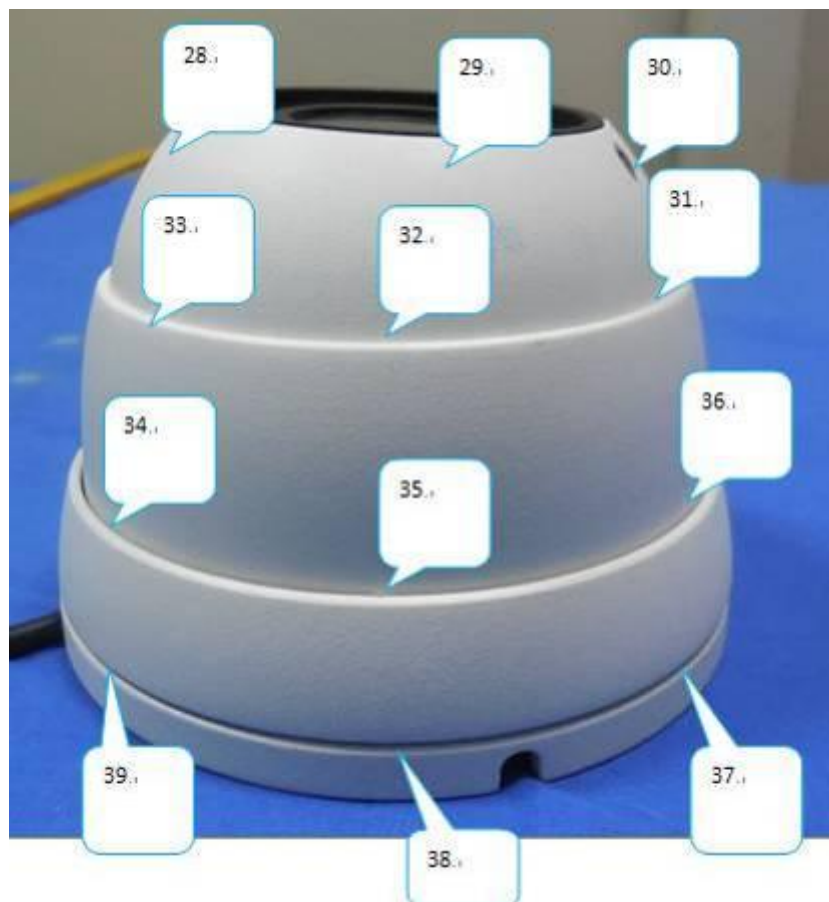


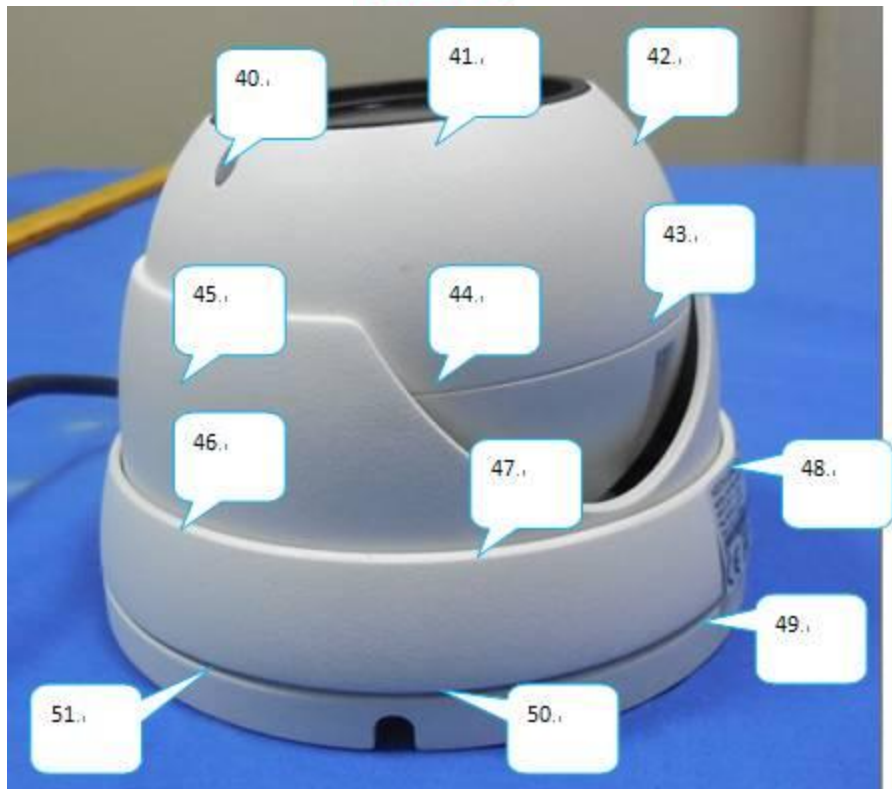


Original:

DH-HAC-HDW2120RP-VF

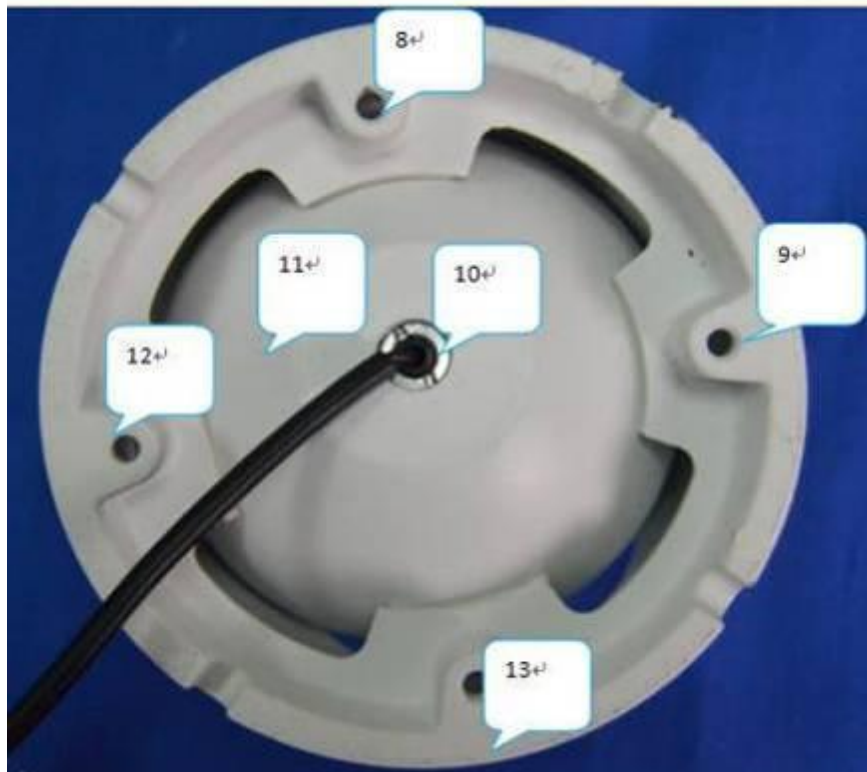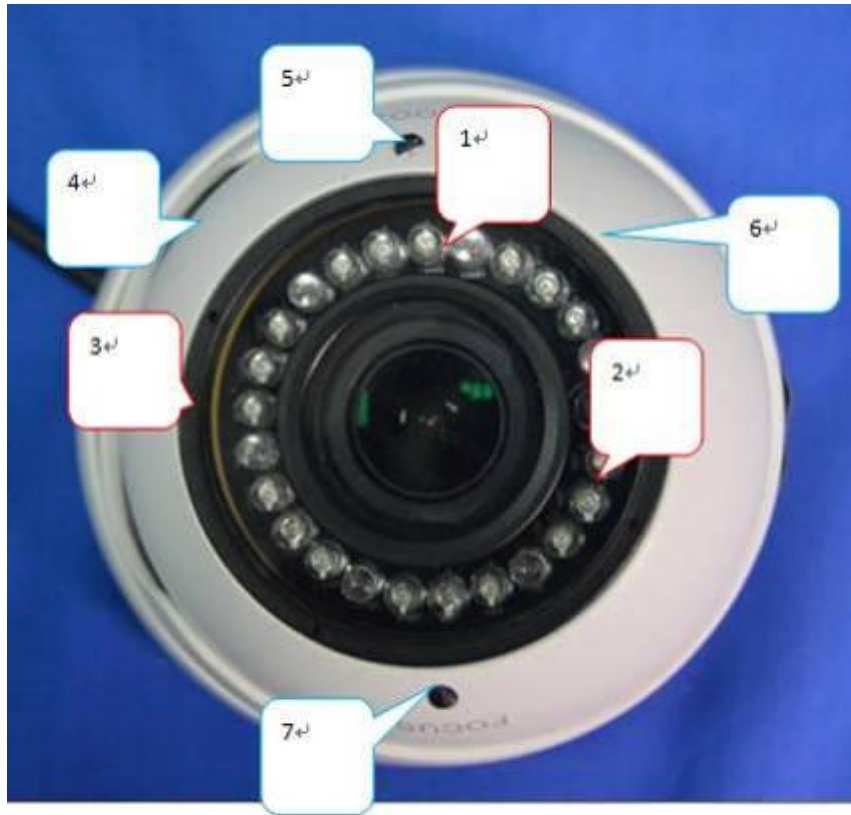


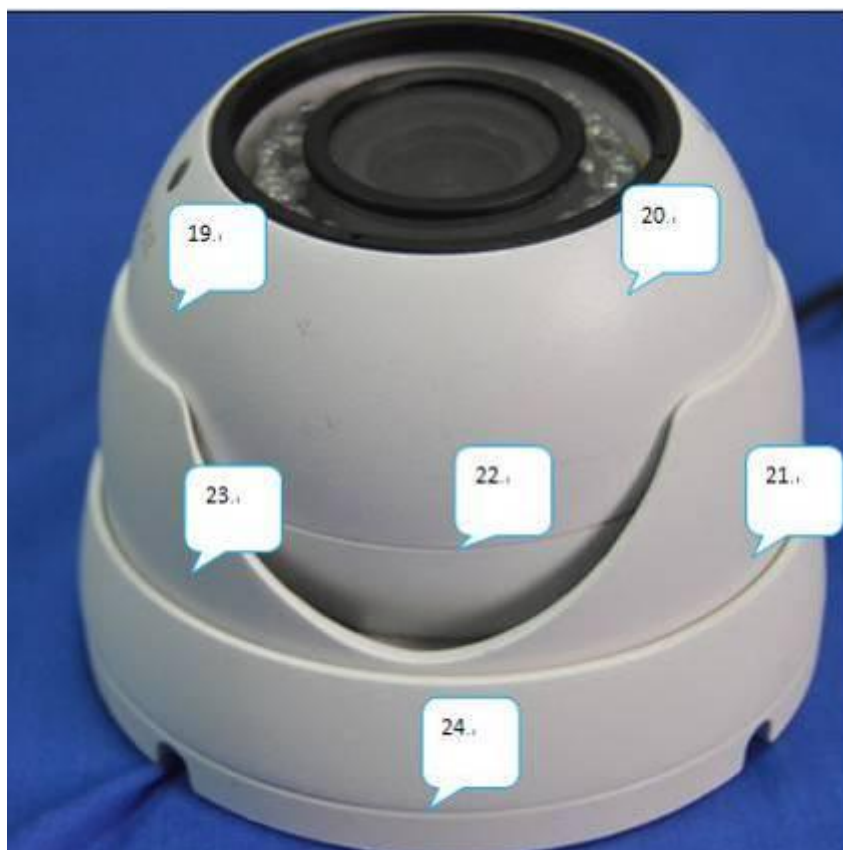


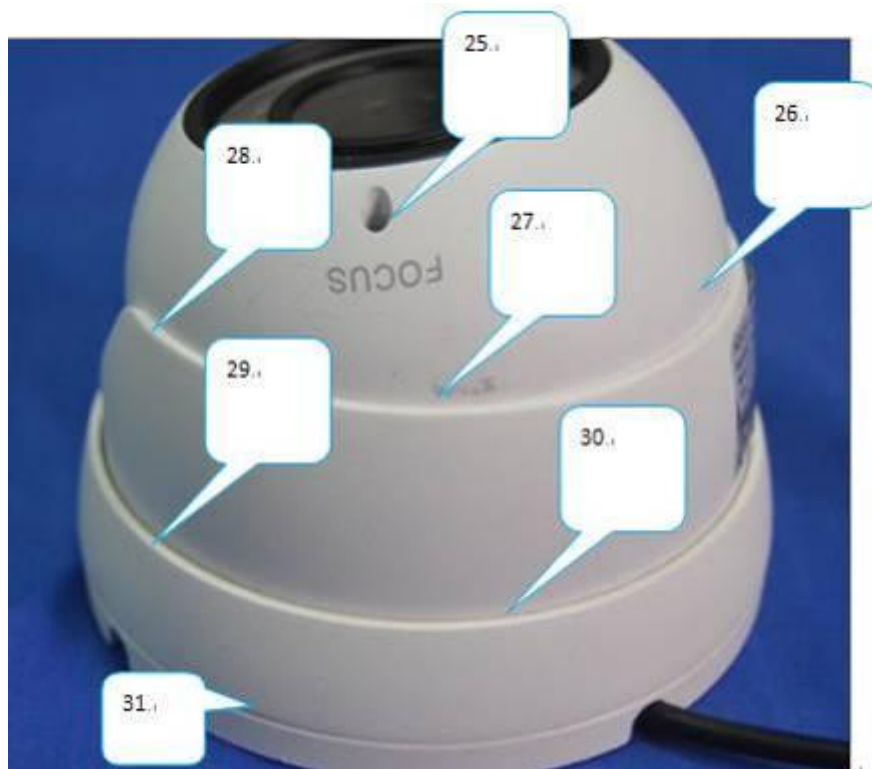




DH-HAC-HDW2120RP-VF

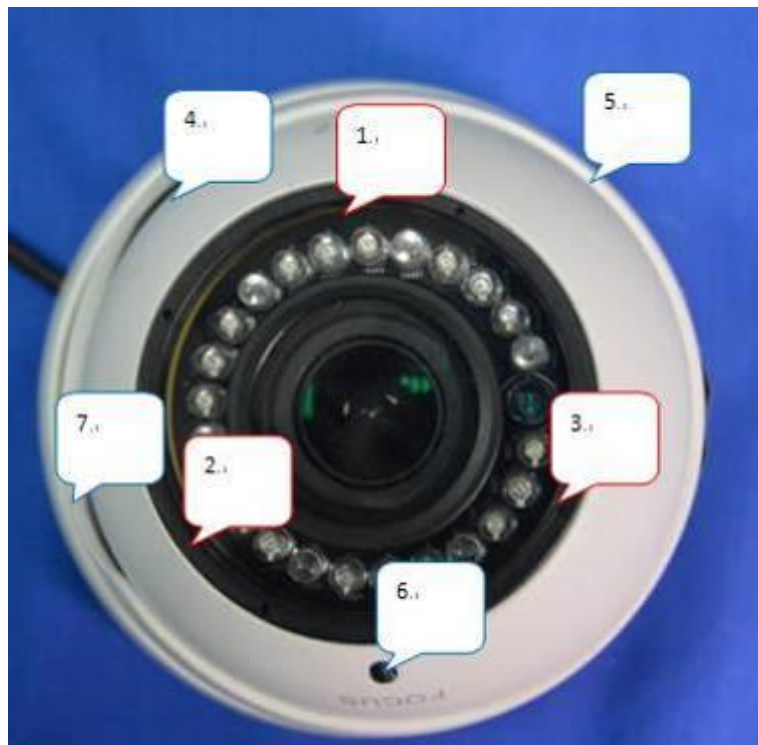

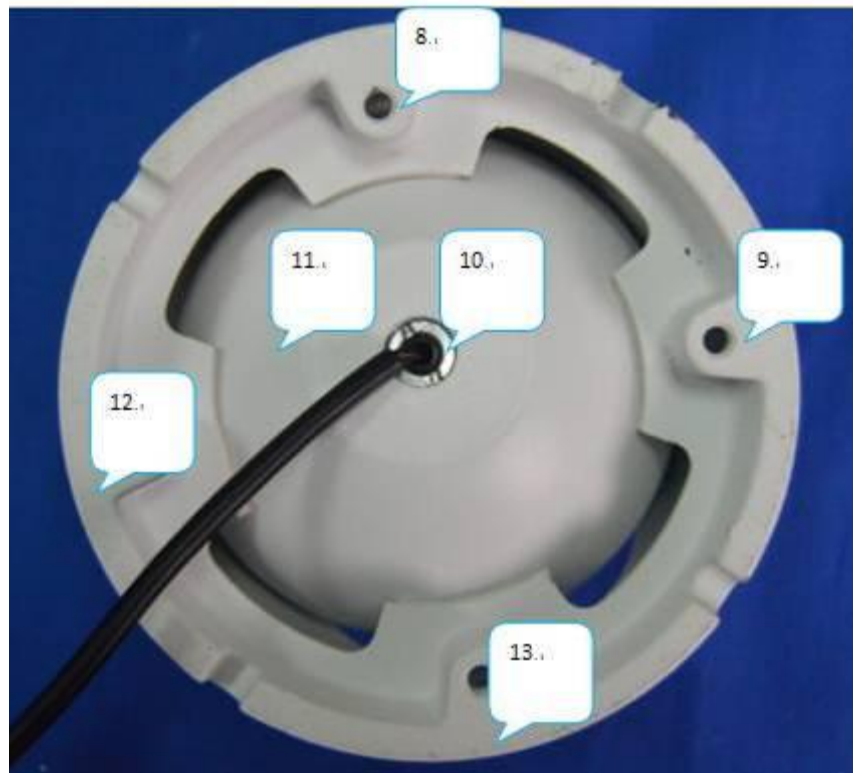

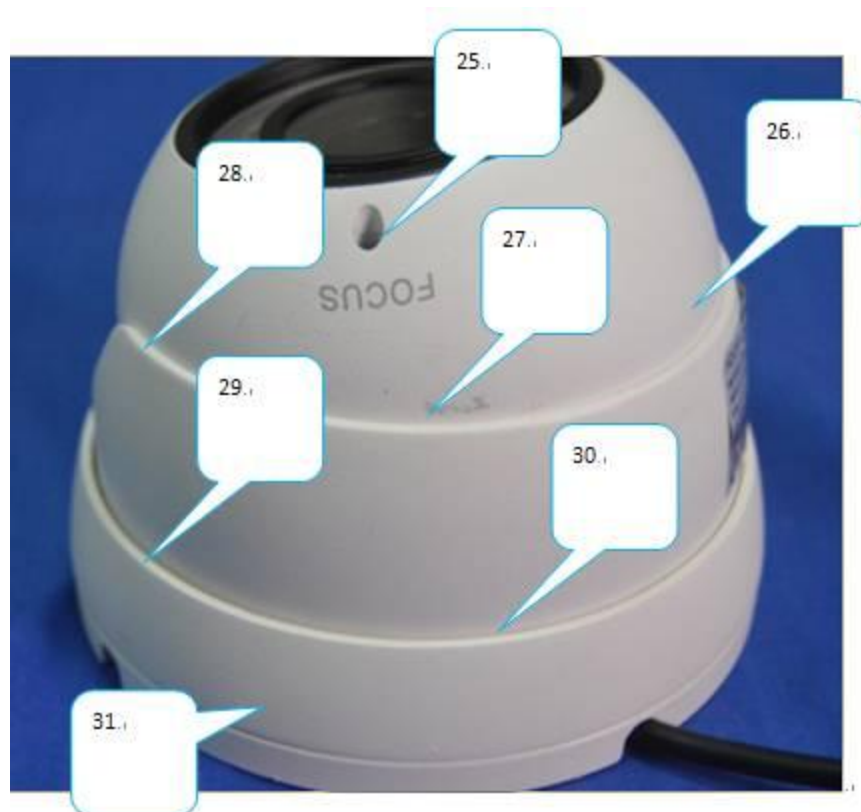



10. Radio Frequency electromagnetic field immunity test

10.1. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-2700 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of $1.5 \cdot 10^{-3}$ decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

10.2. Test Severity Levels

	Condition of Test	Remarks
1.	Field Strength	10 V/m
2.	Radiated Signal	AM 80% Modulated with 1kHz Pulse modulation 1Hz (0.5s ON; 0.5s OFF)
3.	Scanning Frequency	80MHz - 2700MHz
4.	Dwell Time	3 Seconds
5.	Frequency step size Δf	1%
6.	The rate of Swept of Frequency	1.5 x 10 ⁻³ decades/s

10.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Signal Generator	R&S	SML03	103287	2016.03.26	2017.03.25
Power Sensor	R&S	NR P-Z91	100383	2016.03.26	2017.03.25
Power Sensor	R&S	NRP-Z91	100384	2016.03.26	2017.03.25
Power Meter	R&S	NRP	101206	2016.03.26	2017.03.25
Power Amplifier	BONN	BLWA0830-16 0/100/40D	076659	2016.03.26	2017.03.25
Istropic Electric Field Probe	EST.LINDGREN	HI-6105	137445	2015.11.20	2016.11.19
EMS Antenna	R&S	HL046E	100028	N/A	N/A
Temperature/ Humidity Meter	feiyang	N/A	101	2016.03.29	2017.03.28
EMC-32	Rohde&Schwarz	Ver 6.10.0	N/A	N/A	N/A



10.4. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-3
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1100RP-VF
 Final Test Result : PASS
 Temperature : 20°C
 Relative Humidity : 49%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 15, 2016

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



First edition:

Basic Standard : IEC 61000-4-3
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 20°C
 Relative Humidity : 49%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 13, 2015

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Original:

Basic Standard : IEC 61000-4-3
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
 Final Test Result : PASS
 Temperature : 20°C
 Relative Humidity : 50%
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 09, 2015

Test Mode 1 & Mode 2:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A



For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A

Test Voltage: AC 195.5V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A


Test Voltage: AC 253V/50Hz

Modulation : AM 80% , 1KHz sine wave , Dwell time: 3.0 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Horizontal &Vertical	Front	10 V/m	A
80~2700	Horizontal &Vertical	Rear	10 V/m	A
80~2700	Horizontal &Vertical	Left	10 V/m	A
80~2700	Horizontal &Vertical	Right	10 V/m	A



Test engineer: Seben

10.5. Test Photographs


Second edition:

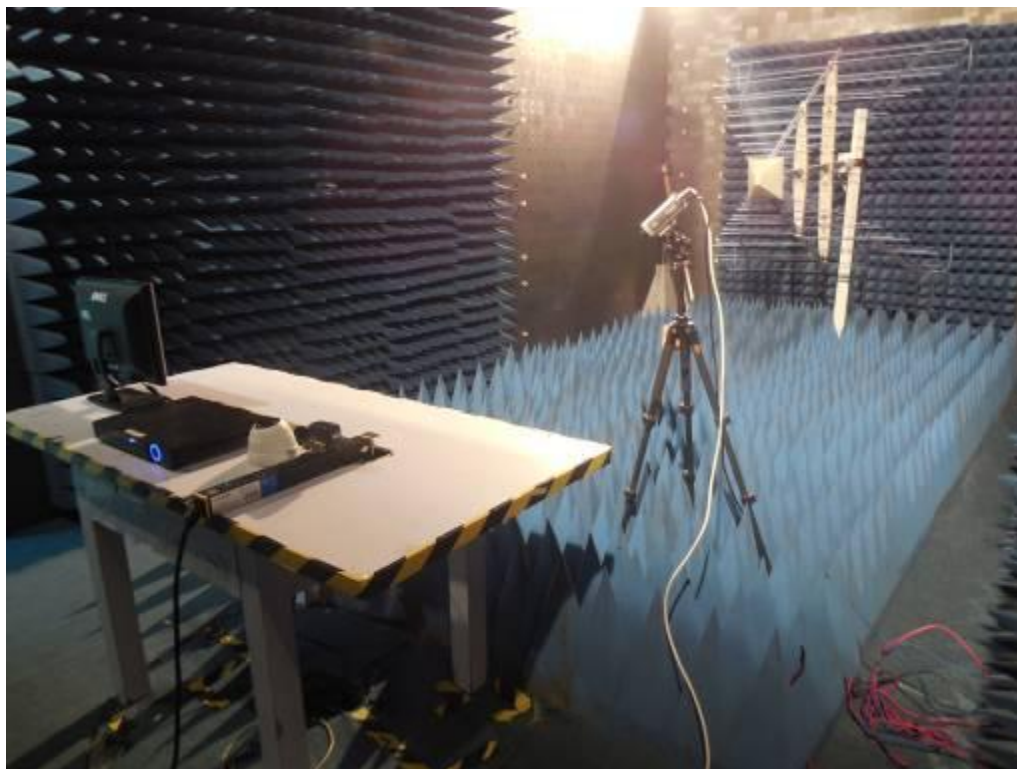

First edition:

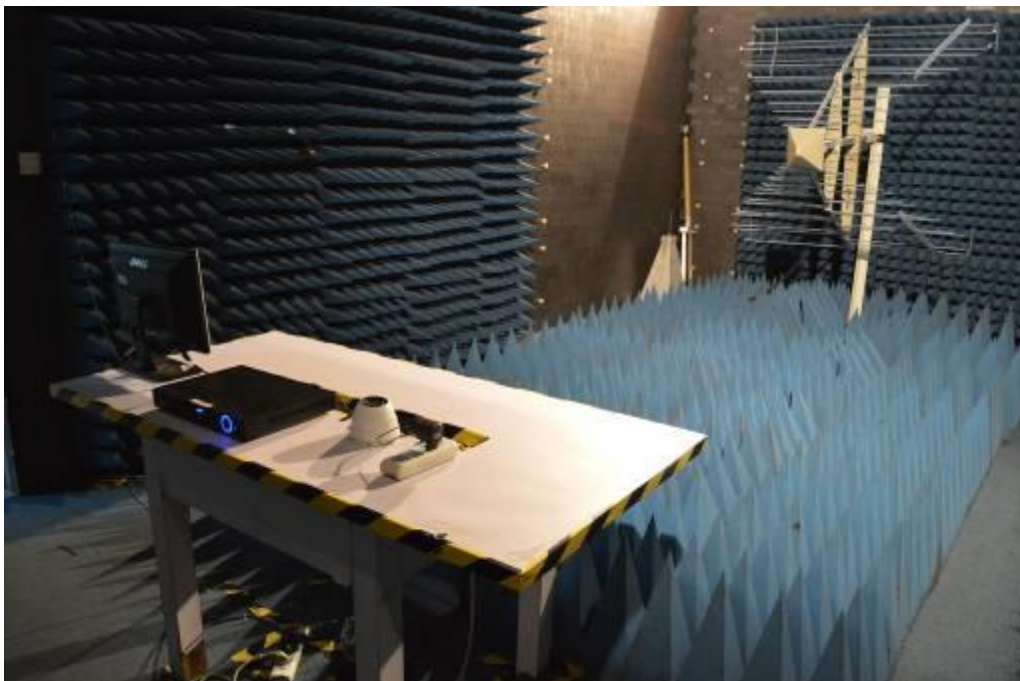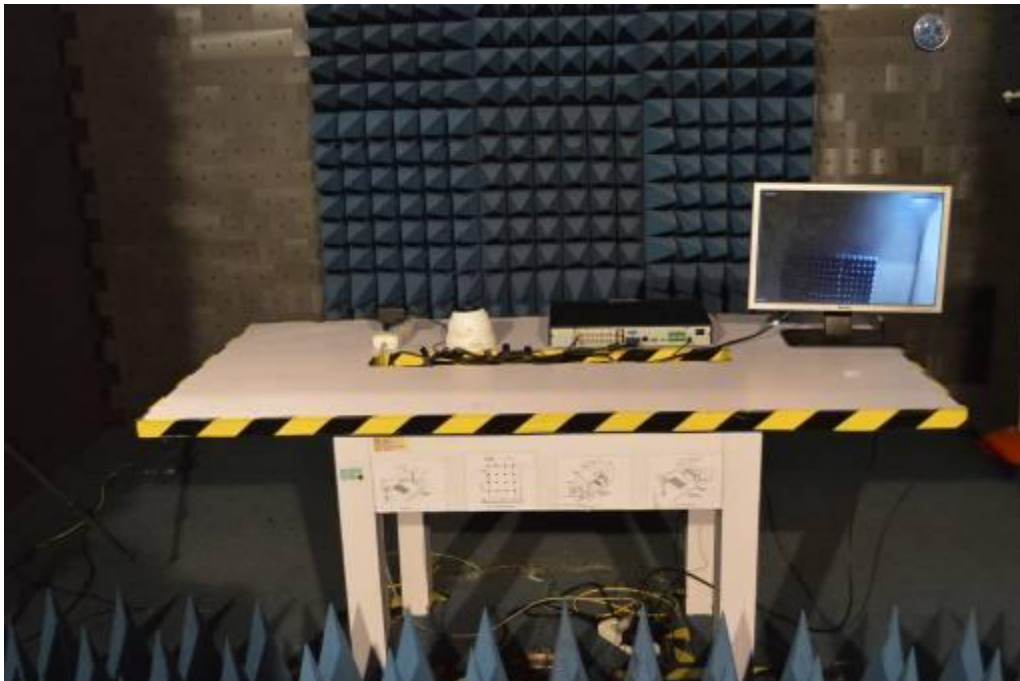

Original:

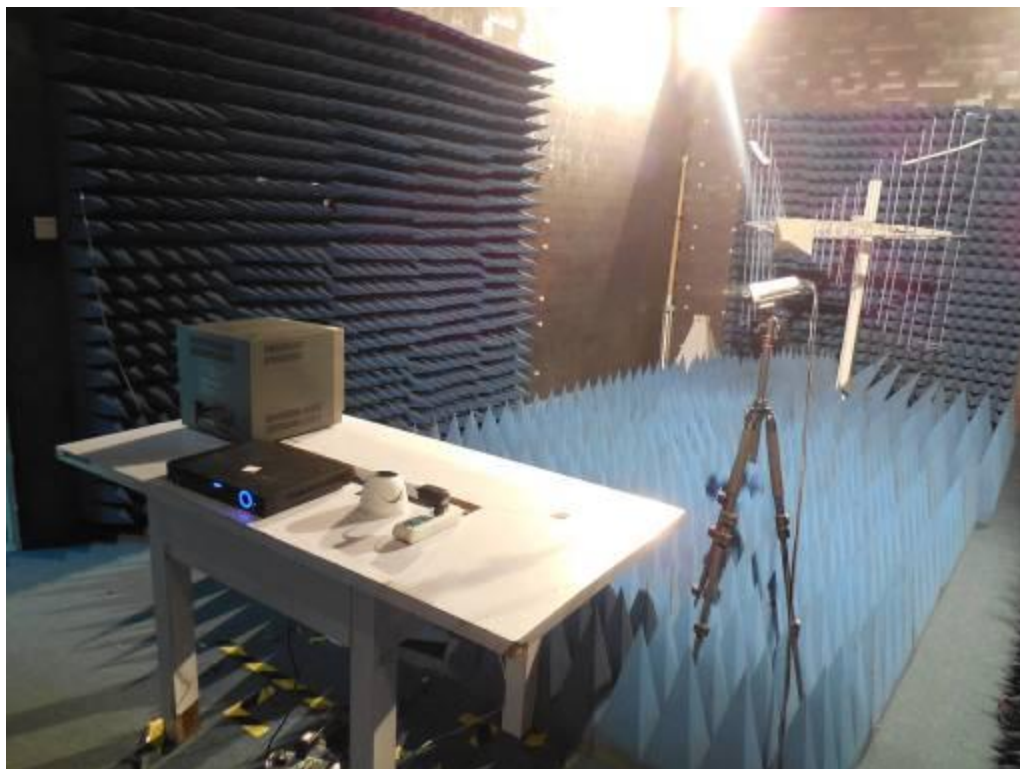

11. Electrical Fast Transient/ Burst Immunity Test

11.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ✧ ambient temperature: 15°C to 35°C;
 - ✧ relative humidity : 45% to 75%;
 - ✧ Atmospheric pressure: 86 Kpa (860 hPa) to 106 Kpa (1060 hPa).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - ✧ The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT is not exceeding 1 m.
 - ✧ The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - ✧ The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - ✧ The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - ✧ Normal performance within the specification limits.
 - ✧ Temporary degradation or loss of function or performance which is self-recoverable.
 - ✧ Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - ✧ Degradation or loss of function which is not recoverable due to damage of equipment (components).

11.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 KV	0.25 KV
2	1.0 KV	0.50 KV
3	2.0 KV	1.00 KV
4	4.0 KV	2.00 KV
X	Specified	Specified

Remark : “ X ” is an open level. The level is subject to negotiation between the user and the manufacturer or is specified by the manufacturer.

11.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2016.03.26	2017.03.25
CDN	EMCPARTNER	CDN2000-06-32	121	2016.03.26	2017.03.25
Coupling clamp	EMCPARTNER	CN-EFT1000	547	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2016.03.29	2017.03.28

11.4. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-4
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1100RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 22, 2016

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5 kHz</u>			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---



First edition:

Basic Standard : IEC 61000-4-4
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 15, 2015

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5 kHz</u>			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---



Original:

Basic Standard : IEC 61000-4-4
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
 Final Test Result : PASS
 Temperature : 21°C
 Relative Humidity : 49%
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 13, 2015

Test Mode 1 & mode 2:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5 kHz</u>			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz


Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 195.5V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test Voltage: AC 253V/50Hz

Pulse : 5/50 ns		Repetition Rate: <u>5/100</u> kHz			
Burst : 15m/300ms					
Test time : 1 min/each condition					
Voltage/ Mode/ Polarity/ Result/ Phase		<u>1.0 kV</u>		<u>2.0 kV</u>	
		+	—	+	—
Power Line	L	---	---	A	A
	N	---	---	A	A
	L-N	---	---	A	A
Signal Line	BNC	A	A	---	---

Test engineer: 

11.5. Test Photographs

Second edition:

Main



BNC



First edition:

Main



BNC




Original:

Main



BNC

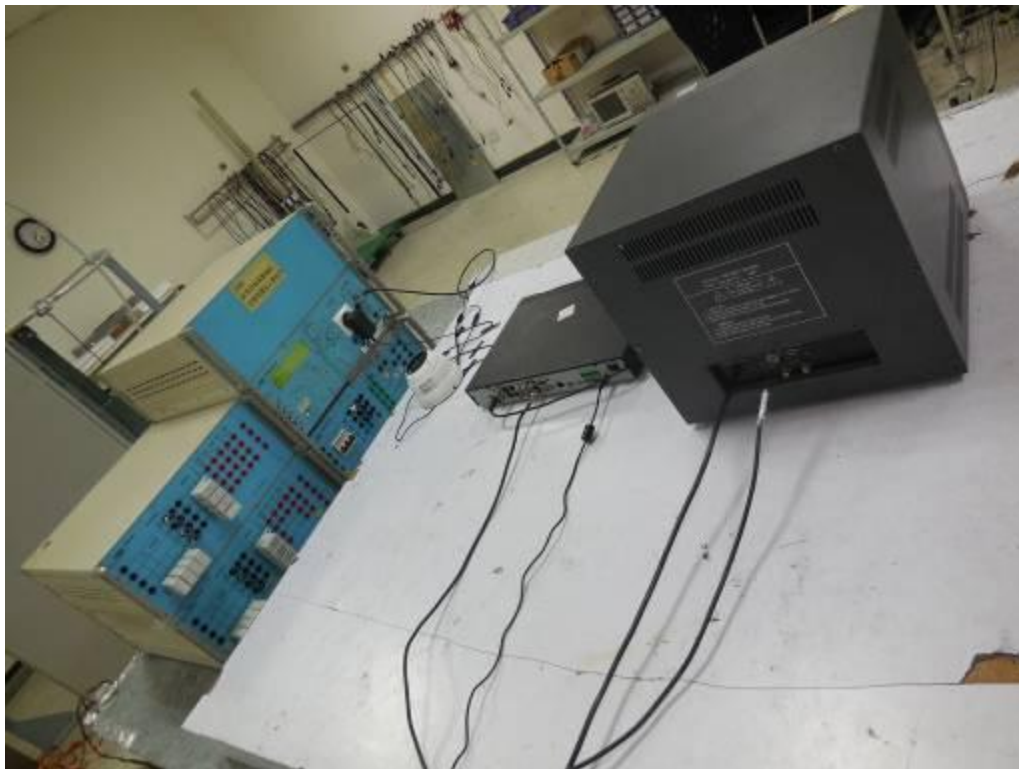

12. Surge Immunity Test

12.1. Test Procedure

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

- ✧ ambient temperature : 15 °C to 35 °C
- ✧ relative humidity : 10 % to 75 %
- ✧ atmospheric pressure : 86 kPa to 106 kPa (860 hPa to 1060 hPa)

b. Electromagnetic conditions

the electromagnetic environment of the laboratory shall not influence the test results.

c. The test shall be performed according the test plan that shall specify the test set-up with

- ✧ generator and other equipment utilized;
- ✧ test level (voltage/current);
- ✧ generator source impedance;
- ✧ internal or external generator trigger;
- ✧ number of tests : at least five positive and five negative at the selected points;
- ✧ repetition rate : maximum 1/min.
- ✧ inputs and outputs to be tested;
- ✧ representative operating conditions of the EUT;
- ✧ sequence of application of the surge to the circuit;
- ✧ phase angle in the case of AC. power supply;
- ✧ actual installation conditions, for example :

AC : neutral earthed,

DC : (+) or (-) earthed to simulated the actual earthing conditions.

- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.

12.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$, KV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified
NOTE: "X" is an open class. This level can be specified in the product specification.	

12.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2016.03.26	2017.03.25
CDN	EMCPARTNER	CDN-UTP8	021	2016.03.26	2017.03.25
CDN	EMCPARTNER	CDN2000-06-32	121	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2016.03.29	2017.03.28

12.4. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-5
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1100RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 22, 2016

Test Mode 1:

For EN 55024: 2010

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

For EN 50130-4: 2011

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1.0</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1.0</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A



First edition:

Basic Standard : IEC 61000-4-5
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 15, 2015

Test Mode 1:

For EN 55024: 2010

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

For EN 50130-4: 2011

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1.0</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1.0</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A



Original:

Basic Standard : IEC 61000-4-5
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
 Final Test Result : PASS
 Temperature : 21 °C
 Relative Humidity : 49%
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 13, 2015

Test Mode 1 & mode 2:

For EN 55024: 2010

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform :10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

For EN 50130-4: 2011

Power Port

Test Voltage: AC 230V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5 kV</u>		<u>1.0 kV</u>	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 195.5V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0 kV</u>	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1.0</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A


Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Power Port

Test Voltage: AC 253V/50Hz						
Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 20 time/each condition						
/Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
<u>0.5/1.0</u> kV	L-N	+	A	A	A	A
		—	A	A	A	A

Waveform : 1.2/50µs(8/20µs) Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	<u>0.5</u> kV		<u>1</u> kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Waveform : 10/700µs Repetition rate : 60 sec Time : 5 time/each condition				
Voltage	0.5 kV		1.0 kV	
Mode / Polarity / Result	+	—	+	—
BNC	A	A	A	A

Test engineer: 

12.5. Test Photographs

Second edition:



First edition:



Original:



13. Conduction Disturbances induced by Radio-Frequency Fields

13.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 100 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.

13.2. Test Severity Levels

Level	Voltage Level (emf.)
1	1 V
2	3 V
3	10 V
x	Specified
NOTE - x is an open class. This level can be specified in the product specification.	

13.3. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Conducted immunity test system	FRANKONIA	CIT-10/75	102D1294	2016.03.26	2017.03.25
EM Injection clamp	FCC	F-203I-23MM	536	2016.03.26	2017.03.25
CDN	FRANKONIA	CDN-T2	A3010029	2016.03.26	2017.03.25
CDN	FRANKONIA	CDN-T4	A3015017	2016.03.26	2017.03.25
CDN	FRANKONIA	CDN-T8	A3022010	2016.03.26	2017.03.25
CDN	FRANKONIA	CDN-M2	A3002037	2016.03.26	2017.03.25
CDN	FRANKONIA	CDN-M2+M3	A3011102	2016.03.26	2017.03.25
CDN	FCC	CDN-M5/32	A3013024	2016.03.26	2017.03.25
6 dB Attenuator	FRANKONIA	N/A	N/A	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2016.03.29	2017.03.28
EN61000-4-6	Hubert GmbH	Ver 2.21	N/A	N/A	N/A

13.4. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-6
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1100RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 23, 2016

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	BNC	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A



First edition:

Basic Standard : IEC 61000-4-6
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 23°C
 Relative Humidity : 47%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 15, 2015

Test Mode 1:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	BNC	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 195.5V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 253V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A



Original:

Basic Standard : IEC 61000-4-6
 Product Standard : EN 50130-4: 2011
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
 Final Test Result : PASS
 Temperature : 21°C
 Relative Humidity : 49%
 Atmospheric Pressure : 100 kPa
 Test Date : Jan 13, 2015

Test Mode 1 & mode 2:

For EN 55024: 2010

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80MHz	Power(M2)	3	A
0.15 ~ 80MHz	BNC	3	A

For EN 50130-4: 2011

Test Voltage: AC 230V/50Hz

Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s Frequency Step Size : 1 % of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 195.5V/50Hz


Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A

Test Voltage: AC 253V/50Hz


Frequency : 0.15~100MHz, Modulation : AM 80%,1KHz sine wave, Dwell time: 3.0s
Frequency Step Size : 1 % of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100MHz	Power(M2)	10	A
0.15 ~ 100MHz	BNC	10	A


Test engineer: 

13.5. Test Photographs


Second edition:

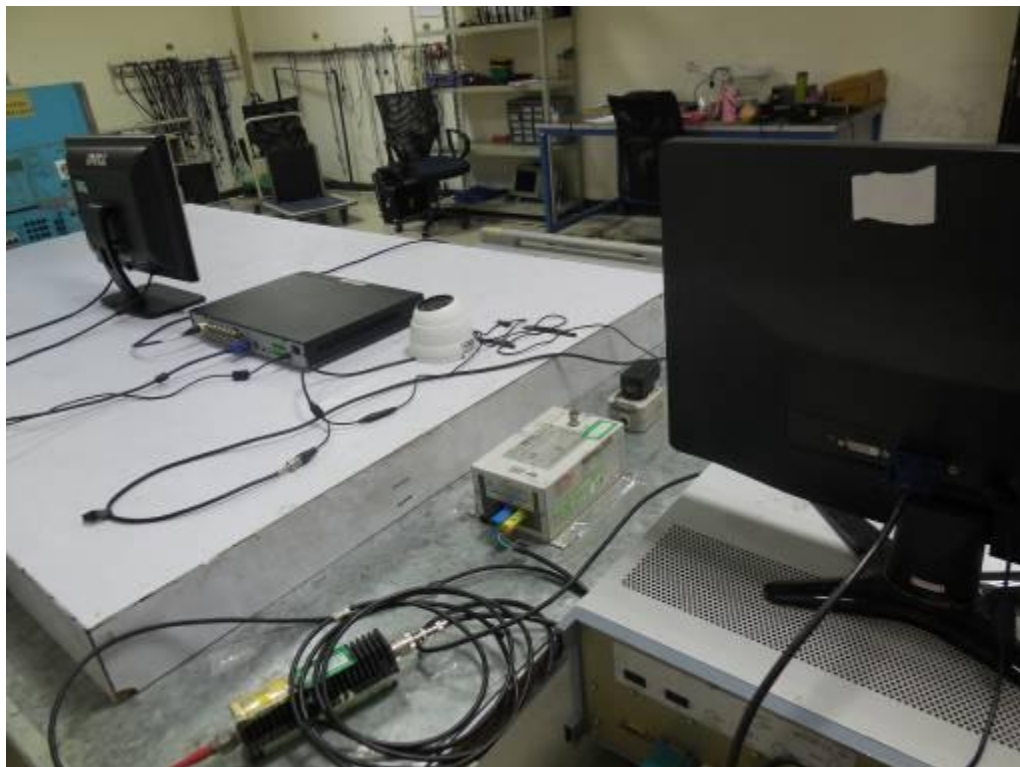

First edition:

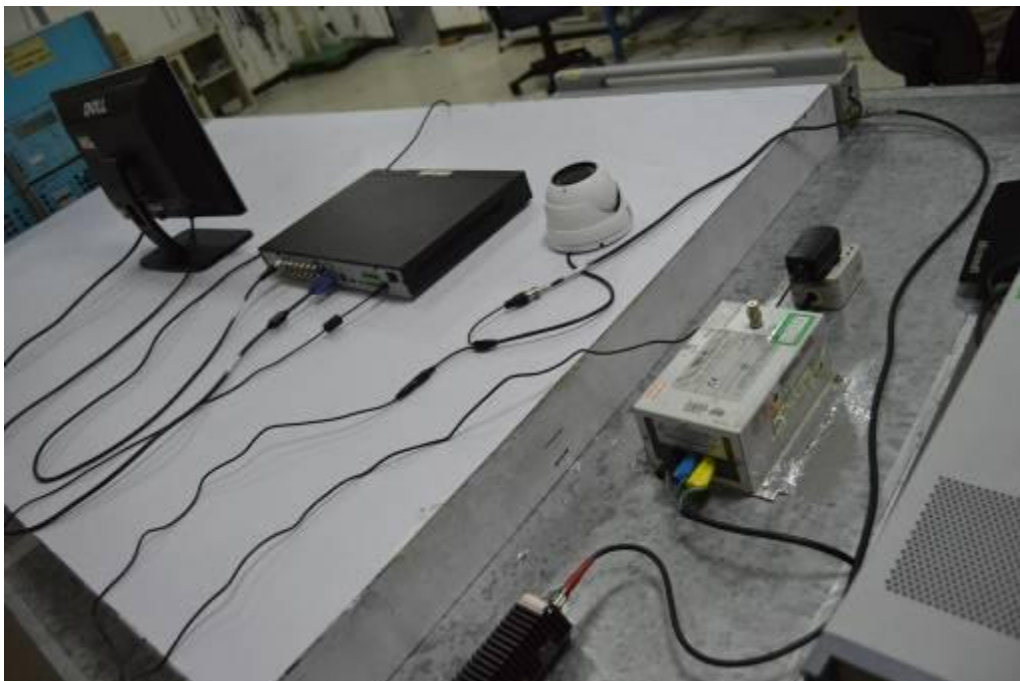


Original:

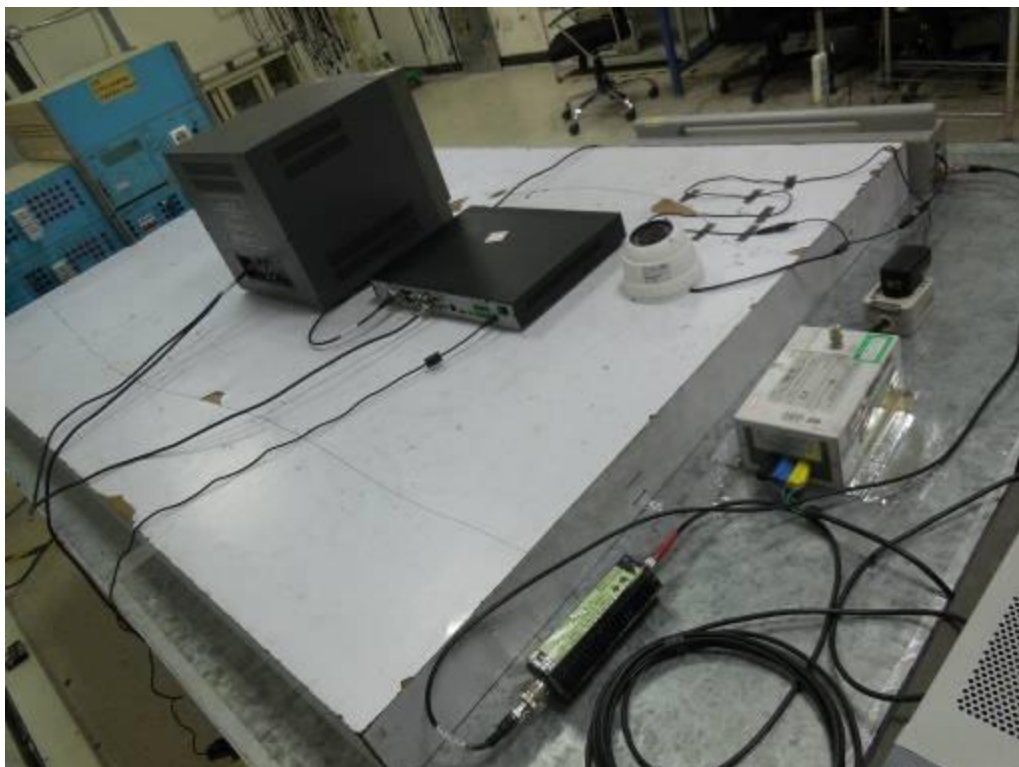

14. Power Frequency Magnetic Field Immunity Tests

14.1. Test Setup

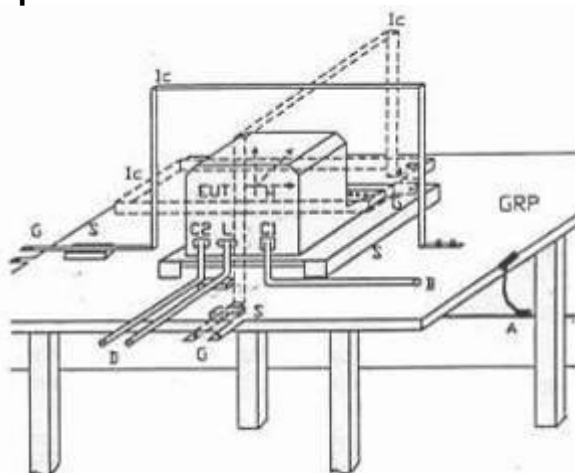

GPR	:	Ground plane	C1	:	Power supply circuit
A	:	Safety earth	C2	:	Signal circuit
S	:	Insulating support	L	:	Communication line
EUT	:	Equipment under test	B	:	To power supply source
Lc	:	Induction coil	D	:	To signal source, simulator
E	:	Earth terminal	G	:	To the test generator

14.2. Test Severity Levels

Level	Magnetic field strength A/m
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special
NOTE 1 "X" is an open level. This level can be given in the product specification.	

14.1. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2016.03.26	2017.03.25
H-Filed-Loop	EMCPARTNER	MF1000-1	144	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2016.03.29	2017.03.28

14.1. Test Result and Data

Second edition:

Basic Standard : IEC 61000-4-8
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1100RP-VF
 Final Test Result : PASS
 Temperature : 22 °C
 Relative Humidity : 48%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 23, 2016

Test Mode 1:

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A
Power Frequency Magnetic Field : <u>60</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A



First edition:

Basic Standard : IEC 61000-4-8
 Product Standard : EN 55024 : 2010
 Equipment : HDCVI CAMERA
 Model No. : DH-HAC-HDW1200RP-VF
 Final Test Result : PASS
 Temperature : 22°C
 Relative Humidity : 48%
 Atmospheric Pressure : 100 kPa
 Test Date : Apr 14, 2015

Test Mode 1:

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A
Power Frequency Magnetic Field : <u>60</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A



Original:

Basic Standard : IEC 61000-4-8
Product Standard : EN 55024 : 2010
Equipment : HDCVI CAMERA
Model No. : DH-HAC-HDW2120RP-VF, DH-HAC-HDW2220RP-VF
Final Test Result : PASS
Temperature : 22°C
Relative Humidity : 47%
Atmospheric Pressure : 100 kPa
Test Date : Jan 12, 2015


Test Mode 1 & mode 2:

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A
Power Frequency Magnetic Field : <u>60</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Test engineer: 

14.2. Test Photographs

Second edition:

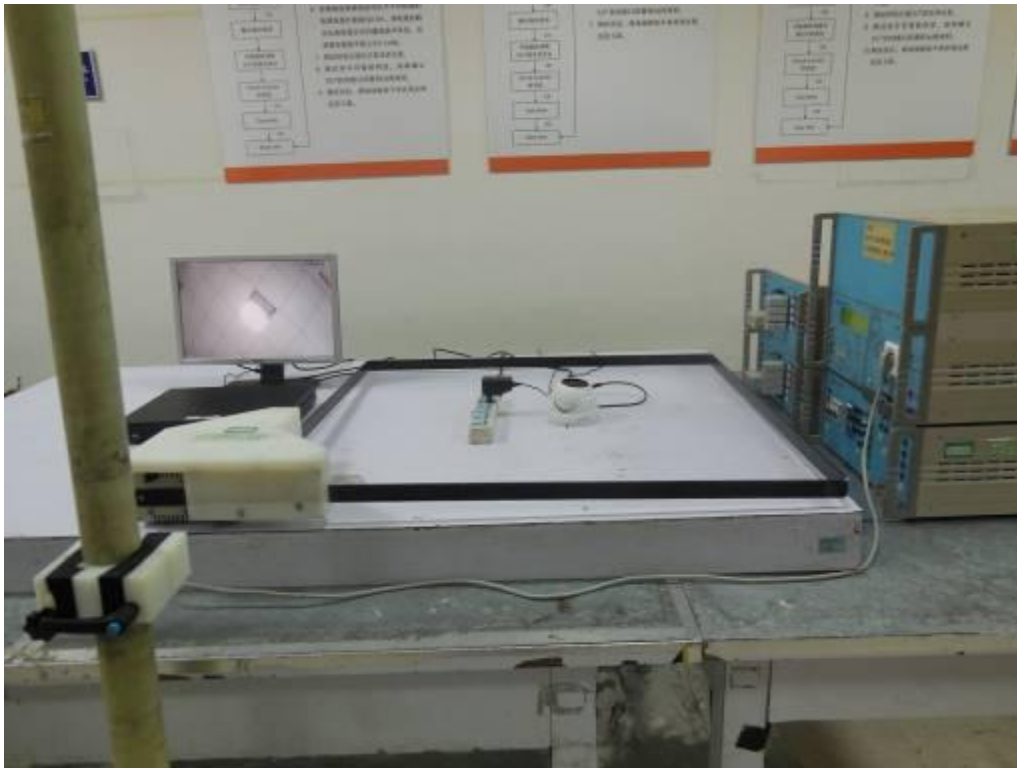

First edition:



Original:



15. Voltage Dips and Voltage Interruptions Immunity Test Setup

15.1. Test Conditions

1. Source voltage and frequency : 230V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input AC Power Ports				
Voltage Dips		% Reduction period	20 250	
		% Reduction period	30 25	
		% Reduction period	60 10	
Voltage Interruptions		% Reduction period	100 250	

15.2. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
TRANSIENT	EMCPARTNER	TRA2000IN6	901	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-005	2016.03.29	2017.03.28



15.3. Test Result and Data

This project does not need to test.


16. EUT Photographs

Second edition:

1) EUT Photo (DH-HAC-HDW1100RP-VF)



2) EUT Photo (DH-HAC-HDW1100RP-VF)

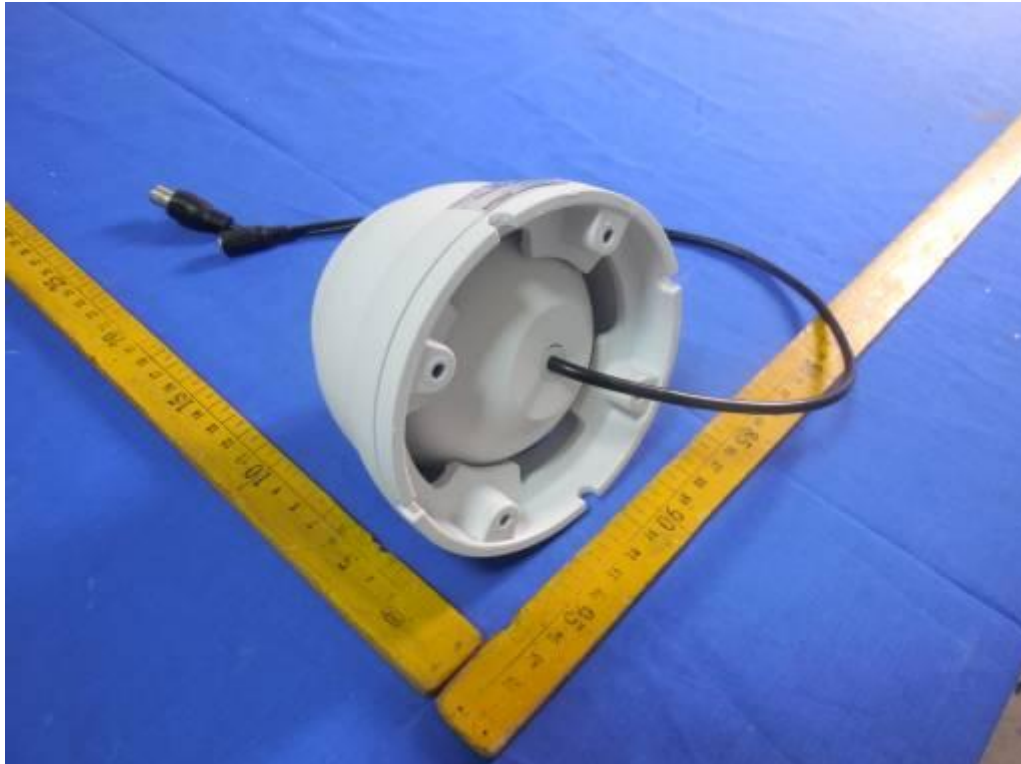

3) EUT Photo (DH-HAC-HDW1100RP-VF)



4) EUT Photo (DH-HAC-HDW1100RP-VF)




First edition:

5) EUT Photo (DH-HAC-HDW1200RP-VF)



6) EUT Photo (DH-HAC-HDW1200RP-VF)

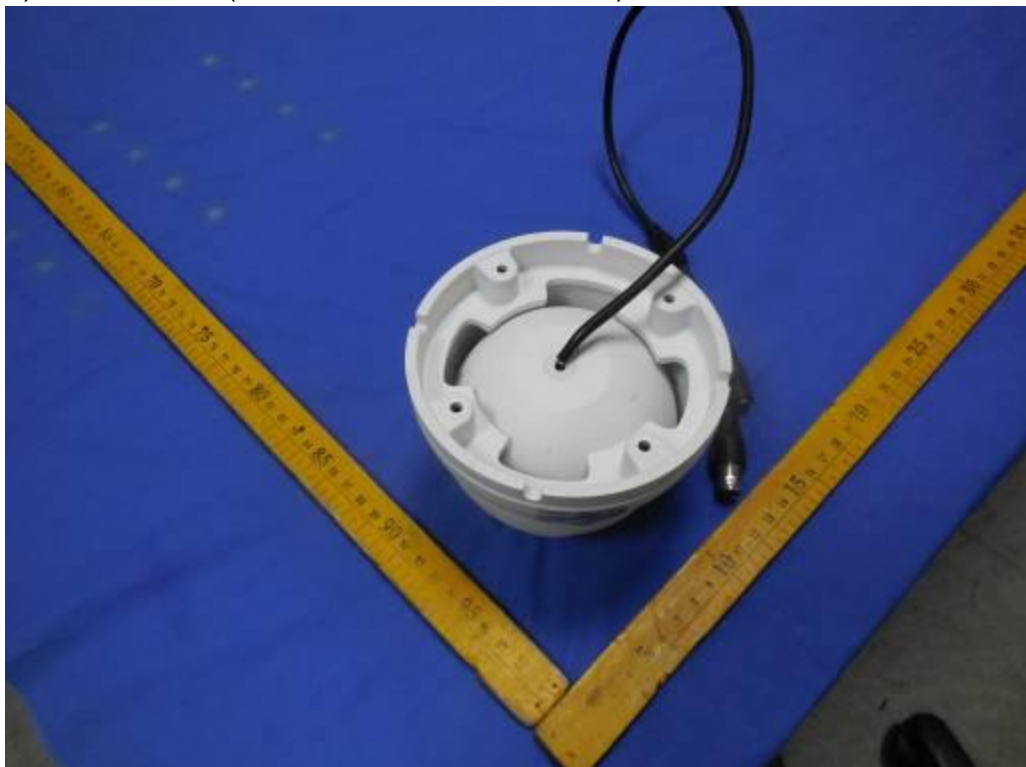

7) EUT Photo (DH-HAC-HDW1200RP-VF)



8) EUT Photo (DH-HAC-HDW1200RP-VF)



9) EUT Photo (DH-HAC-HDW1200RP-VF)




Original:

10) EUT Photo (DH-HAC-HDW2120RP-VF)




11) EUT Photo (DH-HAC-HDW2120RP-VF)

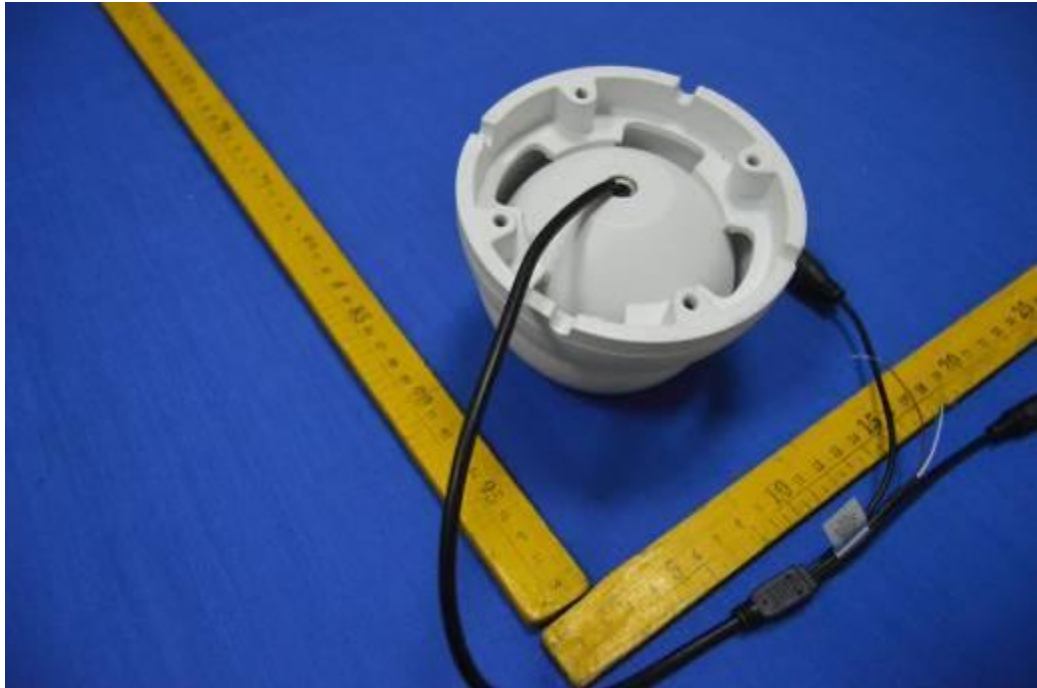

12) EUT Photo (DH-HAC-HDW2120RP-VF)




13) EUT Photo (DH-HAC-HDW2120RP-VF)

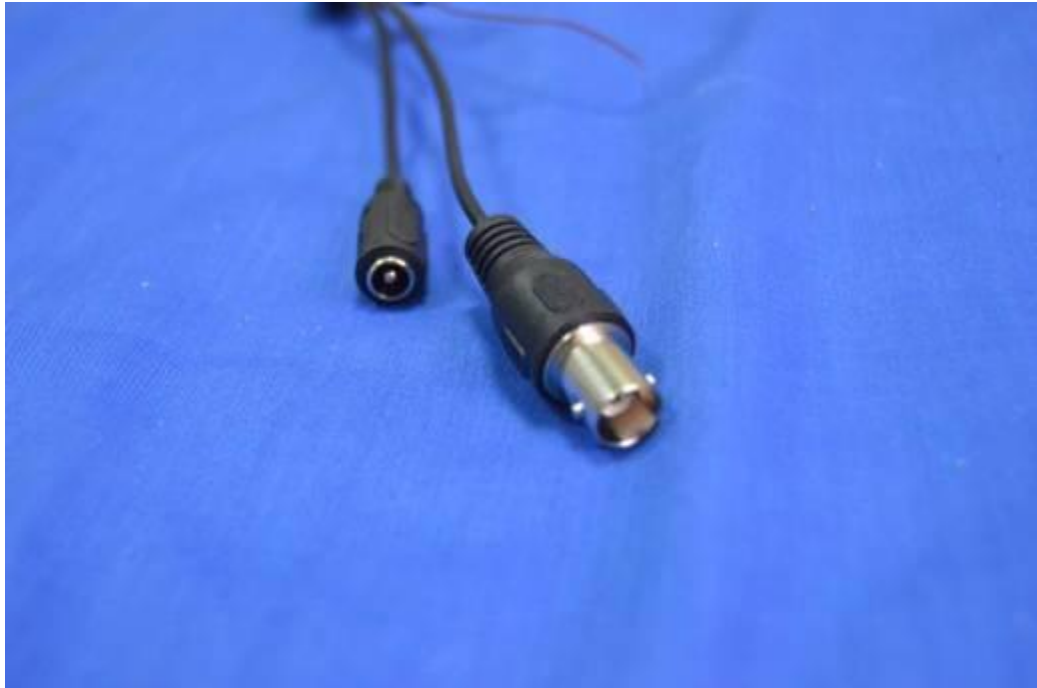

14) EUT Photo (DH-HAC-HDW2220RP-VF)



15) EUT Photo (DH-HAC-HDW2220RP-VF)

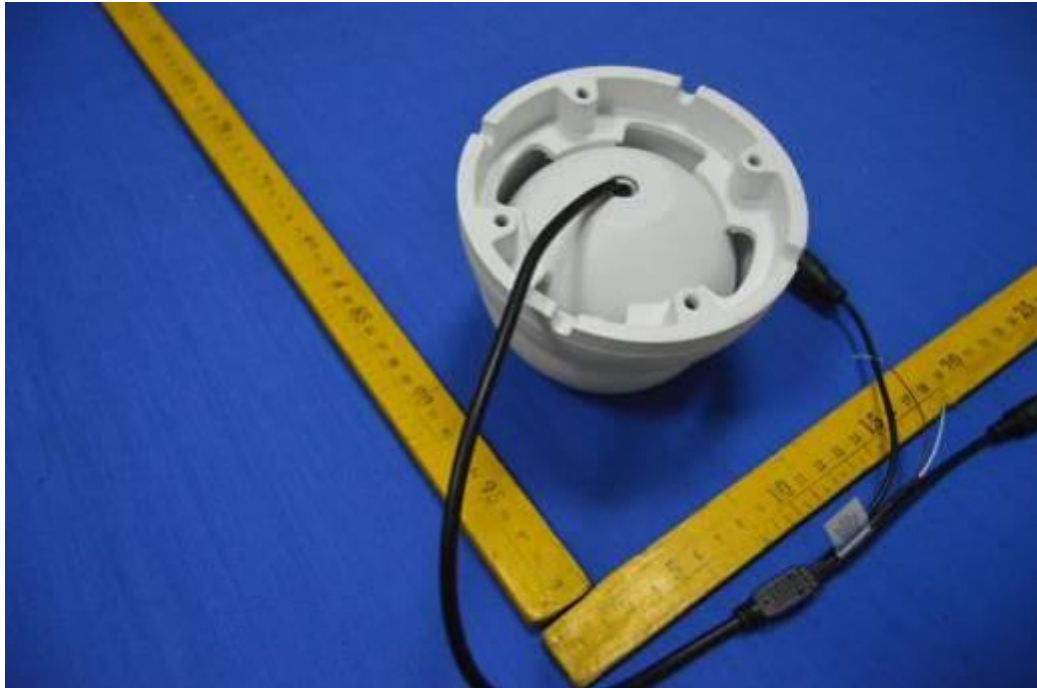


16) EUT Photo (DH-HAC-HDW2220RP-VF)



17) EUT Photo (DH-HAC-HDW2220RP-VF)



18) EUT Photo

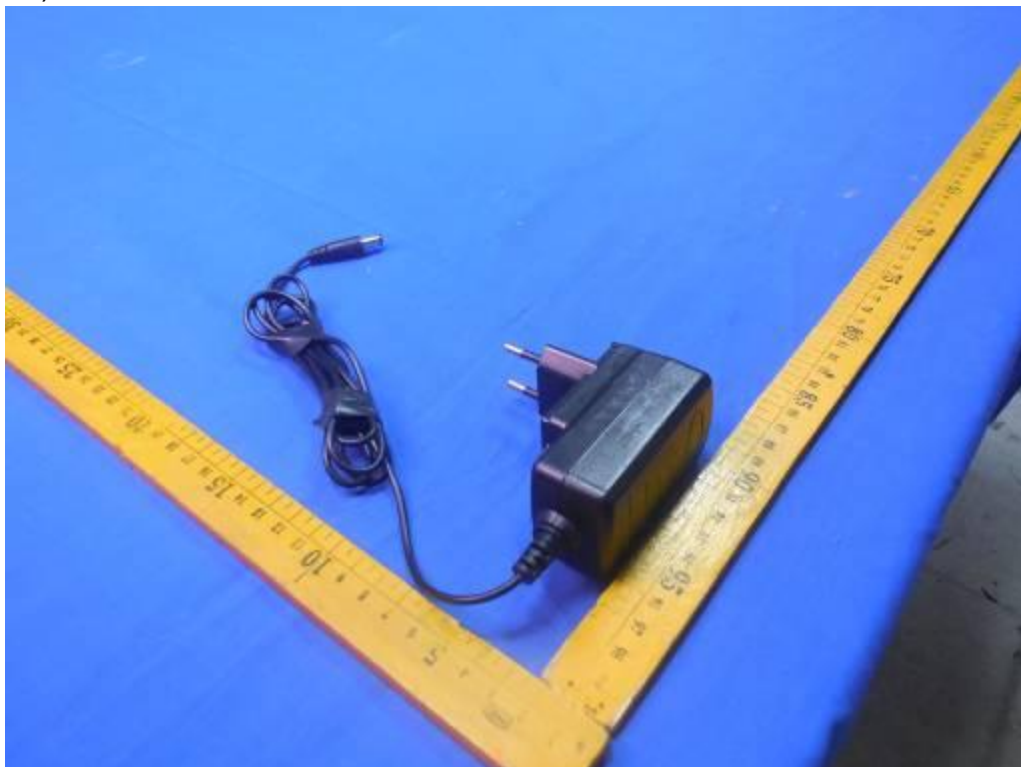

19) EUT Photo



20) EUT Photo



21) EUT Photo





17.APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, BUREAU VERITAS ADT (Shanghai) Corporation, were founded in 2004 to provide our best service in EMC, Radio and Vehicle consultation. Our laboratories are accredited by the following accreditation bodies according to ISO/IEC 17025 (2005) .

USA	A2LA Certificate No.: 2343.01
China	CNAS Certificate No.: L2810

Copies of accreditation certificates could be inquired from our office. If you have any comments, please feel free to contact us at the following:

EMC / RF / Vehicle Lab:

Tel: +86 21 6465 9091

Fax: +86 21 6465 9092

Email: bvadtshmail@cn.bureauveritas.com

--- END ---