

DH-HAC-HDBW2501F-A

5MP Starlight HDCVI IR Dome Camera



* The parameters and datasheets below can only be applied to 2501-S2 series.
* In order to use the 5MP 16:9 HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000001.0.R.200908 or later version.

- Max 25 fps@5MP (16:9 video output)
- Starlight, 120 dB true WDR, 3D NR
- CVI/CVBS/AHD/TVI switchable
- 3.6 mm fixed lens (2.8 mm optional)
- Built-in mic
- Max. IR length 30 m, Smart IR
- IP67, IK10, DC12V±30%



System Overview

Experience 5MP full HD video and the simplicity of using existing cabling infrastructure with HDCVI. The Pro series 5MP HDCVI camera features a compact design and offers a high quality image at a friendly price. It offers various motorized/fixed lens models with 120 dB true WDR and a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance make the camera an ideal choice for SMB solutions.

Functions

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the XVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 700 m for 5MP HD video via coaxial cable, and up to 300 m via UTP cable.*

*Actual results verified by real-scene testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Starlight

With the adoption of large sized high performance sensor, the camera is able to provide incomparable performance even under extreme lowlight environment. The starlight feature allows more details to be captured and accurate color to be recognized at night or in scenes with limited illumination.

Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmission over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.

Smart IR

The camera is designed with IR LED illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua unique Smart IR adjusts the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object comes closer to the camera.

Wide Dynamic Range

Embedded with industry leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. True WDR (120dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Advanced 3DNR

3DNR is noise reduction technology that detects and eliminates random noises by comparing two sequential frames. Dahua's advanced 3DNR technology allows remarkable noise reduction with little impact to sharpness, especially under limited lighting condition. Besides, the advanced 3DNR effectively decreases the band width and saves the storage space.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

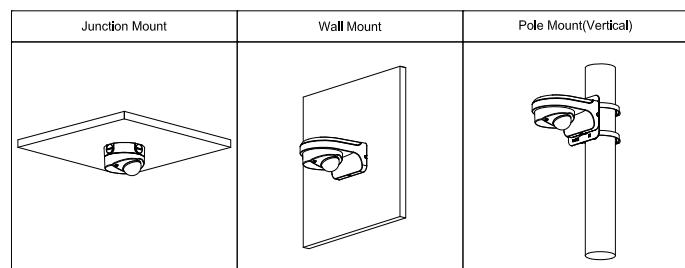
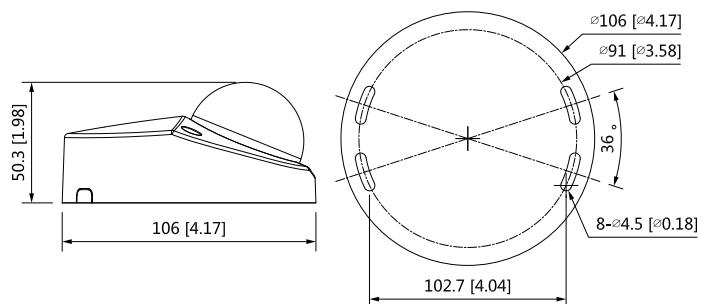
With working temperature range of -40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$), the camera is designed for extreme temperature environments.

Supporting $\pm 30\%$ input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4 KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Technical Specification									
Camera									
Image Sensor		1/2.7 inch CMOS							
Max. Resolution		2880 (H) x 1620 (V)							
Pixel		5 MP							
Scanning System		Progressive							
Electronic Shutter Speed		PAL: 1/3 s–1/100,000 s NTSC: 1/4 s–1/100,000 s							
S/N Ratio		0.001 Lux/F1.6, 30IRE, 0Lux IR on							
Min. Illumination		> 65 dB							
Illumination Distance		30 m (98.4 ft)							
Illuminator On/Off Control		Auto / Manual							
Illuminator Number		8							
Pan/Tilt/Rotation Range		Pan: 0°–60° Tilt: 0°–80° Rotation: 0°–360°							
Lens									
Lens Type		Fixed-focal							
Mount Type		M12							
Focal Length		2.8 mm; 3.6 mm							
Max. Aperture		F1.6							
Field of View		2.8 mm: 132° x 111° x 58° (diagonal x horizontal x vertical) 3.6 mm: 109° x 92° x 48° (diagonal x horizontal x vertical)							
Iris Type		Fixed iris							
Close Focus Distance		2.8 mm: 0.9 m (3.0 ft) 3.6 mm: 1.6 m (5.2 ft)							
DORI Distance	Lens		Detect	Observe	Recognize				
	2.8 mm		63.6 m (208.7 ft)	25.4 m (83.3 ft)	12.7 m (41.7 ft)				
	3.6 mm		80 m (262.5 ft)	32 m (105.0 ft)	16 m (52.5 ft)				
					8 m (26.2 ft)				
*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.									
Video									
Frame Rate		CVI: PAL: 5M@25 fps; 4M@25 fps; 1080P@25 fps NTSC: 5M@25 fps; 4M@30 fps; 1080P@30 fps AHD: PAL: 4M@25 fps; NTSC: 4M@30 fps							
		TVI: PAL: 4M@25 fps; NTSC: 4M@30 fps CVBS: PAL: 960H; NTSC: 960H							
Technical Specification									
Resolution									
5M (2880 x 1620); 4M (2560 x 1440); 1080P (1920 x 1080); 960H (960 x 576/960 x 480)									
Day/Night									
Auto switch by ICR									
BLC									
BLC/HLC/WDR/HLC-Pro									
WDR									
120 dB									
White Balance									
Auto / Manual									
Gain Control									
Auto / Manual									
Noise Reduction									
2D NR/3D NR									
Smart IR									
Yes									
Mirror									
Off/On									
Privacy Masking									
Off/On (8 areas, rectangle)									
Certifications									
CE (EN55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN55024:2010+A1:2015, EN 55035:2017, EN50130-4:2011+A1:2014, EN 62368-1:2014+A11:2017) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)									
Port									
Audio Interface									
One channel built-in mic									
Video Output									
Video output choices of CVI/TVI/AHD/CVBS by one BNC port (DIP Switch)									
Power									
Power Supply									
DC 12V ±30%									
Power Consumption									
Max 4.0W (12V DC, IR on)									
Environment									
Operating Temperature									
-40°C to +60°C (-40°F to +140°F); < 95% (non-condensation)									
Storage Temperature									
-40°C to +60°C (-40°F to +140°F); < 95% (non-condensation)									
Protection Grade									
IP67, IK10									
Structure									
Casing									
Plastic dome cover+metal upper casing+metal pedestal									
Camera Dimensions									
Φ106 mm x 50.3 mm (Φ4.17" x 1.98")									
Net Weight									
0.33 kg (0.73 lb)									
Gross Weight									
0.44 kg (0.97 lb)									

Ordering Information

Type	Part Number	Description
5MP Camera	DH-HAC-HDBW2501FP-A 2.8 mm	Starlight HDCVI IR Dome Camera
	DH-HAC-HDBW2501FN-A 2.8 mm	
	DH-HAC-HDBW2501FP-A 3.6 mm	
	DH-HAC-HDBW2501FN-A 3.6 mm	
Accessories	PFA139	Junction Box
	PFB204W	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFA106	Mount Adapter
	PFB220C	Ceiling Mount Bracket
	PFA151	Corner Mount
	PFB305W	Wall Mount Bracket
	PFM800-4K	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

**Dimensions (mm[inch])****Accessories****Optional:**PFA139
Junction BoxPFB204W
Wall Mount BracketPFA152-E
Pole Mount BracketPFA106
Mount AdapterPFB220C
Ceiling Mount BracketPFA151
Corner MountPFB305W
Wall Mount BracketPFM800-4K
Passive HDCVI BalunPFM321D
12V 1A Power AdapterPFM904
Integrated Mount Tester